Experiment:-9

StudentName: Ajay   **UID:**22BCS12696

Branch: CSE   **Section/Group:**603-B

Semester:6th   **DateofPerformance:**10/04/2025

SubjectName:AP Lab-2   **SubjectCode:**22CSP-351

Problem-1

1. **Aim:** Numberof Islands

2. **Objective:**

- **Learn to Identify Islands in a Grid:** Understand how to recognize separate land regions in a 2D grid where '1' represents land and '0' represents water.
- **UseDepth-FirstSearch(DFS)forExploration:**LearnhowDFShelpsinvisitingallconnected land cells, ensuring each island is counted only once.
- **ImplementGridTraversalEffectively:**Understandhowtoscaneachcellinthegrid systematically, making sure no land portion is left unchecked.
- **Apply Recursion to Find Connected Areas:** Learn how recursive function calls help explore all possible directions (up, down, left, right) to find the full extent of an island.
- **EnhanceProblem-SolvingAbilitiesinGraphTheory:**Developskillsinhandlinggraph-based problems, such as finding connected components, which have real-world applications.
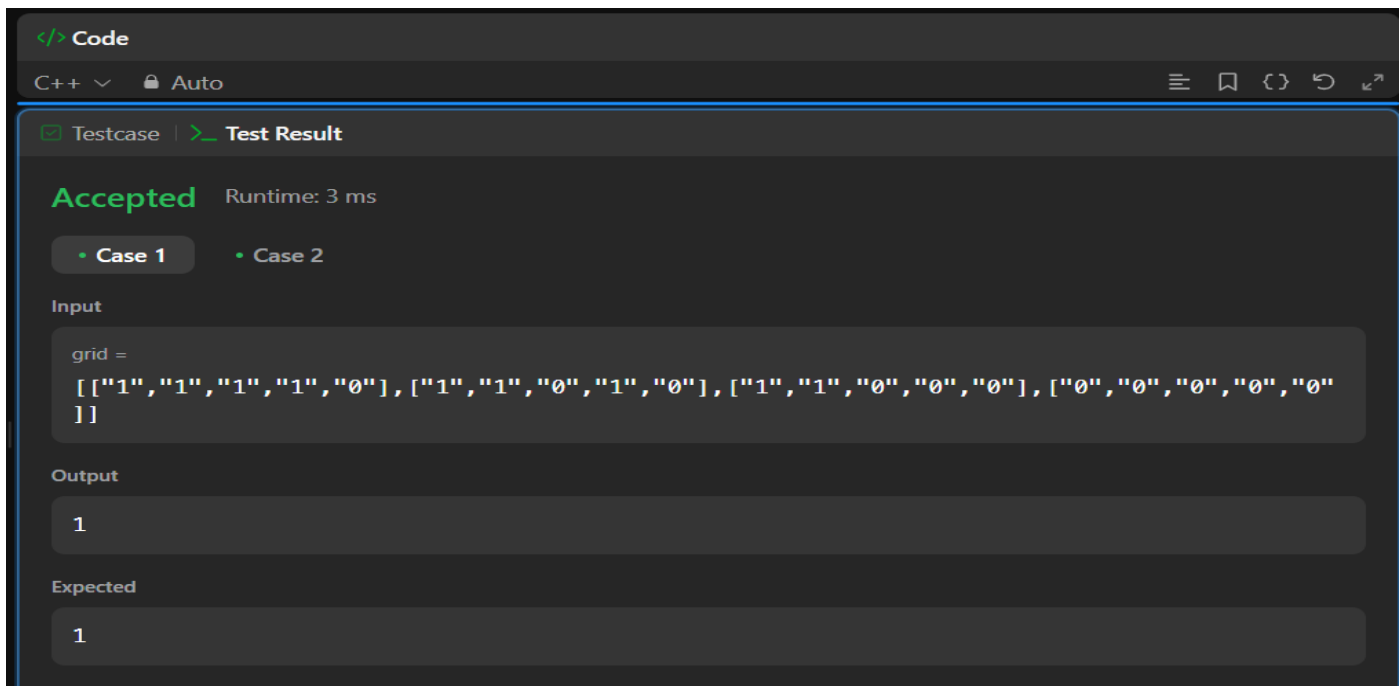
3. **Implementation/Code:**

```cpp
classSolution{ public:
    voiddfs(vector<vector<char>>&grid,inti,intj){ int m
        = grid.size(), n = grid[0].size();
        if(i<0 ||j<0 ||i>=m||j>=n ||grid[i][j]=='0'){ return;
        }
        grid[i][j]='0';
        dfs(grid,i+1, j);
        dfs(grid,i -1, j);
        dfs(grid,i,j+1);
        dfs(grid,i,j-1);
    }
    intnumIslands(vector<vector<char>>&grid){ if
        (grid.empty()) return 0;
        intm=grid.size(),n=grid[0].size(),count=0; for (int
        i = 0; i < m; ++i) {
            for(intj=0;j<n;++j){ if
                (grid[i][j] == '1') {
```

```
            ++count;
            dfs(grid,i,j);
          }
        }
      }
      returncount;
    }
  };
```

4. Output

Figure1

5. LearningOutcomes:

- **Ability to Count Islands in a Grid:** Gain the skill to count distinct islands in a binary grid by detecting connected land regions.
- **Understanding of DFS and Its Application:** Learn how Depth-First Search (DFS) is used to traverse and mark visited land cells in a grid.
- **EfficiencyinGrid-BasedProblemSolving:**Becomeproficientinscanningandmodifyinggrid structures to solve connectivity problems.
- **MasteringRecursionforConnectivityChecks:**Developanunderstandingofrecursivealgorithms for exploring all possible paths in a grid.
- **ImprovedLogicalThinkingandCodingSkills:**Strengthenlogicalreasoningbysolving complex problems related to graphs and connected components.

Problem-2

1. **Aim:** SurroundedRegions
2. **Objectives:**

- **Understand Capturing Regions in a Grid:** Learn how to identify and replace 'O' regions that are completely surrounded by 'X' in a 2D matrix.
- **UseDepth-FirstSearch(DFS)forTraversal:** ExplorehowDFShelpsmarkconnected'O'cells on the board edges, preventing them from being captured.
- **HandleEdgeCasesEfficiently:** Understandhowtocorrectlyprocessthegridbychecking border 'O' cells first and avoiding unnecessary replacements.
- **Modify the Grid in Place:** Learn how to update the given board directly without using extramemory, making the solution efficient.
- **Improve Logical Thinking in Grid Problems:** Strengthen problem-solving skills by working with matrix-based transformations and connected components.

3. Implementation/Code:

```
classSolution{ public:
    voiddfs(vector<vector<char>>&board,inti,intj){ int m
        = board.size(), n = board[0].size();
        if(i<0||i>=m ||j <0||j >=n ||board[i][j]!='O') return;
        board[i][j] = '#';
        dfs(board,i+1,j);
        dfs(board, i - 1, j);
        dfs(board,i,j+1);
        dfs(board, i, j - 1);
    }
    voidsolve(vector<vector<char>>&board){
        int m = board.size(), n = board[0].size();
        if (m == 0 || n == 0) return;
        for(int i =0;i <m; i++) {
            if(board[i][0]== 'O')dfs(board,i,0);
            if(board[i][n -1]=='O')dfs(board, i,n -1);
        }
        for(int j =0;j <n; j++) {
            if(board[0][j]== 'O')dfs(board,0,j);
            if(board[m-1][j] =='O')dfs(board,m -1,j);
        }
        for(int i =0;i <m; i++) {
```
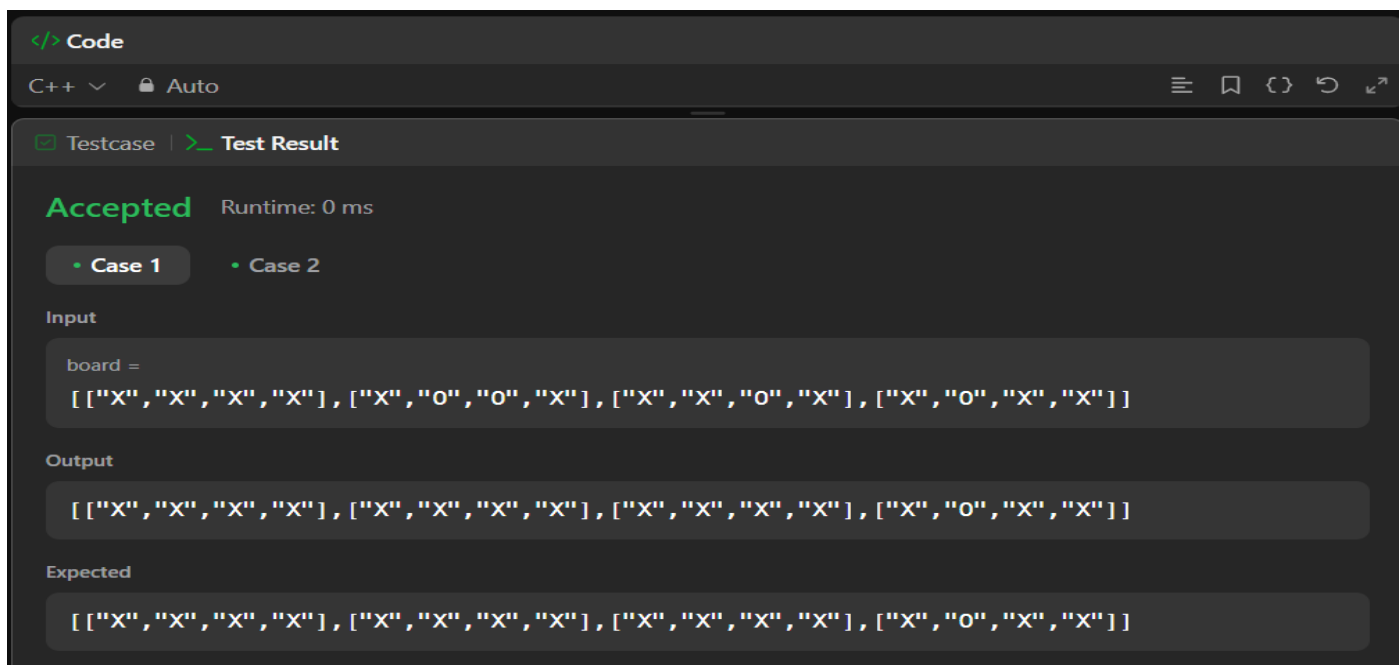
3

```
            for(int j =0;j <n; j++) {
                if(board[i][j]=='O')board[i][j] ='X';
                if(board[i][j]=='#')board[i][j] ='O';
            }
        }
    }
};
```

4. Output:

Figure2

5. LearningOutcomes:

- **Ability to Detect Surrounded Regions:** Gain the skill to identify and replace 'O' regions that are fully enclosed by 'X' cells.
- **UnderstandingofDFSforGridExploration:**LearnhowDFScantraverseconnected components in a 2D grid and mark visited cells.
- **Mastering Edge Case Handling:** Develop techniques to correctly identify which 'O' regionsshould be replaced and which should remain.
- **EfficientlyModifyingDataStructures:**Learnhowtoupdatetheboardinplaceusingtemporary markers, ensuring an optimized approach.
- **Enhancing Coding and Problem-Solving Skills:** Improve the ability to implement algorithms that modify grids dynamically, useful in various applications.
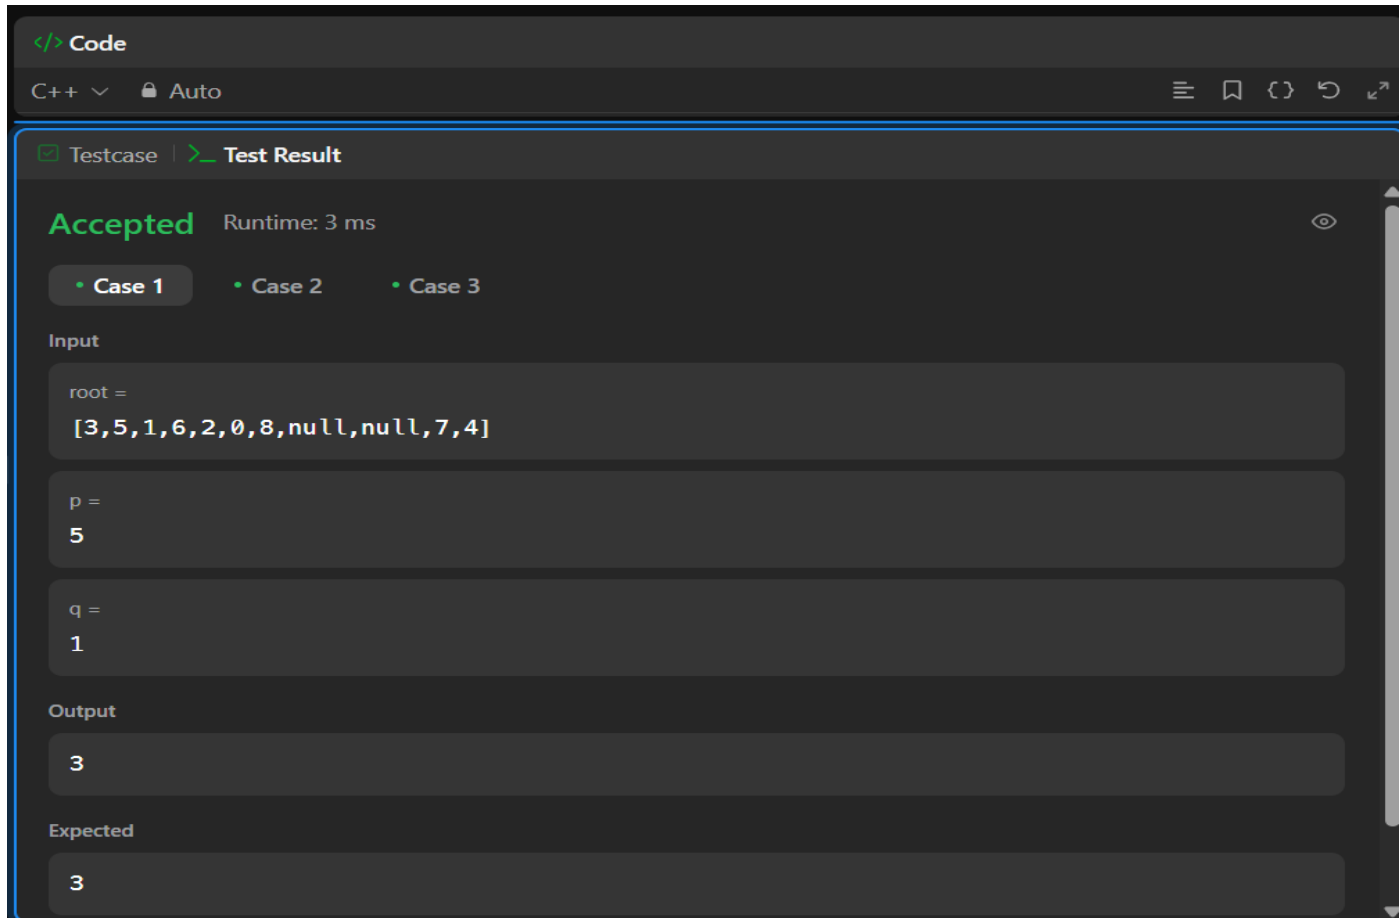
Problem:-3

1. **Aim:**LowestCommonAncestorof aBinaryTree
2. **Objectives:**

- Learn how to find the lowest common ancestor of two nodes in a binary tree using recursion. Thishelpsinunderstandinghierarchicalrelationshipsintreesandimprovesknowledgeoftree- based algorithms.
- Understand how depth-first search (DFS) is used to traverse the tree efficiently. This method helps in searching for nodes and their ancestors and enhances tree traversal techniques.
- Improve problem-solving skills by analysing tree structures and solving ancestor-related problems. This enhances logical thinking in programming and helps in developing efficient solutions.
- Learntohandlebasecasesandedgecasesinrecursivetreeproblems.Thisensuresthesolution works correctly for all possible inputs and prevents errors in complex tree structures.
- Develop coding skills by implementing tree traversal techniques. This helps in solving similar tree-based problems in interviews and real-world applications, making coding more efficient.

3. **Implementation/Code:**

```
classSolution{ public:
   TreeNode*lowestCommonAncestor(TreeNode*root,TreeNode*p,TreeNode*q){ if
     (root == NULL || root == p || root == q) {
        returnroot;
     }
     TreeNode* left = lowestCommonAncestor(root->left, p, q);
     TreeNode*right=lowestCommonAncestor(root->right,p,q); if
     (left != NULL && right != NULL) {
        returnroot;
     }
     returnleft!=NULL?left: right;
   }
};
```

4. Output:

Figure3

5. LearningOutcomes:

- You will be able to find the lowest common ancestor of two given nodes in a binary tree. This will help in solving hierarchical tree problems.
- Youwillunderstandhowrecursionhelpsinsolvingcomplextree-basedproblems.Thiswill improve your ability to write efficient recursive functions.
- Youwilllearntoapplydepth-firstsearch(DFS)tonavigatethroughtrees.Thiswillmakeiteasier to find specific nodes and their ancestors.
- Youwillgainconfidenceinhandlingbasecasesandedgecasesinrecursivesolutions.Thiswill ensure your code runs correctly for all scenarios.
- You will be able to write clear and optimized C++ code for tree problems. This will strengthen your programming skills and logical thinking.