



THOX Device Packaging System Guide

Packaging architecture, visual language, insert layouts, and

Founder Edition Prototype Direction

Dark-first THOX.ai retail packaging with emerald intelligence accents, local AI positioning, MagStack storytelling, premium insert cards, and a rapid overnight prototype path for fewer than four devices.

Prepared as a production-ready packaging brief and vendor RFQ companion.

Attached THOX packaging reference images



Clip,

1. Executive Summary

Packaging objective and immediate deliverables.

The attached references establish the correct THOX packaging direction: premium matte black surfaces, emerald neon signal accents, bold anti-cloud messaging, technical product UI, and a founder-edition unboxing experience. The goal is to package four prototype devices under one visual family while allowing each product to have its own box size, tray insert, and product promise.

Immediate Package Set

Build four photo-ready founder packages for ThoxMini, ThoxAir, ThoxClip, and ThoxNova.

Prototype Path

Use blank black rigid boxes, printed wraps, decals, card inserts, and EVA foam for 24-48 hour builds.

Production Path

Move to printed rigid boxes, die-cut sleeves, molded inserts, and serialized founder cards after dimensions lock.

Design Rule

Make every package read like private local AI hardware, not a generic electronics box.

Core design principles

- Lead with a big, witty claim: NO CLOUD INSIDE, THING O BOX, or BUILT FOR OWNERS, NOT USERS.
- Use the THOX.ai lockup, chip mark, and emerald signal line consistently across every panel.
- Show the device UI on every hero package because ThoxOS is a major trust cue.
- Use side panels for proof points: 0% cloud dependency, MagStack-ready, privacy-first, no rate limits.
- Use black EVA or molded insert geometry to make small prototype devices feel premium and intentional.
- Include founder cards, quick-start cards, sticker cards, and a certificate to make each prototype feel collectible.

Recommended P0 build

For fewer than four devices, order blank matte black magnetic gift boxes or mailer boxes, print adhesive vinyl panels using the artwork map in this guide, cut black EVA foam inserts, and print rounded insert cards. This creates the look of custom production packaging without waiting for tooling or custom minimum order quantities.

2. Reference Packaging Analysis

What to preserve from the attached examples.

Attached THOX packaging reference images



Extracted visual DNA

- Premium black-on-black base with subtle texture and low-key network line art.
- Emerald accent used as the intelligence layer, not as decoration everywhere.
- Hero claims are short, provocative, and anti-cloud: NO CLOUD INSIDE; THING O BOX.
- Founder Edition seal creates limited-run urgency for Kickstarter and investor demos.
- Side icons communicate benefits quickly without explaining the full technical stack.
- Interior lid copy makes the unboxing feel philosophical: Built for owners, not users.
- Cards and stickers extend the brand after the box is opened.
- Device render plus ThoxOS screen establishes that this is real hardware plus software.

Corrections for production accuracy

- Avoid product claims that cannot be defended on the actual prototype.
- Use Qi2/wireless marks only when the physical device truly includes that feature.
- Keep the exact ThoxOS wordmark on device screens.
- Make side text larger than the renders if the package will be physically printed under 10 inches wide.
- Prepare a separate foil/spot-UV mask file if using premium print finishes.

3. Product Family System

A unified package language across four products.



THOX DEVICE PACKAGING FAMILY

One coherent visual system for four prototype products.

ThoxMini

USB-form private AI module



PACKAGE

Pocket box / tuck + sleeve

TARGET SIZE


2.8 x 4.8 x 1.4 in

ROLE

Fast prototype / impulse kit

ThoxAir

WiFi mesh local AI node



PACKAGE

Slim rigid magnetic box

TARGET SIZE

4.8 x 6.8 x 1.6 in

ROLE

Networked edge device

ThoxClip

Wearable / clip-on AI companion



PACKAGE

Accessory tray box

TARGET SIZE

3.8 x 5.8 x 1.4 in

ROLE

Portable companion module

ThoxNova

6-inch MagStack compute slab



PACKAGE

Premium rigid founder box

TARGET SIZE

7.6 x 9.6 x 2.0 in

ROLE

Hero device / Kickstarter flagship

Design intent: matte black, emerald signal layer, technical typography, private-local intelligence positioning.

4. Shared Packaging Architecture

Layered unboxing stack for all THOX products.



PACKAGING ARCHITECTURE

Every product uses the same unboxing language with different insert geometry.

SYSTEM PRINCIPLES

One black chassis

All boxes feel like one THOX hardware family.

One emerald signal

Use emerald only for intelligence, security, and MagStack cues.

One claim hierarchy

Brand, big claim, product render, proof points, specs.

One tray grammar

Device left or center, accessories right, card stack on top.

One prototype path

Blank rigid boxes + vinyl wrap + EVA insert for overnight builds.

Printed outer sleeve

Black sleeve with product claim, render, icons, specs

Rigid magnetic box

Form board, soft-touch laminate, hidden magnetic closure

Foam or pulp tray

CNC-cut EVA for prototypes; molded pulp at scale

Device + accessories

Device well, cable/adaptor well, card pocket, sticker pocket

Card and quick-start stack

Founder card, quick-start, safety, activation/redeem card

5. ThoxMini Packaging Specification

USB-form / pocket AI module

Smallest package in the family. Make it feel like a secure hardware key and private AI seed device.

FRONT PANEL COPY

NO CLOUD IN YOUR POCKET

Local intelligence. Pocket scale.

Contains private AI. Handle responsibly.

Side-panel claims: 0% cloud dependency / MagStack-ready / privacy-first / no rate limits.

Build Specification

- Outer: compact tuck box or small magnetic box with THOX.ai chip mark and NO CLOUD INSIDE claim.
- Insert: vertical device slot, USB-C adapter/cap well, micro quick-start card pocket.
- Recommended prototype size: approx. 2.8 x 4.8 x 1.4 in depending on final enclosure and accessory bundle.
- Best insert: black EVA foam with removable finger notch and emerald pull tab.

Box contents

- Device
- Quick-start card
- Founder certificate
- THOX sticker card
- Safety / compliance insert
- USB-C cable or adapter if applicable

6. ThoxAir Packaging Specification

WiFi mesh / MagStack Air node


Slim horizontal package that communicates wireless edge compute and mesh deployment.

FRONT PANEL COPY

NO CLOUD INSIDE

Mesh-ready local AI.

It does not phone home. It just computes.

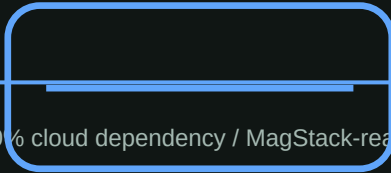

Side-panel claims: 0% cloud dependency / MagStack-ready / privacy-first / no rate limits.

Build Specification

- Outer: slim rigid magnetic box or premium mailer sleeve with network line art.
- Insert: device centered horizontally with power cable / adapter well underneath or to the right.
- Recommended prototype size: approx. 4.8 x 6.8 x 1.6 in.
- Best insert: EVA tray with nested accessory slot and MeshStack quick-start card.

Box contents

- Device
- Quick-start card
- Founder certificate
- THOX sticker card
- Safety / compliance insert
- USB-C cable or adapter if applicable

7. ThoxClip Packaging Specification

Wearable / clip-on AI companion

Accessory-style package with wearable trust cues and a practical start guide.

FRONT PANEL COPY

PRIVATE AI YOU CAN CLIP ON

Always local. Always yours.

Built for owners, not users.

Side-panel claims: 0% cloud dependency / MapStack-ready / privacy-first / no rate limits.

Build Specification

- Outer: compact accessory box with clip silhouette, privacy-first seal, and wearable positioning.
- Insert: device well plus clip/strap accessory cavity and safety card slot.
- Recommended prototype size: approx. 3.8 x 5.8 x 1.4 in.
- Best insert: EVA foam with rounded clip cavity and card stack above device.

Box contents

- Device
- Quick-start card
- Founder certificate
- THOX sticker card
- Safety / compliance insert
- USB-C cable or adapter if applicable

8. ThoxNova Packaging Specification

6-inch MagStack compute slab


Hero package and Kickstarter flagship. This is the full founder-edition unboxing experience.

FRONT PANEL COPY

THING O BOX

A suspiciously powerful private AI computer.

MagStack. Power without limits.



Side-panel claims: 0% cloud dependency / MagStack-ready / privacy-first / no rate limits.

Build Specification

- Outer: premium rigid magnetic presentation box with sleeve or printed wrap.
- Insert: device well, accessory/cup well, card stack, cable/peripheral bay.
- Recommended prototype size: approx. 7.6 x 9.6 x 2.0 in minimum; adjust to accessory bundle.
- Best insert: black EVA tray with 10 mm top reveal and 20-30 mm device cavity.

Box contents


- Device
- Quick-start card
- Founder certificate
- THOX sticker card
- Safety / compliance insert
- USB-C cable or adapter if applicable

9. Exterior Front Panel System

Hero layout, typography hierarchy, and proof points.

EXTERIOR PANEL SYSTEM

Reusable grid for ThoxMini, ThoxAir, ThoxClip, and ThoxNova artwork.

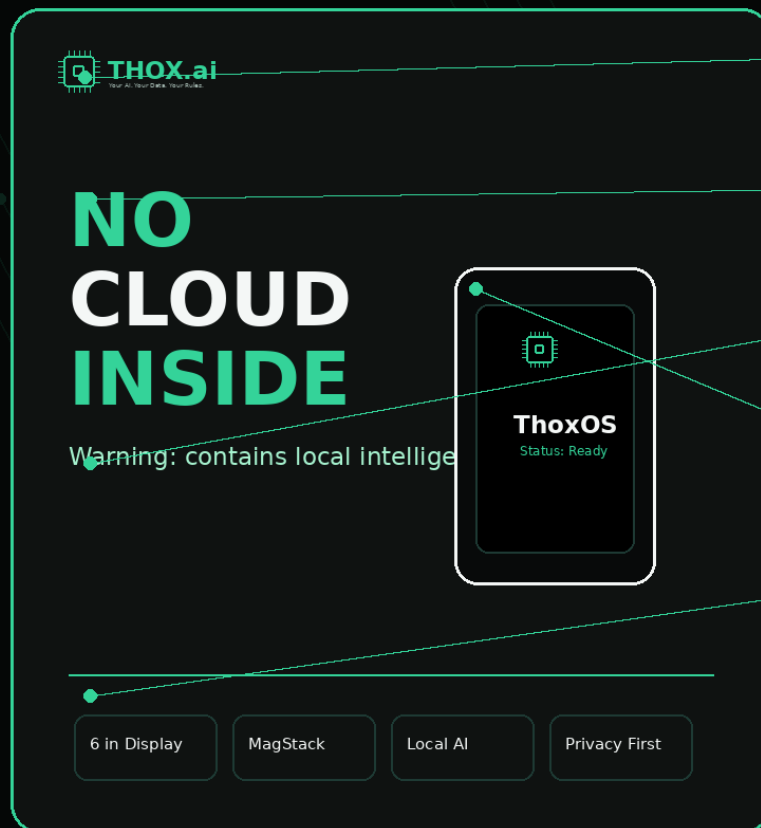

A. Brand lockup + micro tagline

B. Massive claim block

C. Witty proof subtitle

D. Product render / UI screenshot

E. Spec ribbon

Panel rule: make the package readable at thumbnail size. The hero c

10. Side, Back, and Bottom Panel Content

Reusable copy and proof-point hierarchy.

Panel	Purpose	Recommended Content
Left side	Shelf recognition	Vertical product name, chip mark, short curiosity line: Thing in the Box? It is the future.
Right side	Benefit stack	0% Cloud Dependency, MagStack-ready, Privacy first, No rate limits. Use one icon per claim.
Back panel	Product story	Three proof bullets, product render, contents list, serial/QR area, compliance zone.
Bottom panel	Operational data	Model, serial number, support URL, QR code, manufacturer line, recycle marks where applicable.
Inside lid	Emotional payoff	Built for owners, not users. Private AI you can hold.

Back panel story block

The back panel should translate the front-panel joke into proof. Keep the voice confident and concise: This device runs local intelligence. It does not phone home. It does not ask permission. It computes where your data lives.

11. Insert and Tray Layouts


Prototype-ready top-view cavity plans.

INSERT AND TRAY LAYOUTS

Prototype EVA foam cut plans for four package sizes.

ThoxMini

USB-stick module

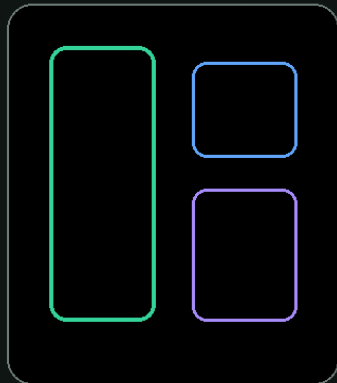


FOAM LAYERS

Device vertical slot, USB-C adapter, micro card pocket

Prototype stack: 10 mm top reveal + 20-30 mm device

ThoxAir

Mesh compute node

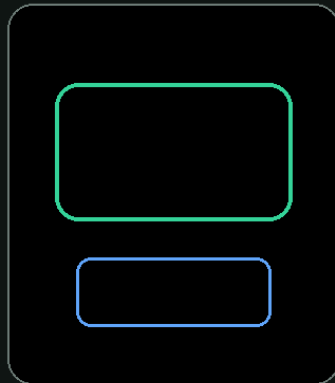


FOAM LAYERS

Device center, power cable, antenna/accessory well

Prototype stack: 10 mm top reveal + 20-30 mm device

ThoxClip

Wearable clip module

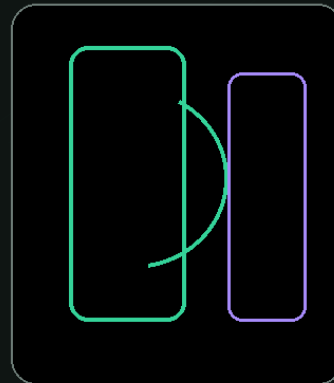


FOAM LAYERS

Clip bay, strap/clip accessory, safety card slot

Prototype stack: 10 mm top reveal + 20-30 mm device

ThoxNova

6-inch compute slab

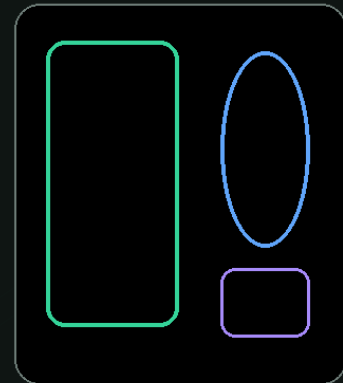

FOAM LAYERS

Device left, cup/accessory bay, card stack, cable well


Prototype stack: 10 mm top reveal + 20-30 mm device

12. Founder Edition Unboxing Flow

The physical story from outer sleeve to activation.

FOUNDER EDITION UNBOXING FLOW

Turn the prototype package into a product story.

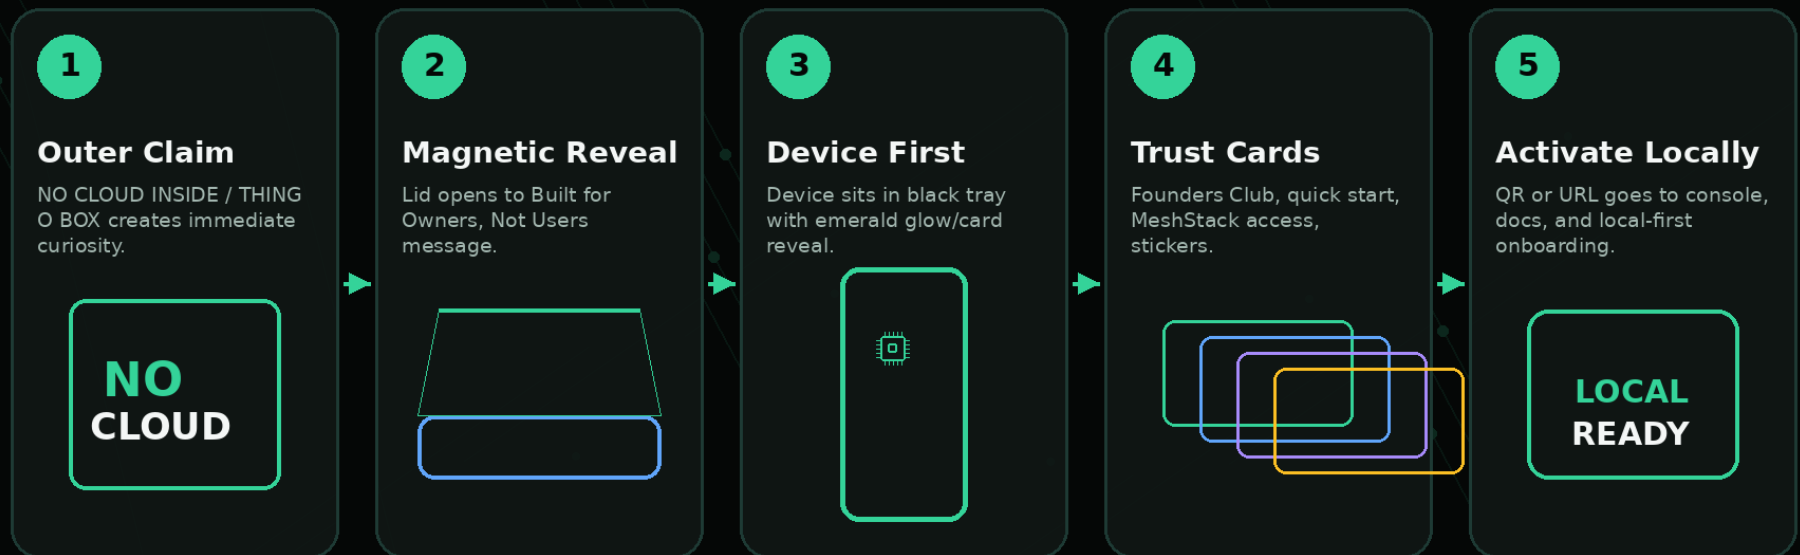

13. Insert Cards, Stickers, and Founder Materials

Card set that makes every prototype feel collectible.

Congratulations Card

Congratulations. You have received a THOX device. Do not feed it API keys after midnight.

Founders Club Card

THOX.ai Founders Club, serial number, limited edition number, owner registration URL.

MeshStack Access Card

12-month access, redemption code, console URL, support QR.

Quick Start Card

Power on, stack and connect, pair and deploy, scale and run.

Sticker Set

THING O BOX, NO CLOUD INSIDE, THOX chip mark, privacy-first badge.

Certificate

Device model, prototype batch, serial number, build date, QA initials.

Card production spec

- Size: credit-card format or 4 x 6 in quick-start cards depending on box size.
- Material: 16-24 pt black cardstock, matte laminate, rounded corners.
- Print: white + emerald ink where possible; for overnight, use black cardstock with white/emerald labels or white cardstock with dark full-bleed print.
- Serialization: reserve a small field for #0001 / prototype batch / model code.
- QR/URL: point to console.thox.ai/redeem or local setup documentation once live.

14. Materials and Finishes

Premium prototype materials without tooling.

MATERIALS AND FINISHES BOARD

Prototype materials that can look premium without tooling.



Soft-touch matte black laminate

Outer sleeve and rigid box wrap

Premium tactile finish, hides fingerprints better than gloss.



Emerald foil or spot UV

Logo, founder seal, headline accents

Creates the signature THOX signal layer.



Black EVA foam insert

Prototype tray and accessory cavities

Fast CNC/knife-cut; excellent for under-10 runs.



Black cardstock insert cards

Quick start, certificate, Founders Club


Easy same-day print, rounded-corner cards.



Clear/emerald vinyl decals

Overnight prototype wrap

Fastest bridge before custom boxes arrive.



Molded pulp insert at scale

Production sustainability option

Replace EVA once dimensions are stable.

Prototype finish stack:


Blank black rigid box + adhesive printed wrap + emerald decals + EVA insert + printed cards = 24-48 hour founder-edition package.

15. Dieline, Print File, and Artwork Handoff

How to structure vendor-ready files.

ARTWORK DIELINE AND PANEL MAP

Use this map to prepare print files for each product size.

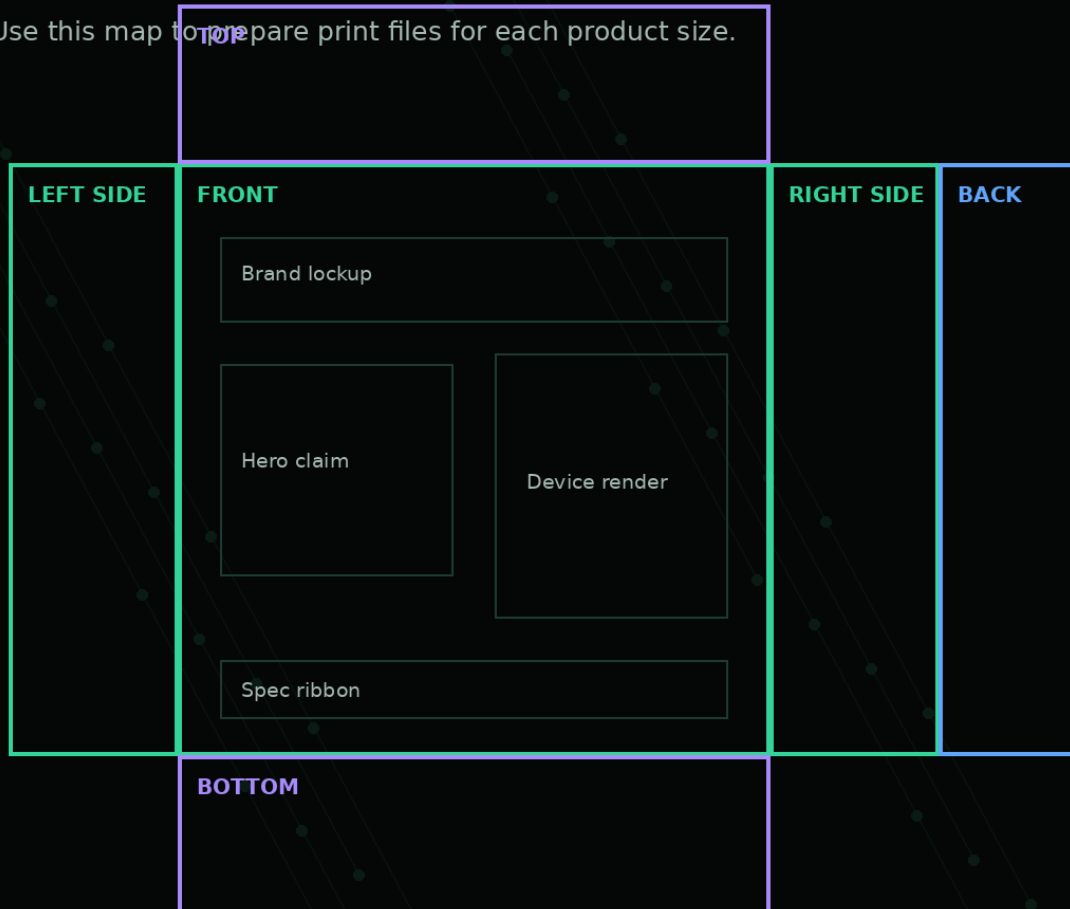

DIELINE RULES

Bleed

0.125 in on every exterior artwork edge.

Safe area

Keep text 0.20 in from folds and edges.

Color

CMYK black build plus THOX emerald spot/foil layer.

Files

AI/PDF vector + PNG mockup + separate foil/UV mask.

Prototype

For vinyl wrap, export front/back/sides as individual stickers.

16. Copy Deck

Reusable packaging language by product and panel.

Primary copy blocks

FAMILY HEADLINE

NO CLOUD INSIDE

Warning: contains local intelligence.

FAMILY HEADLINE

THING O BOX

A suspiciously powerful private AI computer.

FOUNDER INTERIOR

BUILT FOR OWNERS, NOT USERS.

Private AI you can hold.

THOXMINI

NO CLOUD IN YOUR POCKET

Pocket-scale local AI. No phone-home required.

THOXAIR

MESH YOUR INTELLIGENCE

Local AI that connects without surrendering your data.

THOXCLIP

PRIVATE AI YOU CAN CLIP ON

Portable, local, and yours.

THOXNOVA

MAGSTACK. POWER WITHOUT LIMITS Scale your intelligence by stacking devices, not subscriptions.

Microcopy rules

- Keep jokes short and product-safe. The box can be playful, but claims must be defensible.
- Do not over-explain the model, NPU, memory, or benchmarks on the front panel.
- Use side panels for credibility and proof points; use the front panel for one bold idea.
- Prefer active, local-first language: runs locally, computes privately, stacks physically, deploys at the edge.

17. Overnight Prototype Build Plan

How to make fewer than four boxes look production-ready.

Fastest path

- Order blank matte black magnetic gift boxes or black mailer boxes sized slightly larger than the device plus accessories.
- Print adhesive vinyl panels for front, sides, lid, and inside-lid artwork. Use local same-day sign printing when possible.
- Cut black EVA foam to fit the box. Use layered foam if CNC cutting is unavailable: bottom support layer, cavity layer, top reveal layer.
- Print insert cards on matte black or full-bleed dark cardstock. Round corners using a corner punch for a finished look.
- Add emerald vinyl line accents or thin LED/photo lighting only for photography; avoid implying built-in lights unless real.
- Photograph package closed, package open, device in tray, insert cards, and product family lineup.

Vendor RFQ text to paste

I need 1-4 prototype premium technology device packages with matte black THOX.ai branding. Please quote rush production for a rigid magnetic presentation box or premium mailer box with printed exterior wrap, inside-lid print, black foam insert, and small printed insert cards. Finish target: soft-touch matte black, emerald green logo/accent, optional spot UV or foil if available. I can provide artwork as PDF/AI/PNG and device dimensions. Need fastest available turnaround.

18. Packaging QA Checklist

Before photography, investor demos, or Kickstarter assets.

Artwork QA

- ☐ Logo spelling: THOX.ai and ThoxOS must be correct.
- ☐ No placeholder or fantasy feature claims remain.
- ☐ Emerald accents are consistent and not oversaturated.
- ☐ Text is readable at physical print size.

Physical QA

- ☐ Device fits without rattling.
- ☐ Finger notch allows removal without tools.
- ☐ Cards do not scratch device.
- ☐ Box closes cleanly with all accessories inside.

Photography QA

- ☐ No visible seams, bubbles, or wrinkled vinyl.
- ☐ Edges and corners are clean.
- ☐ Screen UI is readable.
- ☐ Lighting shows matte texture and emerald accent.

Vendor QA

- ☐ Bleed and safe areas included.
- ☐ Separate spot UV/foil mask supplied.
- ☐ CMYK export plus proof PNG supplied.
- ☐ Serial/QR/compliance zones reserved.

Final acceptance rule


The package is ready when a buyer can understand the product category, local-first promise, founder-edition value, and next action within ten seconds of looking at the closed box.

19. Roadmap and Production Phases

Package maturity from prototype to campaign fulfillment.

PACKAGING DELIVERY ROADMAP

From overnight founder samples to scalable Kickstarter packaging.

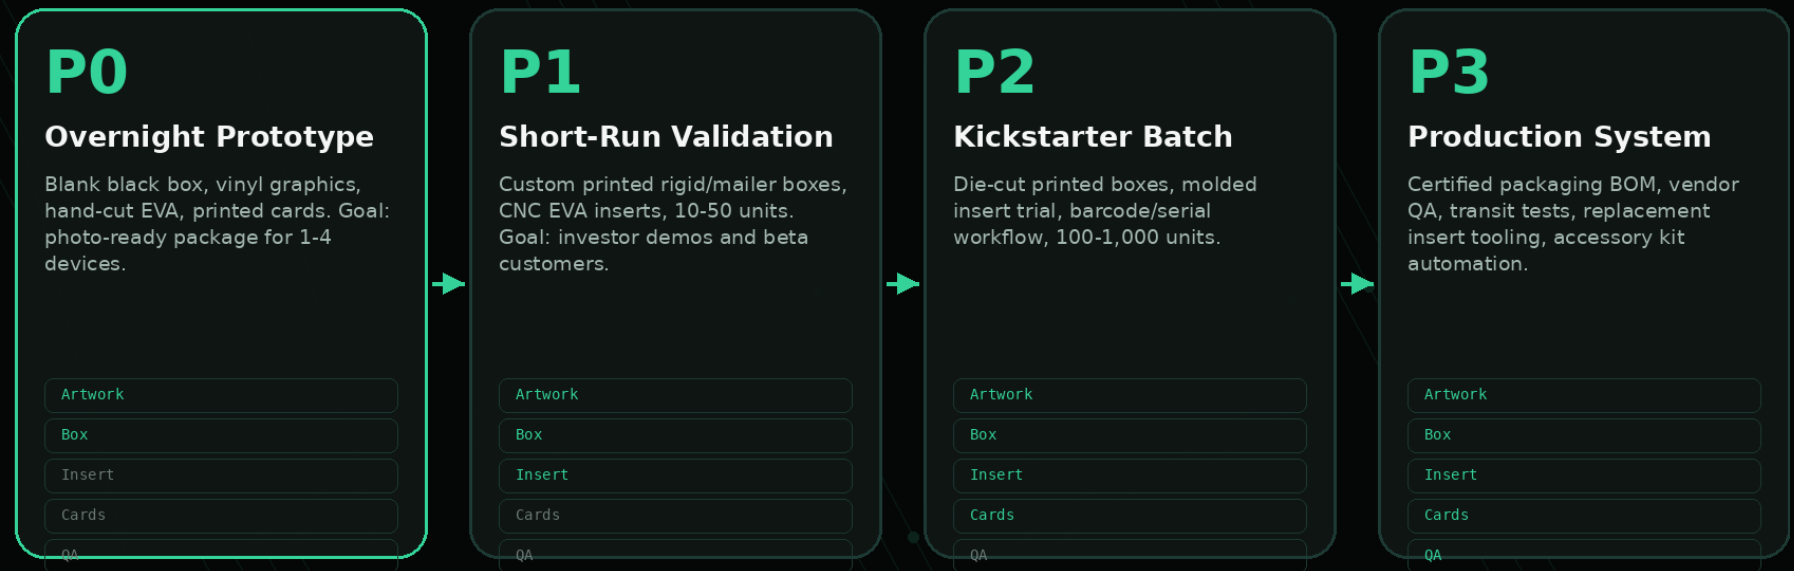

Immediate target: P0 package set for ThoxMini, ThoxAir, ThoxClip, and ThoxNova, with one shared visual system and product-specific tray insert.

20. Artwork Package Checklist

Files to create for each THOX package SKU.

- 01_brand/THOX.ai logo, chip mark, color tokens, typography notes, icon set.
- 02_artwork/front panel, left side, right side, back panel, top, bottom, inside lid.
- 03_masks/separate emerald foil, spot UV, emboss/deboss, and white ink masks if used.
- 04_renders/product render PNG with transparent background, screen UI export, package mockup JPG.
- 05_insert/foam tray cut plan, device cavity dimensions, accessory cavity dimensions, card pocket dimensions.
- 06_cards/founder card, quick-start card, certificate, sticker sheet, MeshStack/redeem card.
- 07_vendor/spec sheet with dimensions, materials, finishes, quantity, turnaround, shipping address, and approval contact.
- 08_QA/photo proof, physical proof notes, revision log, serial number list.

Next design task

Create four SKU-specific dieline files and card sheets using this guide as the master system. Start with ThoxNova as the flagship package, then adapt the same grid and copy hierarchy to ThoxMini, ThoxAir, and ThoxClip.