# COMP3170 Assignment 2 Transformations

### Objective

The purpose of this assignment is to test your knowledge of:

- 2D & 3D transformations: translation, rotation, scale, and shear
- Homogeneous coordinates & affine matrices
- Nested coordinate frames & the scene graph

#### Instructions

Throughout this assignment, all diagrams that *you* draw should be carefully drawn to scale **using graph paper** that you can download from the Internet. Sketches can be done by hand (using a ruler) and scanned (using a traditional scanner, a smartphone, or any other device that can legibly capture your sketches). You can also create your sketches using a suitable drawing program. Make sure there is always a clear distinction between the object and the axes in your diagrams. Marks will be deducted for poorly legible work.

Assignment Project Exam Help

You will be submitting your solution as a PDF, so ensure that you allow time for scanning your work to prepare your final PDF submission. Also, make sure that your scanned document is clearly legible; easy to read and clear for marking.

We will use the following notation for basic transformations. Please also **use this notation** in your answers. Incorrect notation may lose you marks.

#### **2D Transformations**

• T(dx, dy) – translate by dx units in the x direction and dy units in the y direction.

weunat: cstutorcs

- $R(\theta)$  rotate anticlockwise by angle  $\theta$ .
- S(sx, sy) scale by sx in the x direction and sy in the y direction.
- $Sh_h(h)$  shear by h units horizontally.
- $Sh_v(v)$  shear by v units vertically.

#### **3D Transformations**

- T(dx, dy, dz) translate by dx units in the x direction, dy units in the y direction and dz units in the z direction.
- $R_x(\theta)$  rotate about the x axis by angle  $\theta$ .
- $R_{\nu}(\theta)$  rotate about the y axis by angle  $\theta$ .
- $R_z(\theta)$  rotate about the z axis by angle  $\theta$ .
- S(sx, sy, sz) scale by sx units in the x direction, sy units in the y direction and sz units in the z direction.

Note: All points should be expressed as column vectors, i.e.:

$$\begin{pmatrix} x \\ y \\ w \end{pmatrix}$$
 for 2D points, and

$$\begin{pmatrix} x \\ y \\ z \\ w \end{pmatrix}$$
 for 3D points.

This means that vector multiplication should be done on the right.

E.g., transforming point  $P = \begin{pmatrix} x \\ y \\ 1 \end{pmatrix}$  by translation matrix  $T(dx, dy) = \begin{bmatrix} 1 & 0 & dx \\ 0 & 1 & dy \\ 0 & 0 & 1 \end{bmatrix}$  is represented by the equation:

$$Q = T(dx, dy)P$$


Assignment 
$$P_0^1 \circ e_0^0 e_1^0 = e_1^0 \cdot e_1$$

https://tute(
$$\overset{x+dx}{\underset{1}{\text{tr}}}$$
com

WeChat: cstutorcs

### Question 1. Sketching Transformations in 2D [30 marks]

Figure 1 below shows a flag made up of four vertices with coordinates given in a model coordinate frame. Draw the result of applying each of the following transformations M to the flag. Label the new coordinates for the four vertices in world coordinates. Show values to 1 decimal place. [5 marks each]



# Assignment Project Exam Help

E.g. For M = T(-1,0) the resulting diagram would be:

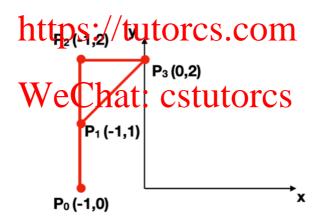


Figure 2: The flag above after the transformation M=T(-1,0) is applied.

Note: These transformations do not stack. Apply each transformation to the original flag in Figure 1, not the previous question's result.

- a)  $M = R(180^{\circ})$
- b) M = S(1, 0.5)
- c) M = S(-1,1)T(1,0)
- d)  $M = T(1,0)R(90^{\circ})$
- e)  $M = R(45^{\circ})T(0, -1)$
- f)  $M = S(1,0)R(-45^{\circ})$

## Question 2: 2D Homogeneous Matrices [30 Marks]

For each of the homogeneous matrices in (a)-(e) below:

- i. Draw (to scale) the inner (model) and outer (world) coordinate frames for the transformation represented by M, [2 marks]
- ii. Write the decomposition of M into **two** simple 2D transformations. Answers should be specified in T, R, Sh, S order. [4 marks]

[6 Marks each]

For example, the matrix:

$$M = \begin{bmatrix} 2 & 0 & 1 \\ 0 & 1 & 2 \\ 0 & 0 & 1 \end{bmatrix}$$

Can be drawn as:

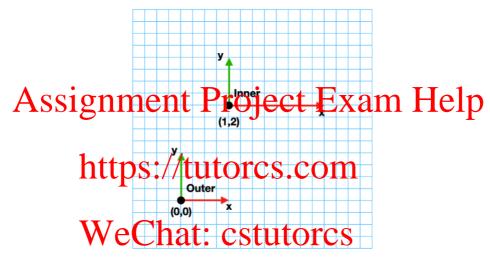


Figure 3: Example sketch of inner and outer coordinate frames for the matrix above.

And written as:

$$M = T(1,2)S(2,1)$$

**Note**: Some questions have multiple correct answers. Any one correct answer is enough.

a) 
$$M = \begin{bmatrix} -1 & 0 & -1 \\ 0 & 1 & 1 \\ 0 & 0 & 1 \end{bmatrix}$$

d) 
$$M = \begin{bmatrix} 1 & 0 & 1 \\ 1 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

b) 
$$M = \begin{bmatrix} 1 & -1 & 0 \\ 1 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

e) 
$$M = \begin{bmatrix} \frac{\sqrt{3}}{2} & \frac{1}{2} & 0\\ \frac{-1}{2} & \frac{\sqrt{3}}{2} & \frac{1}{2}\\ 0 & 0 & 1 \end{bmatrix}$$

c) 
$$M = \begin{bmatrix} 0 & 1 & 1 \\ 1 & 0 & 1 \\ 0 & 0 & 1 \end{bmatrix}$$

## Question 3: 3D Transformations [40 Marks]

In the question below, give your answers as the **product of simple transforms**, e.g.

$$M = R_{\nu}(90^{\circ})T(0,100,0)R_{x}(45^{\circ})S(2,1,1)$$

Transforms can be given in whatever order best suits the question.

**Show your working**. Incorrect answers with correct working may receive partial marks.

Do **not** calculate matrix values unless specifically requested (i.e. in part (g)).

Consider the following model aeroplane with origin and coordinate frame as indicated in Figure 4:

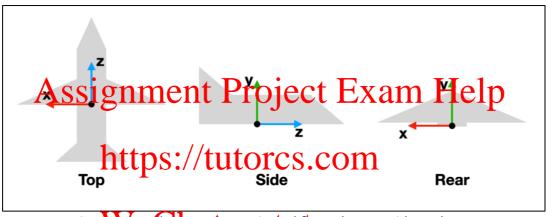


Figure Visable raroptane viewed from the top, side and rear.

a) Is this a right-handed or left-handed coordinate system? [2 marks]

Two copies of this model (P1 and P2) are placed in a scene, as shown in Figure 5 below.

- **P1** is 200m north of the world's origin point and 100m in the air. It is heading west.
- P2 is 300m west of the world's origin point and 200m in the air. It is heading northeast.

Neither plane has been scaled.

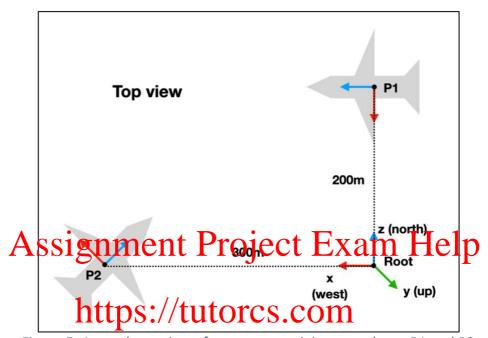


Figure 5: A top-down view of a scene containing two planes P1 and P2.

- b) What is the model matrix  $M_{P1 \to Root}$  representing plane P1's coordinate frame relative to the world, expressed as a product of simple 3D transformations  $(T, R_x, R_y, R_z, S)$ ? [3 marks]
- c) What is the model matrix  $M_{P2\rightarrow Root}$  representing plane P2's coordinate frame relative to the world, expressed as a product of simple 3D transformations  $(T, R_x, R_y, R_z, S)$ ? [3 marks]

Plane P2 flies forwards in a north-east direction for 200m without changing its altitude.

d) What is the new model matrix  $M_{P2\rightarrow Root}$  representing plane P2's resulting coordinate frame relative to the world after this movement, expressed as a product of simple 3D transformations (T, Rx, Ry, Rz, S)? [3 marks]

A **camera C** is mounted on the right wing of the **plane P1** positioned 20 metres directly to the right of the origin, as shown in Figure 6. The z-axis of the camera points to the right side of the plane.

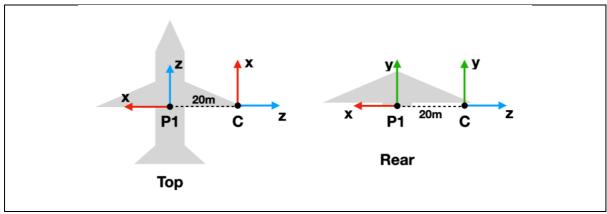


Figure 6: Top and side views showing the camera **C** on the wing of plane **P1**.

e) Draw a scene graph including **P1**, **P2** and **C**, with the world coordinate frame as the root. [4 marks]

Assignment Project Exam Help

f) What is the matrix  $M_{C\to P1}$  representing the camera C's coordinate frame relative to the plane P1, expressed as a product of simple 3D transformations (T, R<sub>x</sub>, R<sub>y</sub>, R<sub>z</sub>, S)? [3 marks] https://tutorcs.com

The plane P1 pitches up 30 degrees, as shown in Figure 7:

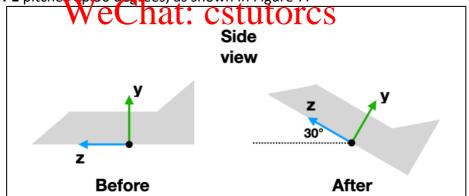


Figure 7: Side view showing the plane P1 pitching up 30° (before and after).

g) What is the **homogeneous matrix** M representing this 30° rotation in pitch? Write the matrix in full, using the trig functions  $\sin()$  and  $\cos()$ . You do **not** need to calculate a numerical result. [6 marks]

Taking the movements in (d) and (g) into account:

- h) What is the model matrix  $M_{C \to Root}$  representing the **camera C's** coordinate frame relative to the world, expressed as a product of simple 3D transformations (T, R<sub>x</sub>, R<sub>y</sub>, R<sub>z</sub>, S)? [6 marks]
- i) What is the model-view matrix  $M_{P2\to C}$  representing the **plane P2's** coordinate frame relative to the **camera C**, expressed as a product of simple 3D transformations (T, R<sub>x</sub>, R<sub>y</sub>, R<sub>z</sub>, S)? [10 marks]

# Assignment Project Exam Help

https://tutorcs.com

WeChat: cstutorcs