


## Dimensions (Unit:mm)


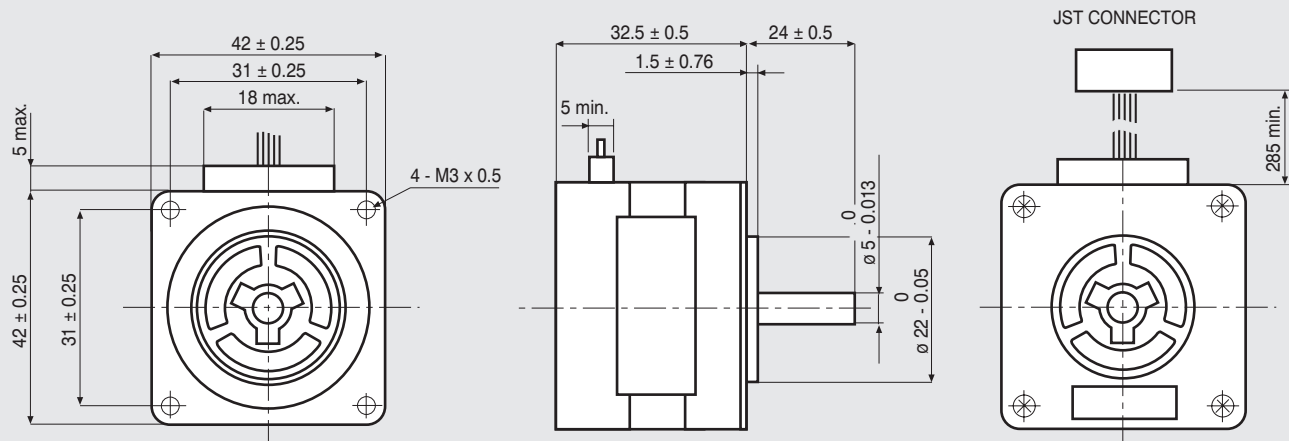


MOTOR CONNECTOR IS JST mod. EHR-4A/  
EHR-6 at 4 / 6 POLES FEMALE.  
FOR CONNECTION USE JST mod. B4B-EH-A/  
B6B-EH-A MALE CONNECTOR.

## FEATURES

| MODEL                                                 | 103-546-55500 |
|-------------------------------------------------------|---------------|
| BASIC STEP ANGLE                                      | 1.8° ± 0.09°  |
| BIPOLAR CURRENT (Amp)                                 | 0.2           |
| UNIPOLAR CURRENT (Amp)                                |               |
| RESISTANCE (Ohm)                                      | 37.5          |
| INDUCTANCE (mH)                                       | 52            |
| BIPOLAR HOLDING TORQUE (Ncm)                          | 12.5          |
| UNIPOLAR HOLDING TORQUE (Ncm)                         |               |
| ROTOR INERTIA (Kg·m <sup>2</sup> × 10 <sup>-7</sup> ) | 20            |
| THEORETICAL ACCELERATION (rad × sec. <sup>-2</sup> )  | 63000         |
| BACK E.M.F. (V/Krpm)                                  | 47            |
| MASS (Kg)                                             | 0.2           |
| LEADS CODE                                            | V             |

## TORQUE/SPEED CURVE

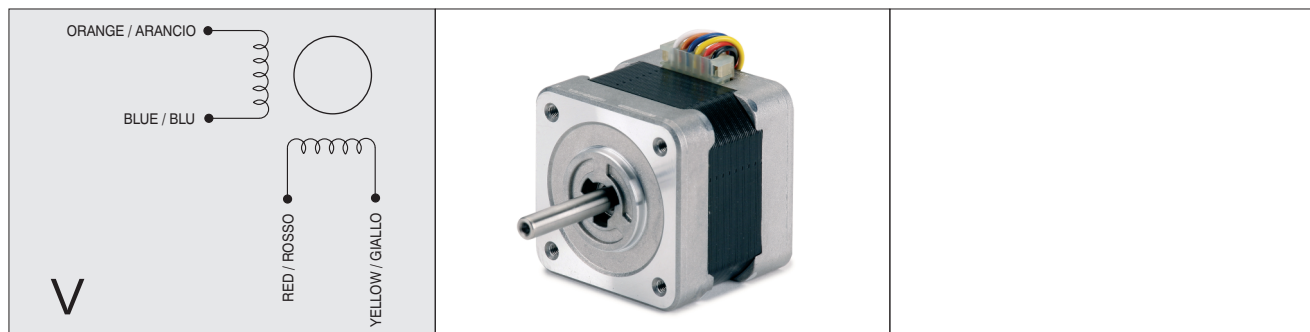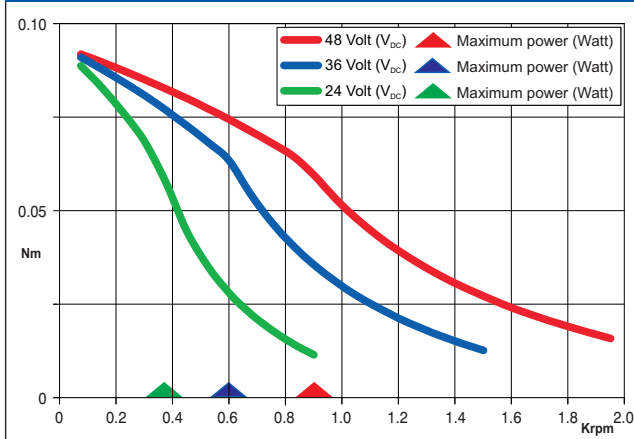

**Suggested driver: contact R.T.A.**



R.T.A. s.r.l.  
Via E. Mattei - Fraz. Divisa  
27020 MARCIGNAGO (PV) ITALY  
Tel. +39.0382.929.855 - Fax +39.0382.929.150  
www.rta.it

R.T.A. Deutschland GmbH  
Bublitzer Straße 34  
40599 DÜSSELDORF (Germany)  
Tel. +49.211.749.668.60 - Fax +49.211.749.668.66  
www.rta-deutschland.de

R.T.A. IBERICA-Motion Control Systems S.L.  
C/Generalitat 22, 1° 3°  
08850 GAVA - BARCELONA (Spain)  
Tel. +34.936.388.805 - Fax +34.936.334.595  
www.rta-iberica.es