

ICOM IC-A25N SERVICE MANUAL



Table of Contents

[Table of Contents](#)

[SPECIFICATIONS](#)

[INSIDE VIEWS](#)

[DISASSEMBLY INSTRUCTION](#)

[ADJUSTMENT PROCEDURES](#)

[PREPARATION](#)

[FREQUENCY AND TRANSMIT ADJUSTMENTS](#)

[RECEIVE ADJUSTMENTS](#)

[PARTS LIST](#)

[MECHANICAL PARTS](#)

[BOARD LAYOUT](#)

[BLOCK DIAGRAM](#)

[VOLTAGE DIAGRAM](#)

[Other ManualsLib Projects](#)

SERVICE MANUAL ADDENDUM

IC-A25N/IC-A25C/IC-A25NE/IC-A25CE

NOTE: Use these amended pages as one addendum set.
Do not mix them up with the previous master pages.

	Definitions
Replacement page	The page to replace the original one.
Addendum page	The page to be added to the original set.
Amended page	The page to be added as change history, including corrections.

CONTENTS

SPECIFICATIONS	1-1a
ADJUSTMENT PROCEDURE	4-1a to 4-6a
PARTS LIST	5-1a to 5-19a
MECHANICAL PARTS	6-1a to 6-3a
BOARD LAYOUTS	7-1a to 7-8a

[VERSION LIST]

MODEL	VERSION	VERSION NUMBER	VOR/GPS	Bluetooth	WX	LOGIC Unit	MAIN Unit	LOGIC-1 Unit	MAIN-1 Unit
IC-A25N	USA-01	#11	✓	✓	✓	✓	✓	—	—
	EXP-01	#12	✓	✓	✓	✓	✓	—	—
IC-A25NE	EUR-01	#13	✓	✓	—	—	—	✓	✓
	AUS-01	#14	✓	✓	—	—	—	✓	✓
IC-A25N	USA-02	#16*	✓	✓	✓	—	—	✓	✓
	EXP-02	#17*	✓	✓	✓	—	—	✓	✓
IC-A25C	USA-01	#21	—	—	✓	✓	✓	—	—
	EXP-01	#22	—	—	✓	✓	✓	—	—
IC-A25CE	EUR-01	#23	—	—	—	—	—	✓	✓
	AUS-01	#24	—	—	—	—	—	✓	✓
IC-A25C	EXP-02	#27*	—	—	✓	—	—	✓	✓
	USA-02	#31*	—	—	✓	✓	✓	—	—
IC-A25CE	EUR-02	#33*	—	—	—	—	—	✓	✓
	AUS-02	#34*	—	—	—	—	—	✓	✓
IC-A25C	USA-03	#36*	—	—	✓	—	—	✓	✓

* Newly added versions.

✓ Unit installed

SECTION 1

SPECIFICATIONS

The underlined parts have been updated from the previous version of the addendum, or the original page.

			IC-A25N	IC-A25C	IC-A25NE	IC-A25CE
GENERAL	Frequency coverage (Unit: MHz)	TX	118.000~136.99166			
		RX	108.000~ 136.99166	118.000~ 136.99166	108.000~ 136.99166	118.000~ 136.99166
		WX	161.650~163.275		—	
	Channel spacing		25 kHz/8.33 kHz			
	Type of emission		6K00A3E/5K60A3E, 16K0G3E (WX)		6K80A3E/5K00A3E	
	Number of memory channels		300 channels			
	Usable temperature range		-10°C~+60°C, +14°F~+140°F		-20°C~+55°C	
	Frequency stability		±0.4 kHz		±1 ppm	
	Power supply		7.2 V DC standard or 11.0 V DC at the external DC jack			
	Current drain (at 7.2 V DC)*1					
	Transmit		Less than 1.8 A			
	Receive (Maximum AF output)		Less than 500 mA			
	(Standby)		90 mA typical			
	Antenna connector		BNC (50 Ω)			
Dimensions (projections not included)		58.9 (W)×148.4 (H)×31.8 (D) mm, 2.3(W)×5.8 (H)×1.3 (D) inches				
Weight (approximate)		200 g, 7.1 oz (Without battery pack, battery case, and antenna)				
TRANSMITTER	Modulation system		Low level modulation			
	Output power (at 7.2 V DC)	PEP	6.0 W			
		Carrier Wave	1.8 W			
	Modulation limiting		70~100%		—	
	Modulation depth		—		85%	
	Spurious emissions		More than 46 dB*2		Less than -36 dBm*3	
	Audio harmonic distortion		Less than 10% (at 60% Mod.)		Less than 10% (at 85% Mod. <u>input level</u> +3 dB)	
	Ham and noise ratio		More than 35 dB		—	
	Microphone impedance		150 Ω			
RECEIVER	Receive system		Double Conversion Superheterodyne			
	Intermediate frequencies	1st	46.35 MHz			
		2nd	450 kHz			
	Sensitivity*4	COM	Less than 0 dBμ (at 6 dB S/N)		Less than 0 dBμ (at 12 dB SINAD: with CCITT)	
		VOR	Less than 0 dBμ (at 6 dB S/N)	—	Less than 0 dBμ (at 6 dB S/N)	—
		WX	Less than -8 dBμ (at 12 dB SINAD)		—	
	Audio output power		More than 350 mW with 60% Mod. at 10% distortion into an 8 Ω load			
	Adjacent Channel rejection		—		More than 60 dB	
	Ham and noise		More than 35 dB at 30% Mod.		More than 40 dB at 90% Mod.	
	Spurious response rejection ratio	AM	More than 60 dB		More than 70 dB	
FM (WX)		More than 30 dB		—		
Squelch Sensitivity (threshold)	COM/VOR	Less than 0 dBμ				
	WX	Less than -5 dBμ		—		

*1 When GPS, Bluetooth, and backlight are OFF.

*2 Except ±62.5 kHz from the operating frequency, in the AM mode, and ±20.825 kHz, in the AM narrow mode.

*3 30 MHz to 1 GHz, except ±1 MHz from the operating frequency.

*4 The input signal strength level of this receive sensitivity is measured at the load end (PD).

Measurements made in accordance with FCC Part87 (IC-A25N and IC-A25C), or EN300 676 (IC-A25NE and IC-A25CE).

All stated specifications are typical and subject to change without notice or obligation.

SECTION 4 ADJUSTMENT PROCEDURE


The underlined parts have been updated from the previous version of the addendum, or the original page.

4-1 PREPARATION


■ REQUIRED EQUIPMENT

EQUIPMENT	SPECIFICATIONS	EQUIPMENT	SPECIFICATIONS
DC power supply	Output voltage: 11 V Current capacity: 5 A or more	Programming software	CS-A25 Programming software (Revision 1.0 or later)
Battery pack	BP-288 (Fully charged)	Programming cable	OPC-478UC
RF power meter (50 Ω terminated)	Measuring range: 0.1~5 W Frequency range: 100~300 MHz SWR: Less than 1.2 : 1	Standard signal generator (SSG)	Frequency range: 0.1~300 MHz Output level: -20 dB μ to 90 dB μ (-127 to -17 dBm)
Frequency counter	Frequency range: 0.1~300 MHz Frequency accuracy: ± 1 ppm or better	Audio generator (AG)	Frequency range: 300~3000 Hz Output level: 1~500 mV
Modulation Analyzer	Frequency range: 30~300 MHz Measuring range: 0~100%	JIG cable	See the illustration below.
Attenuator	Power attenuation: 30~40 dB Capacity: More than 10 W	AC millivoltmeter	Measuring range: 10 mV to 10 V Frequency range: 108~118 MHz Output level: -20 dB μ to 90 dB μ (-127 to -17 dBm)

■ JIG CABLE

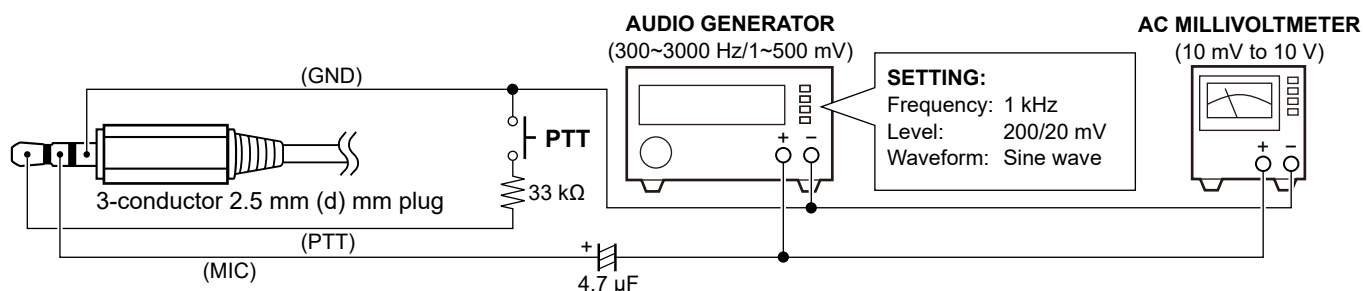



■ CONNECTIONS

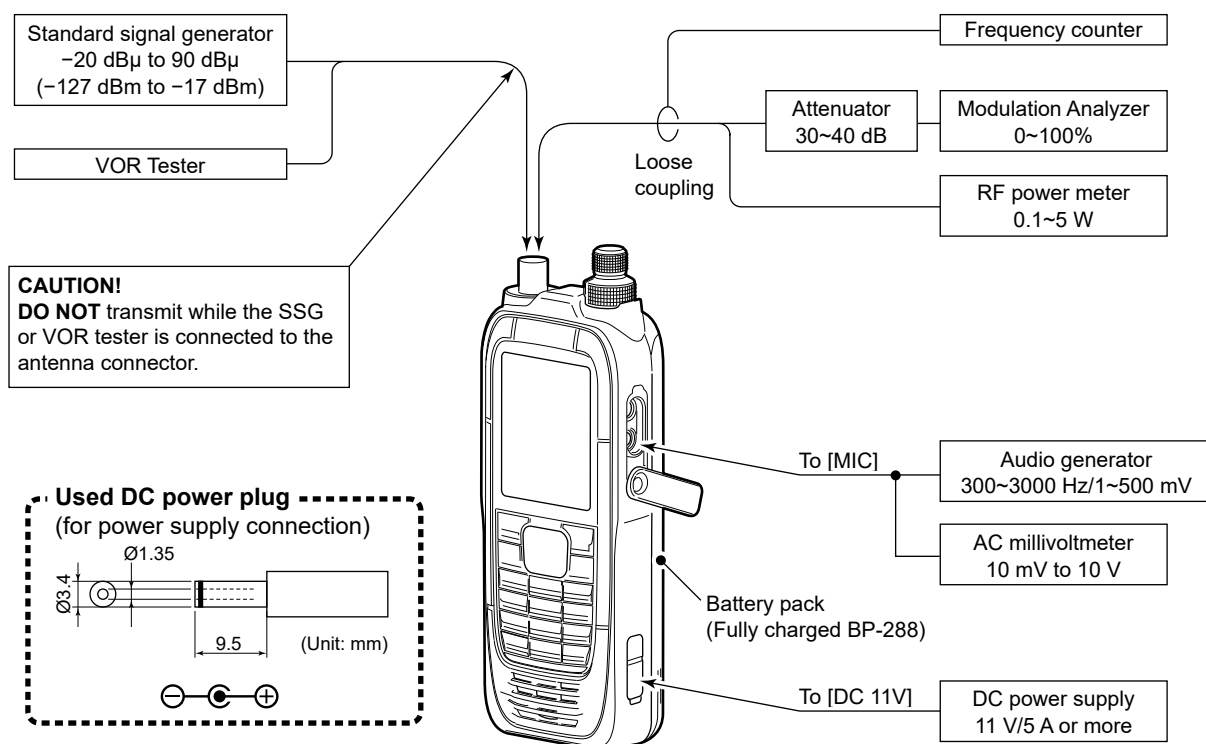


The underlined parts have been updated from the previous version of the addendum, or the original page.

■ ENTERING THE ADJUSTMENT MODE


- Right click the CS-A25's icon on the desktop and select the "Properties."
- The CS-A25 properties window appears.
- Append "/Expert" to the end of the contents of the Target field, and then click [OK].
- A space is necessary before slash.
- Write the data to the transceiver.
- Turn the power OFF, and then disconnect the OPC-478UC from the transceiver.
- While holding down [F] and [CLR], turn ON the power.
- Enters to the adjustment mode.

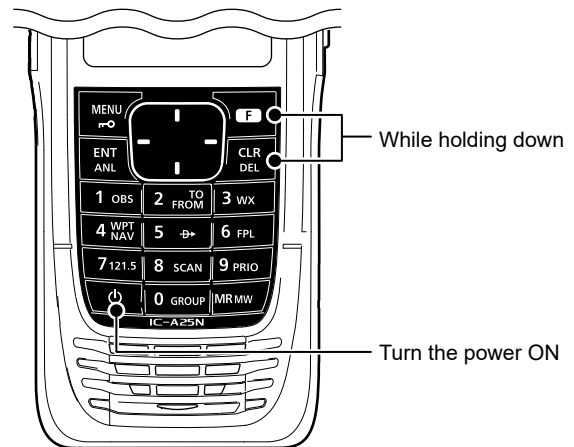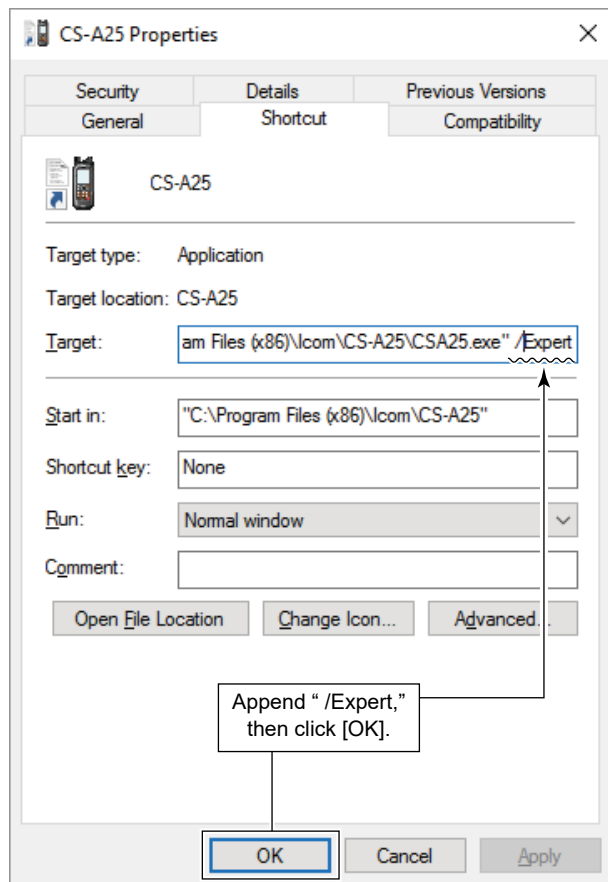

■ ADJUSTMENT MODE SCREEN

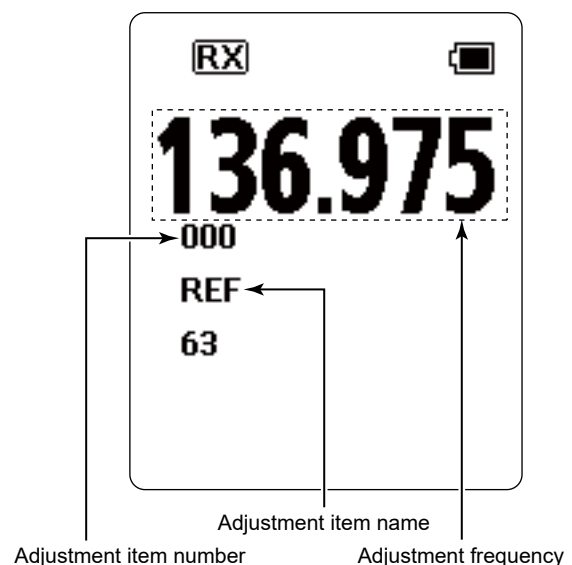

- Boot up the programming software, CS-A25.
- Connect the transceiver and the PC using with the OPC-478UC, and then turn the power ON.
- Read the transceiver data into the PC.
- Save the cloning data of the transceiver with the programming software.
- Set "Adjust Mode" in the "EXPERT" to "Enable."

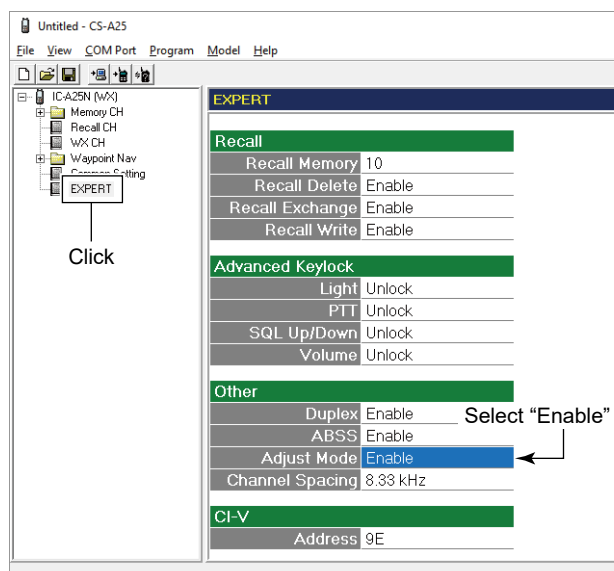


The underlined parts have been updated from the previous version of the addendum, or the original page.

■ KEY ASSIGNMENTS FOR THE ADJUSTMENT MODE

- Push [▲] to select the next adjustment item, push [▼] to select the previous adjustment item.
- Rotate [DIAL] to set or modify the adjustment value.
- Push [ENT] to store the adjusted value, and select the next adjustment item.

■ WRITE THE CLONING DATA

After adjusting, write back save the cloning data.

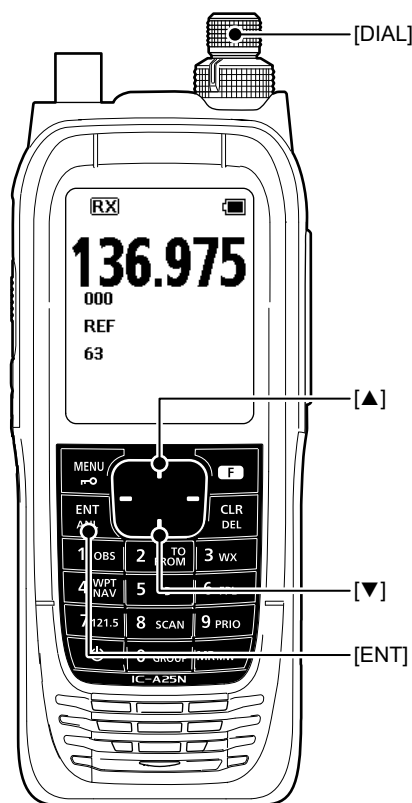

The underlined parts have been updated from the previous version of the addendum, or the original page.

4-2 FREQUENCY AND TRANSMIT ADJUSTMENTS

1. Select an adjustment item by pushing [▲]/[▼].
2. Set or modify the adjustment value as specified by rotating [DIAL], and then push [ENT].

ADJUSTMENT	ADJUSTMENT ITEM		TRANSCIVER'S CONDITION	OPERATION	VALUE
	NO.	NAME			
REFERENCE FREQUENCY	1	000 REF	- Frequency: 136.975 MHz - Transmitting	- Connect the RF power meter to the antenna connector. - Loosely couple the frequency counter to the antenna connector.	136.975 MHz (±100 Hz)
TX OUTPUT POWER (at 7.2 V)	1	013 BATT PL	- Frequency: 118.000 MHz - Transmitting	- Attach the fully charged battery pack. - Connect the RF power meter to the antenna connector. - No audio applied to [MIC].	1.8 W
	2	014 BATT PM	- Frequency: 127.500 MHz - Transmitting		
	3	015 BATT PH	- Frequency: 136.975 MHz - Transmitting		
TX OUTPUT POWER (at 11.0 V)	1	016 EXT PL	- Frequency: 118.000 MHz - Transmitting	- Detach the battery pack. - Connect the DC power supply to [DC 11 V]. - While transmitting, adjust the power supply voltage to 11.0 V. - No audio applied to [MIC].	<u>1.8 W</u>
	2	017 EXT PM	- Frequency: 127.500 MHz - Transmitting		
	3	018 EXT PH	- Frequency: 136.975 MHz - Transmitting		
MODULATION (at 7.2 V)	1	019 BATT 25MML	- Frequency: 118.000 MHz - Transmitting	- Disconnect the DC power supply. - Attach the fully charged battery pack. - Connect the modulation analyzer to the antenna connector, through the attenuator, and set it to: <u>HPF:</u> OFF <u>LPF:</u> 20 kHz <u>De-emphasis:</u> OFF <u>Detector:</u> (P-P)/2 - Connect the audio generator to [MIC], and set it to: Frequency: 1 kHz Level: 200 mV rms Waveform: Sine wave	90% (±2%)
	2	020 BATT 25MMM	- Frequency: 127.500 MHz - Transmitting		
	3	021 BATT 25MMH	- Frequency: 136.975 MHz - Transmitting		
	4	022 BATT 8MML	- Frequency: 118.005 MHz - Transmitting		
	5	023 BATT 8MMM	- Frequency: 127.505 MHz - Transmitting		
	6	024 BATT 8MMH	- Frequency: 136.980 MHz - Transmitting		
	7	031 BATT 25NML	- Frequency: 118.000 MHz - Transmitting	Set the audio generator to: Level: 20 mV rms	USA, EXP: 80% (±2%) EUR, AUS: 90% (±2%)
	8	032 BATT 25NMM	- Frequency: 127.500 MHz - Transmitting		
	9	033 BATT 25NMH	- Frequency: 136.975 MHz - Transmitting		
	10	034 BATT 8NML	- Frequency: 118.005 MHz - Transmitting		
	11	035 BATT 8NMM	- Frequency: 127.505 MHz - Transmitting		
	12	036 BATT 8NMH	- Frequency: 136.980 MHz - Transmitting		
					30% (±5%)

The underlined parts have been updated from the previous version of the addendum, or the original page.

4-2 FREQUENCY AND TRANSMIT ADJUSTMENTS (CONTINUED)

1. Select an adjustment item by pushing [▲]/[▼].
2. Set or modify the adjustment value as specified by rotating [DIAL], and then push [ENT].

ADJUSTMENT		ADJUSTMENT ITEM		TRANSCIVER'S CONDITION	OPERATION	VALUE
		NO.	NAME			
MODULATION (at 11.0 V)	1	025	EXT 25MML	• Frequency: 118.000 MHz • Transmitting	• Detach the battery pack. • Connect the DC power supply to [DC 11 V]. • While transmitting, adjust the power supply voltage to 11.0 V. • Connect the modulation analyzer to the antenna connector, through the attenuator, and set it to: <u>HPF:</u> OFF <u>LPF:</u> 20 kHz <u>De-emphasis:</u> OFF <u>Detector:</u> (P-P)/2 • Connect the audio generator to [MIC], and set it to: Frequency: 1 kHz Level: 200 mV rms Waveform: Sine wave	USA, EXP: 87% (±2%) EUR, AUS: 90% (±2%)
	2	026	EXT 25MMM	• Frequency: 127.500 MHz • Transmitting		
	3	027	EXT 25MMH	• Frequency: 136.975 MHz • Transmitting		
	4	028	EXT 8MML	• Frequency: 118.005 MHz • Transmitting		USA, EXP: 80% (±2%) EUR, AUS: 90% (±2%)
	5	029	EXT 8MMM	• Frequency: 127.505 MHz • Transmitting		
	6	030	EXT 8MMH	• Frequency: 136.980 MHz • Transmitting		
	7	037	EXT 25NML	• Frequency: 118.000 MHz • Transmitting	Set the audio generator to: Level: 20 mV rms	30% (±5%)
	8	038	EXT 25NMM	• Frequency: 127.500 MHz • Transmitting		
	9	039	EXT 25NMH	• Frequency: 136.975 MHz • Transmitting		
	10	040	EXT 8NML	• Frequency: 118.005 MHz • Transmitting		
	11	041	EXT 8NMM	• Frequency: 127.505 MHz • Transmitting		
	12	042	EXT 8NMH	• Frequency: 136.980 MHz • Transmitting		

The underlined parts have been updated from the previous version of the addendum, or the original page.

4-3 RECEIVE ADJUSTMENTS

1. Select an adjustment item by pushing [▲]/[▼].
2. Set or modify the adjustment value as specified by rotating [DIAL], and then push [ENT].

ADJUSTMENT		ADJUSTMENT ITEM		TRANSCIVER'S CONDITION	OPERATION	VALUE
		NO.	NAME			
RECEIVE SENSITIVITY - AM -	1	044	BPF1	• Frequency: IC-A25N: 108.025 MHz IC-A25C: 118.025 MHz • Receiving	Connect the SSG to the antenna connector, and set <u>it to</u> : Frequency: IC-A25N: 108.025 MHz IC-A25C: 118.025 MHz Modulation: None Level: +10 dBμ [†] (–97 dBm)	Push [ENT] (Automatic adjustment)
	2	045	BPF2	• Frequency: 127.500 MHz • Receiving	Set the SSG to: Frequency: 127.500 MHz Level: +5 dBμ [†] (–102 dBm)	
	3	046	BPF3	• Frequency: 136.975 MHz • Receiving	Set the SSG to: Frequency: 136.975 MHz	
	4	047	BPF4	• Frequency: 161.650 MHz • Receiving	Set the SSG to: Frequency: 161.650 MHz	
	5	048	BPF5	• Frequency: 163.275 MHz • Receiving	Set the SSG to: Frequency: 163.275 MHz	
SQUELCH LEVEL - Wide -	1	050	WSO_S	• Frequency: 118.025 MHz • Receiving	Connect the SSG to the antenna connector, and set <u>it to</u> : Frequency: 118.025 MHz Modulation: None Level: –10 dBμ [†] (–117 dBm)	Push [ENT] (Automatic adjustment)
	2	051	WSC_S		Set the SSG to: Level: –13 dBμ [†] (–120 dBm)	
	3	052	WSO_T		Set the SSG to: Level: +13 dBμ [†] (–94 dBm)	
	4	053	WSC_T		Set the SSG to: Level: +10 dBμ [†] (–97 dBm)	
	5	054	NSO_S	• Frequency: 118.030 MHz • Receiving	Set the SSG to: Level: –10 dBμ [†] (–117 dBm)	
	6	055	NSC_S		Set the SSG to: Level: –13 dBμ [†] (–120 dBm)	
	7	056	NSO_T		Set the SSG to: Level: +13 dBμ [†] (–94 dBm)	
	8	057	NSC_T		Set the SSG to: Level: +10 dBμ [†] (–97 dBm)	
	9	058	SO_S	• Frequency: 162.550 MHz • Receiving	Set the SSG to: Frequency: 162.550 MHz Level: –10 dBμ [†] (–117 dBm)	
	10	059	SC_S		Set the SSG to: Level: –13 dBμ [†] (–120 dBm)	
	11	060	SO_T		Set the SSG to: Level: +13 dBμ [†] (–94 dBm)	
	12	061	SC_T		Set the SSG to: Level: +10 dBμ [†] (–97 dBm)	
VOR 0° (Only for IC-A25N)	1	063	VOR0	• Frequency: 108.000 MHz • Receiving	Connect the VOR tester to the antenna connector, and set <u>it to</u> : Frequency: 108.000 MHz Level: +47 dBμ [†] (–60 dBm) Modulation: 30 Hz 30% 9960 Hz 30% Bearing: 0°	Push [ENT] (Automatic adjustment)
2nd LO FREQUENCY	1	066	LO	• Frequency: 127.510 MHz • Receiving	Connect the SSG to the antenna connector, and set <u>it to</u> : Frequency: 127.50833 MHz Modulation: None Level: +90 dBμ [†] (–17 dBm)	Push [ENT] (Automatic adjustment)

[†]The output level of the standard signal generator (SSG) is measured at the load end (PD).

PARTS LIST

The underlined parts have been updated from the previous version of the addendum, or the original page.

[LOGIC UNIT] (for #11, #12, #21, #22, and #31)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
IC1	1190004712	S.IC HRM1016-010022 [11]	T	37.3/13.5
	1190004712	S.IC HRM1016-010022 [12]		
IC11	1110003790	S.IC NJM2903V-TE1-#FMZB [11]	B	17.6/8.1
	1110003790	S.IC NJM2903V-TE1-#FMZB [12]		
IC12	1110006470	S.IC LMV324IPWR [11]	B	24.1/19.7
	1110006470	S.IC LMV324IPWR [12]		
IC13	1110006740	S.IC LMV358IPWR [11]	B	8.4/11.0
	1110006740	S.IC LMV358IPWR [12]		
IC17	1190004620	S.IC GSU-141A-098A [11]	B	23.8/85.9
	1190004620	S.IC GSU-141A-098A [12]		
IC27	1140018060	S.IC R5F52108BDLK [11]	B	31.0/52.9
IC30	1180004760	S.REG S-1200B33-M5T1U [11]	T	18.2/10.2
	1180004760	S.REG S-1200B33-M5T1U [12]		
IC31	1180004760	S.REG S-1200B33-M5T1U [11]	B	32.5/96.5
	1180004760	S.REG S-1200B33-M5T1U [12]		
IC32	1110006490	S.IC LMV321IDCKR [11]	B	38.6/5.1
	1110006490	S.IC LMV321IDCKR [12]		
IC34	1180003570	S.REG NJM2830U1-33-TE1-#ZZZB [11]	B	39.7/44.0
IC35	1130014260	S.IC SN74LVC2GU04DCKR [11]	B	29.0/13.8
IC36	1130014260	S.IC SN74LVC2GU04DCKR [11]	B	40.9/31.9
IC37	1130016621	S.IC GT24C128B-2ZLI-TR [11]	B	31.3/68.1
IC38	1110007780	S.IC NJU7704F3-28A-TE1-#ZZZH [11]	B	22.4/67.7
IC39	1110007780	S.IC NJU7704F3-28A-TE1-#ZZZH [11]	T	22.1/13.2
	1110007780	S.IC NJU7704F3-28A-TE1-#ZZZH [12]		
IC40	1180005110	S.REG NJM2836DL3-05-TE1 [11]	B	31.8/35.9
IC41	1180003460	S.REG NJM2831F05-TE1-#ZZZB [12]	B	29.1/64.5
Q3	1530004190	S.TRA L2SC4617ST1G [11]	B	24.9/72.7
Q5	1590004070	S.TRA LDTIC144EET1G [12]	T	36.3/21.2
	1590004070	S.TRA LDTIC144EET1G [11]		
Q13	1530004140	S.TRA L2SC4081RT1G [11]	B	21.1/12.6
	1530004140	S.TRA L2SC4081RT1G [12]		
Q15	1590004530	S.TRA DMG564050R [11]	B	24.9/29.6
	1590004530	S.TRA DMG564050R [12]		
Q16	1590004070	S.TRA LDTIC144EET1G [11]	B	40.5/11.3
	1590004070	S.TRA LDTIC144EET1G [12]		
Q17	1590004070	S.TRA LDTIC144EET1G [11]	T	19.9/17.9
	1590004070	S.TRA LDTIC144EET1G [12]		
Q22	1530004000	S.TRA 2SC4738-GR (TE85LF) [11]	B	32.4/14.2
Q23	1510001100	S.TRA 2SA1832-GR (TE85RF) [11]	B	28.1/17.0
Q24	1510001100	S.TRA 2SA1832-GR (TE85RF) [11]	B	40.8/28.5
Q25	1560001730	S.FET RUE002N02 TL [11]	B	35.8/29.7
Q31	1510001100	S.TRA 2SA1832-GR (TE85RF) [11]	T	14.7/13.5
Q32	1510001100	S.TRA 2SA1832-GR (TE85RF) [11]	T	13.4/18.5
Q33	1590004070	S.TRA LDTIC144EET1G [11]	T	17.2/7.4
Q34	1590004070	S.TRA LDTIC144EET1G [11]	T	14.8/15.5
D1	1750001810	S.DIO L1SS400T1G [11]	T	5.4/19.4
D2	1750002220	S.DIO DA6J101K0R [11]	T	3.4/16.6
D4	1750001810	S.DIO L1SS400T1G [21]	T	3.9/12.1
	1750001810	S.DIO L1SS400T1G [22]		
	1750001810	S.DIO L1SS400T1G [31]		
D6	1750001810	S.DIO L1SS400T1G [12]	B	11.2/56.2
	1750001810	S.DIO L1SS400T1G [22]		
D8	1750001810	S.DIO L1SS400T1G [11]	B	32.5/72.5
D16	1750001810	S.DIO L1SS400T1G [11]	B	13.2/6.8
	1750001810	S.DIO L1SS400T1G [12]		
D17	1750001810	S.DIO L1SS400T1G [11]	B	17.5/12.6
	1750001810	S.DIO L1SS400T1G [12]		
D18	1750001790	S.DIO 1SS390 TE61 [11]	B	40.7/57.6
D34	1750001810	S.DIO L1SS400T1G [11]	B	26.3/36.4
D35	1750001810	S.DIO L1SS400T1G [11]	B	45.0/44.6
D46	1750001810	S.DIO L1SS400T1G [11]	T	17.8/12.6
	1750001810	S.DIO L1SS400T1G [12]		
D47	1750001810	S.DIO L1SS400T1G [11]	B	32.5/17.4
D48	1750001810	S.DIO L1SS400T1G [11]	B	36.0/28.1
X1	6050013790	S.XTA CR-981 (19.6608 MHz) [11]	B	39.7/53.9
R3	7030015910	S.RES RMC1/16S-101JTH (100) [11]	B	33.6/8.2
	7030015910	S.RES RMC1/16S-101JTH (100) [12]		
R5	7030016020	S.RES RMC1/16S-104JTH (100 k) [11]	B	23.5/70.8
R16	7030016020	S.RES RMC1/16S-104JTH (100 k) [11]	B	22.6/70.8
R17	7030015970	S.RES RMC1/16S-103JTH (10 k) [11]	B	26.9/73.2
R18	7030015970	S.RES RMC1/16S-103JTH (10 k) [11]	B	28.3/71.6
R25	7030016160	S.RES RMC1/16S-820JTH (82) [11]	T	11.0/35.2
R26	7030016160	S.RES RMC1/16S-820JTH (82) [11]	T	22.0/35.2
R28	7030016560	S.RES RMC1/16SJPTH [11]	B	31.8/8.2
	7030016560	S.RES RMC1/16SJPTH [12]		
R60	7030016340	S.RES RMC1/16S-393JTH (39 k) [11]	B	22.0/8.4
	7030016340	S.RES RMC1/16S-393JTH (39 k) [12]		
R61	7030016110	S.RES RMC1/16S-473JTH (47 k) [11]	B	13.3/8.8
	7030016110	S.RES RMC1/16S-473JTH (47 k) [12]		
R62	7030016020	S.RES RMC1/16S-104JTH (100 k) [11]	B	12.2/8.4
	7030016020	S.RES RMC1/16S-104JTH (100 k) [12]		
R63	7030016330	S.RES RMC1/16S-153JTH (15 k) [11]	B	11.0/2.3
	7030016330	S.RES RMC1/16S-153JTH (15 k) [12]		
R64	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [11]	B	4.5/9.2
	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [12]		

[LOGIC UNIT] (for #11, #12, #21, #22, and #31)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
R65	7030016040	S.RES RMC1/16S-224JTH (220 k) [11]	B	9.2/6.6
	7030016040	S.RES RMC1/16S-224JTH (220 k) [12]		
R66	7030016040	S.RES RMC1/16S-224JTH (220 k) [11]	B	9.2/5.7
	7030016040	S.RES RMC1/16S-224JTH (220 k) [12]		
R67	7030015970	S.RES RMC1/16S-103JTH (10 k) [11]	B	5.9/10.2
	7030015970	S.RES RMC1/16S-103JTH (10 k) [12]		
R68	7030016200	S.RES RMC1/16S-274JTH (270 k) [11]	B	5.9/11.8
	7030016200	S.RES RMC1/16S-274JTH (270 k) [12]		
R69	7030016360	S.RES RMC1/16S-123JTH (12 k) [11]	B	2.8/14.3
	7030016360	S.RES RMC1/16S-123JTH (12 k) [12]		
R72	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [11]	B	9.9/15.3
	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [12]		
R73	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [11]	B	21.7/24.9
	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [12]		
R74	7030016040	S.RES RMC1/16S-224JTH (220 k) [11]	B	21.7/24.0
	7030016040	S.RES RMC1/16S-224JTH (220 k) [12]		
R75	7030016110	S.RES RMC1/16S-473JTH (47 k) [11]	B	23.7/24.0
	7030016110	S.RES RMC1/16S-473JTH (47 k) [12]		
R76	7030016110	S.RES RMC1/16S-473JTH (47 k) [11]	B	22.7/26.4
	7030016110	S.RES RMC1/16S-473JTH (47 k) [12]		
R77	7030016040	S.RES RMC1/16S-224JTH (220 k) [11]	B	24.8/25.0
	7030016040	S.RES RMC1/16S-224JTH (220 k) [12]		
R78	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [11]	B	26.5/25.5
	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [12]		
R79	7030016120	S.RES RMC1/16S-682JTH (6.8 k) [11]	B	24.8/13.4
	7030016120	S.RES RMC1/16S-682JTH (6.8 k) [12]		
R80	7030016030	S.RES RMC1/16S-154JTH (150 k) [11]	B	26.0/15.4
	7030016030	S.RES RMC1/16S-154JTH (150 k) [12]		
R81	7030016290	S.RES RMC1/16S-222JTH (2.2 k) [11]	B	23.9/15.0
	7030016290	S.RES RMC1/16S-222JTH (2.2 k) [12]		
R82	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [11]	B	26.4/13.3
	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [12]		
R83	7030016040	S.RES RMC1/16S-224JTH (220 k) [11]	B	22.4/15.3
	7030016040	S.RES RMC1/16S-224JTH (220 k) [12]		
R84	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [11]	B	16.6/18.5
	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [12]		
R85	7030016360	S.RES RMC1/16S-123JTH (12 k) [11]	B	14.4/21.3
	7030016360	S.RES RMC1/16S-123JTH (12 k) [12]		
R86	7030016560	S.RES RMC1/16SJPTH [11]	B	15.3/21.3
	7030016560	S.RES RMC1/16SJPTH [12]		
R88	7030016000	S.RES RMC1/16S-823JTH (82 k) [11]	B	18.2/23.5
	7030016000	S.RES RMC1/16S-823JTH (82 k) [12]		
R91	7030016100	S.RES RMC1/16S-334JTH (330 k) [11]	B	23.0/10.4
	7030016100	S.RES RMC1/16S-334JTH (330 k) [12]		
R93	7030016070	S.RES RMC1/16S-474JTH (470 k) [11]	B	21.5/14.4
	7030016070	S.RES RMC1/16S-474JTH (470 k) [12]		
R94	7030016450	S.RES RMC1/16S-824JTH (820 k) [11]	B	23.0/13.7
	7030016450	S.RES RMC1/16S-824JTH (820 k) [12]		
R95	7030016090	S.RES RMC1/16S-223JTH (22 k) [11]	B	19.2/13.0
	7030016090	S.RES RMC1/16S-223JTH (22 k) [12]		
R112	7030016320	S.RES RMC1/16S-225JTH (2.2 M) [11]	B	16.7/11.0
	7030016320	S.RES RMC1/16S-225JTH (2.2 M) [12]		
R145	7030016060	S.RES RMC1/16S-105JTH (1 M) [11]	T	2.2/13.8
R146	7030016060	S.RES RMC1/16S-105JTH (1 M) [11]	T	2.7/14.8
R147	7030016060	S.RES RMC1/16S-105JTH (1 M) [11]	T	5.6/13.8
R148	7030016060	S.RES RMC1/16S-105JTH (1 M) [11]	T	4.1/9.3
R151	7510001661	S.THR NTCG16 4LH 473JT [11]	T	34.8/24.7
R152	7030008270	S.RES RR0510P-104-D (100 k) [11]	T	36.8/25.5
R558	7030016360	S.RES RMC1/16S-123JTH (12 k) [11]	B	21.5/9.8
	7030016360	S.RES RMC1/16S-123JTH (12 k) [12]		
R595	7030015520	S.RES RMC1/16JPTP [11]	B	28.0/32.2
R856	7030015900	S.RES RMC1/16S-470JTH (47) [11]	B	19.2/88.3
	7030015900	S.RES RMC1/16S-470JTH (47) [12]		
R857	7030016560	S.RES RMC1/16SJPTH [11]	B	18.8/85.4
	7030016560	S.RES RMC1/16SJPTH [12]		
R858	7030016560	S.RES RMC1/16SJPTH [11]	B	21.5/79.2
	7030016560	S.RES RMC1/16SJPTH [12]		
R859	7030016560	S.RES RMC1/16SJPTH [11]	B	28.7/86.5
	7030016560	S.RES RMC1/16SJPTH [12]		
R860	7030016020	S.RES RMC1/16S-104JTH (100 k) [11]	B	28.7/87.4
	7030016020	S.RES RMC1/16S-104JTH (100 k) [12]		
R861	7030016020	S.RES RMC1/16S-104JTH (100 k) [11]	B	29.7/97.1
	7030016020	S.RES RMC1/16S-104JTH (100 k) [12]		
R862	7030016560	S.RES RMC1/16SJPTH [11]	B	28.9/98.0
	7030016560	S.RES RMC1/16SJPTH [12]		
R863	7030016560	S.RES RMC1/16SJPTH [11]	T	22.8/16.1
	7030016560	S.RES RMC1/16SJPTH [12]		
R864	7030016110	S.RES RMC1/16S-473JTH (47 k) [11]	B	40.1/16.4
	7030016110	S.RES RMC1/16S-473JTH (47 k) [12]		
R865	7030016110	S.RES RMC1/16S-473JTH (47 k) [11]	B	38.5/15.3
	7030016110	S.RES RMC1/16S-473JTH (47 k) [12]		
R866	7030016020	S.RES RMC1/16S-104JTH (100 k) [11]	T	21.9/17.9
	7030016020	S.RES RMC1/16S-104JTH (100 k) [12]		
R867	7030016020	S.RES RMC1/16S-104JTH (100 k) [11]	B	40.1/12.9
	7030016020	S.RES RMC1/16S-104JTH (100 k) [12]		
R868	7030016110	S.RES RMC1/16S-473JTH (47 k) [11]	B	40.1/14.1
	7030016110	S.RES RMC1/16S-473JTH (47 k) [12]		
R869	7030016110	S.RES RMC1/16S-473JTH (47 k) [11]	B	40.1/15.3
	7030016110	S.RES RMC1/16S-473JTH (47 k) [12]		
R871	7030015970	S.RES RMC1/16S-103JTH (10 k) [11]	B	36.3/11.8
	7030015970	S.RES RMC1/16S-103JTH (10 k) [12]		
R873	7030016050	S.RES RMC1/16S-102JTH (1 k) [11]	B	38.7/8.4
	7030016050	S.RES RMC1/16S-102JTH (1 k) [12]		
R874	7030016190	S.RES RMC1/16S-273JTH (27 k) [11]	B	39.0/2.4
	7030016190	S.RES RMC1/16S-273JTH (27 k) [12]		

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

M.= Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)
H/V LOCATION=See the BOARD LAYOUTS for details.

The underlined parts have been updated from the previous version of the addendum, or the original page.

[LOGIC UNIT] (for #11, #12, #21, #22, and #31)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
R875	7030016190	S.RES RMC1/16S-273JTH (27 k) [11]	B	40.8/4.3
	7030016190	S.RES RMC1/16S-273JTH (27 k) [12]		
R876	7030016160	S.RES RMC1/16S-820JTH (82)	T	33.0/35.2
R878	7030015920	S.RES RMC1/16S-221JTH (220)	T	13.2/14.6
R879	7030016020	S.RES RMC1/16S-104JTH (100 k) [11]	B	41.3/5.5
	7030016020	S.RES RMC1/16S-104JTH (100 k) [12]		
R881	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	27.9/18.5
R882	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	29.6/16.9
R883	7030016380	S.RES RMC1/16S-183JTH (18 k)	B	30.9/17.3
R884	7030016360	S.RES RMC1/16S-123JTH (12 k)	B	30.9/14.1
R885	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	39.2/28.6
R886	7030016380	S.RES RMC1/16S-183JTH (18 k)	B	38.0/28.1
R887	7030016560	S.RES RMC1/16SJPTH	B	38.0/30.2
R888	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	42.8/31.9
R901	7030014460	S.RES MCR006YZPJ 101 (100)	B	30.3/43.5
R902	7030014460	S.RES MCR006YZPJ 101 (100)	B	23.5/43.3
R903	7030014460	S.RES MCR006YZPJ 101 (100)	B	30.2/61.4
R906	7030014460	S.RES MCR006YZPJ 101 (100)	B	23.5/62.3
R907	7030014460	S.RES MCR006YZPJ 101 (100)	B	39.2/50.1
R908	7030016060	S.RES RMC1/16S-105JTH (1 M)	B	37.1/52.9
R909	7030016150	S.RES RMC1/16S-100JTH (10)	B	35.8/53.0
R910	7030016360	S.RES RMC1/16S-123JTH (12 k)	B	39.3/57.6
R911	7030016090	S.RES RMC1/16S-223JTH (22 k)	B	39.3/56.7
R912	7030016360	S.RES RMC1/16S-123JTH (12 k)	B	42.0/58.4
R913	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	26.0/67.7
R914	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	25.0/68.2
R917	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	24.1/21.2
R920	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	23.7/20.0
R925	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	44.4/52.9
R926	7030016560	S.RES RMC1/16SJPTH [11]	B	9.9/16.2
	7030016560	S.RES RMC1/16SJPTH [12]		
R927	7030016560	S.RES RMC1/16SJPTH [11]	B	20.7/15.3
	7030016560	S.RES RMC1/16SJPTH [12]		
R928	7030016560	S.RES RMC1/16SJPTH [11]	B	21.3/26.2
	7030016560	S.RES RMC1/16SJPTH [12]		
R929	7030014460	S.RES MCR006YZPJ 101 (100) [11]	B	24.6/50.9
	7030014460	S.RES MCR006YZPJ 101 (100) [12]		
R930	7030014460	S.RES MCR006YZPJ 101 (100) [11]	B	24.0/51.9
	7030014460	S.RES MCR006YZPJ 101 (100) [12]		
R931	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	23.8/49.3
R932	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	23.4/50.5
R933	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	22.1/69.6
R934	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	26.0/69.8
R935	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	35.3/54.5
R937	7030016560	S.RES RMC1/16SJPTH	B	30.3/27.6
R940	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	28.4/61.3
R943	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	35.6/44.1
R944	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	36.5/47.0
R945	7030016020	S.RES RMC1/16S-104JTH (100 k) [11]	B	19.2/86.6
	7030016020	S.RES RMC1/16S-104JTH (100 k) [12]		
R946	7030016020	S.RES RMC1/16S-104JTH (100 k) [11]	B	20.3/79.6
	7030016020	S.RES RMC1/16S-104JTH (100 k) [12]		
R947	7030016020	S.RES RMC1/16S-104JTH (100 k) [11]	T	15.9/9.8
	7030016020	S.RES RMC1/16S-104JTH (100 k) [12]		
R949	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	21.1/21.2
R952	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	17.7/26.7
R962	7030016020	S.RES RMC1/16S-104JTH (100 k) [11]	B	39.1/77.1
	7030016020	S.RES RMC1/16S-104JTH (100 k) [12]		
R963	7030016210	S.RES RMC1/16S-121JTH (120)	T	13.2/16.2
R964	7030014400	S.RES MCR006YZPJ 100 (10)	B	28.6/60.4
R965	7030014400	S.RES MCR006YZPJ 100 (10)	B	30.9/59.6
R966	7030014400	S.RES MCR006YZPJ 100 (10)	B	43.4/58.4
R967	7030014400	S.RES MCR006YZPJ 100 (10)	B	34.7/47.9
R968	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/49.7
R969	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/51.8
R970	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/66.3
R971	7030014400	S.RES MCR006YZPJ 100 (10)	B	25.0/66.8
R972	7030014400	S.RES MCR006YZPJ 100 (10)	B	34.6/44.5
R973	7030014400	S.RES MCR006YZPJ 100 (10)	B	35.6/47.1
R974	7030014400	S.RES MCR006YZPJ 100 (10)	B	23.5/47.8
R975	7030014400	S.RES MCR006YZPJ 100 (10)	B	29.3/47.9
R976	7030014400	S.RES MCR006YZPJ 100 (10)	B	28.7/47.9
R977	7030014400	S.RES MCR006YZPJ 100 (10)	B	27.5/47.9
R978	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/50.9
R979	7030014400	S.RES MCR006YZPJ 100 (10)	B	33.0/44.0
R980	7030014400	S.RES MCR006YZPJ 100 (10)	B	39.4/51.5
R981	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/48.8
R982	7030014400	S.RES MCR006YZPJ 100 (10)	B	28.1/47.9
R983	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.3/47.9
R984	7030014400	S.RES MCR006YZPJ 100 (10)	B	24.1/55.7
R985	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/50.6
R986	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/49.1
R987	7030014400	S.RES MCR006YZPJ 100 (10)	B	33.1/47.9
R988	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/48.5
R989	7030014400	S.RES MCR006YZPJ 100 (10)	B	32.3/47.9
R990	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/51.8
R991	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/53.0
R992	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/52.4
R993	7030014400	S.RES MCR006YZPJ 100 (10)	B	33.5/46.2
R994	7030014400	S.RES MCR006YZPJ 100 (10)	B	28.9/57.7
R995	7030014400	S.RES MCR006YZPJ 100 (10)	B	23.7/58.8
R996	7030014400	S.RES MCR006YZPJ 100 (10)	B	29.0/44.3
R997	7030014400	S.RES MCR006YZPJ 100 (10)	B	28.4/43.5
R998	7030014400	S.RES MCR006YZPJ 100 (10)	B	34.5/46.2
R999	7030014380	S.RES MCR006YZPJ 103 (10 k)	B	31.3/42.9
R1000	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/42.5
R1001	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.7/42.5
R1002	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.9/47.9
R1003	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/50.0
R1004	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/47.9
R1005	7030014400	S.RES MCR006YZPJ 100 (10)	B	32.7/46.2
R1006	7030014380	S.RES MCR006YZPJ 103 (10 k)	B	31.5/47.9

[LOGIC UNIT] (for #11, #12, #21, #22, and #31)

REF NO.	PART NO.	DESCRIPTION		M.	H/V LOCATION
R1007	7030014400	S.RES	MCR006YZPJ 100 (10)	B	24.1/47.2
R1008	7030014400	S.RES	MCR006YZPJ 100 (10)	B	26.0/49.4
R1009	7030014400	S.RES	MCR006YZPJ 100 (10)	B	35.1/46.2
R1010	7030014400	S.RES	MCR006YZPJ 100 (10)	B	33.9/47.9
R1011	7030014400	S.RES	MCR006YZPJ 100 (10)	B	31.9/46.2
R1012	7030014400	S.RES	MCR006YZPJ 100 (10)	B	35.5/57.6
R1013	7030014400	S.RES	MCR006YZPJ 100 (10)	B	34.7/57.9
R1014	7030014400	S.RES	MCR006YZPJ 100 (10)	B	33.8/57.9
R1015	7030014400	S.RES	MCR006YZPJ 100 (10)	B	32.2/57.7
R1016	7030014400	S.RES	MCR006YZPJ 100 (10)	B	31.6/57.7
R1017	7030014400	S.RES	MCR006YZPJ 100 (10)	B	31.0/57.7
R1018	7030014400	S.RES	MCR006YZPJ 100 (10)	B	29.5/57.7
R1019	7030014400	S.RES	MCR006YZPJ 100 (10)	B	24.1/58.1
R1020	7030014400	S.RES	MCR006YZPJ 100 (10)	B	24.1/57.5
R1021	7030014400	S.RES	MCR006YZPJ 100 (10)	B	35.0/59.5
R1022	7030014400	S.RES	MCR006YZPJ 100 (10)	B	32.2/59.5
R1023	7030014400	S.RES	MCR006YZPJ 100 (10)	B	31.6/59.6
R1024	7030014400	S.RES	MCR006YZPJ 100 (10)	B	30.1/58.8
R1025	7030014400	S.RES	MCR006YZPJ 100 (10)	B	28.0/57.3
R1026	7030014400	S.RES	MCR006YZPJ 100 (10)	B	24.1/56.9
R1027	7030014400	S.RES	MCR006YZPJ 100 (10)	B	37.7/58.5
R1028	7030014400	S.RES	MCR006YZPJ 100 (10)	B	34.3/59.5
R1029	7030014400	S.RES	MCR006YZPJ 100 (10)	B	33.2/60.1
R1030	7030014400	S.RES	MCR006YZPJ 100 (10)	B	28.5/62.4
R1031	7030014400	S.RES	MCR006YZPJ 100 (10)	B	44.3/55.4
R1032	7030014400	S.RES	MCR006YZPJ 100 (10)	B	36.8/57.8
R1033	7030014400	S.RES	MCR006YZPJ 100 (10)	B	34.3/61.9
R1034	7030014400	S.RES	MCR006YZPJ 100 (10)	B	31.6/62.0
R1035	7030014400	S.RES	MCR006YZPJ 100 (10)	B	30.4/57.7
R1036	7030014400	S.RES	MCR006YZPJ 100 (10)	B	20.6/63.1
R1037	7030014390	S.RES	MCR006YZPJ 102 (1 k)	B	24.1/56.3
R1038	7030014400	S.RES	MCR006YZPJ 100 (10)	B	24.1/55.1
R1039	7030014390	S.RES	MCR006YZPJ 102 (1 k)	B	26.0/54.7
R1040	7030014400	S.RES	MCR006YZPJ 100 (10)	B	44.9/55.4
R1041	7030014400	S.RES	MCR006YZPJ 100 (10)	B	24.1/54.3
R1042	7030014400	S.RES	MCR006YZPJ 100 (10)	B	26.0/53.9
R1043	7030014400	S.RES	MCR006YZPJ 100 (10)	B	24.1/53.5
R1044	7030014400	S.RES	MCR006YZPJ 100 (10)	B	20.7/68.3
R1045	7030014400	S.RES	MCR006YZPJ 100 (10)	B	43.9/52.0
R1046	7030014400	S.RES	MCR006YZPJ 100 (10)	B	23.5/61.7
R1047	7030014400	S.RES	MCR006YZPJ 100 (10)	B	44.0/51.4
R1050	7030014400	S.RES	MCR006YZPJ 100 (10)	B	24.1/46.6
R1053	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	14.7/11.9
R1054	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	15.0/18.6
R1055	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	15.0/10.2
R1056	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	14.6/17.0
R1057	7030016150	S.RES	RMC1/16S-100JTH (10)	B	41.0/40.6
R1059	7030016560	S.RES	RMC1/16SJPTH	B	29.7/96.2
	7030016560	S.RES	RMC1/16SJPTH	[11]	
R1060	7030016560	S.RES	RMC1/16SJPTH	[11]	16.6/13.6
	7030016560	S.RES	RMC1/16SJPTH	[12]	
R1061	7210003820	VAR	TP76D1190E20-20.5F -10KB-3699		
R1062	7030016560	S.RES	RMC1/16SJPTH	B	40.3/89.6
R1063	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	21.8/15.1
	7030015970	S.RES	RMC1/16S-103JTH (10 k)	[11]	
	7030015970	S.RES	RMC1/16S-103JTH (10 k)	[12]	
R1064	7030016560	S.RES	RMC1/16SJPTH	T	13.7/4.9
R1065	7030016560	S.RES	RMC1/16SJPTH	T	13.7/7.7
R1066	7030016560	S.RES	RMC1/16SJPTH	T	11.3/3.6
R1067	7030016560	S.RES	RMC1/16SJPTH	T	12.6/10.5
R1068	7030016560	S.RES	RMC1/16SJPTH	T	10.3/3.6
R1069	7030016560	S.RES	RMC1/16SJPTH	T	5.6/21.3
R1070	7030016560	S.RES	RMC1/16SJPTH	T	9.4/4.5
R1071	7030016560	S.RES	RMC1/16SJPTH	T	5.4/17.4
R1072	7030016560	S.RES	RMC1/16SJPTH	T	8.2/3.9
R1073	7030016560	S.RES	RMC1/16SJPTH	T	13.7/6.7
R1074	7030016020	S.RES	RMC1/16S-104JTH (100 k)	B	28.5/46.5
R1075	7030014400	S.RES	MCR006YZPJ 100 (10)	B	37.3/51.2
R1076	7030014400	S.RES	MCR006YZPJ 100 (10)	B	30.9/47.9
R1077	7030016560	S.RES	RMC1/16SJPTH	T	32.4/20.7
	7030016560	S.RES	RMC1/16SJPTH	[11]	
	7030016560	S.RES	RMC1/16SJPTH	[12]	
R1078	7030016090	S.RES	RMC1/16S-223JTH (22 k)	B	30.9/16.4
R1079	7030016290	S.RES	RMC1/16S-222JTH (2.2 k)	B	38.0/29.0
R1081	7030016060	S.RES	RMC1/16S-105JTH (1 M)	B	33.5/63.6
R1082	7030016050	S.RES	RMC1/16S-102JTH (1 k)	B	36.6/42.0
R1083	7030016110	S.RES	RMC1/16S-473JTH (47 k)	B	23.2/46.4
R1084	7410001340	S.ARR	EXB28V473JX	B	25.3/45.0
R1085	7030014380	S.RES	MCR006YZPJ 103 (10 k)	B	45.2/50.3
	7030014380	S.RES	MCR006YZPJ 103 (10 k)	[21]	
	7030014380	S.RES	MCR006YZPJ 103 (10 k)	[22]	
	7030014380	S.RES	MCR006YZPJ 103 (10 k)	[31]	
R1086	7030014380	S.RES	MCR006YZPJ 103 (10 k)	B	45.2/51.4
	7030014380	S.RES	MCR006YZPJ 103 (10 k)	[21]	
	7030014380	S.RES	MCR006YZPJ 103 (10 k)	[22]	
	7030014380	S.RES	MCR006YZPJ 103 (10 k)	[31]	
R1087	7030016320	S.RES	RMC1/16S-225JTH (2.2 M)	B	33.2/64.8
R1088	7030016240	S.RES	RMC1/16S-684JTH (680 k)	B	31.9/64.1
R1089	7030016110	S.RES	RMC1/16S-473JTH (47 k)	B	25.2/63.3
R1090	7030016000	S.RES	RMC1/16S-823JTH (82 k)	B	5.4/18.4
	7030016000	S.RES	RMC1/16S-823JTH (82 k)	[11]	
	7030016000	S.RES	RMC1/16S-823JTH (82 k)	[12]	
R1091	7030016040	S.RES	RMC1/16S-224JTH (220 k)	B	9.0/17.1
	7030016040	S.RES	RMC1/16S-224JTH (220 k)	[11]	
	7030016040	S.RES	RMC1/16S-224JTH (220 k)	[12]	
R1092	7030016050	S.RES	RMC1/16S-102JTH (1 k)	B	42.4/8.0
	7030016050	S.RES	RMC1/16S-102JTH (1 k)	[11]	
	7030016050	S.RES	RMC1/16S-102JTH (1 k)	[12]	
R1093	7030016410	S.RES	RMC1/16S-561JTH (560)	B	41.9/6.8
	7030016410	S.RES	RMC1/16S-561JTH (560)	[11]	
	7030016410	S.RES	RMC1/16S-561JTH (560)	[12]	
R1097	7030016020	S.RES	RMC1/16S-104JTH (100 k)	B	28.9/15.6
R1098	7030016020	S.RES	RMC1/16S-104JTH (100 k)	B	40.5/30.0
C1	4030021240	S.CER	C1005 JB 1C 105K-T	[11]	23.6/17.9
	4030021240	S.CER	C1005 JB 1C 105K-T	[12]	
C2	4030021240	S.CER	C1005 JB 1C 105K-T	[11]	24.1/16.5
	4030021240	S.CER	C1005 JB 1C 105K-T	[12]	

The underlined parts have been updated from the previous version of the addendum, or the original page.

[LOGIC UNIT] (for #11, #12, #21, #22, and #31)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
C5	4030021240	S.CER C1005 JB 1C 105K-T	[#11] B	32.7/8.2
	4030021240	S.CER C1005 JB 1C 105K-T	[#12] B	
C6	4030021240	S.CER C1005 JB 1C 105K-T	[#11] B	30.6/8.7
	4030021240	S.CER C1005 JB 1C 105K-T	[#12] B	
C7	4030021240	S.CER C1005 JB 1C 105K-T	[#11] B	33.2/9.4
	4030021240	S.CER C1005 JB 1C 105K-T	[#12] B	
C8	4030023090	S.CER 0402B102K500CT	[#11] B	24.7/70.4
C16	4030023090	S.CER 0402B102K500CT	[#11] T	18.3/17.9
	4030023090	S.CER 0402B102K500CT	[#12] B	
C18	4030022640	S.CER 0402N101J500CT	[#11] B	28.5/7.3
	4030022640	S.CER 0402N101J500CT	[#12] B	
C20	4030023090	S.CER 0402B102K500CT	[#11] B	24.7/71.3
C21	4030022540	S.CER 0402N3R0B500CT	[#11] B	27.6/7.3
	4030022540	S.CER 0402N3R0B500CT	[#12] B	
C22	4030023090	S.CER 0402B102K500CT	[#11] B	27.4/72.0
C25	4030023010	S.CER 0402B104K160CT	[#11] B	29.0/28.1
C31	4030023010	S.CER 0402B104K160CT	[#11] B	25.7/34.5
C101	4030023090	S.CER 0402B102K500CT	[#11] B	13.8/10.1
	4030023090	S.CER 0402B102K500CT	[#12] B	
C102	4030023200	S.CER 0402B471K500CT	[#11] B	14.2/5.5
	4030023200	S.CER 0402B471K500CT	[#12] B	
C103	4030019560	S.CER GRM21BB31C106KE15L	[#11] B	19.9/24.7
	4030019560	S.CER GRM21BB31C106KE15L	[#12] B	
C104	4030019560	S.CER GRM21BB31C106KE15L	[#11] B	22.1/27.9
	4030019560	S.CER GRM21BB31C106KE15L	[#12] B	
C105	4030019560	S.CER GRM21BB31C106KE15L	[#11] B	21.3/31.5
	4030019560	S.CER GRM21BB31C106KE15L	[#12] B	
C106	4030019560	S.CER GRM21BB31C106KE15L	[#11] B	21.3/29.7
	4030019560	S.CER GRM21BB31C106KE15L	[#12] B	
C107	4030022940	S.CER 0402B104K100CT	[#11] B	26.5/24.6
	4030022940	S.CER 0402B104K100CT	[#12] B	
C108	4030023090	S.CER 0402B102K500CT	[#11] B	24.8/15.0
	4030023090	S.CER 0402B102K500CT	[#12] B	
C109	4030023090	S.CER 0402B102K500CT	[#11] B	26.0/14.5
	4030023090	S.CER 0402B102K500CT	[#12] B	
C111	4550007300	S.TAN F931A335MAABMA	[#11] B	14.4/24.7
	4550007300	S.TAN F931A335MAABMA	[#12] B	
C112	4550008210	S.TAN 267M3502 104MR	[#11] B	20.3/20.1
	4550008210	S.TAN 267M3502 104MR	[#12] B	
C113	4550008210	S.TAN 267M3502 104MR	[#11] B	18.2/20.1
	4550008210	S.TAN 267M3502 104MR	[#12] B	
C114	4550008210	S.TAN 267M3502 104MR	[#11] B	8.0/2.0
	4550008210	S.TAN 267M3502 104MR	[#12] B	
C115	4550008210	S.TAN 267M3502 104MR	[#11] B	8.0/4.1
	4550008210	S.TAN 267M3502 104MR	[#12] B	
C116	4030023090	S.CER 0402B102K500CT	[#11] B	11.2/15.0
	4030023090	S.CER 0402B102K500CT	[#12] B	
C121	4030023030	S.CER 0402B103K250CT	[#11] B	23.0/12.0
	4030023030	S.CER 0402B103K250CT	[#12] B	
C122	4030019560	S.CER GRM21BB31C106KE15L	[#11] B	18.8/11.0
	4030019560	S.CER GRM21BB31C106KE15L	[#12] B	
C123	4030023090	S.CER 0402B102K500CT	[#11] B	24.6/31.5
C125	4550007520	S.TAN F931A106MAABMA	[#11] B	4.4/12.2
	4550007520	S.TAN F931A106MAABMA	[#12] B	
C155	4030023090	S.CER 0402B102K500CT	[#11] T	11.8/2.4
C156	4030023090	S.CER 0402B102K500CT	[#11] T	13.5/10.5
C157	4030023090	S.CER 0402B102K500CT	[#11] T	13.7/4.0
C158	4030023090	S.CER 0402B102K500CT	[#11] T	14.1/8.9
C159	4030023090	S.CER 0402B102K500CT	[#11] T	9.9/2.4
C161	4030023090	S.CER 0402B102K500CT	[#11] T	35.9/25.5
C600	4030023030	S.CER 0402B103K250CT	[#11] B	21.5/10.8
	4030023030	S.CER 0402B103K250CT	[#12] B	
C629	4030023010	S.CER 0402B104K160CT	[#11] B	24.8/26.6
	4030023010	S.CER 0402B104K160CT	[#12] B	
C630	4030022640	S.CER 0402N101J500CT	[#11] B	19.3/90.9
	4030022640	S.CER 0402N101J500CT	[#12] B	
C631	4050000380	S.FEE NFM15PC104R1A3D	[#11] B	18.2/89.2
	4050000380	S.FEE NFM15PC104R1A3D	[#12] B	
C632	4050000380	S.FEE NFM15PC104R1A3D	[#11] B	33.6/94.1
	4050000380	S.FEE NFM15PC104R1A3D	[#12] B	
C633	4030019560	S.CER GRM21BB31C106KE15L	[#11] B	33.7/92.4
	4030019560	S.CER GRM21BB31C106KE15L	[#12] B	
C634	4030023090	S.CER 0402B102K500CT	[#11] B	32.6/94.0
	4030023090	S.CER 0402B102K500CT	[#12] B	
C637	4030023090	S.CER 0402B102K500CT	[#11] B	28.7/88.4
	4030023090	S.CER 0402B102K500CT	[#12] B	
C638	4030023090	S.CER 0402B102K500CT	[#11] B	19.2/84.1
	4030023090	S.CER 0402B102K500CT	[#12] B	
C639	4030023090	S.CER 0402B102K500CT	[#11] B	22.5/79.2
	4030023090	S.CER 0402B102K500CT	[#12] B	
C640	4030023090	S.CER 0402B102K500CT	[#11] B	29.9/87.9
	4030023090	S.CER 0402B102K500CT	[#12] B	
C641	4030023090	S.CER 0402B102K500CT	[#11] B	18.3/84.1
	4030023090	S.CER 0402B102K500CT	[#12] B	
C642	4030023090	S.CER 0402B102K500CT	[#11] B	19.6/78.7
	4030023090	S.CER 0402B102K500CT	[#12] B	
C643	4050000380	S.FEE NFM15PC104R1A3D	[#11] T	20.1/13.2
	4050000380	S.FEE NFM15PC104R1A3D	[#12] T	
C645	4030021240	S.CER C1005 JB 1C 105K-T	[#11] B	36.3/10.2
	4030021240	S.CER C1005 JB 1C 105K-T	[#12] B	
C648	4030022540	S.CER 0402N3R0B500CT	[#11] T	25.0/16.5
	4030022540	S.CER 0402N3R0B500CT	[#12] T	
C649	4030022540	S.CER 0402N3R0B500CT	[#11] T	23.6/18.8
	4030022540	S.CER 0402N3R0B500CT	[#12] T	
C650	4030023010	S.CER 0402B104K160CT	[#11] B	40.4/5.5
	4030023010	S.CER 0402B104K160CT	[#12] B	
C651	4030019560	S.CER GRM21BB31C106KE15L	[#11] B	36.7/7.1
	4030019560	S.CER GRM21BB31C106KE15L	[#12] B	
C652	4030022640	S.CER 0402N101J500CT	[#11] B	39.0/3.3
	4030022640	S.CER 0402N101J500CT	[#12] B	
C653	4030023010	S.CER 0402B104K160CT	[#11] B	42.2/5.1
	4030023010	S.CER 0402B104K160CT	[#12] B	

[LOGIC UNIT] (for #11, #12, #21, #22, and #31)

REF NO.	PART NO.	DESCRIPTION		M.	H/V LOCATION
C654	4030023090	S.CER	0402B102K500CT	B	41.3/89.6
C655	4030023090	S.CER	0402B102K500CT	B	39.3/89.6
C656	4030023090	S.CER	0402B102K500CT	B	38.3/89.7
C657	4030023090	S.CER	0402B102K500CT	B	42.3/89.6
C659	4030023010	S.CER	0402B104K160CT	B	28.6/10.3
C660	4030023010	S.CER	0402B104K160CT	B	34.2/30.5
C661	4030019560	S.CER	GRM21BB31C106KE15L	B	43.4/44.6
C662	4030021520	S.CER	GRM31CB31H106KA12L	T	31.4/24.4
C663	4030021520	S.CER	GRM31CB31H106KA12L	T	32.4/28.2
C664	4030021520	S.CER	GRM31CB31H106KA12L	T	32.4/30.4
C666	4030023010	S.CER	0402B104K160CT	T	33.3/22.3
C667	4030023010	S.CER	0402B104K160CT	T	33.7/23.8
C669	4030022630	S.CER	0402N100C500CT	B	37.1/54.5
C670	4030022520	S.CER	0402N100B500CT	B	42.0/53.9
C671	4030022640	S.CER	0402N101J500CT	B	42.1/56.8
C672	4030023010	S.CER	0402B104K160CT	B	39.3/58.5
C674	4030023030	S.CER	0402B103K250CT	B	26.9/68.8
C677	4030022940	S.CER	0402B104K100CT	B	27.5/43.2
C678	4030023090	S.CER	0402B102K500CT	B	31.5/41.9
C679	4030023090	S.CER	0402B102K500CT	B	37.1/56.1
C680	4030023090	S.CER	0402B102K500CT	B	36.2/56.2
C681	4030022940	S.CER	0402B104K100CT	B	35.3/56.2
C682	4030023000	S.CER	0402B683K100CT	B	22.8/65.8
C683	4030022940	S.CER	0402B104K100CT	B	24.1/68.2
C684	4030023010	S.CER	0402B104K160CT	B	36.2/54.5
C687	4030023010	S.CER	0402B104K160CT	B	25.2/36.6
C688	4030019560	S.CER	GRM21BB31C106KE15L	B	23.8/36.4
C689	4030023090	S.CER	0402B102K500CT	B	29.0/27.2
C693	4030022940	S.CER	0402B104K100CT	T	16.4/15.5
C694	4030023090	S.CER	0402B102K500CT	B	18.8/82.1
	4030023090	S.CER	0402B102K500CT	[#11] [#12]	
C695	4030023010	S.CER	0402B104K160CT	T	18.8/7.4
C696	4030023010	S.CER	0402B104K160CT	T	15.9/11.4
C698	4030023010	S.CER	0402B104K160CT	B	39.9/47.0
C699	4030023010	S.CER	0402B104K160CT	B	43.2/42.2
C700	4030023090	S.CER	0402B102K500CT	B	44.2/42.2
C701	4030023090	S.CER	0402B102K500CT	B	25.7/33.6
C703	4030023000	S.CER	0402B683K100CT	T	21.7/11.2
	4030023000	S.CER	0402B683K100CT	[#11] [#12]	
C704	4030023090	S.CER	0402B102K500CT	T	22.8/17.0
	4030023090	S.CER	0402B102K500CT	[#11] [#12]	
C705	4030023090	S.CER	0402B102K500CT	T	24.9/13.7
	4030023090	S.CER	0402B102K500CT	[#11] [#12]	
C708	4030023090	S.CER	0402B102K500CT	T	26.6/20.9
C709	4030021240	S.CER	C1005 JB 1C 105K-T	[#11] B	36.3/4.4
	4030021240	S.CER	C1005 JB 1C 105K-T	[#11] [#12]	
C711	4030023090	S.CER	0402B102K500CT	B	39.1/33.8
C712	4030022920	S.CER	0402N820J500CT	B	31.1/45.6
C713	4030022920	S.CER	0402N820J500CT	B	24.5/42.4
C714	4030020000	S.CER	C1005 JB 1A 105K-T	B	31.3/65.3
C715	4030023820	S.CER	0603B104K250CT	B	26.7/63.6
C716	4030023210	S.CER	0402B472K500CT	B	34.1/64.8
C717	4030023210	S.CER	0402B472K500CT	B	26.9/58.1
C718	4030023210	S.CER	0402B472K500CT	B	31.5/27.6
C719	4030023210	S.CER	0402B472K500CT	B	40.0/18.9
C720	4550008210	S.TAN	267M3502 104MR	[#11] B	5.8/15.6
	4550008210	S.TAN	267M3502 104MR	[#12] B	
C721	4550008210	S.TAN	267M3502 104MR	[#11] B	9.1/20.4
	4550008210	S.TAN	267M3502 104MR	[#12] B	
C722	4030021240	S.CER	C1005 JB 1C 105K-T	[#11] B	34.5/15.4
	4030021240	S.CER	C1005 JB 1C 105K-T	[#11] [#12]	
C723	4030021240	S.CER	C1005 JB 1C 105K-T	B	26.5/72.0
C724	4030023090	S.CER	0402B102K500CT	B	35.9/58.6
J1	6510030220	S.CON	50RF-JMCS-G-1B-TF (N) (LF) (SN)	B	35.5/23.0
J2	6510031390	S.CON	15FXVL-RSM1-GAN-TF-1 (HF)	T	9.4/7.9
J3	6510023480	S.CON	AYU1-1P-02676-120-TF	[#11] B	23.2/96.1
	6510023480	S.CON	AYU1-1P-02676-120-TF	[#11] [#12]	
J4	6510031380	S.CON	31FXVL-RSM1-GAN-TF-1 (HF)	T	24.4/24.8
DS2	5040003550	S.LED	NSSW208T	T	13.8/35.5
DS3	5040003550	S.LED	NSSW208T	T	24.8/35.5
DS4	5040003550	S.LED	NSSW208T	T	35.8/35.5
DS5	5030004360	LCD	TM128160D1CIWUGND		
S23	2260003320	S.SWI	SKRTLAE010	B	2.1/83.2
S24	2260003320	S.SWI	SKRTLAE010	B	2.1/44.4
S25	2260003320	S.SWI	SKRTLAE010	B	2.1/34.4
EP3	6910023920	S.BEA	BLM15GA750SN1D	[#11] B	38.5/16.4
	6910023920	S.BEA	BLM15GA750SN1D	[#12] B	
EP4	6910023920	S.BEA	BLM15GA750SN1D	[#11] B	36.9/15.3
	6910023920	S.BEA	BLM15GA750SN1D	[#12] B	
EP9	6910020610	S.BEA	BLM15BD102SN1D	[#11] B	18.4/90.9
	6910020610	S.BEA	BLM15BD102SN1D	[#11] [#12]	
EP10	6910020610	S.BEA	BLM15BD102SN1D	T	34.7/22.6
EP11	6910020610	S.BEA	BLM15BD102SN1D	T	30.8/20.7
EP12	6910020610	S.BEA	BLM15BD102SN1D	T	25.0/21.2
EP13	6910020610	S.BEA	BLM15BD102SN1D	T	17.7/28.7
EP14	6910020610	S.BEA	BLM15BD102SN1D	T	23.2/21.2
EP16	6910020610	S.BEA	BLM15BD102SN1D	T	17.7/27.8
EP19	6910020610	S.BEA	BLM15BD102SN1D	T	22.3/21.2

The underlined parts have been updated from the previous version of the addendum, or the original page.

[MAIN UNIT] (for #11, #12, #21, #22, and #31)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
IC1	1110007300	S.IC NJM2552V-TE1-#ZZZB	B	35.6/72.6
IC2	1130009981	S.IC TC7W53FK (TE85LF)	B	33.1/63.1
IC5	1130011760	S.IC CD4094BPWR	B	39.9/44.3
IC14	1110006490	S.IC LMV321IDCKR	T	7.7/69.0
IC22	1110006490	S.IC LMV321IDCKR	B	23.9/64.7
IC24	1130007021	S.IC TC7S66FU (TE85LF)	B	41.0/79.3
IC25	1110006490	S.IC LMV321IDCKR	B	21.3/70.5
IC203	1130017460	S.IC AK1542A-L	B	29.7/44.6
IC215	1110007630	S.IC NJM2783V-TE1-#ZZZH	T	41.5/30.8
IC216	1110007291	S.IC AK2330P7-L	B	24.7/60.1
IC219	1130007021	S.IC TC7S66FU (TE85LF)	B	22.3/46.2
IC220	1110007291	S.IC AK2330P7-L	T	28.4/37.4
IC221	1110008450	S.IC ISD8102SYI T&R	B	30.6/26.5
IC222	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	B	24.9/59.2
IC223	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	B	9.9/30.9
IC224	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	B	10.0/25.6
IC225	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	B	10.0/21.1
IC226	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	B	10.0/15.8
IC228	1130009981	S.IC TC7W53FK (TE85LF)	B	10.5/11.8
IC229	1110008680	S.IC NJU72341V-TE2-#UZZH	T	38.6/39.5
IC231	1130009981	S.IC TC7W53FK (TE85LF)	T	42.3/48.4
IC232	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	T	44.5/41.7
IC233	1110006490	S.IC LMV321IDCKR	B	11.9/5.8
IC234	6910026630	S.DC XC9263B75DER-G	B	30.6/8.3
IC235	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	T	17.6/15.9
IC238	1180004760	S.REG S-1200B33-M5T1U	T	30.3/89.2
IC239	1180004420	S.REG NJM2830U1-08-TE1-#ZGZB	T	10.4/18.2
IC240	1180005110	S.REG NJM2836DL3-05-TE1	T	29.3/96.4
IC241	1130007021	S.IC TC7S66FU (TE85LF) [#11]	B	21.3/68.0
	1130007021	S.IC TC7S66FU (TE85LF) [#12]		
Q2	1560002350	S.FET RD12MVS1-T214	T	13.0/83.6
Q3	1560002420	S.FET RD01MUS2B-T513	T	12.3/74.7
Q4	1530004100	S.TRA MT3S20P (TE12LF)	B	11.6/65.4
Q7	1520000201	S.TRA 2SB798-T1-AZ DK	T	17.0/59.1
Q8	1590004410	S.TRA DMC501010R	T	12.9/59.8
Q11	1580000731	S.FET 3SK293 (TE85LF)	B	30.0/106.2
Q12	1580000731	S.FET 3SK293 (TE85LF)	B	27.8/96.9
Q13	1530002381	S.TRA 2SC4215-Y (TE85LF)	B	27.4/78.3
Q20	1590004300	S.TRA DRA9114T0L	B	36.2/60.1
Q21	1590004100	S.TRA LDT144EET1G	B	29.3/61.3
Q25	1520000201	S.TRA 2SB798-T1-AZ DK	T	44.2/113.7
Q26	1590004330	S.TRA DRC9114EOL	T	31.5/105.3
Q28	1530003322	S.TRA 2SC5108-YLF	B	11.3/53.4
Q29	1530003322	S.TRA 2SC5108-YLF	B	12.4/48.4
Q33	1530002851	S.TRA 2SC4116-BL (TE85RF)	B	6.2/52.5
Q35	1520000651	S.TRA 2SB1201S-TL-E	T	16.1/26.9
Q36	1590004410	S.TRA DMC501010R	B	20.9/26.1
Q50	1510001151	S.TRA L2SA1576AST1G	B	42.5/115.6
Q52	1590004530	S.TRA DMG564050R	T	37.5/27.8
Q53	1590004070	S.TRA LDT144EET1G	B	25.9/71.5
Q54	1590004050	S.TRA LDTA144EET1G	T	33.8/68.6
Q57	1590004520	S.TRA DMA561030R	B	13.6/45.6
Q58	1530004610	S.TRA 2SC5086-OLF	T	17.7/47.5
Q59	1530004610	S.TRA 2SC5086-OLF	T	10.6/46.9
Q60	1530003322	S.TRA 2SC5108-YLF	T	14.3/49.3
Q62	1530004190	S.TRA L2SC4617ST1G	B	43.4/71.2
Q66	1590004070	S.TRA LDT144EET1G	B	40.1/56.7
Q68	1590004070	S.TRA LDT144EET1G	B	43.0/82.9
Q212	1550000241	S.FET TPCF8107LF	T	21.7/122.8
Q213	1550000241	S.FET TPCF8107LF	T	24.6/122.1
Q215	1560000531	S.FET 2SK880-GR (TE85RF)	B	22.5/41.6
Q216	1590004070	S.TRA LDT144EET1G	B	24.0/50.7
Q217	1590004070	S.TRA LDT144EET1G	B	15.6/43.9
Q218	1590004070	S.TRA LDT144EET1G	T	30.7/60.7
Q220	1590004070	S.TRA LDT144EET1G	T	18.7/7.2
Q223	1550000090	S.FET RSQ035P03TR	T	32.2/11.4
Q224	1590004070	S.TRA LDT144EET1G	T	34.1/14.3
Q226	1590004070	S.TRA LDT144EET1G	B	39.7/20.3
Q232	1560001330	S.FET RSR025N03	T	36.5/23.0
Q233	1590004060	S.TRA LDT144EET1G	T	34.9/26.1
Q234	1520000651	S.TRA 2SB1201S-TL-E	T	33.9/4.4
Q235	1530002280	S.TRA 2SC4081-T106 S	T	25.9/12.9
Q236	1590004070	S.TRA LDT144EET1G	B	38.1/50.8
Q238	1590004070	S.TRA LDT144EET1G	B	29.2/15.5
Q239	1510000671	S.TRA 2SA1588-GR (TE85R F)	T	24.4/7.6
Q240	1590004070	S.TRA LDT144EET1G	T	22.0/6.9
Q243	1590004070	S.TRA LDT144EET1G	T	31.6/71.6
Q245	1590004050	S.TRA LDTA144EET1G	T	31.3/31.0
Q246	1590004070	S.TRA LDT144EET1G	T	33.5/31.0
D1	1750000581	S.DIO 1SV307 (TPH3F)	T	5.4/19.4
D2	1750001800	S.DIO RB886CS T2RA	T	13.2/102.7
D3	1750001800	S.DIO RB886CS T2RA	T	12.4/99.6
D4	1750001800	S.DIO RB886CS T2RA	T	13.2/103.8
D5	1750001800	S.DIO RB886CS T2RA	T	5.1/12.1
D6	1750001790	S.DIO 1SS390 TE61	T	5.1/9.6
D8	1750000581	S.DIO 1SV307 (TPH3F)	T	10.3/110.7
D11	1750001790	S.DIO 1SS390 TE61	T	27.8/85.7
D12	1750001790	S.DIO 1SS390 TE61	T	37.4/71.0
D13	1720000702	S.VAR 1SV305H3F	B	19.9/103.3
D14	1790001622	S.DIO 1SV308L3F	B	11.8/108.5
D15	1720000702	S.VAR 1SV305H3F	B	31.2/102.2
D16	1720000702	S.VAR 1SV305H3F	B	30.3/99.5
D17	1750001790	S.DIO 1SS390 TE61	B	13.7/55.8
D18	1750002170	S.DIO DB2S31400L	B	29.6/64.6
D23	1790001980	S.DIO DA3S101F0L	T	32.2/109.1
D24	1750001790	S.DIO 1SS390 TE61	T	33.7/67.0
D25	1750001790	S.DIO 1SS390 TE61	T	37.3/66.8
D27	1750001810	S.DIO L1SS400T1G	T	37.2/110.1

[MAIN UNIT] (for #11, #12, #21, #22, and #31)

REF NO.	PART NO.	DESCRIPTION		M.	H/V LOCATION
D29	1790001622	S.DIO	1SV308L3F	B	12.8/104.9
D30	1750001810	S.DIO	L1SS400T1G	T	34.3/17.6
D31	1750001810	S.DIO	L1SS400T1G	T	18.4/109.1
D36	1750001810	S.DIO	L1SS400T1G	B	42.2/112.7
D38	1750001771	S.VAR	1SV323H3F	T	19.4/41.5
D40	1750002170	S.DIO	DB2S31400L	B	27.3/69.9
D44	1790001622	S.DIO	1SV308L3F	B	13.2/102.3
D45	1750001771	S.VAR	1SV323H3F	T	11.5/40.1
D46	1750001771	S.VAR	1SV323H3F	T	12.2/38.0
D48	1750001771	S.VAR	1SV323H3F	T	19.4/40.2
D49	1750001800	S.DIO	RB886CS T2RA	T	12.0/113.6
D50	1720000702	S.VAR	1SV305H3F	B	28.0/105.4
D51	1750001800	S.DIO	RB886CS T2RA	T	12.0/112.5
D52	1750001810	S.DIO	L1SS400T1G	B	36.0/86.2
D55	1750001790	S.DIO	1SS390 TE61	B	28.9/80.3
D56	1750001790	S.DIO	1SS390 TE61	B	26.1/92.2
D57	1750001790	S.DIO	1SS390 TE61	B	27.1/81.3
D58	1750001790	S.DIO	1SS390 TE61	B	28.9/91.4
D59	1750001800	S.DIO	RB886CS T2RA	B	40.3/85.4
D62	1750002170	S.DIO	DB2S31400L	T	31.5/70.0
D66	1750000520	S.DIO	DAN222TL	T	31.3/62.7
D67	1750001810	S.DIO	L1SS400T1G	T	31.7/119.3
D68	1750001690	S.DIO	RB050LA-40	T	27.9/119.4
D71	1730002830	S.ZEN	DZ2J051M0L	B	40.9/26.0
D72	1790002160	S.VAR	TPD1E10B06DPYR	B	42.3/96.4
D74	1750001800	S.DIO	RB886CS T2RA	T	44.8/37.5
D78	1750001810	S.DIO	L1SS400T1G	T	21.0/96.5
D80	1750001810	S.DIO	L1SS400T1G	T	26.9/11.0
D81	1750001810	S.DIO	L1SS400T1G	T	24.2/11.0
D82	1750001810	S.DIO	L1SS400T1G	T	14.2/19.1
D83	1750001810	S.DIO	L1SS400T1G	T	30.7/91.6
D85	1790002160	S.VAR	TPD1E10B06DPYR	T	28.2/122.1
D86	1790001622	S.DIO	1SV308L3F	B	30.3/77.2
D87	1750001810	S.DIO	L1SS400T1G	T	24.2/9.8
D88	1750001810	S.DIO	L1SS400T1G	T	26.8/9.8
D89	1750001790	S.DIO	1SS390 TE61	[#11]	36.5/68.6
	1750001790	S.DIO	1SS390 TE61	[#12]	
D90	1750001790	S.DIO	1SS390 TE61	[#11]	30.4/85.7
	1750001790	S.DIO	1SS390 TE61	[#12]	
D91	1750001810	S.DIO	L1SS400T1G	T	33.2/70.8
D92	1750001810	S.DIO	L1SS400T1G	T	33.2/73.3
D93	1750002170	S.DIO	DB2S31400L	T	23.8/85.7
D94	1750002170	S.DIO	DB2S31400L	B	27.7/90.5
F11	2030000970	S.MON	FL-455 (46.35 MHz)	B	23.4/86.8
F12	2020002720	S.CER	LTWC450D	T	28.1/79.0
F13	2030000860	S.MON	FL-439 (46.350 MHz)	B	30.2/85.7
F14	2020002520	S.CER	LTWC450H	T	41.1/77.1
F15	2020002770	S.CER	LTUCG450C	[#11]	38.7/86.0
	2020002770	S.CER	LTUCG450C	[#12]	
X1	6070000300	S.DIS	JTBM450CX24	T	42.1/63.4
X2	6050013940	S.XTA	CR-994 (12.8 MHz)	B	32.8/38.8
X203	6050013930	S.XTA	CR-993 (15.3 MHz)	B	42.5/65.4
L2	6200013110	S.COI	0.35-1.6-9TL 52.0N	T	8.6/115.9
L3	6200013110	S.COI	0.35-1.6-9TL 52.0N	T	6.2/111.0
L4	6200004480	S.COI	MLF1608D R82K-T	T	9.0/105.0
L5	6200012460	S.COI	0.30-1.7-8TL 54N	T	9.8/101.2
L6	6200012850	S.COI	0.40-0.8-2TL 2.5N	T	8.1/90.2
L7	6200013030	S.COI	0.35-1.6-6TL 31.0N	T	15.5/88.5
L8	6200009280	S.COI	LQW18AN27NG00D (LQW1608A27NG00)	T	11.0/78.0
L10	6200013800	S.COI	MLK1005S39NJT	T	15.4/77.8
L11	6200013790	S.COI	MLK1005S47NJT	T	15.5/71.2
L12	6200013780	S.COI	MLK1005S56NJT	B	15.5/66.5
L15	6200012460	S.COI	0.30-1.7-8TL 54N	T	8.3/107.2
L18	6200009890	S.COI	C2012C-82NG-A	B	15.0/102.0
L21	6200009890	S.COI	C2012C-82NG-A	B	33.8/104.6
L22	6200009930	S.COI	C2012C-68NG-A	B	17.7/102.5
L23	6200009890	S.COI	C2012C-82NG-A	B	33.3/100.5
L24	6200011090	S.COI	C2012C-R56J-A	B	31.4/95.2
L25	6200004600	S.COI	MLF1608D R15K-T	B	27.6/75.6
L38	6200014760	S.COI	MLK1005SR22JT	B	13.0/54.6
L45	6200012910	S.COI	0.35-1.6-8TL 45.5N	T	11.1/119.6
L46	6200012870	S.COI	0.30-1.4-5TR 23.5N	T	10.6/94.2
L56	6200013760	S.COI	MLK1005S82NJT	B	8.4/61.7
L57	6200010540	S.COI	C2012C-47NG-A	T	17.2/40.9
L58	6200003550	S.COI	MLF1608A 4R7K-T	T	13.3/41.6
L63	6200011050	S.COI	C2012C-R12G-A	T	20.4/44.8
L64	6200011050	S.COI	C2012C-R12G-A	T	8.9/42.4
L67	6200013760	S.COI	MLK1005S82NJT	T	15.9/50.2
L69	6200009890	S.COI	C2012C-82NG-A	B	21.6/102.8
L71	6200003640	S.COI	MLF1608E 100K-T	T	8.8/40.2
L72	6200003640	S.COI	MLF1608E 100K-T	T	21.2/40.8
L85	6200004600	S.COI	MLF1608D R15K-T	B	43.8/77.3
L86	6200004590	S.COI	MLF1608D R18K-T	B	41.7/76.7
L87	6200003960	S.COI	MLF1608A 1R0K-T	B	45.0/74.5
L88	6200004590	S.COI	MLF1608D R18K-T	B	41.8/72.8
L91	6200003550	S.COI	MLF1608A 4R7K-T	T	15.4/40.9
L92	6200011050	S.COI	C2012C-R12G-A	T	9.2/38.4
L93	6200014370	S.COI	MLF1005L 2R2K-T	B	26.3/91.2
L94	6200014370	S.COI	MLF1005L 2R2K-T	B	25.3/81.3
L95	6200014370	S.COI	MLF1005L 2R2K-T	B	31.0/79.2
L96	6200014370	S.COI	MLF1005L 2R2K-T	B	32.4/91.3
L97	6200011650	S.COI	LQW18AN68NG00D	B	25.3/95.7
L99	6200014260	S.COI	LQM2MPN2R2NG0L	B	27.5/7.7
L100	6200014260	S.COI	LQM2MPN2R2NG0L	B	37.0/7.4

The underlined parts have been updated from the previous version of the addendum, or the original page.

[MAIN UNIT] (for #11, #12, #21, #22, and #31)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
R2	7030015780	S.RES RMC1/10-331JTP (330)	T	12.3/107.0
R3	7030016090	S.RES RMC1/16S-223JTH (22 k)	T	9.5/67.1
R4	7030015910	S.RES RMC1/16S-101JTH (100)	T	9.9/66.2
R5	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	6.8/71.8
R7	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	T	14.6/104.2
R8	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	T	13.5/97.2
R9	7030015780	S.RES RMC1/10-331JTP (330)	T	12.2/105.2
R10	7030015930	S.RES RMC1/16S-471JTH (470)	T	6.0/74.2
R11	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	T	6.8/70.9
R12	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	T	9.0/70.9
R13	7030016090	S.RES RMC1/16S-223JTH (22 k)	T	8.0/72.2
R14	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	T	6.5/81.4
R15	7030015910	S.RES RMC1/16S-101JTH (100)	T	9.0/81.3
R16	7030015980	S.RES RMC1/16S-333JTH (33 k)	T	7.8/82.1
R17	7030016110	S.RES RMC1/16S-473JTH (47 k)	T	5.9/77.2
R18	7030015920	S.RES RMC1/16S-221JTH (220)	T	8.7/74.6
R19	7510001461	S.THE NTCG16 3NH 471JT	T	6.9/75.7
R20	7030015680	S.RES RMC1/10-150JTP (15)	B	16.1/64.0
R21	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	7.7/63.9
R22	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	13.7/63.0
R23	7030016150	S.RES RMC1/16S-100JTH (10)	B	7.0/65.3
R24	7030016170	S.RES RMC1/16S-560JTH (56)	B	9.6/60.5
R25	7030016270	S.RES RMC1/16S-151JTH (150)	B	11.0/59.4
R26	7030016170	S.RES RMC1/16S-560JTH (56)	B	9.6/58.0
R27	7030016510	S.RES RMC1/16S-4R7JTH (4.7)	T	15.5/72.8
R28	7030016080	S.RES RMC1/16S-822JTH (8.2 k)	T	11.8/57.9
R29	7030015950	S.RES RMC1/16S-152JTH (1.5 k)	T	10.1/58.8
R30	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	11.9/57.6
R40	7030016330	S.RES RMC1/16S-153JTH (15 k)	T	10.1/57.9
R41	7030015930	S.RES RMC1/16S-471JTH (470)	B	13.9/105.3
R43	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	19.9/100.5
R44	7030016000	S.RES RMC1/16S-823JTH (82 k)	B	32.7/106.7
R45	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	31.8/106.7
R47	7030016500	S.RES RMC1/16S-562JTH (5.6 k)	B	13.9/107.3
R48	7030016540	S.RES RMC1/16SK334FTH (330 k)	B	36.2/106.7
R49	7030015900	S.RES RMC1/16S-470JTH (47)	B	33.9/107.1
R51	7030016370	S.RES RMC1/16S-271JTH (270)	B	30.5/103.9
R52	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	33.8/102.4
R53	7030015910	S.RES RMC1/16S-101JTH (100)	B	10.1/107.4
R54	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	28.7/101.4
R58	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	29.6/98.5
R59	7030016030	S.RES RMC1/16S-154JTH (150 k)	B	33.6/96.9
R60	7030015990	S.RES RMC1/16S-683JTH (68 k)	B	33.6/98.0
R62	7030016390	S.RES RMC1/16S-184JTH (180 k)	B	25.3/93.6
R63	7030015990	S.RES RMC1/16S-683JTH (68 k)	B	23.2/93.8
R64	7030015910	S.RES RMC1/16S-101JTH (100)	B	30.9/92.8
R65	7030016180	S.RES RMC1/16S-680JTH (68)	B	26.4/94.7
R66	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	33.1/95.0
R67	7030016560	S.RES RMC1/16SJPTH	B	33.9/106.2
R68	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	25.4/79.2
R69	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	26.0/75.2
R70	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	25.2/80.1
R71	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	40.4/67.7
R72	7030016220	S.RES RMC1/16S-563JTH (56 k)	B	34.0/65.7
R73	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	29.9/68.1
R74	7030016150	S.RES RMC1/16S-100JTH (10)	B	39.1/77.8
R75	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	40.6/81.2
R76	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	31.2/73.1
R77	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	34.0/68.1
R79	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	30.3/71.5
R80	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	28.2/71.8
R81	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	B	27.3/68.1
R82	7030016070	S.RES RMC1/16S-474JTH (470 k)	B	30.8/70.2
R83	7030016090	S.RES RMC1/16S-223JTH (22 k)	B	40.6/82.1
R87	7030015910	S.RES RMC1/16S-101JTH (100)	T	41.7/68.3
R90	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	29.9/66.9
R94	7030016560	S.RES RMC1/16SJPTH	B	29.9/70.2
R99	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	28.9/66.9
R100	7030016000	S.RES RMC1/16S-823JTH (82 k)	B	27.7/66.4
R101	7030016100	S.RES RMC1/16S-334JTH (330 k)	B	30.2/65.6
R102	7030016320	S.RES RMC1/16S-225JTH (2.2 M)	B	30.2/63.3
R107	7030015780	S.RES RMC1/10-331JTP (330)	T	37.0/106.9
R108	7030015690	S.RES RMC1/10-180JTP (18)	T	33.5/106.5
R109	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	31.8/107.4
R111	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	9.6/57.1
R114	7030016370	S.RES RMC1/16S-271JTH (270)	B	13.6/57.1
R115	7030016090	S.RES RMC1/16S-223JTH (22 k)	B	13.0/53.7
R117	7030015920	S.RES RMC1/16S-221JTH (220)	B	11.6/50.8
R118	7030016130	S.RES RMC1/16S-150JTH (15)	T	10.7/50.7
R119	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	15.9/50.0
R120	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	13.1/50.2
R121	7030015910	S.RES RMC1/16S-101JTH (100)	B	15.0/48.8
R122	7030016170	S.RES RMC1/16S-560JTH (56)	B	26.7/41.0
R123	7030011000	S.RES RR0510P-392-D (3.9 k)	T	20.9/47.3
R124	7030011000	S.RES RR0510P-392-D (3.9 k)	T	8.8/46.3
R130	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	B	4.4/52.9
R134	7030015930	S.RES RMC1/16S-471JTH (470)	B	23.6/44.2
R135	7030016480	S.RES RMC1/16S-821JTH (820)	B	24.5/47.1
R140	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	29.7/23.2
R142	7030015640	S.RES RMC1/10JPTP	T	18.5/31.3
R145	7030005820	S.RES RR0510P-103-D (10 k)	B	21.0/27.9
R147	7030005950	S.RES RR0510P-123-D (12 k)	B	19.8/28.3
R148	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	19.1/26.5
R150	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	21.6/23.4
R192	7030016740	S.RES RMC1/16SK474DTH (470 k)	T	35.5/16.1
R193	7030016750	S.RES RMC1/16SK124DTH (120 k)	T	34.7/19.6
R194	7030016740	S.RES RMC1/16SK474DTH (470 k)	T	19.9/109.9
R195	7030016750	S.RES RMC1/16SK124DTH (120 k)	T	17.3/109.4
R210	7030016560	S.RES RMC1/16SJPTH	B	33.3/23.2
R211	7030016390	S.RES RMC1/16S-184JTH (180 k)	B	28.0/58.0
R212	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	27.8/56.8
R213	7030016340	S.RES RMC1/16S-393JTH (39 k)	B	29.6/56.6

[MAIN UNIT] (for #11, #12, #21, #22, and #31)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
R214	7030016450	S.RES RMC1/16S-824JTH (820 k)	B	23.5/57.0
R219	7030015660	S.RES RMC1/10-2R7JTP (2.7)	T	11.2/79.6
R220	7030015930	S.RES RMC1/16S-471JTH (470)	B	40.8/117.2
R222	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	44.7/115.2
R223	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	42.3/113.8
R224	7030016330	S.RES RMC1/16S-153JTH (15 k)	B	44.5/113.1
R225	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	37.7/26.3
R226	7030016090	S.RES RMC1/16S-223JTH (22 k)	T	35.6/101.7
R227	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	39.4/44.1
R231	7030016560	S.RES RMC1/16SJPTH	T	37.1/32.8
R252	7030016560	S.RES RMC1/16SJPTH	B	25.5/44.4
R253	7030016490	S.RES RMC1/16S-391JTH (390)	B	24.6/44.4
R254	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	10.9/44.2
R256	7030011920	S.RES RR0510P-561-D (560)	T	20.9/48.6
R258	7030008340	S.RES RR0510P-182-D (1.8 k)	T	17.8/46.1
R260	7030008340	S.RES RR0510P-182-D (1.8 k)	T	8.7/47.2
R262	7030011920	S.RES RR0510P-561-D (560)	T	14.0/44.7
R265	7030015930	S.RES RMC1/16S-471JTH (470)	T	18.3/50.3
R266	7030015990	S.RES RMC1/16S-683JTH (68 k)	T	17.1/49.3
R274	7030015930	S.RES RMC1/16S-471JTH (470)	B	33.0/68.4
R283	7030016390	S.RES RMC1/16S-184JTH (180 k)	B	29.6/57.5
R290	7030015900	S.RES RMC1/16S-470JTH (47)	T	43.7/68.3
R293	7030016000	S.RES RMC1/16S-823JTH (82 k)	B	35.2/106.7
R299	7030015640	S.RES RMC1/10JPTP	T	17.2/79.6
R302	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	11.8/100.9
R303	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	13.2/101.6
R304	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	12.0/114.7
R305	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	T	13.6/113.0
R311	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	27.8/103.3
R313	7030015900	S.RES RMC1/16S-470JTH (47)	B	10.3/51.4
R316	7030016090	S.RES RMC1/16S-223JTH (22 k)	B	33.6/57.5
R317	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	31.5/56.6
R318	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	32.7/58.4
R319	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	33.6/56.6
R320	7030016300	S.RES RMC1/16S-332JTH (3.3 k)	T	7.6/83.8
R321	7510001661	S.THR NTCG16 4LH 473JT	T	7.4/85.2
R322	7030016190	S.RES RMC1/16S-273JTH (27 k)	T	6.7/83.8
R323	7030016440	S.RES RMC1/16S-272JTH (2.7 k)	T	6.4/82.5
R331	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	7.1/76.7
R333	7030016190	S.RES RMC1/16S-273JTH (27 k)	T	8.5/77.5
R334	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	32.0/41.4
R338	7030016000	S.RES RMC1/16S-823JTH (82 k)	T	9.2/119.6
R349	7030015640	S.RES RMC1/10JPTP	B	39.6/88.5
R352	7030016270	S.RES RMC1/16S-151JTH (150)	B	32.2/80.6
R353	7030016560	S.RES RMC1/16SJPTH	B	31.2/90.8
R355	7030016240	S.RES RMC1/16S-684JTH (680 k)	B	45.1/72.3
R357	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	45.1/78.7
R359	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	21.5/39.7
R361	7030016090	S.RES RMC1/16S-223JTH (22 k)	B	27.0/82.6
R363	7030016090	S.RES RMC1/16S-223JTH (22 k)	B	28.8/93.4
R366	7030015910	S.RES RMC1/16S-101JTH (100)	B	23.5/81.7
R367	7030015910	S.RES RMC1/16S-101JTH (100)	B	22.8/91.8
R368	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	14.7/54.7
R369	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	25.6/76.4
R370	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	12.2/102.0
R374	7030016330	S.RES RMC1/16S-153JTH (15 k)	T	39.5/77.2
R375	7030016360	S.RES RMC1/16S-123JTH (12 k)	T	27.1/87.2
R376	7030016330	S.RES RMC1/16S-153JTH (15 k)	B	37.0/66.6
R377	7030016360	S.RES RMC1/16S-123JTH (12 k)	T	39.4/71.7
R378	7030016270	S.RES RMC1/16S-151JTH (150)	B	15.4/57.9
R379	7030016470	S.RES RMC1/16S-390JTH (39)	B	14.5/57.9
R380	7030016270	S.RES RMC1/16S-151JTH (150)	B	15.9/59.1
R381	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	29.0/73.1
R388	7030016360	S.RES RMC1/16S-123JTH (12 k)	T	43.3/71.3
R389	7030016360	S.RES RMC1/16S-123JTH (12 k)	T	28.5/69.3
R390	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	31.1/68.1
R391	7030016060	S.RES RMC1/16S-105JTH (1 M)	B	33.3/36.5
R393	7030016450	S.RES RMC1/16S-824JTH (820 k)	B	24.9/37.6
R394	7030016400	S.RES RMC1/16S-564JTH (560 k)	B	30.8/37.0
R397	7030016560	S.RES RMC1/16SJPTH	B	24.3/95.7
R398	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	26.5/66.3
R399	7030008270	S.RES RR0510P-104-D (100 k)	B	21.1/65.4

The underlined parts have been updated from the previous version of the addendum, or the original page.

[MAIN UNIT] (for #11, #12, #21, #22, and #31)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
R472	7030015930	S.RES RMC1/16S-471JTH (470)	T	31.4/34.7
R473	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	26.4/41.2
R478	7030016560	S.RES RMC1/16SJPTH	B	9.2/35.1
R479	7030016780	S.RES RMC1/16SK224DTH (220 k)	B	8.0/34.5
R480	7030017390	S.RES RMC1/16SK184FTH (180 k)	B	6.8/33.2
R481	7030008270	S.RES RR0510P-104-D (100 k)	B	7.4/29.0
R482	7030008270	S.RES RR0510P-104-D (100 k)	B	7.4/27.9
R483	7030008270	S.RES RR0510P-104-D (100 k)	B	5.8/24.3
R484	7030008270	S.RES RR0510P-104-D (100 k)	B	6.2/23.0
R485	7030008270	S.RES RR0510P-104-D (100 k)	B	5.8/17.7
R486	7030008270	S.RES RR0510P-104-D (100 k)	B	4.9/16.1
R487	7030016930	S.RES RMC1/16SK274DTH (270 k)	B	10.1/35.1
R488	7030018520	S.RES RMC1/16SK564FTH (560 k)	B	11.3/34.4
R489	7030016930	S.RES RMC1/16SK274DTH (270 k)	B	12.1/33.2
R490	7030005850	S.RES RR0510P-563-D (56 k)	B	13.9/29.9
R491	7030007610	S.RES RR0510P-683-D (68 k)	B	12.4/27.6
R492	7030008270	S.RES RR0510P-104-D (100 k)	B	13.9/25.4
R493	7030016750	S.RES RMC1/16SK124DTH (120 k)	B	13.0/22.6
R494	7030016750	S.RES RMC1/16SK124DTH (120 k)	B	13.0/21.0
R495	7030016750	S.RES RMC1/16SK124DTH (120 k)	B	13.0/19.1
R497	7030015980	S.RES RMC1/16S-333JTH (33 k)	B	12.1/8.8
R498	7030016400	S.RES RMC1/16S-564JTH (560 k)	T	43.2/35.3
R499	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	T	43.3/36.2
R500	7030015980	S.RES RMC1/16S-333JTH (33 k)	T	42.3/25.6
R501	7030016250	S.RES RMC1/16S-220JTH (22)	T	34.6/34.6
R502	7030016560	S.RES RMC1/16SJPTH	T	35.1/39.1
R503	7030016200	S.RES RMC1/16S-274JTH (270 k)	T	21.2/125.0
R504	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	23.0/125.0
R505	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	33.0/121.1
R515	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	7.9/21.7
R519	7030012340	S.RES RR0510P-821-D	B	26.6/14.8
R520	7030016750	S.RES RMC1/16SK124DTH (120 k)	B	27.5/9.3
R521	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	32.2/13.7
R524	7030016560	S.RES RMC1/16SJPTH	T	26.8/33.7
R526	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	13.5/8.4
R527	7030015980	S.RES RMC1/16S-333JTH (33 k)	B	40.4/24.6
R528	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	B	37.7/23.0
R529	7030015910	S.RES RMC1/16S-101JTH (100)	B	36.6/23.9
R530	7030016420	S.RES RMC1/16S-182JTH (1.8 k)	B	19.9/24.3
R532	7030016560	S.RES RMC1/16SJPTH	B	21.5/24.3
R537	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	23.2/99.3
R540	7030016330	S.RES RMC1/16S-153JTH (15 k)	T	48.0/42.0
R541	7030016100	S.RES RMC1/16S-334JTH (330 k)	T	48.0/40.1
R542	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	42.1/39.0
R543	7030016320	S.RES RMC1/16S-225JTH (2.2 M)	T	44.7/38.6
R544	7030016220	S.RES RMC1/16S-563JTH (56 k)	T	43.0/38.1
R545	7030016100	S.RES RMC1/16S-334JTH (330 k)	T	46.6/37.5
R546	7030016060	S.RES RMC1/16S-105JTH (1 M)	T	48.5/38.3
R548	7030016070	S.RES RMC1/16S-474JTH (470 k)	T	34.9/28.5
R549	7030016220	S.RES RMC1/16S-563JTH (56 k)	T	34.3/24.4
R550	7030016560	S.RES RMC1/16SJPTH	T	32.5/36.7
R551	7030016560	S.RES RMC1/16SJPTH	T	32.5/37.6
R552	7030016560	S.RES RMC1/16SJPTH	T	32.0/38.7
R554	7030016560	S.RES RMC1/16SJPTH	T	29.1/41.6
R555	7030016560	S.RES RMC1/16SJPTH	T	26.7/64.0
R556	7030016560	S.RES RMC1/16SJPTH	T	25.7/64.0
R558	7030016560	S.RES RMC1/16SJPTH	T	23.5/63.6
R559	7030016560	S.RES RMC1/16SJPTH	T	21.0/61.1
R561	7030016560	S.RES RMC1/16SJPTH	T	27.7/62.1
R562	7030016560	S.RES RMC1/16SJPTH	T	28.4/60.0
R563	7030016380	S.RES RMC1/16S-183JTH (18 k)	B	10.0/8.0
R564	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	11.1/4.0
R565	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	9.6/5.0
R566	7030015980	S.RES RMC1/16S-333JTH (33 k)	B	11.7/7.6
R568	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	13.3/7.5
R569	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	35.7/48.1
R571	7030006020	S.RES RR0510P-682-D (6.8 k)	B	27.8/14.4
R572	7030016500	S.RES RMC1/16S-562JTH (5.6 k)	T	15.4/12.2
R573	7030019630	S.RES RL1220S-1R8-F (1.8)	T	20.3/10.6
R574	7030019630	S.RES RL1220S-1R8-F (1.8)	T	22.0/10.6
R575	7030019630	S.RES RL1220S-1R8-F (1.8)	T	27.5/7.6
R577	7030015940	S.RES RMC1/16S-681JTH (680)	T	23.8/12.7
R578	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	24.6/14.7
R580	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	16.8/19.4
R581	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	21.1/18.5
R582	7030019580	S.RES RG1005P-104-B-T5 (100 k)	T	29.8/12.2
R583	7030006020	S.RES RR0510P-682-D (6.8 k)	T	30.0/13.8
R584	7030019580	S.RES RG1005P-104-B-T5 (100 k)	T	30.4/15.0
R585	7030019600	S.RES RG1005P-103-B-T5 (10 k)	T	14.3/16.6
R588	7030019630	S.RES RL1220S-1R8-F (1.8)	T	28.3/5.1
R589	7030019600	S.RES RG1005P-103-B-T5 (10 k)	T	15.6/18.3
R590	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	14.7/15.3
R591	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	16.3/11.7
R593	7030016560	S.RES RMC1/16SJPTH	B	38.6/27.2
R594	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	46.1/44.8
R595	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	43.1/44.7
R596	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	21.7/57.4
R597	7030016060	S.RES RMC1/16S-105JTH (1 M)	B	25.7/55.8
R600	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	35.5/51.8
R601	7030016560	S.RES RMC1/16SJPTH	B	20.2/65.4
R602	7030016560	S.RES RMC1/16SJPTH	T	22.1/98.4
R604	7030016560	S.RES RMC1/16SJPTH	T	26.9/90.2
R605	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	38.9/7.7
R606	7520000241	S.POS PRF18BC471QB5RB	T	14.8/79.1
R607	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	T	18.9/78.3
R608	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	20.3/6.8
R609	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	18.4/9.4
R610	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	18.1/10.7
R612	7030015910	S.RES RMC1/16S-101JTH (100)	T	15.9/20.4
R613	7030016560	S.RES RMC1/16SJPTH	T	21.7/118.8
R617	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	B	29.4/79.2
R619	7030016560	S.RES RMC1/16SJPTH	B	9.3/61.7

[MAIN UNIT] (for #11, #12, #21, #22, and #31)

REF NO.	PART NO.	DESCRIPTION		M.	H/V LOCATION
R620	7030015910	S.RES	RMC1/16S-101JTH (100)	T	44.8/36.2
R621	7030015960	S.RES	RMC1/16S-472JTH (4.7 k)	B	15.4/18.4
R622	7030016110	S.RES	RMC1/16S-473JTH (47 k)	B	15.4/21.3
R623	7030016110	S.RES	RMC1/16S-473JTH (47 k)	B	10.2/28.3
R624	7030016110	S.RES	RMC1/16S-473JTH (47 k)	B	14.3/31.2
R626	7030015960	S.RES	RMC1/16S-472JTH (4.7 k)	B	6.0/16.1
R627	7030016110	S.RES	RMC1/16S-473JTH (47 k)	B	6.9/21.5
R629	7030016110	S.RES	RMC1/16S-473JTH (47 k)	B	6.9/25.6
R632	7030016110	S.RES	RMC1/16S-473JTH (47 k)	B	6.9/31.3
R635	7030015900	S.RES	RMC1/16S-470JTH (47)	B	7.5/67.2
R637	7030016020	S.RES	RMC1/16S-104JTH (100 k)	B	40.0/64.2
R638	7030016290	S.RES	RMC1/16S-222JTH (2.2 k)	B	31.9/77.7
R639	7030016050	S.RES	RMC1/16S-102JTH (1 k)	B	24.8/78.0
R642	7030015940	S.RES	RMC1/16S-681JTH (680)	T	23.3/13.9
R644	7030016020	S.RES	RMC1/16S-104JTH (100 k)	T	39.7/45.4
R645	7030016020	S.RES	RMC1/16S-104JTH (100 k)	T	39.7/47.0
R646	7030016020	S.RES	RMC1/16S-104JTH (100 k)	T	38.8/47.6
R647	7030016020	S.RES	RMC1/16S-104JTH (100 k)	T	37.9/47.6
R648	7030016020	S.RES	RMC1/16S-104JTH (100 k)	T	41.8/46.6
R649	7030016360	S.RES	RMC1/16S-123JTH (12 k)	[#11] [#12]	T 32.3/85.4
	7030016360	S.RES	RMC1/16S-123JTH (12 k)		
R650	7030016050	S.RES	RMC1/16S-102JTH (1 k)	T	31.1/69.0
R651	7030016560	S.RES	RMC1/16SJPTH	B	36.5/79.5
R652	7030016090	S.RES	RMC1/16S-223JTH (22 k)	B	21.2/72.2
R653	7030016050	S.RES	RMC1/16S-102JTH (1 k)	T	20.3/75.7
R654	7030015960	S.RES	RMC1/16S-472JTH (4.7 k)	B	23.9/79.2
R655	7030016030	S.RES	RMC1/16S-154JTH (150 k)	B	32.6/64.9
R656	7030016190	S.RES	RMC1/16S-273JTH (27 k)	B	27.3/61.1
R657	7030016040	S.RES	RMC1/16S-224JTH (220 k)	B	28.0/59.6
R658	7030015930	S.RES	RMC1/16S-471JTH (470)	B	15.4/105.8
R660	7030016020	S.RES	RMC1/16S-104JTH (100 k)	T	31.4/23.2
R662	7030016050	S.RES	RMC1/16S-102JTH (1 k)	[#11] [#12]	T 39.1/23.0
R670	7030016360	S.RES	RMC1/16S-123JTH (12 k)		
	7030016360	S.RES	RMC1/16S-123JTH (12 k)		
R671	7030017740	S.RES	RMC1/10-271JTP (270)	T	35.2/106.7
R672	7030015900	S.RES	RMC1/16S-470JTH (47)	B	17.5/105.9
R673	7030015930	S.RES	RMC1/16S-471JTH (470)	B	22.4/80.0
R674	7030016460	S.RES	RMC1/16S-181JTH (180)	T	28.2/110.8
R677	7030015960	S.RES	RMC1/16S-472JTH (4.7 k)	T	32.5/46.6
R678	7030016020	S.RES	RMC1/16S-104JTH (100 k)	T	33.1/45.7
R679	7030010990	S.RES	RR0510P-272-D (2.7 k)	B	25.4/14.4
R680	7030016090	S.RES	RMC1/16S-223JTH (22 k)	B	33.6/29.6
C3	4030023580	S.CER	0603N220J500CT	T	8.3/118.0
C4	4030023410	S.CER	0603N9R0D500CT	T	9.6/113.8
C5	4030023620	S.CER	0603N270J500CT	T	6.7/113.8
C6	4030023350	S.CER	0603N5R0B500CT	T	8.3/112.0
C7	4030023580	S.CER	0603N220J500CT	T	3.2/107.8
C8	4030023850	S.CER	0603B102K500CT	T	5.1/107.0
C9	4030023850	S.CER	0603B102K500CT	T	12.7/108.5
C10	4030023850	S.CER	0603B102K500CT	T	9.0/103.8
C11	4030022610	S.CER	0402N0R3B500CT	T	11.5/103.8
C13	4030023580	S.CER	0603N220J500CT	T	7.1/102.6
C14	4030023580	S.CER	0603N220J500CT	T	9.0/98.7
C15	4030022610	S.CER	0402N0R3B500CT	T	11.2/98.5
C17	4030023200	S.CER	0402B471K500CT	T	7.2/74.0
C19	4030023590	S.CER	0603N221J500CT	T	9.0/97.5
C20	4030023090	S.CER	0402B102K500CT	T	14.5/109.4
C23	4030023130	S.CER	0402B222K500CT	T	9.2/71.8
C24	4030023010	S.CER	0402B104K160CT	T	14.5/91.0
C25	4030023090	S.CER	0402B102K500CT	T	8.5/83.8
C28	4030023030	S.CER	0402B103K250CT	T	9.7/68.4
C29	4030023090	S.CER	0402B102K500CT	B	14.7/63.0
C30	4030022880	S.CER	0402N560J500CT	T	13.4/78.0
C31	4030023030	S.CER	0402B103K250CT	T	17.6/75.9
C32	4030023090	S.CER	0402B102K500CT	T	8.7/76.2
C33	4030023090	S.CER	0402B102K500CT	B	14.4/61.7
C34	4030022630	S.CER	0402N100C500CT	T	14.6/70.3
C35	4030022880	S.CER	0402N560J500CT	T	15.5/69.4
C37	4550007360	S.TAN	F931A226MABAMA	T	19.6/69.7
C38	4030023090	S.CER	0402B102K500CT	T	18.8/73.7
C39	4030022700	S.CER	0402N180J500CT	B	6.0/64.3
C40	4030023090	S.CER	0402B102K500CT	B	11.0/57.6
C48	4030023090	S.CER	0402B102K500CT	T	19.9/57.6
C49	4550007390	S.TAN	F931C225MAABAMA	T	10.4/56.3
C50	4030023820	S.CER	0603B104K250CT	T	19.5/65.6
C51	4030023090	S.CER	0402B102K500CT	T	10.1/59.7
C52	4030023010	S.CER	0402B104K160CT	T	10.1/60.7
C53	4030023580	S.CER	0603N220J500CT	T	3.2/106.3
C54	4030022740	S.CER	0402N220J500CT	T	11.7/111.2
C56	4030023090	S.CER	0402B102K500CT	T	12.9/110.7
C57	4030023090	S.CER	0402B102K500CT	B	16.4/107.1
C58	4030023090	S.CER	0402B102K500CT	B	12.7/107.1
C60	4030023090	S.CER	0402B102K500CT	B	21.2/100.6
C61	4030023010	S.CER	0402B104K160CT	B	24.0/92.5
C62	4030022700	S.CER	0402N180J500CT	B	27.9/107.9
C63	4030023090	S.CER	0402B102K500CT	B	11.0/109.0
C64	4030023090	S.CER	0402B102K500CT	B	12.1/100.3
C65	4030023090	S.CER	0402B102K500CT	B	37.1/106.7
C66	4030023010	S.CER	0402B104K160CT	B	36.5/105.0
C67	4030023090	S.CER	0402B102K500CT	B	34.7/102.6
C68	4030023090	S.CER	0402B102K500CT	B	29.6/103.9
C69	4030020000	S.CER	C1005 JB 1A 105K-T	B	36.5/103.1
C71	4030022660	S.CER	0402N120J500CT	B	17.0/104.1
C72	4030022520	S.CER	0402N1R0B500CT	B	31.8/105.1
C73	4030022790	S.CER	0402N2R5B500CT	B	32.9/102.4
C74	4030022720	S.CER	0402N1R5B500CT	B	35.3/101.0
C75	4030023090	S.CER	0402B102K500CT	B	29.6/102.3
C76	4030023090	S.CER	0402B102K500CT	B	39.1/108.4
C77	4030022530	S.CER	0402N2R0B500CT	B	33.6/98.9
C78	4030022700	S.CER	0402N180J500CT	B	31.7/98.1

The underlined parts have been updated from the previous version of the addendum, or the original page.

[MAIN UNIT] (for #11, #12, #21, #22, and #31)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
C79	4030023090	S.CER 0402B102K500CT	B	30.3/100.9
C80	4030023090	S.CER 0402B102K500CT	B	24.4/93.7
C81	4030023090	S.CER 0402B102K500CT	B	28.2/94.7
C82	4030023030	S.CER 0402B103K250CT	B	32.9/92.6
C83	4030023090	S.CER 0402B102K500CT	B	33.8/92.6
C84	4030023090	S.CER 0402B102K500CT	B	33.8/93.8
C85	4030022700	S.CER 0402N180J500CT	B	34.1/95.1
C86	4030022580	S.CER 0402N7R0C500CT	B	20.1/85.3
C87	4030022560	S.CER 0402N5R0B500CT	B	13.7/99.9
C88	4030023030	S.CER 0402B103K250CT	B	25.7/77.0
C90	4030023090	S.CER 0402B102K500CT	B	29.0/76.2
C91	4030022590	S.CER 0402N8R0C500CT	B	38.5/67.7
C92	4030023020	S.CER 0402B473K160CT	B	35.6/64.9
C93	4030023090	S.CER 0402B102K500CT	B	31.7/67.9
C95	4030023030	S.CER 0402B103K250CT	B	31.6/68.8
C97	4550007520	S.TAN F931A106MAABMA	B	36.6/81.0
C98	4030022640	S.CER 0402N101J500CT	B	29.1/77.8
C99	4030023030	S.CER 0402B103K250CT	B	28.6/70.6
C100	4030023200	S.CER 0402B471K500CT	B	29.9/69.0
C101	4030019560	S.CER GRM21BB31C106KE15L	B	36.5/78.1
C102	4030023200	S.CER 0402B471K500CT	B	28.6/69.3
C103	4030022540	S.CER 0402N3R0B500CT	B	43.0/74.1
C104	4030023030	S.CER 0402B103K250CT	B	37.0/68.2
C106	4030023010	S.CER 0402B104K160CT	B	40.1/70.6
C107	4030020000	S.CER C1005 JB 1A 105K-T	T	42.6/67.4
C110	4030023090	S.CER 0402B102K500CT	B	36.5/104.1
C113	4030023010	S.CER 0402B104K160CT	B	42.8/80.9
C115	4030023010	S.CER 0402B104K160CT	B	29.3/63.3
C116	4030023090	S.CER 0402B102K500CT	T	18.5/75.9
C117	4030023090	S.CER 0402B102K500CT	T	19.5/80.9
C118	4030023030	S.CER 0402B103K250CT	T	18.6/80.9
C121	4030019560	S.CER GRM21BB31C106KE15L	T	35.3/110.2
C125	4030023030	S.CER 0402B103K250CT	T	21.9/109.5
C126	4030023010	S.CER 0402B104K160CT	T	26.6/122.4
C127	4030023090	S.CER 0402B102K500CT	T	33.9/109.6
C130	4510009700	S.ELE EEEFK1C101P	T	37.9/115.5
C150	4030022680	S.CER 0402N150J500CT	B	11.0/55.0
C151	4030022600	S.CER 0402N9R0C500CT	B	11.9/51.8
C152	4030023090	S.CER 0402B102K500CT	B	14.6/53.8
C153	4030023090	S.CER 0402B102K500CT	B	14.1/49.0
C155	4030022810	S.CER 0402N330J500CT	T	12.5/50.7
C156	4030023090	S.CER 0402B102K500CT	B	15.9/48.9
C168	4550007550	S.TAN F931V334MAABMA	T	17.6/38.3
C169	4550007390	S.TAN F931C225MAABMA	B	25.0/48.6
C170	4030022720	S.CER 0402N1R5B500CT	T	19.2/42.6
C171	4030023090	S.CER 0402B102K500CT	B	12.8/59.1
C172	4030023010	S.CER 0402B104K160CT	B	8.3/52.0
C173	4550008160	S.TAN F931A226MAA	B	7.7/55.0
C174	4030023010	S.CER 0402B104K160CT	B	22.2/50.1
C176	4030023010	S.CER 0402B104K160CT	T	16.4/109.4
C180	4030023010	S.CER 0402B104K160CT	T	34.7/118.7
C187	4030023010	S.CER 0402B104K160CT	B	17.0/25.9
C188	4030017480	S.CER C1608 JB 1A 474K-T	B	18.0/26.4
C190	4030022750	S.CER 0402N221J500CT	B	14.4/104.1
C191	4030023030	S.CER 0402B103K250CT	B	31.5/103.5
C192	4030023090	S.CER 0402B102K500CT	B	26.9/99.6
C193	4030023090	S.CER 0402B102K500CT	B	26.8/98.7
C196	4030023010	S.CER 0402B104K160CT	B	22.6/28.8
C197	4030023020	S.CER 0402B473K160CT	B	27.3/62.2
C201	4030022840	S.CER 0402N390J500CT	B	38.5/68.6
C202	4030023010	S.CER 0402B104K160CT	B	15.0/6.8
C211	4030023330	S.CER 0603N4R0B500CT	T	13.2/119.4
C212	4030023700	S.CER 0603N390J500CT	T	6.7/96.3
C223	4030024520	S.CER C1005 JB 1C 474K-T	B	33.3/21.5
C225	4030024050	S.CER 0603B473K500CT	B	6.8/12.9
C229	4030023030	S.CER 0402B103K250CT	T	44.6/68.8
C232	4030022530	S.CER 0402N2R0B500CT	B	24.1/91.6
C235	4030020000	S.CER C1005 JB 1A 105K-T	B	8.2/108.9
C237	4030023090	S.CER 0402B102K500CT	B	40.8/118.2
C238	4550007270	S.TAN F931A475MAABMA	T	38.5/120.9
C239	4030022980	S.CER 0402B473K100CT	B	44.7/116.2
C240	4030023090	S.CER 0402B102K500CT	B	40.3/116.3
C241	4030023090	S.CER 0402B102K500CT	B	45.3/114.2
C242	4030023010	S.CER 0402B104K160CT	B	37.7/24.7
C243	4030023090	S.CER 0402B102K500CT	B	40.4/114.5
C245	4030023010	S.CER 0402B104K160CT	T	35.3/103.8
C249	4030023090	S.CER 0402B102K500CT	T	27.2/52.8
C274	4030023090	S.CER 0402B102K500CT	B	36.2/84.6
C293	4030023090	S.CER 0402B102K500CT	B	12.7/4.0
C294	4030020000	S.CER C1005 JB 1A 105K-T	B	29.6/55.7
C296	4030023760	S.CER 0603N6R0J500CT	T	9.2/87.2
C297	4030023530	S.CER 0603N181J500CT	B	6.7/95.1
C301	4030023090	S.CER 0402B102K500CT	B	13.1/43.6
C302	4030022810	S.CER 0402N330J500CT	T	20.9/42.6
C306	4030023670	S.CER 0603N330J500CT	T	16.7/45.0
C307	4030022570	S.CER 0402N6R0C500CT	T	11.7/42.3
C308	4030023090	S.CER 0402B102K500CT	B	11.8/44.2
C309	4030023090	S.CER 0402B102K500CT	B	11.4/46.5
C310	4030023670	S.CER 0603N330J500CT	T	19.5/48.0
C311	4030023790	S.CER 0603N820J500CT	T	9.5/45.2
C312	4030023090	S.CER 0402B102K500CT	T	16.4/46.3
C313	4030023090	S.CER 0402B102K500CT	T	12.5/48.6
C315	4030023670	S.CER 0603N330J500CT	T	12.2/45.2
C316	4030024490	S.CER 0402NR75B500CT	T	16.3/48.4
C317	4030024490	S.CER 0402NR75B500CT	T	12.4/49.7
C319	4030023090	S.CER 0402B102K500CT	T	19.6/49.8
C321	4030023030	S.CER 0402B103K250CT	B	36.1/68.2
C323	4030023030	S.CER 0402B103K250CT	B	27.3/94.7
C327	4030023090	S.CER 0402B102K500CT	B	28.7/103.3
C328	4030023090	S.CER 0402B102K500CT	B	26.9/101.1
C329	4030022530	S.CER 0402N2R0B500CT	B	21.2/104.9
C330	4030023030	S.CER 0402B103K250CT	B	31.1/58.4

[MAIN UNIT] (for #11, #12, #21, #22, and #31)

REF NO.	PART NO.	DESCRIPTION		M.	H/V LOCATION
C331	4030023010	S.CER	0402B104K160CT	B	12.5/10.2
C333	4030023090	S.CER	0402B102K500CT	B	6.8/97.0
C335	4030023670	S.CER	0603N330J500CT	T	12.9/46.4
C336	4030022860	S.CER	0402N470J500CT	T	10.5/42.2
C338	4030023670	S.CER	0603N330J500CT	T	18.6/44.4
C347	4030023010	S.CER	0402B104K160CT	B	36.5/76.7
C349	4550007550	S.TAN	F931V334MAABMA	B	24.9/41.1
C350	4030022860	S.CER	0402N470J500CT	T	16.7/75.9
C351	4030022750	S.CER	0402N221J500CT	T	7.2/67.1
C352	4030023090	S.CER	0402B102K500CT	T	9.2/72.7
C354	4030023090	S.CER	0402B102K500CT	B	36.2/61.6
C355	4030021240	S.CER	C1005 JB 1C 105K-T	B	30.8/38.8
C356	4030023010	S.CER	0402B104K160CT	B	40.1/72.5
C357	4030022980	S.CER	0402B473K100CT	B	35.1/66.9
C361	4030022550	S.CER	0402N4R0B500CT	B	30.3/81.1
C364	4030022540	S.CER	0402N3R0B500CT	B	32.5/90.4
C365	4030022680	S.CER	0402N150J500CT	B	33.5/84.2
C372	4030023090	S.CER	0402B102K500CT	T	15.4/91.0
C373	4030023090	S.CER	0402B102K500CT	T	11.1/66.7
C375	4030022610	S.CER	0402N0R3B500CT	T	9.7/112.8
C376	4030023090	S.CER	0402B102K500CT	B	32.9/50.0
C377	4030022620	S.CER	0402N0R5B500CT	T	10.2/49.3
C379	4030023330	S.CER	0603N4R0B500CT	T	16.8/43.8
C381	4030023090	S.CER	0402B102K500CT	B	36.2/62.8
C383	4030023330	S.CER	0603N4R0B500CT	T	11.4/43.6
C384	4030021520	S.CER	GRM31CB31H106KA12L	T	25.0/109.6
C385	4030021240	S.CER	C1005 JB 1C 105K-T	T	21.6/106.1
C386	4030022560	S.CER	0402N5R0B500CT	T	11.7/41.2
C387	4030023090	S.CER	0402B102K500CT	B	28.4/41.5
C388	4030023090	S.CER	0402B102K500CT	T	20.3/90.4
C389	4030022560	S.CER	0402N5R0B500CT	T	12.1/39.0
C390	4030023090	S.CER	0402B102K500CT	B	32.8/76.8
C391	4030022900	S.CER	0402N6R0J500CT	B	26.5/76.4
C392	4030023090	S.CER	0402B102K500CT	B	23.6/75.2
C393	4030020000	S.CER	C1005 JB 1A 105K-T	B	24.7/76.4
C394	4030023030	S.CER	0402B103K250CT	B	23.8/76.4
C395	4030023090	S.CER	0402B102K500CT	B	15.9/54.2
C396	4030022660	S.CER	0402N120J500CT	B	15.1/56.7
C397	4030022680	S.CER	0402N150J500CT	B	16.2/60.5
C398	4030022860	S.CER	0402N470J500CT	B	42.1/74.1
C399	4030022650	S.CER	0402N110J500CT	B	42.8/75.6
C400	4030022640	S.CER	0402N101J500CT	B	41.2/74.1
C401	4030022550	S.CER	0402N4R0B500CT	B	41.2/75.5
C402	4030022880	S.CER	0402N560J500CT	B	40.3/74.1
C403	4030023090	S.CER	0402B102K500CT	B	33.0/43.9
C405	4030023090	S.CER	0402B102K500CT	B	19.4/99.2
C407	4030020450	S.CER	C1005 JB 0J 475M-T	B	16.3/105.4
C418	4030023090	S.CER	0402B102K500CT	T	40.3/12.6
C420	4030023090	S.CER	0402B102K500CT	T	37.3/104.8
C429	4030022860	S.CER	0402N470J500CT	T	16.4/91.0
C430	4030021240	S.CER	C1005 JB 1C 105K-T	B	22.7/77.8
C431	4030023090	S.CER	0402B102K500CT	T	37.2/16.9
C432	4030023090	S.CER	0402B102K500CT	B	38.1/106.7
C438	4030022630	S.CER	0402N100C500CT	B	32.9/41.4
C439	4030022640	S.CER	0402N101J500CT	B	43.7/69.2
C440	4030023090	S.CER	0402B102K500CT	B	33.8/41.4
C441	4030020000	S.CER	C1005 JB 1A 105K-T	B	34.8/38.9
C443	4030023090	S.CER	0402B102K500CT	B	23.1/39.7
C444	4030023010	S.CER	0402B104K160CT	B	35.4/46.5
C445	4030021240	S.CER	C1005 JB 1C 105K-T	B	34.8/44.3
C446	4030023030	S.CER	0402B103K250CT	B	45.1/79.6
C451	4030023010	S.CER	0402B104K160CT	B	24.4/81.3
C458	4030023010	S.CER	0402B104K160CT	B	29.9/91.1
C459	4030023010	S.CER	0402B104K160CT	B	31.0/80.1
C460	4030023010	S.CER	0402B104K160CT	B	40.0/75.8
C461	4030023010	S.CER	0402B104K160CT	T	25.3/85.9
C462	4030023010	S.CER	0402B104K160CT	T	38.2/72.1
C463	4030023010	S.CER	0402B104K160CT	T	26.2/72.1
C464	4030023010	S.CER	0402B104K160CT	T	44.5/71.7
C466	4030023010	S.CER	0402B104K160CT	T	28.9/72.3
C467	4030023010	S.CER	0402B104K160CT	T	42.1/71.7
C468	4030023010	S.CER	0402B104K160CT	T	26.2/86.8
C469	4030023010	S.CER	0402B104K160CT	B	26.7/84.2
C470	4030023010	S.CER	0402B104K160CT	B	26.6/89.5
C471	4030023010	S.CER	0402B104K160CT	B	33.7/90.8
C472	4030023010	S.CER	0402B104K160CT	B	33.1/80.6
C473	4030022560	S.CER	0402N5R0B500CT	B	41.6/70.4
C474	4030022570	S.CER	0402N6R0C500CT	B	43.9/72.8
C475	4030022880	S.CER	0402N560J500CT	B	41.3/71.7
C476	4030023090	S.CER	0402B102K500CT	B	26.8/80.2
C477	4030023090	S.CER	0402B102K500CT	B	29.7/94.7
C478	4030023030	S.CER	0402B103K250CT	B	22.0/64.9
C479	4030023030	S.CER	0402B103K250CT	B	24.9/62.8
C481	4030019560	S.CER	GRM21BB31C106KE15L	B	9.6/109.5
C484	4030023030	S.CER	0402B103K250CT	B	8.7/52.9
C485	4030023090	S.CER	0402B102K500CT	T	25.7/66.2
C486	4030023090	S.CER	0402B102K500CT	T	26.7/66.2
C487	4030023090	S.CER	0402B102K500CT	T	27.7/66.2
C488	4030019560	S.CER	GRM21BB31C106KE15L	B	9.5/106.0
C489	4030020000	S.CER	C1005 JB 1A 105K-T	B	24.2/72.3
C490	4030023010	S.CER	0402B104K160CT	B	35.7/38.9
C491	4030023090	S.CER	0402B102K500CT	B	31.5/57.5
C492	4030020450	S.CER	C1005 JB 0J 475M-T	T	28.9/70.5
C493	4030020450	S.CER	C1005 JB 0J 475M-T	T	40.3/71.7
C495	4030021520	S.CER	GRM31CB31H106KA12L	T	19.6/82.7
C496	4030021520	S.CER	GRM31CB31H106KA12L	T	21.3/107.7
C508	4030023090	S.CER	0402B102K500CT	T	14.4/41.4
C509	4030023090	S.CER	0402B102K500CT	T	13.9/38.5
C510	4030023090	S.CER	0402B102K500CT	B	26.6/45.7
C511	4030022640	S.CER	0402N101J500CT	B	29.4/40.4
C512	4030024500	S.CER	C1005 JB 1C 224K-T	B	30.3/40.4
C513	4030019560	S.CER	GRM21BB31C106KE15L	B	27.6/38.9

The underlined parts have been updated from the previous version of the addendum, or the original page.

[MAIN UNIT] (for #11, #12, #21, #22, and #31)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
C514	4030023010	S.CER 0402B104K160CT	B	33.9/44.3
C515	4030023010	S.CER 0402B104K160CT	B	32.4/48.1
C516	4030019560	S.CER GRM21BB31C106KE15L	B	28.4/49.8
C517	4030023010	S.CER 0402B104K160CT	B	29.9/38.8
C518	4030023090	S.CER 0402B102K500CT	B	26.3/50.7
C519	4030023090	S.CER 0402B102K500CT	B	28.7/47.7
C520	4030023090	S.CER 0402B102K500CT	B	15.5/42.4
C521	4030023090	S.CER 0402B102K500CT	B	16.4/47.7
C522	4030023090	S.CER 0402B102K500CT	T	19.5/50.7
C523	4030023090	S.CER 0402B102K500CT	B	21.9/38.5
C524	4030023090	S.CER 0402B102K500CT	B	21.5/37.3
C525	4030023090	S.CER 0402B102K500CT	B	44.1/67.8
C526	4030022630	S.CER 0402N100C500CT	B	42.4/67.8
C527	4030021240	S.CER C1005 JB 1C 105K-T	B	40.5/65.4
C528	4030023010	S.CER 0402B104K160CT	B	39.6/65.4
C529	4030023010	S.CER 0402B104K160CT	B	44.5/64.6
C530	4030021240	S.CER C1005 JB 1C 105K-T	B	41.9/63.1
C531	4030023010	S.CER 0402B104K160CT	T	21.0/62.0
C532	4030019560	S.CER GRM21BB31C106KE15L	T	26.5/54.9
C533	4030023010	S.CER 0402B104K160CT	T	24.8/54.9
C534	4030023090	S.CER 0402B102K500CT	T	32.5/33.3
C535	4030023010	S.CER 0402B104K160CT	T	24.3/36.0
C536	4030019560	S.CER GRM21BB31C106KE15L	T	24.7/34.0
C537	4030023010	S.CER 0402B104K160CT	T	30.5/33.8
C538	4520000020	S.NIO NOJC227M006RWJV	T	30.3/26.1
C539	4030023090	S.CER 0402B102K500CT	B	41.3/96.4
C541	4030021240	S.CER C1005 JB 1C 105K-T	B	34.8/27.6
C542	4030023010	S.CER 0402B104K160CT	B	34.5/23.2
C543	4030023090	S.CER 0402B102K500CT	T	15.9/9.5
C544	4030023090	S.CER 0402B102K500CT	T	13.0/6.6
C549	4030017810	S.CER C1608 CH 1H 102J-T	B	5.6/31.1
C550	4030022910	S.CER 0402N681J500CT	B	8.7/33.2
C551	4030018620	S.CER C1608 CH 1H 222J-T	B	6.0/28.1
C552	4030022820	S.CER 0402N331J500CT	B	9.0/28.0
C553	4030019570	S.CER C1608 CH 1H 332J-T	B	5.6/19.4
C554	4030022670	S.CER 0402N121J500CT	B	8.0/23.4
C555	4030022350	S.CER C1608 CH 1H 822J-T	B	5.5/14.7
C557	4030022930	S.CER 0402N821J500CT	B	11.4/35.3
C558	4030022930	S.CER 0402N821J500CT	B	13.0/31.7
C559	4030022690	S.CER 0402N151J500CT	B	10.5/33.2
C560	4030020170	S.CER C1608 CH 1H 472J-T	B	13.7/27.4
C561	4030022870	S.CER 0402N471J500CT	B	11.2/28.3
C562	4030020940	S.CER C1608 CH 1H 392J-T	B	14.1/22.1
C563	4030022640	S.CER 0402N101J500CT	B	12.1/23.2
C564	4030020160	S.CER C1608 CH 1H 103J-T	B	14.1/19.1
C565	4030022680	S.CER 0402N150J500CT	B	9.3/18.3
C566	4030021240	S.CER C1005 JB 1C 105K-T	T	41.5/35.4
C567	4030021240	S.CER C1005 JB 1C 105K-T	T	41.9/36.8
C568	4030021240	S.CER C1005 JB 1C 105K-T	T	40.9/25.9
C569	4030023010	S.CER 0402B104K160CT	T	42.6/26.5
C570	4030023010	S.CER 0402B104K160CT	T	39.6/26.3
C571	4030019560	S.CER GRM21BB31C106KE15L	T	35.0/37.1
C572	4030019560	S.CER GRM21BB31C106KE15L	T	37.6/34.9
C573	4030023090	S.CER 0402B102K500CT	T	9.1/21.3
C574	4030022900	S.CER 0402N680J500CT	B	27.5/10.2
C577	4030021520	S.CER GRM31CB31H106KA12L	B	21.7/9.3
C579	4030021520	S.CER GRM31CB31H106KA12L	B	23.8/9.3
C580	4030021520	S.CER GRM31CB31H106KA12L	B	34.9/6.7
C585	4030023010	S.CER 0402B104K160CT	B	25.4/9.5
C586	4030023030	S.CER 0402B103K250CT	B	26.3/9.5
C587	4030022870	S.CER 0402N471J500CT	B	40.4/23.7
C588	4030022860	S.CER 0402N470J500CT	B	41.6/21.9
C589	4030021240	S.CER C1005 JB 1C 105K-T	B	39.1/22.5
C590	4030023090	S.CER 0402B102K500CT	B	35.2/87.5
C591	4030022640	S.CER 0402N101J500CT	B	36.9/88.1
C592	4030022640	S.CER 0402N101J500CT	B	40.1/96.7
C593	4030023090	S.CER 0402B102K500CT	B	41.5/94.8
C596	4030023090	S.CER 0402B102K500CT	T	11.7/10.7
C597	4030023010	S.CER 0402B104K160CT	B	26.6/26.3
C598	4030021240	S.CER C1005 JB 1C 105K-T	B	25.7/26.3
C599	4030023090	S.CER 0402B102K500CT	T	23.4/118.8
C602	4030023090	S.CER 0402B102K500CT	T	21.2/120.6
C605	4030022640	S.CER 0402N101J500CT	T	28.2/123.0
C608	4030019560	S.CER GRM21BB31C106KE15L	B	21.2/29.9
C610	4030023090	S.CER 0402B102K500CT	T	23.0/97.1
C612	4030019560	S.CER GRM21BB31C106KE15L	T	27.8/91.6
C613	4030023090	S.CER 0402B102K500CT	T	22.1/100.3
C614	4030023010	S.CER 0402B104K160CT	T	25.7/92.4
C615	4030023010	S.CER 0402B104K160CT	T	23.9/97.1
C616	4030023090	S.CER 0402B102K500CT	T	24.8/92.4
C622	4030023060	S.CER 0402B183K250CT	T	46.7/42.3
C623	4030023060	S.CER 0402B183K250CT	T	46.7/40.7
C624	4030023010	S.CER 0402B104K160CT	T	46.6/38.4
C627	4030023010	S.CER 0402B104K160CT	B	10.8/9.2
C628	4030023010	S.CER 0402B104K160CT	B	13.9/5.3
C629	4050000340	S.FEE NFM21PC224R1C3D	B	32.9/6.7
C631	4030022560	S.CER 0402N5R0B500CT	B	10.2/18.3
C632	4030022810	S.CER 0402N330J500CT	B	7.6/17.6
C633	4030023010	S.CER 0402B104K160CT	B	11.1/18.7
C634	4030023010	S.CER 0402B104K160CT	B	13.0/24.2
C635	4030023010	S.CER 0402B104K160CT	B	12.1/28.8
C636	4030023010	S.CER 0402B104K160CT	B	13.1/15.0
C637	4030023010	S.CER 0402B104K160CT	B	12.2/13.7
C638	4030023010	S.CER 0402B104K160CT	B	25.5/57.0
C639	4030023090	S.CER 0402B102K500CT	B	40.6/108.4
C640	4030023090	S.CER 0402B102K500CT	B	45.6/104.3
C641	4030023010	S.CER 0402B104K160CT	T	43.6/46.2
C642	4030023010	S.CER 0402B104K160CT	T	47.9/39.2
C643	4030023010	S.CER 0402B104K160CT	T	41.7/43.5
C644	4030023200	S.CER 0402B471K500CT	T	48.0/41.1
C645	4030023010	S.CER 0402B104K160CT	T	42.1/50.2
C646	4030019560	S.CER GRM21BB31C106KE15L	T	32.8/91.3

[MAIN UNIT] (for #11, #12, #21, #22, and #31)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
C647	4030023010	S.CER 0402B104K160CT	T	28.1/89.8
C648	4030023090	S.CER 0402B102K500CT	B	12.2/60.3
C649	4030023090	S.CER 0402B102K500CT	B	10.2/61.7
C650	4030023010	S.CER 0402B104K160CT	T	19.8/15.8
C651	4030023010	S.CER 0402B104K160CT	T	13.8/21.2
C652	4030023010	S.CER 0402B104K160CT	T	11.7/15.2
C653	4030021240	S.CER C1005 JB 1C 105K-T	T	22.0/97.1
C656	4030023090	S.CER 0402B102K500CT	T	15.6/7.8
C660	4030023090	S.CER 0402B102K500CT	B	6.6/67.2
C661	4030023010	S.CER 0402B104K160CT	T	40.6/46.4
C662	4030023010	S.CER 0402B104K160CT	T	41.2/44.9
C663	4030023010	S.CER 0402B104K160CT	T	33.2/85.4
C664	4030023010	S.CER 0402B104K160CT	B	36.5/41.7
C665	4030023070	S.CER 0402B223K250CT	B	20.7/75.2
C666	4030023010	S.CER 0402B104K160CT	T	34.3/22.5
C667	4030023090	S.CER 0402B102K500CT	B	14.0/15.0
C668	4030023090	S.CER 0402B102K500CT	B	12.0/18.7
C669	4030023090	S.CER 0402B102K500CT	B	13.9/24.2
C670	4030023090	S.CER 0402B102K500CT	B	13.0/29.4
C671	4030022640	S.CER 0402N101J500CT	B	6.0/21.5
C672	4030022640	S.CER 0402N101J500CT	B	6.9/16.1
C673	4030023090	S.CER 0402B102K500CT	T	42.4/45.6
C674	4030023090	S.CER 0402B102K500CT	T	16.1/22.4
C675	4030023090	S.CER 0402B102K500CT	T	6.5/15.7
C676	4030023090	S.CER 0402B102K500CT	T	19.3/79.5
C677	4030019560	S.CER GRM21BB31C106KE15L	B	24.5/68.6
	4030019560	S.CER GRM21BB31C106KE15L		
C680	4030023010	S.CER 0402B104K160CT	T	32.7/86.6
	4030023010	S.CER 0402B104K160CT		
C681	4030023010	S.CER 0402B104K160CT	T	35.2/81.9
	4030023010	S.CER 0402B104K160CT		
C682	4030023010	S.CER 0402B104K160CT	T	30.1/71.4
C683	4030023090	S.CER 0402B102K500CT	B	43.1/94.4
C684	4030023090	S.CER 0402B102K500CT	B	38.9/95.7
J1	6450000870	CON HEC2711-01-020		
J2	6450000131	CON HSJ1102-018540		
J4	6510021901	S.CON BMO2B-ASRS-TF (LF) (SN)	T	13.0/4.0
J5	6450001060	CON HSJ1493-01-010		
J6	6510031230	S.CON 50P4.5-JMCS-G-TF (N) (1)	T	35.7/54.3
MC1	7700003060	MIC F6027AP-SBC-462		
S1	2260003640	SWI SKHLLCA010		
EP3	6910014640	S.BEA MPZ2012S221A-T	T	39.3/14.4
EP4	6910014640	S.BEA MPZ2012S221A-T	T	19.5/121.0
EP5	6910014730	S.BEA MPZ2012S331A-T	T	37.0/102.8
EP6	6910014730	S.BEA MPZ2012S331A-T	B	40.2/110.9
EP7	6910014730	S.BEA MPZ2012S331A-T	B	41.8/106.3
EP10	6910014730	S.BEA MPZ2012S331A-T	T	13.9/8.6
EP11	6910014730	S.BEA MPZ2012S331A-T	B	39.7/103.7
EP13	6910020610	S.BEA BLM15BD102SN1D	T	15.7/47.5
EP14	6910020610	S.BEA BLM15BD102SN1D	T	12.5/47.6
EP15	6910014640	S.BEA MPZ2012S221A-T	T	39.7/18.7
EP16	6910014640	S.BEA MPZ2012S221A-T	T	18.5/89.0
EP18	6910020610	S.BEA BLM15BD102SN1D	T	27.7/56.8
EP19	6910020610	S.BEA BLM15BD102SN1D	T	23.5/54.5
EP20	6910020610	S.BEA BLM15BD102SN1D	T	26.6/42.9
EP21	6910020610	S.BEA BLM15BD102SN1D	T	32.6/34.2
EP23	6910014730	S.BEA MPZ2012S331A-T	T	12.2/8.6
EP24	6910014730	S.BEA MPZ2012S331A-T	B	42.4/92.3
EP25	6910020610	S.BEA BLM15BD102SN1D	B	36.5/87.2
EP26	6910020610	S.BEA BLM15BD102SN1D	B	40.1/95.7
EP28	6910020610	S.BEA BLM15BD102SN1D	T	26.9/110.8
EP29	6910014640	S.BEA MPZ2012S221A-T	T	30.3/110.0
EP30	6910014640	S.BEA MPZ2012S221A-T	B	34.9/10.9
EP31	6910020610	S.BEA BLM15BD102SN1D	T	19.5/111.2

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

M.= Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)
H/V LOCATION=See the BOARD LAYOUTS for details.

The underlined parts have been updated from the previous version of the addendum, or the original page.

[LOGIC-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION			M.	H/V LOCATION
IC1	1190004712	S.IC	HRM1016-010022	[#13]	T	37.3/13.5
	1190004712	S.IC	HRM1016-010022	[#14]		
	1190004712	S.IC	HRM1016-010022	[#16]		
	1190004712	S.IC	HRM1016-010022	[#17]		
IC11	1110003790	S.IC	NJM2903V-TE1-#FMZB	[#13]	B	17.6/8.1
	1110003790	S.IC	NJM2903V-TE1-#FMZB	[#14]		
	1110003790	S.IC	NJM2903V-TE1-#FMZB	[#16]		
	1110003790	S.IC	NJM2903V-TE1-#FMZB	[#17]		
IC12	1110006470	S.IC	LMV324IPWR	[#13]	B	24.1/19.7
	1110006470	S.IC	LMV324IPWR	[#14]		
	1110006470	S.IC	LMV324IPWR	[#16]		
	1110006470	S.IC	LMV324IPWR	[#17]		
IC13	1110006740	S.IC	LMV358IPWR	[#13]	B	8.4/11.0
	1110006740	S.IC	LMV358IPWR	[#14]		
	1110006740	S.IC	LMV358IPWR	[#16]		
	1110006740	S.IC	LMV358IPWR	[#17]		
IC17	1190004620	S.IC	GSU-141A-098A	[#13]	B	23.8/85.9
	1190004620	S.IC	GSU-141A-098A	[#14]		
	1190004620	S.IC	GSU-141A-098A	[#16]		
	1190004620	S.IC	GSU-141A-098A	[#17]		
IC27	1140018060	S.IC	R5F52108BDLK		B	31.0/52.9
IC30	1180004760	S.REG	S-1200B33-M5T1U	[#13]	T	18.2/10.2
	1180004760	S.REG	S-1200B33-M5T1U	[#14]		
	1180004760	S.REG	S-1200B33-M5T1U	[#16]		
	1180004760	S.REG	S-1200B33-M5T1U	[#17]		
IC31	1180004760	S.REG	S-1200B33-M5T1U	[#13]	B	32.5/96.5
	1180004760	S.REG	S-1200B33-M5T1U	[#14]		
	1180004760	S.REG	S-1200B33-M5T1U	[#16]		
	1180004760	S.REG	S-1200B33-M5T1U	[#17]		
IC32	1110006490	S.IC	LMV321IDCKR	[#13]	B	38.6/5.1
	1110006490	S.IC	LMV321IDCKR	[#14]		
	1110006490	S.IC	LMV321IDCKR	[#16]		
	1110006490	S.IC	LMV321IDCKR	[#17]		
IC34	1180003570	S.REG	NJM2830U1-33-TE1-#ZZZB		B	39.7/44.0
IC35	1130014260	S.IC	SN74LVC2GU04DCKR		B	29.0/13.8
IC36	1130014260	S.IC	SN74LVC2GU04DCKR		B	40.9/31.9
IC37	1130016621	S.IC	GT24C128B-2ZLI-TR		B	31.3/68.1
IC38	1110007780	S.IC	NJU7704F3-28A-TE1-#ZZZH		B	22.4/67.7
IC39	1110007780	S.IC	NJU7704F3-28A-TE1		T	22.1/13.2
			-#ZZZH	[#13]		
			NJU7704F3-28A-TE1	[#14]		
			-#ZZZH	[#16]		
			NJU7704F3-28A-TE1	[#17]		
IC40	1180005110	S.REG	NJM2836DL3-05-TE1		B	31.8/35.9
	1180003460	S.REG	NJM2831F05-TE1-#ZZZB			
Q3	1530004190	S.TRA	L2SC4617ST1G		B	24.9/72.7
	1590004070	S.TRA	LDTIC144EET1G	[#13]		
	1590004070	S.TRA	LDTIC144EET1G	[#14]		
	1590004070	S.TRA	LDTIC144EET1G	[#16]		
	1590004070	S.TRA	LDTIC144EET1G	[#17]		
Q13	1530004140	S.TRA	L2SC4081RT1G	[#13]	B	21.1/12.6
	1530004140	S.TRA	L2SC4081RT1G	[#14]		
	1530004140	S.TRA	L2SC4081RT1G	[#16]		
	1530004140	S.TRA	L2SC4081RT1G	[#17]		
	1590004530	S.TRA	DMG564050R	[#13]		
Q15	1590004530	S.TRA	DMG564050R	[#14]	B	24.9/29.6
	1590004530	S.TRA	DMG564050R	[#16]		
	1590004530	S.TRA	DMG564050R	[#17]		
	1590004070	S.TRA	LDTIC144EET1G	[#13]		
	1590004070	S.TRA	LDTIC144EET1G	[#14]		
Q16	1590004070	S.TRA	LDTIC144EET1G	[#16]	B	40.5/11.3
	1590004070	S.TRA	LDTIC144EET1G	[#17]		
	1590004070	S.TRA	LDTIC144EET1G	[#13]		
	1590004070	S.TRA	LDTIC144EET1G	[#14]		
	1590004070	S.TRA	LDTIC144EET1G	[#16]		
Q17	1590004070	S.TRA	LDTIC144EET1G	[#17]	T	19.9/17.9
	1590004070	S.TRA	LDTIC144EET1G	[#13]		
	1590004070	S.TRA	LDTIC144EET1G	[#14]		
	1590004070	S.TRA	LDTIC144EET1G	[#16]		
	1590004070	S.TRA	LDTIC144EET1G	[#17]		
Q22	1530004000	S.TRA	2SC4738-GR (TE85LF)		B	32.4/14.2
	1510001100	S.TRA	2SA1832-GR (TE85RF)	B		
	1510001100	S.TRA	2SA1832-GR (TE85RF)	B		
	1560001730	S.FET	RUE002N02 TL	B		
	1510001100	S.FET	2SA1832-GR (TE85RF)	T		
Q31	1510001100	S.FET	2SA1832-GR (TE85RF)	T	B	14.7/13.5
	1510001100	S.FET	2SA1832-GR (TE85RF)	T		
	1510001100	S.FET	2SA1832-GR (TE85RF)	T		
	1590004070	S.FET	LDTIC144EET1G	T		
	1590004070	S.FET	LDTIC144EET1G	T		
Q34	1590004070	S.FET	LDTIC144EET1G	T	B	14.8/15.5
	1590004070	S.FET	LDTIC144EET1G	T		
	1590004070	S.FET	LDTIC144EET1G	T		
	1590004070	S.FET	LDTIC144EET1G	T		
	1590004070	S.FET	LDTIC144EET1G	T		
D1	1750001810	S.DIO	L1SS400T1G		T	6.1/104.9
	1750002220	S.DIO	DA6J101K0R	T		
	1750001810	S.DIO	L1SS400T1G	[#23]		
	1750001810	S.DIO	L1SS400T1G	[#24]		
	1750001810	S.DIO	L1SS400T1G	[#27]		
D4	1750001810	S.DIO	L1SS400T1G	[#33]	T	3.9/12.1
	1750001810	S.DIO	L1SS400T1G	[#34]		
	1750001810	S.DIO	L1SS400T1G	[#36]		
	1750001810	S.DIO	L1SS400T1G	[#13]		
	1750001810	S.DIO	L1SS400T1G	[#14]		
D5	1750001810	S.DIO	L1SS400T1G	[#23]	T	13.0/98.5
	1750001810	S.DIO	L1SS400T1G	[#24]		
	1750001810	S.DIO	L1SS400T1G	[#33]		
	1750001810	S.DIO	L1SS400T1G	[#34]		
	1750001810	S.DIO	L1SS400T1G	[#14]		
D6	1750001810	S.DIO	L1SS400T1G	[#17]	B	11.2/56.2
	1750001810	S.DIO	L1SS400T1G	[#24]		
	1750001810	S.DIO	L1SS400T1G	[#27]		
	1750001810	S.DIO	L1SS400T1G	[#34]		
	1750001810	S.DIO	L1SS400T1G	[#14]		

The underlined parts have been updated from the previous version of the addendum, or the original page.

[LOGIC-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
R77	7030016040	S.RES RMC1/16S-224JTH (220 k) [13]	B	24.8/25.0
	7030016040	S.RES RMC1/16S-224JTH (220 k) [14]		
	7030016040	S.RES RMC1/16S-224JTH (220 k) [16]		
	7030016040	S.RES RMC1/16S-224JTH (220 k) [17]		
R78	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [13]	B	26.5/25.5
	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [14]		
	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [16]		
	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [17]		
R79	7030016120	S.RES RMC1/16S-682JTH (6.8 k) [13]	B	24.8/13.4
	7030016120	S.RES RMC1/16S-682JTH (6.8 k) [14]		
	7030016120	S.RES RMC1/16S-682JTH (6.8 k) [16]		
	7030016120	S.RES RMC1/16S-682JTH (6.8 k) [17]		
R80	7030016030	S.RES RMC1/16S-154JTH (150 k) [13]	B	26.0/15.4
	7030016030	S.RES RMC1/16S-154JTH (150 k) [14]		
	7030016030	S.RES RMC1/16S-154JTH (150 k) [16]		
	7030016030	S.RES RMC1/16S-154JTH (150 k) [17]		
R81	7030016290	S.RES RMC1/16S-222JTH (2.2 k) [13]	B	23.9/15.0
	7030016290	S.RES RMC1/16S-222JTH (2.2 k) [14]		
	7030016290	S.RES RMC1/16S-222JTH (2.2 k) [16]		
	7030016290	S.RES RMC1/16S-222JTH (2.2 k) [17]		
R82	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [13]	B	26.4/13.3
	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [14]		
	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [16]		
	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [17]		
R83	7030016040	S.RES RMC1/16S-224JTH (220 k) [13]	B	22.4/15.3
	7030016040	S.RES RMC1/16S-224JTH (220 k) [14]		
	7030016040	S.RES RMC1/16S-224JTH (220 k) [16]		
	7030016040	S.RES RMC1/16S-224JTH (220 k) [17]		
R84	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [13]	B	16.6/18.5
	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [14]		
	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [16]		
	7030015960	S.RES RMC1/16S-472JTH (4.7 k) [17]		
R85	7030016360	S.RES RMC1/16S-123JTH (12 k) [13]	B	14.4/21.3
	7030016360	S.RES RMC1/16S-123JTH (12 k) [14]		
	7030016360	S.RES RMC1/16S-123JTH (12 k) [16]		
	7030016360	S.RES RMC1/16S-123JTH (12 k) [17]		
R86	7030016560	S.RES RMC1/16SJPTH [13]	B	15.3/21.3
	7030016560	S.RES RMC1/16SJPTH [14]		
	7030016560	S.RES RMC1/16SJPTH [16]		
	7030016560	S.RES RMC1/16SJPTH [17]		
R88	7030016000	S.RES RMC1/16S-823JTH (82 k) [13]	B	18.2/23.5
	7030016000	S.RES RMC1/16S-823JTH (82 k) [14]		
	7030016000	S.RES RMC1/16S-823JTH (82 k) [16]		
	7030016000	S.RES RMC1/16S-823JTH (82 k) [17]		
R91	7030016100	S.RES RMC1/16S-334JTH (330 k) [13]	B	23.0/10.4
	7030016100	S.RES RMC1/16S-334JTH (330 k) [14]		
	7030016100	S.RES RMC1/16S-334JTH (330 k) [16]		
	7030016100	S.RES RMC1/16S-334JTH (330 k) [17]		
R93	7030016070	S.RES RMC1/16S-474JTH (470 k) [13]	B	21.5/14.4
	7030016070	S.RES RMC1/16S-474JTH (470 k) [14]		
	7030016070	S.RES RMC1/16S-474JTH (470 k) [16]		
	7030016070	S.RES RMC1/16S-474JTH (470 k) [17]		
R94	7030016450	S.RES RMC1/16S-824JTH (820 k) [13]	B	23.0/13.7
	7030016450	S.RES RMC1/16S-824JTH (820 k) [14]		
	7030016450	S.RES RMC1/16S-824JTH (820 k) [16]		
	7030016450	S.RES RMC1/16S-824JTH (820 k) [17]		
R95	7030016090	S.RES RMC1/16S-223JTH (22 k) [13]	B	19.2/13.0
	7030016090	S.RES RMC1/16S-223JTH (22 k) [14]		
	7030016090	S.RES RMC1/16S-223JTH (22 k) [16]		
	7030016090	S.RES RMC1/16S-223JTH (22 k) [17]		
R112	7030016320	S.RES RMC1/16S-225JTH (2.2 M) [13]	B	16.7/11.0
	7030016320	S.RES RMC1/16S-225JTH (2.2 M) [14]		
	7030016320	S.RES RMC1/16S-225JTH (2.2 M) [16]		
	7030016320	S.RES RMC1/16S-225JTH (2.2 M) [17]		
R145	7030016060	S.RES RMC1/16S-105JTH (1 M) [13]	T	2.2/13.8
R146	7030016060	S.RES RMC1/16S-105JTH (1 M) [14]	T	2.7/14.8
R147	7030016060	S.RES RMC1/16S-105JTH (1 M) [16]	T	5.6/13.8
R148	7030016060	S.RES RMC1/16S-105JTH (1 M) [17]	T	4.1/9.3
R151	7510001661	S.THR NTG16 ALH 473JT [13]	T	34.8/24.7
R152	7030008270	S.RES RR0510P-104-D (100 k) [13]	T	36.8/25.5
R558	7030016360	S.RES RMC1/16S-123JTH (12 k) [14]	B	21.5/9.8
	7030016360	S.RES RMC1/16S-123JTH (12 k) [16]		
	7030016360	S.RES RMC1/16S-123JTH (12 k) [17]		
R595	7030015520	S.RES RMC1/16SJPTH [13]	B	28.0/32.2
R856	7030015900	S.RES RMC1/16S-470JTH (47 k) [14]	B	19.2/88.3
	7030015900	S.RES RMC1/16S-470JTH (47 k) [16]		
	7030015900	S.RES RMC1/16S-470JTH (47 k) [17]		
R857	7030016560	S.RES RMC1/16SJPTH [13]	B	18.8/85.4
	7030016560	S.RES RMC1/16SJPTH [14]		
	7030016560	S.RES RMC1/16SJPTH [16]		
	7030016560	S.RES RMC1/16SJPTH [17]		
R858	7030016560	S.RES RMC1/16SJPTH [13]	B	21.5/79.2
	7030016560	S.RES RMC1/16SJPTH [14]		
	7030016560	S.RES RMC1/16SJPTH [16]		
	7030016560	S.RES RMC1/16SJPTH [17]		
R859	7030016560	S.RES RMC1/16SJPTH [13]	B	28.7/86.5
	7030016560	S.RES RMC1/16SJPTH [14]		
	7030016560	S.RES RMC1/16SJPTH [16]		
	7030016560	S.RES RMC1/16SJPTH [17]		
R860	7030016020	S.RES RMC1/16S-104JTH (100 k) [13]	B	28.7/87.4
	7030016020	S.RES RMC1/16S-104JTH (100 k) [14]		
	7030016020	S.RES RMC1/16S-104JTH (100 k) [16]		
	7030016020	S.RES RMC1/16S-104JTH (100 k) [17]		
R861	7030016020	S.RES RMC1/16S-104JTH (100 k) [13]	B	29.7/97.1
	7030016020	S.RES RMC1/16S-104JTH (100 k) [14]		
	7030016020	S.RES RMC1/16S-104JTH (100 k) [16]		
	7030016020	S.RES RMC1/16S-104JTH (100 k) [17]		

[LOGIC-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION			M.	H/V LOCATION
R862	7030016560	S.RES	RMC1/16SJPTH	[#13]	B	28.9/98.0
	7030016560	S.RES	RMC1/16SJPTH	[#14]		
	7030016560	S.RES	RMC1/16SJPTH	[#16]		
	7030016560	S.RES	RMC1/16SJPTH	[#17]		
R863	7030016560	S.RES	RMC1/16SJPTH	[#13]	T	22.8/16.1
	7030016560	S.RES	RMC1/16SJPTH	[#14]		
	7030016560	S.RES	RMC1/16SJPTH	[#16]		
	7030016560	S.RES	RMC1/16SJPTH	[#17]		
R864	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#13]	B	40.1/16.4
	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#14]		
	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#16]		
	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#17]		
R865	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#13]	B	38.5/15.3
	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#14]		
	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#16]		
	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#17]		
R866	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#13]	T	21.9/17.9
	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#14]		
	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#16]		
	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#17]		
R867	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#13]	B	40.1/12.9
	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#14]		
	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#16]		
	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#17]		
R868	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#13]	B	40.1/14.1
	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#14]		
	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#16]		
	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#17]		
R869	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#13]	B	40.1/15.3
	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#14]		
	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#16]		
	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#17]		
R871	7030015970	S.RES	RMC1/16S-103JTH (10 k)	[#13]	B	36.3/11.8
	7030015970	S.RES	RMC1/16S-103JTH (10 k)	[#14]		
	7030015970	S.RES	RMC1/16S-103JTH (10 k)	[#16]		
	7030015970	S.RES	RMC1/16S-103JTH (10 k)	[#17]		
R873	7030016050	S.RES	RMC1/16S-102JTH (1 k)	[#13]	B	38.7/8.4
	7030016050	S.RES	RMC1/16S-102JTH (1 k)	[#14]		
	7030016050	S.RES	RMC1/16S-102JTH (1 k)	[#16]		
	7030016050	S.RES	RMC1/16S-102JTH (1 k)	[#17]		
R874	7030016190	S.RES	RMC1/16S-273JTH (27 k)	[#13]	B	39.0/2.4
	7030016190	S.RES	RMC1/16S-273JTH (27 k)	[#14]		
	7030016190	S.RES	RMC1/16S-273JTH (27 k)	[#16]		
	7030016190	S.RES	RMC1/16S-273JTH (27 k)	[#17]		
R875	7030016190	S.RES	RMC1/16S-273JTH (27 k)	[#13]	B	40.8/4.3
	7030016190	S.RES	RMC1/16S-273JTH (27 k)	[#14]		
	7030016190	S.RES	RMC1/16S-273JTH (27 k)	[#16]		
	7030016190	S.RES	RMC1/16S-273JTH (27 k)	[#17]		
R876	7030016160	S.RES	RMC1/16S-820JTH (82)	[#13]	T	33.0/35.2
R878	7030015920	S.RES	RMC1/16S-221JTH (220)	[#14]	T	13.2/14.6
R879	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#13]	B	41.3/5.5
	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#14]		
	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#16]		
	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#17]		
R881	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#13]	B	27.9/18.5
R882	7030015970	S.RES	RMC1/16S-103JTH (10 k)	[#14]	B	29.6/16.9
R883	7030016380	S.RES	RMC1/16S-183JTH (18 k)	[#13]	B	30.9/17.3
R884	7030016360	S.RES	RMC1/16S-123JTH (12 k)	[#14]	B	30.9/14.1
R885	7030015970	S.RES	RMC1/16S-103JTH (10 k)	[#13]	B	39.2/28.6
R886	7030016380	S.RES	RMC1/16S-183JTH (18 k)	[#14]	B	38.0/28.1
R887	7030016560	S.RES	RMC1/16SJPTH	[#13]	B	38.0/30.2
R888	7030015970	S.RES	RMC1/16S-103JTH (10 k)	[#14]	B	42.8/31.9
R901	7030014460	S.RES	MCR006YZPJ 101 (100)	[#13]	B	30.3/43.5
R902	7030014460	S.RES	MCR006YZPJ 101 (100)	[#14]	B	23.5/43.3
R903	7030014460	S.RES	MCR006YZPJ 101 (100)	[#16]	B	30.2/61.4
R906	7030014460	S.RES	MCR006YZPJ 101 (100)	[#17]	B	23.5/62.3
R907	7030014460	S.RES	MCR006YZPJ 101 (100)	[#13]	B	39.2/50.1
R908	7030016060	S.RES	RMC1/16S-105JTH (1 M)	[#14]	B	37.1/52.9
R909	7030016150	S.RES	RMC1/16S-100JTH (10)	[#13]	B	35.8/53.0
R910	7030016360	S.RES	RMC1/16S-123JTH (12 k)	[#14]	B	39.3/57.6
R911	7030016090	S.RES	RMC1/16S-223JTH (22 k)	[#13]	B	39.3/56.7
R912	7030016360	S.RES	RMC1/16S-123JTH (12 k)	[#14]	B	42.0/58.4
R913	7030015960	S.RES	RMC1/16S-472JTH (4.7 k)	[#13]	B	26.0/67.7
R914	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#14]	B	25.0/68.2
R917	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#13]	T	24.1/21.2
R920	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#14]	T	23.7/20.0
R925	7030015970	S.RES	RMC1/16S-103JTH (10 k)	[#13]	B	44.4/52.9
R926	7030016560	S.RES	RMC1/16SJPTH	[#13]	B	9.9/16.2
	7030016560	S.RES	RMC1/16SJPTH	[#14]		
	7030016560	S.RES	RMC1/16SJPTH	[#16]		
	7030016560	S.RES	RMC1/16SJPTH	[#17]		
R927	7030016560	S.RES	RMC1/16SJPTH	[#13]	B	20.7/15.3
	7030016560	S.RES	RMC1/16SJPTH	[#14]		
	7030016560	S.RES	RMC1/16SJPTH	[#16]		
	7030016560	S.RES	RMC1/16SJPTH	[#17]		
R928	7030016560	S.RES	RMC1/16SJPTH	[#13]	B	21.3/26.2
	7030016560	S.RES	RMC1/16SJPTH	[#14]		
	7030016560	S.RES	RMC1/16SJPTH	[#16]		
	7030016560	S.RES	RMC1/16SJPTH	[#17]		
R929	7030014460	S.RES	MCR006YZPJ 101 (100)	[#13]	B	24.6/50.9
	7030014460	S.RES	MCR006YZPJ 101 (100)	[#14]		
	7030014460	S.RES	MCR006YZPJ 101 (100)	[#16]		
	7030014460	S.RES	MCR006YZPJ 101 (100)	[#17]		
R930	7030014460	S.RES	MCR006YZPJ 101 (100)	[#13]	B	24.0/51.9
	7030014460	S.RES	MCR006YZPJ 101 (100)	[#14]		
	7030014460	S.RES	MCR006YZPJ 101 (100)	[#16]		
	7030014460	S.RES	MCR006YZPJ 101 (100)	[#17]		
R931	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#13]	B	23.8/49.3
R932	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#14]	B	23.4/50.5
R933	7030015970	S.RES	RMC1/16S-103JTH (10 k)	[#13]	B	22.1/69.6

The underlined parts have been updated from the previous version of the addendum, or the original page.

[LOGIC-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
R934	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	26.0/69.8
R935	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	35.3/54.5
R937	7030016560	S.RES RMC1/16SJPTH	B	30.3/27.6
R940	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	28.4/61.3
R943	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	35.6/44.1
R944	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	36.5/47.0
R945	7030016020	S.RES RMC1/16S-104JTH (100 k) [13]	B	19.2/86.6
	7030016020	S.RES RMC1/16S-104JTH (100 k) [14]		
	7030016020	S.RES RMC1/16S-104JTH (100 k) [16]		
	7030016020	S.RES RMC1/16S-104JTH (100 k) [17]		
R946	7030016020	S.RES RMC1/16S-104JTH (100 k) [13]	B	20.3/79.6
	7030016020	S.RES RMC1/16S-104JTH (100 k) [14]		
	7030016020	S.RES RMC1/16S-104JTH (100 k) [16]		
	7030016020	S.RES RMC1/16S-104JTH (100 k) [17]		
R947	7030016020	S.RES RMC1/16S-104JTH (100 k) [13]	T	15.9/9.8
	7030016020	S.RES RMC1/16S-104JTH (100 k) [14]		
	7030016020	S.RES RMC1/16S-104JTH (100 k) [16]		
	7030016020	S.RES RMC1/16S-104JTH (100 k) [17]		
R949	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	21.1/21.2
R952	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	17.7/26.7
R962	7030016020	S.RES RMC1/16S-104JTH (100 k) [13]	B	39.1/7.1
	7030016020	S.RES RMC1/16S-104JTH (100 k) [14]		
	7030016020	S.RES RMC1/16S-104JTH (100 k) [16]		
	7030016020	S.RES RMC1/16S-104JTH (100 k) [17]		
R963	7030016210	S.RES RMC1/16S-121JTH (120)	T	13.2/16.2
R964	7030014400	S.RES MCR006YZPJ 100 (10)	B	28.6/60.4
R965	7030014400	S.RES MCR006YZPJ 100 (10)	B	30.9/59.6
R966	7030014400	S.RES MCR006YZPJ 100 (10)	B	43.4/58.4
R967	7030014400	S.RES MCR006YZPJ 100 (10)	B	34.7/47.9
R968	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/49.7
R969	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/51.8
R970	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/66.3
R971	7030014400	S.RES MCR006YZPJ 100 (10)	B	25.0/66.8
R972	7030014400	S.RES MCR006YZPJ 100 (10)	B	34.6/44.5
R973	7030014400	S.RES MCR006YZPJ 100 (10)	B	35.6/47.1
R974	7030014400	S.RES MCR006YZPJ 100 (10)	B	23.5/47.8
R975	7030014400	S.RES MCR006YZPJ 100 (10)	B	29.3/47.9
R976	7030014400	S.RES MCR006YZPJ 100 (10)	B	28.7/47.9
R977	7030014400	S.RES MCR006YZPJ 100 (10)	B	27.5/47.9
R978	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/50.9
R979	7030014400	S.RES MCR006YZPJ 100 (10)	B	33.0/44.0
R980	7030014400	S.RES MCR006YZPJ 100 (10)	B	39.4/51.5
R981	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/48.8
R982	7030014400	S.RES MCR006YZPJ 100 (10)	B	28.1/47.9
R983	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.3/47.9
R984	7030014400	S.RES MCR006YZPJ 100 (10)	B	24.1/55.7
R985	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/50.6
R986	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/49.1
R987	7030014400	S.RES MCR006YZPJ 100 (10)	B	33.1/47.9
R988	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/48.5
R989	7030014400	S.RES MCR006YZPJ 100 (10)	B	32.3/47.9
R990	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/51.8
R991	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/53.0
R992	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/52.4
R993	7030014400	S.RES MCR006YZPJ 100 (10)	B	33.5/46.2
R994	7030014400	S.RES MCR006YZPJ 100 (10)	B	28.9/57.7
R995	7030014400	S.RES MCR006YZPJ 100 (10)	B	23.7/58.8
R996	7030014400	S.RES MCR006YZPJ 100 (10)	B	29.0/44.3
R997	7030014400	S.RES MCR006YZPJ 100 (10)	B	28.4/43.5
R998	7030014400	S.RES MCR006YZPJ 100 (10)	B	34.5/46.2
R999	7030014380	S.RES MCR006YZPJ 103 (10 k)	B	31.3/42.9
R1000	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/42.5
R1001	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.7/42.5
R1002	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.9/47.9
R1003	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/50.0
R1004	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/47.9
R1005	7030014400	S.RES MCR006YZPJ 100 (10)	B	32.7/46.2
R1006	7030014380	S.RES MCR006YZPJ 103 (10 k)	B	31.5/47.9
R1007	7030014400	S.RES MCR006YZPJ 100 (10)	B	24.1/47.2
R1008	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/49.4
R1009	7030014400	S.RES MCR006YZPJ 100 (10)	B	35.1/46.2
R1010	7030014390	S.RES MCR006YZPJ 102 (1 k)	B	33.9/47.9
R1011	7030014400	S.RES MCR006YZPJ 100 (10)	B	32.0/46.2
R1012	7030014400	S.RES MCR006YZPJ 100 (10)	B	35.5/57.6
R1013	7030014390	S.RES MCR006YZPJ 102 (1 k)	B	34.7/57.9
R1014	7030014400	S.RES MCR006YZPJ 100 (10)	B	33.8/57.9
R1015	7030014400	S.RES MCR006YZPJ 100 (10)	B	32.2/57.7
R1016	7030014590	S.RES MCR006YLPJ 000 (JPW)	B	31.6/57.7
R1017	7030014400	S.RES MCR006YZPJ 100 (10)	B	31.0/57.7
R1018	7030014400	S.RES MCR006YZPJ 100 (10)	B	29.5/57.7
R1019	7030014400	S.RES MCR006YZPJ 100 (10)	B	24.1/58.1
R1020	7030014400	S.RES MCR006YZPJ 100 (10)	B	24.1/57.5
R1021	7030014400	S.RES MCR006YZPJ 100 (10)	B	35.0/59.5
R1022	7030014400	S.RES MCR006YZPJ 100 (10)	B	32.2/59.5
R1023	7030014400	S.RES MCR006YZPJ 100 (10)	B	31.6/59.6
R1024	7030014400	S.RES MCR006YZPJ 100 (10)	B	30.1/58.8
R1025	7030014400	S.RES MCR006YZPJ 100 (10)	B	28.0/57.3
R1026	7030014400	S.RES MCR006YZPJ 100 (10)	B	24.1/56.9
R1027	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.7/58.5
R1028	7030014400	S.RES MCR006YZPJ 100 (10)	B	34.3/59.5
R1029	7030014400	S.RES MCR006YZPJ 100 (10)	B	33.2/60.1
R1030	7030014400	S.RES MCR006YZPJ 100 (10)	B	28.5/62.4
R1031	7030014390	S.RES MCR006YZPJ 102 (1 k)	B	44.3/55.4
R1032	7030014400	S.RES MCR006YZPJ 100 (10)	B	36.8/57.8
R1033	7030014400	S.RES MCR006YZPJ 100 (10)	B	34.3/61.9
R1034	7030014390	S.RES MCR006YZPJ 102 (1 k)	B	31.6/62.0
R1035	7030014400	S.RES MCR006YZPJ 100 (10)	B	30.4/57.7
R1036	7030014400	S.RES MCR006YZPJ 100 (10)	B	20.6/63.1
R1037	7030014390	S.RES MCR006YZPJ 102 (1 k)	B	24.1/56.3
R1038	7030014390	S.RES MCR006YZPJ 102 (1 k)	B	24.1/55.1

[LOGIC-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION		M.	H/V LOCATION
R1039	7030014390	S.RES	MCR006YZPJ 102 (1 k)	B	26.0/54.7
R1040	7030014390	S.RES	MCR006YZPJ 102 (1 k)	B	44.9/55.4
R1041	7030014400	S.RES	MCR006YZPJ 100 (10)	B	24.1/54.5
R1042	7030014400	S.RES	MCR006YZPJ 100 (10)	B	26.0/53.9
R1043	7030014400	S.RES	MCR006YZPJ 100 (10)	B	24.1/53.5
R1044	7030014400	S.RES	MCR006YZPJ 100 (10)	B	20.7/68.3
R1045	7030014400	S.RES	MCR006YZPJ 100 (10)	B	43.9/52.0
R1046	7030014400	S.RES	MCR006YZPJ 100 (10)	B	23.5/61.7
R1047	7030014400	S.RES	MCR006YZPJ 100 (10)	B	44.0/51.4
R1050	7030014400	S.RES	MCR006YZPJ 100 (10)	B	24.1/46.6
R1053	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	14.7/11.9
R1054	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	15.0/18.6
R1055	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	15.0/10.2
R1056	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	14.6/17.0
R1057	7030016150	S.RES	RMC1/16S-100JTH (10)	B	41.0/40.6
R1059	7030016560	S.RES	RMC1/16SJPTH	B	29.7/96.2
R1060	7030016560	S.RES	RMC1/16SJPTH	T	16.6/13.6
	7030016560	S.RES	RMC1/16SJPTH		
	7030016560	S.RES	RMC1/16SJPTH		
	7030016560	S.RES	RMC1/16SJPTH		
	7030016560	S.RES	RMC1/16SJPTH		
	7030016560	S.RES	RMC1/16SJPTH		
	7030016560	S.RES	RMC1/16SJPTH		
R1061	7210003820	VAR	TP76D1190E20-20.5F -10KB-3699		
R1062	7030016560	S.RES	RMC1/16SJPTH	B	40.3/89.6
R1063	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	21.8/15.1
R1064	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	13.7/7.9
	7030015970	S.RES	RMC1/16S-103JTH (10 k)		
	7030015970	S.RES	RMC1/16S-103JTH (10 k)		
	7030015970	S.RES	RMC1/16S-103JTH (10 k)		
	7030016560	S.RES	RMC1/16SJPTH		
	7030016560	S.RES	RMC1/16SJPTH		
	7030016560	S.RES	RMC1/16SJPTH		
	7030016560	S.RES	RMC1/16SJPTH		
	7030016560	S.RES	RMC1/16SJPTH		
	7030016560	S.RES	RMC1/16SJPTH		
	7030016560	S.RES	RMC1/16SJPTH		
	7030016560	S.RES	RMC1/16SJPTH		
	7030016560	S.RES	RMC1/16SJPTH		
	7030016560	S.RES	RMC1/16SJPTH		
	7030016560	S.RES	RMC1/16SJPTH		
	7030016560	S.RES	RMC1/16SJPTH		
	R1078	7030016090	S.RES		
R1079	7030016290	S.RES	RMC1/16S-222JTH (2.2 k)	B	38.0/29.0
R1081	7030016060	S.RES	RMC1/16S-105JTH (1 M)	B	33.5/63.6
R1082	7030016050	S.RES	RMC1/16S-102JTH (1 k)	B	36.6/42.0
R1083	7030016110	S.RES	RMC1/16S-473JTH (47 k)	B	23.2/46.4
R1084	7410001340	S.ARR	EXB28V473JX	B	25.3/45.0
R1085	7030014380	S.RES	MCR006YZPJ 103 (10 k)	B	45.2/50.3
R1086	7030014380	S.RES	MCR006YZPJ 103 (10 k)	B	45.2/51.4
	7030014380	S.RES	MCR006YZPJ 103 (10 k)		
	7030014380	S.RES	MCR006YZPJ 103 (10 k)		
	7030014380	S.RES	MCR006YZPJ 103 (10 k)		
	7030014380	S.RES	MCR006YZPJ 103 (10 k)		
	7030014380	S.RES	MCR006YZPJ 103 (10 k)		
	7030014380	S.RES	MCR006YZPJ 103 (10 k)		
	7030014380	S.RES	MCR006YZPJ 103 (10 k)		
	7030014380	S.RES	MCR006YZPJ 103 (10 k)		
	7030014380	S.RES	MCR006YZPJ 103 (10 k)		
R1087	7030016320	S.RES	RMC1/16S-225JTH (2.2 M)	B	33.2/64.8
R1088	7030016240	S.RES	RMC1/16S-684JTH (680 k)	B	31.9/64.1
R1089	7030016110	S.RES	RMC1/16S-473JTH (47 k)	B	25.2/63.3
R1090	7030016000	S.RES	RMC1/16S-823JTH (82 k)	B	5.4/18.4
R1091	7030016000	S.RES	RMC1/16S-823JTH (82 k)	B	9.0/17.1
	7030016000	S.RES	RMC1/16S-823JTH (82 k)		
	7030016000	S.RES	RMC1/16S-823JTH (82 k)		
	7030016040	S.RES	RMC1/16S-224JTH (220 k)		
	7030016040	S.RES	RMC1/16S-224JTH (220 k)		
	7030016040	S.RES	RMC1/16S-224JTH (220 k)		
	7030016040	S.RES	RMC1/16S-224JTH (220 k)		
R1092	7030016050	S.RES	RMC1/16S-102JTH (1 k)	B	42.4/8.0
R1093	7030016050	S.RES	RMC1/16S-102JTH (1 k)	B	41.9/6.8
	7030016050	S.RES	RMC1/16S-102JTH (1 k)		
	7030016050	S.RES	RMC1/16S-102JTH (1 k)		
	7030016410	S.RES	RMC1/16S-561JTH (560)		
	7030016410	S.RES	RMC1/16S-561JTH (560)		
	7030016410	S.RES	RMC1/16S-561JTH (560)		
	7030016410	S.RES	RMC1/16S-561JTH (560)		
R1097	7030016020	S.RES	RMC1/16S-104JTH (100 k)	B	28.9/15.6
R1098	7030016020	S.RES	RMC1/16S-104JTH (100 k)	B	40.5/30.0
C1	4030021240	S.CER	C1005 JB 1C 105K-T	T	23.6/17.9
C2	4030021240	S.CER	C1005 JB 1C 105K-T	T	24.1/16.5
	4030021240	S.CER	C1005 JB 1C 105K-T		
	4030021240	S.CER	C1005 JB 1C 105K-T		
	4030021240	S.CER	C1005 JB 1C 105K-T		
	4030021240	S.CER	C1005 JB 1C 105K-T		
C5	4030021240	S.CER	C1005 JB 1C 105K-T	B	32.7/8.2
	4030021240	S.CER	C1005 JB 1C 105K-T		
	4030021240	S.CER	C1005 JB 1C 105K-T		
	4030021240	S.CER	C1005 JB 1C 105K-T		

The underlined parts have been updated from the previous version of the addendum, or the original page.

[LOGIC-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
C6	4030021240	S.CER C1005 JB 1C 105K-T	[#13] B	30.6/8.7
	4030021240	S.CER C1005 JB 1C 105K-T	[#14]	
	4030021240	S.CER C1005 JB 1C 105K-T	[#16]	
	4030021240	S.CER C1005 JB 1C 105K-T	[#17]	
C7	4030021240	S.CER C1005 JB 1C 105K-T	[#13] B	33.2/9.4
	4030021240	S.CER C1005 JB 1C 105K-T	[#14]	
	4030021240	S.CER C1005 JB 1C 105K-T	[#16]	
	4030021240	S.CER C1005 JB 1C 105K-T	[#17]	
C8	4030023090	S.CER 0402B102K500CT	[#13] B	24.7/70.4
C16	4030023090	S.CER 0402B102K500CT	[#13] T	18.3/17.9
	4030023090	S.CER 0402B102K500CT	[#14]	
	4030023090	S.CER 0402B102K500CT	[#16]	
	4030023090	S.CER 0402B102K500CT	[#17]	
C18	4030022640	S.CER 0402N101J500CT	[#13] B	28.5/7.3
	4030022640	S.CER 0402N101J500CT	[#14]	
	4030022640	S.CER 0402N101J500CT	[#16]	
	4030022640	S.CER 0402N101J500CT	[#17]	
C20	4030023090	S.CER 0402B102K500CT	[#13] B	24.7/71.3
C21	4030022540	S.CER 0402N3R0B500CT	[#13] B	27.6/7.3
	4030022540	S.CER 0402N3R0B500CT	[#14]	
	4030022540	S.CER 0402N3R0B500CT	[#16]	
	4030022540	S.CER 0402N3R0B500CT	[#17]	
C22	4030023090	S.CER 0402B102K500CT	[#13] B	27.4/72.0
C25	4030023010	S.CER 0402B104K160CT	[#13] B	29.0/28.1
C31	4030023010	S.CER 0402B104K160CT	[#13] B	25.7/34.5
C101	4030023090	S.CER 0402B102K500CT	[#13] B	13.8/10.1
	4030023090	S.CER 0402B102K500CT	[#14]	
	4030023090	S.CER 0402B102K500CT	[#16]	
	4030023090	S.CER 0402B102K500CT	[#17]	
C102	4030023200	S.CER 0402B471K500CT	[#13] B	14.2/5.5
	4030023200	S.CER 0402B471K500CT	[#14]	
	4030023200	S.CER 0402B471K500CT	[#16]	
	4030023200	S.CER 0402B471K500CT	[#17]	
C103	4030019560	S.CER GRM21BB31C106KE15L	[#13] B	19.9/24.7
	4030019560	S.CER GRM21BB31C106KE15L	[#14]	
	4030019560	S.CER GRM21BB31C106KE15L	[#16]	
	4030019560	S.CER GRM21BB31C106KE15L	[#17]	
C104	4030019560	S.CER GRM21BB31C106KE15L	[#13] B	22.1/27.9
	4030019560	S.CER GRM21BB31C106KE15L	[#14]	
	4030019560	S.CER GRM21BB31C106KE15L	[#16]	
	4030019560	S.CER GRM21BB31C106KE15L	[#17]	
C105	4030019560	S.CER GRM21BB31C106KE15L	[#13] B	21.3/31.5
	4030019560	S.CER GRM21BB31C106KE15L	[#14]	
	4030019560	S.CER GRM21BB31C106KE15L	[#16]	
	4030019560	S.CER GRM21BB31C106KE15L	[#17]	
C106	4030019560	S.CER GRM21BB31C106KE15L	[#13] B	21.3/29.7
	4030019560	S.CER GRM21BB31C106KE15L	[#14]	
	4030019560	S.CER GRM21BB31C106KE15L	[#16]	
	4030019560	S.CER GRM21BB31C106KE15L	[#17]	
C107	4030022940	S.CER 0402B104K100CT	[#13] B	26.5/24.6
	4030022940	S.CER 0402B104K100CT	[#14]	
	4030022940	S.CER 0402B104K100CT	[#16]	
	4030022940	S.CER 0402B104K100CT	[#17]	
C108	4030023090	S.CER 0402B102K500CT	[#13] B	24.8/15.0
	4030023090	S.CER 0402B102K500CT	[#14]	
	4030023090	S.CER 0402B102K500CT	[#16]	
	4030023090	S.CER 0402B102K500CT	[#17]	
C109	4030023090	S.CER 0402B102K500CT	[#13] B	26.0/14.5
	4030023090	S.CER 0402B102K500CT	[#14]	
	4030023090	S.CER 0402B102K500CT	[#16]	
	4030023090	S.CER 0402B102K500CT	[#17]	
C111	4550007300	S.TAN F931A335MAABMA	[#13] B	14.4/24.7
	4550007300	S.TAN F931A335MAABMA	[#14]	
	4550007300	S.TAN F931A335MAABMA	[#16]	
	4550007300	S.TAN F931A335MAABMA	[#17]	
C112	4550008210	S.TAN 267M3502 104MR	[#13] B	20.3/20.1
	4550008210	S.TAN 267M3502 104MR	[#14]	
	4550008210	S.TAN 267M3502 104MR	[#16]	
	4550008210	S.TAN 267M3502 104MR	[#17]	
C113	4550008210	S.TAN 267M3502 104MR	[#13] B	18.2/20.1
	4550008210	S.TAN 267M3502 104MR	[#14]	
	4550008210	S.TAN 267M3502 104MR	[#16]	
	4550008210	S.TAN 267M3502 104MR	[#17]	
C114	4550008210	S.TAN 267M3502 104MR	[#13] B	8.0/2.0
	4550008210	S.TAN 267M3502 104MR	[#14]	
	4550008210	S.TAN 267M3502 104MR	[#16]	
	4550008210	S.TAN 267M3502 104MR	[#17]	
C115	4550008210	S.TAN 267M3502 104MR	[#13] B	8.0/4.1
	4550008210	S.TAN 267M3502 104MR	[#14]	
	4550008210	S.TAN 267M3502 104MR	[#16]	
	4550008210	S.TAN 267M3502 104MR	[#17]	
C116	4030023090	S.CER 0402B102K500CT	[#13] B	11.2/15.0
	4030023090	S.CER 0402B102K500CT	[#14]	
	4030023090	S.CER 0402B102K500CT	[#16]	
	4030023090	S.CER 0402B102K500CT	[#17]	
C121	4030023030	S.CER 0402B103K250CT	[#13] B	23.0/12.0
	4030023030	S.CER 0402B103K250CT	[#14]	
	4030023030	S.CER 0402B103K250CT	[#16]	
	4030023030	S.CER 0402B103K250CT	[#17]	
C122	4030019560	S.CER GRM21BB31C106KE15L	[#13] B	18.8/11.0
	4030019560	S.CER GRM21BB31C106KE15L	[#14]	
	4030019560	S.CER GRM21BB31C106KE15L	[#16]	
	4030019560	S.CER GRM21BB31C106KE15L	[#17]	
C123	4030023090	S.CER 0402B102K500CT	[#13] B	24.6/31.5
C125	4550007520	S.TAN F931A106MAABMA	[#13] B	4.4/12.2
	4550007520	S.TAN F931A106MAABMA	[#14]	
	4550007520	S.TAN F931A106MAABMA	[#16]	
	4550007520	S.TAN F931A106MAABMA	[#17]	
C155	4030023090	S.CER 0402B102K500CT	[#13] T	11.8/2.4
C156	4030023090	S.CER 0402B102K500CT	[#13] T	13.5/10.5

[LOGIC-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
C157	4030023090	S.CER 0402B102K500CT	[#13] T	13.7/4.0
C158	4030023090	S.CER 0402B102K500CT	[#13] T	14.1/8.9
C159	4030023090	S.CER 0402B102K500CT	[#13] T	9.9/2.4
C161	4030023090	S.CER 0402B102K500CT	[#13] T	35.9/25.5
C600	4030023030	S.CER 0402B103K250CT	[#13] B	21.5/10.8
	4030023030	S.CER 0402B103K250CT	[#14]	
	4030023030	S.CER 0402B103K250CT	[#16]	
	4030023030	S.CER 0402B103K250CT	[#17]	
C629	4030023010	S.CER 0402B104K160CT	[#13] B	24.8/26.6
	4030023010	S.CER 0402B104K160CT	[#14]	
	4030023010	S.CER 0402B104K160CT	[#16]	
	4030023010	S.CER 0402B104K160CT	[#17]	
C630	4030022640	S.CER 0402N101J500CT	[#13] B	19.3/90.9
	4030022640	S.CER 0402N101J500CT	[#14]	
	4030022640	S.CER 0402N101J500CT	[#16]	
	4030022640	S.CER 0402N101J500CT	[#17]	
C631	4050000380	S.FEE NFM15PC104R1A3D	[#13] B	18.2/89.2
	4050000380	S.FEE NFM15PC104R1A3D	[#14]	
	4050000380	S.FEE NFM15PC104R1A3D	[#16]	
	4050000380	S.FEE NFM15PC104R1A3D	[#17]	
C632	4050000380	S.FEE NFM15PC104R1A3D	[#13] B	33.6/94.1
	4050000380	S.FEE NFM15PC104R1A3D	[#14]	
	4050000380	S.FEE NFM15PC104R1A3D	[#16]	
	4050000380	S.FEE NFM15PC104R1A3D	[#17]	
C633	4030019560	S.CER GRM21BB31C106KE15L	[#13] B	33.7/92.4
	4030019560	S.CER GRM21BB31C106KE15L	[#14]	
	4030019560	S.CER GRM21BB31C106KE15L	[#16]	
	4030019560	S.CER GRM21BB31C106KE15L	[#17]	
C634	4030023090	S.CER 0402B102K500CT	[#13] B	32.6/94.0
	4030023090	S.CER 0402B102K500CT	[#14]	
	4030023090	S.CER 0402B102K500CT	[#16]	
	4030023090	S.CER 0402B102K500CT	[#17]	
C637	4030023090	S.CER 0402B102K500CT	[#13] B	28.7/88.4
	4030023090	S.CER 0402B102K500CT	[#14]	
	4030023090	S.CER 0402B102K500CT	[#16]	
	4030023090	S.CER 0402B102K500CT	[#17]	
C638	4030023090	S.CER 0402B102K500CT	[#13] B	19.2/84.1
	4030023090	S.CER 0402B102K500CT	[#14]	
	4030023090	S.CER 0402B102K500CT	[#16]	
	4030023090	S.CER 0402B102K500CT	[#17]	
C639	4030023090	S.CER 0402B102K500CT	[#13] B	22.5/79.2
	4030023090	S.CER 0402B102K500CT	[#14]	
	4030023090	S.CER 0402B102K500CT	[#16]	
	4030023090	S.CER 0402B102K500CT	[#17]	
C640	4030023090	S.CER 0402B102K500CT	[#13] B	29.9/87.9
	4030023090	S.CER 0402B102K500CT	[#14]	
	4030023090	S.CER 0402B102K500CT	[#16]	
	4030023090	S.CER 0402B102K500CT	[#17]	
C641	4030023090	S.CER 0402B102K500CT	[#13] B	18.3/84.1
	4030023090	S.CER 0402B102K500CT	[#14]	
	4030023090	S.CER 0402B102K500CT	[#16]	
	4030023090	S.CER 0402B102K500CT	[#17]	
C642	4030023090	S.CER 0402B102K500CT	[#13] B	19.6/78.7
	4030023090	S.CER 0402B102K500CT	[#14]	
	4030023090	S.CER 0402B102K500CT	[#16]	
	4030023090	S.CER 0402B102K500CT	[#17]	
C643	4050000380	S.FEE NFM15PC104R1A3D	[#13] T	20.1/13.2
	4050000380	S.FEE NFM15PC104R1A3D	[#14]	
	4050000380	S.FEE NFM15PC104R1A3D	[#16]	
	4050000380	S.FEE NFM15PC104R1A3D	[#17]	
C645	4030021240	S.CER C1005 JB 1C 105K-T	[#13] B	36.3/10.2
	4030021240	S.CER C1005 JB 1C 105K-T	[#14]	
	4030021240	S.CER C1005 JB 1C 105K-T	[#16]	
	4030021240	S.CER C1005 JB 1C 105K-T	[#17]	
C648	4030022540	S.CER 0402N3R0B500CT	[#13] T	25.0/16.5
	4030022540	S.CER 0402N3R0B500CT	[#14]	
	4030022540	S.CER 0402N3R0B500CT	[#16]	
	4030022540	S.CER 0402N3R0B500CT	[#17]	
C649	4030022540	S.CER 0402N3R0B500CT	[#13] T	23.6/18.8
	4030022540	S.CER 0402N3R0B500CT	[#14]	
	4030022540	S.CER 0402N3R0B500CT	[#16]	
	4030022540	S.CER 0402N3R0B500CT	[#17]	
C650	4030022540	S.CER 0402N3R0B500CT	[#13] B	40.4/5.5
	4030023010	S.CER 0402B104K160CT	[#13]	
	4030023010	S.CER 0402B104K160CT	[#14]	
	4030023010	S.CER 0402B104K160CT	[#16]	
	4030023010	S.CER 0402B104K160CT	[#17]	
C651	4030019560	S.CER GRM21BB31C106KE15L	[#13] B	36.7/7.1
	4030019560	S.CER GRM21BB31C106KE15L	[#14]	
	4030019560	S.CER GRM21BB31C106KE15L	[#16]	
	4030019560	S.CER GRM21BB31C106KE15L	[#17]	
C652	4030022640	S.CER 0402N101J500CT	[#13] B	39.0/3.3
	4030022640	S.CER 0402N101J500CT	[#14]	
	4030022640	S.CER 0402N101J500CT	[#16]	
	4030022640	S.CER 0402N101J500CT	[#17]	
C653	4030023010	S.CER 0402B104K160CT	[#13] B	42.2/5.1
	4030023010	S.CER 0402B104K160CT	[#14]	
	4030023010	S.CER 0402B104K160CT	[#16]	
	4030023010	S.CER 0402B104K160CT	[#17]	
C654	4030023090	S.CER 0402B102K500CT	[#13] B	41.3/89.6

The underlined parts have been updated from the previous version of the addendum, or the original page.

[LOGIC-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
C669	4030022630	S.CER 0402N100C500CT	B	37.1/54.5
C670	4030022520	S.CER 0402N1R0B500CT	B	42.0/53.9
C671	4030022640	S.CER 0402N101J500CT	B	42.1/56.8
C672	4030023010	S.CER 0402B104K160CT	B	39.3/58.5
C674	4030023030	S.CER 0402B103K250CT	B	26.9/68.8
C677	4030022940	S.CER 0402B104K100CT	B	27.5/43.2
C678	4030023090	S.CER 0402B102K500CT	B	31.5/41.9
C679	4030023090	S.CER 0402B102K500CT	B	37.1/56.1
C680	4030023090	S.CER 0402B102K500CT	B	36.2/56.2
C681	4030022940	S.CER 0402B104K100CT	B	35.3/56.2
C682	4030023000	S.CER 0402B683K100CT	B	22.8/65.8
C683	4030022940	S.CER 0402B104K100CT	B	24.1/68.2
C684	4030023010	S.CER 0402B104K160CT	B	36.2/54.5
C687	4030023010	S.CER 0402B104K160CT	B	25.2/36.6
C688	4030019560	S.CER GRM21BB31C106KE15L	B	23.8/36.4
C689	4030023090	S.CER 0402B102K500CT	B	29.0/27.2
C693	4030022940	S.CER 0402B104K100CT	T	16.4/15.5
C694	4030023090	S.CER 0402B102K500CT	B	18.8/82.1
		[#13]		
		[#14]		
		[#16]		
		[#17]		
C695	4030023010	S.CER 0402B104K160CT	T	18.8/7.4
C696	4030023010	S.CER 0402B104K160CT	T	15.9/11.4
C698	4030023010	S.CER 0402B104K160CT	B	39.9/47.0
C699	4030023010	S.CER 0402B104K160CT	B	43.2/42.2
C700	4030023090	S.CER 0402B102K500CT	B	44.2/42.2
C701	4030023090	S.CER 0402B102K500CT	B	25.7/33.6
C703	4030023000	S.CER 0402B683K100CT	T	21.7/11.2
		[#13]		
		[#14]		
		[#16]		
		[#17]		
C704	4030023090	S.CER 0402B102K500CT	T	22.8/17.0
		[#13]		
		[#14]		
		[#16]		
		[#17]		
C705	4030023090	S.CER 0402B102K500CT	T	24.9/13.7
		[#13]		
		[#14]		
		[#16]		
		[#17]		
C708	4030023090	S.CER 0402B102K500CT	T	26.6/20.9
C709	4030021240	S.CER C1005 JB 1C 105K-T	B	36.3/4.4
		[#13]		
		[#14]		
		[#16]		
		[#17]		
C711	4030023090	S.CER 0402B102K500CT	B	39.1/33.8
C712	4030022920	S.CER 0402N820J500CT	B	31.2/45.6
C713	4030022920	S.CER 0402N820J500CT	B	24.5/42.4
C714	4030020000	S.CER C1005 JB 1A 105K-T	B	31.3/65.3
C715	4030023820	S.CER 0603B104K250CT	B	26.7/63.6
C716	4030023210	S.CER 0402B472K500CT	B	34.1/64.8
C717	4030023210	S.CER 0402B472K500CT	B	26.9/58.1
C718	4030023210	S.CER 0402B472K500CT	B	31.5/27.6
C719	4030023210	S.CER 0402B472K500CT	B	40.0/18.9
C720	4550008210	S.TAN 267M3502 104MR	B	5.8/15.6
		[#13]		
		[#14]		
		[#16]		
		[#17]		
C721	4550008210	S.TAN 267M3502 104MR	B	9.1/20.4
		[#13]		
		[#14]		
		[#16]		
		[#17]		
C722	4030021240	S.CER C1005 JB 1C 105K-T	B	34.5/15.4
		[#13]		
		[#14]		
		[#16]		
		[#17]		
C723	4030021240	S.CER C1005 JB 1C 105K-T	B	26.5/72.0
C724	4030023090	S.CER 0402B102K500CT	B	35.9/58.6
C725	4030023090	S.CER 0402B102K500CT	T	37.7/21.4
C727	4030023090	S.CER 0402B102K500CT	B	43.9/57.2
C730	4030023090	S.CER 0402B102K500CT	B	21.5/55.5
J1	6510030220	S.CON 50RF-JMCS-G-1B-TF (N) (LF) (SN)	B	35.5/23.0
J2	6510031390	S.CON 15FXVL-RSM1-GAN-TF-1 (HF)	T	9.4/7.9
J3	6510023480	S.CON AYU1-1P-02676-120-TF	B	23.2/96.1
		[#13]		
		[#14]		
		[#16]		
		[#17]		
J4	6510031380	S.CON 31FXVL-RSM1-GAN-TF-1 (HF)	T	24.4/24.8
DS2	5040003550	S.LED NSSW208T	T	13.8/35.5
DS3	5040003550	S.LED NSSW208T	T	24.8/35.5
DS4	5040003550	S.LED NSSW208T	T	35.8/35.5
DS5	5030004360	LCD TM128160D1CIWUGND		
S23	2260003320	S.SWI SKRTLAE010	B	2.1/83.2
S24	2260003320	S.SWI SKRTLAE010	B	2.1/44.4
S25	2260003320	S.SWI SKRTLAE010	B	2.1/34.4
EP3	6910023920	S.BEA BLM15GA750SN1D	B	38.5/16.4
		[#13]		
		[#14]		
		[#16]		
		[#17]		

[LOGIC-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
EP4	6910023920	S.BEA BLM15GA750SN1D	B	36.9/15.3
		[#13]		
		[#14]		
		[#16]		
		[#17]		
EP9	6910023920	S.BEA BLM15GA750SN1D	B	18.4/90.9
		[#13]		
		[#14]		
		[#16]		
		[#17]		
EP10	6910020610	S.BEA BLM15BD102SN1D	T	34.7/22.6
EP11	6910020610	S.BEA BLM15BD102SN1D	T	30.8/20.7
EP12	6910020610	S.BEA BLM15BD102SN1D	T	25.0/21.2
EP13	6910020610	S.BEA BLM15BD102SN1D	T	17.7/28.7
EP14	6910020610	S.BEA BLM15BD102SN1D	T	23.2/21.2
EP16	6910020610	S.BEA BLM15BD102SN1D	T	17.7/27.8
EP19	6910020610	S.BEA BLM15BD102SN1D	T	22.3/21.2

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

M.= Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)
H/V LOCATION=See the BOARD LAYOUTS for details.

The underlined parts have been updated from the previous version of the addendum, or the original page.

[MAIN-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
IC1	1110007300	S.IC NJM2552V-TE1-#ZZZB	B	35.6/72.6
IC2	1130009981	S.IC TC7W53FK (TE85LF)	B	33.1/63.1
IC5	1130011760	S.IC CD4049BPWR	B	39.9/44.3
IC14	1110006490	S.IC LMV321IDCKR	T	7.7/69.0
IC22	1110006490	S.IC LMV321IDCKR	B	23.9/64.7
IC24	1130007021	S.IC TC7S66FU (TE85LF)	B	41.0/79.3
IC25	1110006490	S.IC LMV321IDCKR	B	21.3/70.5
IC203	1130017460	S.IC AK1542A-L	B	29.7/44.6
IC215	1110007630	S.IC NJM2783V-TE1-#ZZZH	T	41.5/30.8
IC216	1110007291	S.IC AK2330P7-L	T	24.7/60.1
IC219	1130007021	S.IC TC7S66FU (TE85LF)	B	22.3/46.2
IC220	1110007291	S.IC AK2330P7-L	T	28.4/37.4
IC221	1110008450	S.IC ISD8102SYI T&R	B	30.6/26.5
IC222	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	B	24.9/59.2
IC223	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	B	9.9/30.9
IC224	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	B	10.0/25.6
IC225	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	B	10.0/21.1
IC226	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	B	10.0/15.8
IC228	1130009981	S.IC TC7W53FK (TE85LF)	B	10.5/11.8
IC229	1110008680	S.IC NJU72341V-TE2-#UZZH	T	38.6/39.5
IC231	1130009981	S.IC TC7W53FK (TE85LF)	T	42.3/48.4
IC232	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	T	44.5/41.7
IC233	1110006490	S.IC LMV321IDCKR	B	11.9/5.8
IC234	6910026630	S.DC XC9263B75DER-G	B	30.6/8.3
IC235	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	T	17.6/15.9
IC238	1180004760	S.REG S-1200B33-M5T1U	T	30.3/89.2
IC239	1180004420	S.REG NJM2830U1-08-TE1-#ZGZB	T	10.4/18.2
IC240	1180005110	S.REG NJM2836DL3-05-TE1	T	29.3/96.4
IC241	1130007021	S.IC TC7S66FU (TE85LF) #13	B	21.3/68.0
	1130007021	S.IC TC7S66FU (TE85LF) #14		
	1130007021	S.IC TC7S66FU (TE85LF) #16		
	1130007021	S.IC TC7S66FU (TE85LF) #17		
Q2	1560002350	S.FET RD12MVS1-T214	T	13.0/83.6
Q3	1560002420	S.FET RD01MUS2B-T513	T	12.3/74.7
Q4	1530004100	S.TRA MT3S20P (TE12LF)	B	11.6/65.4
Q7	1520000201	S.TRA 2SB798-T1-AZ DK	T	17.0/59.1
Q8	1590004410	S.TRA DMC501010R	T	12.9/59.8
Q11	1580000731	S.FET 3SK293 (TE85LF)	B	30.0/106.2
Q12	1580000731	S.FET 3SK293 (TE85LF)	B	27.8/96.9
Q13	1530002381	S.TRA 2SC4215-Y (TE85LF)	B	27.4/78.3
Q20	1590004300	S.TRA DRA9114T0L	B	36.2/60.1
Q21	1590004100	S.TRA LDTCL44TET1G	B	29.3/61.3
Q25	1520000201	S.TRA 2SB798-T1-AZ DK	T	44.2/113.7
Q26	1590004330	S.TRA DRC9114E0L	T	31.5/105.3
Q28	1530003322	S.TRA TC7C5108-YLF	B	11.3/53.4
Q29	1530003322	S.TRA 2SC5108-YLF	B	12.4/48.4
Q33	1530002851	S.TRA 2SC4116-BL (TE85RF)	B	6.2/52.5
Q35	1520000651	S.TRA 2SB1201S-TL-E	T	16.1/26.9
Q36	1590004410	S.TRA DMC501010R	B	20.9/26.1
Q50	1510001151	S.TRA L2SA1576AST1G	B	42.5/115.6
Q52	1590004530	S.TRA DMG564050R	T	37.5/27.8
Q53	1590004070	S.TRA LDTCL44EET1G	B	25.9/71.5
Q54	1590004050	S.TRA LDTA144EET1G	T	33.8/68.6
Q57	1590004520	S.TRA DMA561030R	B	13.6/45.6
Q58	1530004610	S.TRA 2SC5086-OLF	T	17.7/47.5
Q59	1530004610	S.TRA 2SC5086-OLF	T	10.6/46.9
Q60	1530003322	S.TRA 2SC5108-YLF	T	14.3/49.3
Q62	1530004190	S.TRA L2SC4617ST1G	B	43.4/71.2
Q66	1590004070	S.TRA LDTCL44EET1G	B	40.1/56.7
Q68	1590004070	S.TRA LDTCL44EET1G	B	43.0/82.9
Q212	1550000241	S.FET TPCF8107LF	T	21.7/122.8
Q213	1550000241	S.FET TPCF8107LF	T	24.6/122.1
Q215	1560000531	S.FET 2SK880-GR (TE85RF)	B	22.5/41.6
Q216	1590004070	S.TRA LDTCL44EET1G	B	24.0/50.7
Q217	1590004070	S.TRA LDTCL44EET1G	B	15.6/43.9
Q218	1590004070	S.TRA LDTCL44EET1G	T	30.7/60.7
Q220	1590004070	S.TRA LDTCL44EET1G	T	18.7/7.2
Q223	1550000090	S.FET RSQ035P03TR	T	32.2/11.4
Q224	1590004070	S.TRA LDTCL44EET1G	T	34.1/14.3
Q226	1590004070	S.TRA LDTCL44EET1G	B	39.7/20.3
Q232	1560001330	S.FET RSR025N03	T	36.5/23.0
Q233	1590004060	S.TRA LDTCL44EET1G	T	34.9/26.1
Q234	1520000651	S.TRA 2SB1201S-TL-E	T	33.9/4.4
Q235	1530002280	S.TRA 2SC4081 T106 S	T	25.9/12.9
Q236	1590004070	S.TRA LDTCL44EET1G	B	38.1/50.8
Q238	1590004070	S.TRA LDTCL44EET1G	B	29.2/15.5
Q239	1510000671	S.TRA 2SA1588-GR (TE85R F)	T	24.4/7.6
Q240	1590004070	S.TRA LDTCL44EET1G	T	22.0/6.9
Q243	1590004070	S.TRA LDTCL44EET1G	T	31.6/71.6
Q246	1590004070	S.TRA LDTCL44EET1G	T	33.5/31.0
D2	1750001800	S.DIO RB886CS T2RA	T	13.2/102.7
D3	1750001800	S.DIO RB886CS T2RA	T	12.4/99.6
D4	1750001800	S.DIO RB886CS T2RA	T	13.2/103.8
D5	1750001800	S.DIO RB886CS T2RA	T	5.1/12.1
D6	1750001790	S.DIO 1SS390 TE61	T	5.1/9.6
D8	1750000581	S.DIO 1SV307 (TPH3F)	T	10.3/110.7
D11	1750001790	S.DIO 1SS390 TE61	T	27.8/85.7
D12	1750001790	S.DIO 1SS390 TE61	T	37.4/71.0
D13	1720000702	S.VAR 1SV305H3F	B	19.9/103.3
D14	1790001622	S.DIO 1SV308L3F	B	11.8/108.5
D15	1720000702	S.VAR 1SV305H3F	B	31.2/102.2
D16	1720000702	S.VAR 1SV305H3F	B	30.3/99.5
D17	1750001790	S.DIO 1SS390 TE61	B	13.7/55.8
D18	1750002170	S.DIO DB2S31400L	B	29.6/64.6
D23	1790001980	S.DIO DA3S101F0L	T	32.2/109.1
D24	1750001790	S.DIO 1SS390 TE61	T	33.7/67.0

[MAIN-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION		M.	H/V LOCATION
D25	1750001790	S.DIO	1SS390 TE61	T	37.3/66.8
D27	1750001810	S.DIO	L1SS400T1G	T	37.2/110.1
D29	1790001622	S.DIO	1SV308L3F	B	12.8/104.9
D30	1750001810	S.DIO	L1SS400T1G	T	34.3/17.6
D31	1750001810	S.DIO	L1SS400T1G	T	18.4/109.1
D36	1750001810	S.DIO	L1SS400T1G	B	42.2/112.7
D38	1750001771	S.VAR	1SV323H3F	T	19.4/41.5
D40	1750002170	S.DIO	DB2S31400L	B	27.3/69.9
D44	1790001622	S.DIO	1SV308L3F	B	13.2/102.3
D45	1750001771	S.VAR	1SV323H3F	T	11.5/40.1
D46	1750001771	S.VAR	1SV323H3F	T	12.2/38.0
D48	1750001771	S.VAR	1SV323H3F	T	19.4/40.2
D49	1750001800	S.DIO	RB886CS T2RA	T	12.0/113.6
D50	1720000702	S.VAR	1SV305H3F	B	28.0/105.4
D51	1750001800	S.DIO	RB886CS T2RA	T	12.0/112.5
D52	1750001810	S.DIO	L1SS400T1G	B	36.0/86.2
D55	1750001790	S.DIO	1SS390 TE61	B	28.9/80.3
D56	1750001790	S.DIO	1SS390 TE61	B	26.1/92.2
D57	1750001790	S.DIO	1SS390 TE61	B	27.1/81.3
D58	1750001790	S.DIO	1SS390 TE61	B	28.9/91.4
D59	1750001800	S.DIO	RB886CS T2RA	B	40.3/85.4
D62	1750002170	S.DIO	DB2S31400L	T	31.5/70.0
D66	1750000520	S.DIO	DAN222TL	T	31.3/62.7
D67	1750001810	S.DIO	L1SS400T1G	T	31.7/119.3
D68	1750001690	S.DIO	RB050LA-40	T	27.9/119.4
D71	1730002830	S.ZEN	DZ2J051M0L	B	40.9/26.0
D72	1790002160	S.VAR	TPD1E10B06DPYR	B	42.3/96.4
D74	1750001800	S.DIO	RB886CS T2RA	T	44.8/37.5
D78	1750001810	S.DIO	L1SS400T1G	T	21.0/96.5
D80	1750001810	S.DIO	L1SS400T1G	T	26.9/11.0
D81	1750001810	S.DIO	L1SS400T1G	T	24.2/11.0
D82	1750001810	S.DIO	L1SS400T1G	T	14.2/19.1
D83	1750001810	S.DIO	L1SS400T1G	T	30.7/91.6
D85	1790002160	S.VAR	TPD1E10B06DPYR	T	28.2/122.1
D86	1790001622	S.DIO	1SV308L3F	B	30.3/77.2
D87	1750001810	S.DIO	L1SS400T1G	T	24.2/9.8
D88	1750001810	S.DIO	L1SS400T1G	T	26.8/9.8
D89	1750001790	S.DIO	1SS390 TE61	T	36.5/68.6
D90	1750001790	S.DIO	1SS390 TE61	T	30.4/85.7
	1750001790	S.DIO	1SS390 TE61		
	1750001790	S.DIO	1SS390 TE61		
	1750001790	S.DIO	1SS390 TE61		
	1750001790	S.DIO	1SS390 TE61		
	1750001790	S.DIO	1SS390 TE61		
D91	1750001810	S.DIO	L1SS400T1G	T	33.2/70.8
D92	1750001810	S.DIO	L1SS400T1G	T	33.2/73.3
D93	1750002170	S.DIO	DB2S31400L	T	23.8/85.7
D94	1750002170	S.DIO	DB2S31400L	B	27.7/90.5
F11	20300000970	S.MON	FL-455 (46.35 MHz)	B	23.4/86.8
F12	2020002720	S.CER	LTWC450D	T	28.1/79.0
F13	2030000860	S.MON	FL-439 (46.350 MHz)	B	30.2/85.7
F14	2020002520	S.CER	LTWC450H	T	41.1/77.1
F15	2020002770	S.CER	LTUCG450C	T	38.7/86.0
	2020002770	S.CER	LTUCG450C	T	
	2020002770	S.CER	LTUCG450C		
	2020002770	S.CER	LTUCG450C		
	2020002770	S.CER	LTUCG450C		
X1	6070000300	S.DIS	JTBM450CX24	T	42.1/63.4
X2	6050013940	S.XTA	CR-994 (12.8 MHz)	B	32.8/38.8
X203	6050013930	S.XTA	CR-993 (15.3 MHz)	B	42.5/65.4
L2	6200013110	S.COI	0.35-1.6-9TL 52.0N	T	8.6/115.9
L3	6200013110	S.COI	0.35-1.6-9TL 52.0N	T	6.2/111.0
L4	6200004480	S.COI	MLF1608D R82K-T	T	9.0/105.0
L5	6200012460	S.COI	0.30-1.7-8TL 54N	T	9.8/101.2
L6	6200012850	S.COI	0.40-0.8-2TL 2.5N	T	8.1/90.2
L7	6200013030	S.COI	0.35-1.6-6TL 31.0N	T	15.5/88.5
L8	6200009220	S.COI	LQW18AN15NG00D (LQW1608A15NG00)	T	11.0/78.0
L10	6200013820	S.COI	MLK1005S27NJT	T	15.4/77.8
L11	6200013790	S.COI	MLK1005S47NJT	T	15.5/71.0
L12	6200013780	S.COI	MLK1005S56NJT	B	15.5/66.5
L15	6200012460	S.COI	0.30-1.7-8TL 54N	T	8.3/107.2
L18	6200009890	S.COI	C2012C-82NG-A	B	15.0/102.0
L21	6200009890	S.COI	C2012C-82NG-A	B	33.8/104.6
L22	6200009930	S.COI	C2012C-68NG-A	B	17.7/102.5
L23	6200009890	S.COI	C2012C-82NG-A	B	33.3/100.5
L24	6200011090	S.COI	C2012C-R56J-A	B	31.4/95.2
L25	6200004600	S.COI	MLF1608D R15K-T	B	27.6/75.6
L38	6200014760	S.COI	MLK1005SR22JT	B	13.0/54.6
L45	6200012910	S.COI	0.35-1.6-8TL 45.5N	T	11.1/119.6
L46	6200012870	S.COI	0.30-1.4-5TR 23.5N	T	10.6/94.2
L56	6200013760	S.COI	MLK1005S82NJT	B	8.4/61.7
L57	6200010540	S.COI	C2012C-47NG-A	T	17.2/40.9
L58	6200003550	S.COI	MLF1608A 4R7K-T	T	13.3/41.6
L63	6200011050	S.COI	C2012C-R12G-A	T	20.4/44.8
L64	6200011050	S.COI	C2012C-R12G-A	T	8.9/42.4
L67	6200013760	S.COI	MLK1005S82NJT	T	15.9/50.2
L69	6200009890	S.COI	C2012C-82NG-A	B	21.6/102.8
L71	6200003640	S.COI	MLF1608E 100K-T	T	8.8/40.2
L72	6200003640	S.COI	MLF1608E 100K-T	T	21.2/40.8
L85	6200004600	S.COI	MLF1608D R15K-T	B	43.8/77.3
L86	6200004590	S.COI	MLF1608D R18K-T	B	41.7/76.7
L87	6200003960	S.COI	MLF1608A 1R0K-T	B	45.0/74.5
L88	6200004590	S.COI	MLF1608D R18K-T	B	41.8/72.8

The underlined parts have been updated from the previous version of the addendum, or the original page.

[MAIN-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
L91	6200003550	S.COI MLF1608A 4R7K-T	T	15.4/40.9
L92	6200011050	S.COI C2012C-R12G-A	T	9.2/38.4
L93	6200014370	S.COI MLF1005L 2R2K-T	B	26.3/91.2
L94	6200014370	S.COI MLF1005L 2R2K-T	B	25.3/81.3
L95	6200014370	S.COI MLF1005L 2R2K-T	B	31.0/79.2
L96	6200014370	S.COI MLF1005L 2R2K-T	B	32.4/91.3
L97	6200011650	S.COI LQW18AN68NG00D	B	25.3/95.7
L99	6200014260	S.COI LQM2MPN2R2NG0L	B	27.5/7.7
L100	6200014260	S.COI LQM2MPN2R2NG0L	B	37.0/7.4
R2	7030015780	S.RES RMC1/10-331JTP (330)	T	12.3/107.0
R3	7030016090	S.RES RMC1/16S-223JTH (22 k)	T	9.5/67.1
R4	7030015910	S.RES RMC1/16S-101JTH (100)	T	9.9/66.2
R5	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	6.8/71.8
R7	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	T	14.6/104.2
R8	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	T	13.5/97.2
R9	7030015780	S.RES RMC1/10-331JTP (330)	T	12.2/105.2
R10	7030015930	S.RES RMC1/16S-471JTH (470)	T	6.0/74.2
R11	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	T	6.8/70.9
R12	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	T	9.0/70.9
R13	7030016090	S.RES RMC1/16S-223JTH (22 k)	T	8.0/72.2
R14	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	T	6.5/81.4
R15	7030015910	S.RES RMC1/16S-101JTH (100)	T	9.0/81.3
R16	7030015980	S.RES RMC1/16S-333JTH (33 k)	T	7.8/82.1
R17	7030016110	S.RES RMC1/16S-473JTH (47 k)	T	5.9/77.2
R18	7030015920	S.RES RMC1/16S-221JTH (220)	T	8.7/74.6
R19	7510001461	S.THE NTCG16 3NH 471JT	T	6.9/75.7
R20	7030015680	S.RES RMC1/10-150JTP (15)	B	16.1/64.0
R21	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	7.7/63.9
R22	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	13.7/63.0
R23	7030016150	S.RES RMC1/16S-100JTH (10)	B	7.0/65.3
R24	7030016210	S.RES RMC1/16S-121JTH (120)	B	9.6/60.5
R25	7030015900	S.RES RMC1/16S-470JTH (47)	B	11.0/59.4
R26	7030016210	S.RES RMC1/16S-121JTH (120)	B	9.6/58.0
R27	7030015920	S.RES RMC1/16S-221JTH (220)	T	16.2/72.8
R28	7030016080	S.RES RMC1/16S-822JTH (8.2 k)	T	11.8/57.9
R29	7030015950	S.RES RMC1/16S-152JTH (1.5 k)	T	10.1/58.8
R39	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	11.9/57.6
R40	7030016330	S.RES RMC1/16S-153JTH (15 k)	T	10.1/57.9
R41	7030015930	S.RES RMC1/16S-471JTH (470)	B	13.9/105.3
R43	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	19.9/100.5
R44	7030016000	S.RES RMC1/16S-823JTH (82 k)	B	32.7/106.7
R45	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	31.8/106.7
R47	7030016500	S.RES RMC1/16S-562JTH (5.6 k)	B	13.9/107.3
R48	7030016540	S.RES RMC1/16S-334JTH (330 k)	B	36.2/106.7
R49	7030015900	S.RES RMC1/16S-470JTH (47)	B	33.9/107.1
R51	7030016370	S.RES RMC1/16S-271JTH (270)	B	30.5/103.9
R52	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	33.8/102.4
R53	7030015910	S.RES RMC1/16S-101JTH (100)	B	10.0/107.4
R54	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	28.7/101.4
R58	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	29.6/98.5
R59	7030016030	S.RES RMC1/16S-154JTH (150 k)	B	33.6/96.9
R60	7030015990	S.RES RMC1/16S-683JTH (68 k)	B	33.6/98.0
R62	7030016390	S.RES RMC1/16S-184JTH (180 k)	B	25.3/93.6
R63	7030015990	S.RES RMC1/16S-683JTH (68 k)	B	23.2/93.8
R64	7030015910	S.RES RMC1/16S-101JTH (100)	B	30.9/92.8
R65	7030016180	S.RES RMC1/16S-680JTH (68)	B	26.4/94.7
R66	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	33.1/95.0
R67	7030016560	S.RES RMC1/16SJPTH	B	33.9/106.2
R68	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	25.4/79.2
R69	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	26.0/75.2
R70	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	25.2/80.1
R71	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	40.4/67.8
R72	7030016220	S.RES RMC1/16S-563JTH (56 k)	B	34.0/65.7
R73	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	29.9/68.1
R74	7030016150	S.RES RMC1/16S-100JTH (10)	B	39.1/78.9
R75	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	40.6/81.2
R76	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	31.2/73.1
R77	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	34.0/68.1
R79	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	30.3/71.5
R80	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	28.2/71.8
R81	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	B	27.3/68.1
R82	7030016070	S.RES RMC1/16S-474JTH (470 k)	B	30.8/70.2
R83	7030016090	S.RES RMC1/16S-223JTH (22 k)	B	40.6/82.1
R87	7030015910	S.RES RMC1/16S-101JTH (100)	T	41.7/68.3
R90	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	29.9/66.9
R94	7030016560	S.RES RMC1/16SJPTH	B	29.9/70.2
R99	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	28.9/66.9
R100	7030016000	S.RES RMC1/16S-823JTH (82 k)	B	27.7/66.4
R101	7030016100	S.RES RMC1/16S-334JTH (330 k)	B	30.2/65.6
R102	7030016320	S.RES RMC1/16S-225JTH (2.2 M)	B	30.2/63.3
R107	7030015780	S.RES RMC1/10-331JTP (330)	T	37.0/106.9
R108	7030015690	S.RES RMC1/10-180JTP (18)	T	33.5/106.5
R109	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	31.8/107.4
R111	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	9.6/57.1
R114	7030016370	S.RES RMC1/16S-271JTH (270)	B	13.6/57.1
R115	7030016090	S.RES RMC1/16S-223JTH (22 k)	B	13.0/53.7
R117	7030015920	S.RES RMC1/16S-221JTH (220)	B	11.6/50.8
R118	7030016130	S.RES RMC1/16S-150JTH (15)	T	10.7/50.7
R119	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	15.9/50.0
R120	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	13.1/50.2
R121	7030015910	S.RES RMC1/16S-101JTH (100)	B	15.0/48.8
R122	7030016170	S.RES RMC1/16S-560JTH (56)	B	26.7/41.0
R123	7030011000	S.RES RR0510P-392-D (3.9 k)	T	20.9/47.3
R124	7030011000	S.RES RR0510P-392-D (3.9 k)	T	8.8/46.3
R130	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	B	4.4/52.9
R134	7030015930	S.RES RMC1/16S-471JTH (470)	B	23.6/44.2
R135	7030016480	S.RES RMC1/16S-821JTH (820)	B	24.5/47.1
R140	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	29.7/23.2

[MAIN-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION		M.	H/V LOCATION
R142	7030015640	S.RES	RMC1/10JPTP	T	18.5/31.3
R145	7030005820	S.RES	RR0510P-103-D (10 k)	B	21.0/27.9
R147	7030005950	S.RES	RR0510P-123-D (12 k)	B	19.8/28.3
R148	7030016050	S.RES	RMC1/16S-102JTH (1 k)	B	19.1/26.5
R150	7030016020	S.RES	RMC1/16S-104JTH (100 k)	B	21.6/23.4
R192	7030016740	S.RES	RMC1/16SK474DTH (470 k)	T	35.5/16.1
R193	7030016750	S.RES	RMC1/16SK124DTH (120 k)	T	34.7/19.6
R194	7030016740	S.RES	RMC1/16SK474DTH (470 k)	T	19.9/109.9
R195	7030016750	S.RES	RMC1/16SK124DTH (120 k)	T	17.3/109.4
R210	7030016560	S.RES	RMC1/16SJPTH	B	33.3/23.2
R211	7030016390	S.RES	RMC1/16S-184JTH (180 k)	B	28.0/58.0
R212	7030016110	S.RES	RMC1/16S-473JTH (47 k)	B	27.8/56.8
R213	7030016340	S.RES	RMC1/16S-393JTH (39 k)	B	29.6/56.6
R214	7030016450	S.RES	RMC1/16S-824JTH (820 k)	B	23.5/57.0
R219	7030015660	S.RES	RMC1/10-2R7JTP (2.7)	T	11.2/79.6
R220	7030015930	S.RES	RMC1/16S-471JTH (470)	B	40.8/117.2
R222	7030016040	S.RES	RMC1/16S-224JTH (220 k)	B	44.7/115.2
R223	7030015970	S.RES	RMC1/16S-103JTH (10 k)	B	42.3/113.8
R224	7030016330	S.RES	RMC1/16S-153JTH (15 k)	B	44.5/113.1
R225	7030015970	S.RES	RMC1/16S-103JTH (10 k)	B	37.7/26.3
R226	7030016090	S.RES	RMC1/16S-223JTH (22 k)	T	35.6/101.7
R227	7030016050	S.RES	RMC1/16S-102JTH (1 k)	T	39.4/44.1
R231	7030016560	S.RES	RMC1/16SJPTH	T	37.1/32.8
R252	7030016560	S.RES	RMC1/16SJPTH	B	25.5/44.4
R253	7030016490	S.RES	RMC1/16S-391JTH (390)	B	24.6/44.4
R254	7030015960	S.RES	RMC1/16S-472JTH (4.7 k)	B	10.9/44.2
R256	7030011920	S.RES	RR0510P-561-D (560)	T	20.9/48.6
R258	7030008340	S.RES	RR0510P-182-D (1.8 k)	T	17.8/46.1
R260	7030008340	S.RES	RR0510P-182-D (1.8 k)	T	8.7/47.2
R262	7030011920	S.RES	RR0510P-561-D (560)	T	14.0/44.7
R265	7030015930	S.RES	RMC1/16S-471JTH (470)	T	18.3/50.3
R266	7030015990	S.RES	RMC1/16S-683JTH (68 k)	T	17.1/49.3
R274	7030015930	S.RES	RMC1/16S-471JTH (470)	B	33.0/68.4
R283	7030016390	S.RES	RMC1/16S-184JTH (180 k)	B	29.6/57.5
R290	7030015900	S.RES	RMC1/16S-470JTH (47)	B	43.7/68.3
R293	7030016000	S.RES	RMC1/16S-823JTH (82 k)	B	35.2/106.7
R299	7030015640	S.RES	RMC1/10JPTP	T	17.2/79.6
R302	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	11.8/100.9
R303	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	13.2/101.6
R304	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	12.0/114.7
R305	7030016290	S.RES	RMC1/16S-222JTH (2.2 k)	T	13.6/113.0
R311	7030016040	S.RES	RMC1/16S-224JTH (220 k)	B	27.8/103.3
R313	7030015900	S.RES	RMC1/16S-470JTH (47)	B	10.3/51.4
R316	7030016090	S.RES	RMC1/16S-223JTH (22 k)	B	33.6/57.5
R317	7030016110	S.RES	RMC1/16S-473JTH (47 k)	B	31.5/56.6
R318	7030015970	S.RES	RMC1/16S-103JTH (10 k)	B	32.7/58.4
R319	7030016110	S.RES	RMC1/16S-473JTH (47 k)	B	33.6/56.6
R320	7030016300	S.RES	RMC1/16S-332JTH (3.3 k)	T	7.6/83.8
R321	7510001661	S.THR	NTCG16 4LH 473JT	T	7.4/85.2
R322	7030016190	S.RES	RMC1/16S-273JTH (27 k)	T	6.7/83.8
R323	7030016440	S.RES	RMC1/16S-272JTH (2.7 k)	T	6.4/82.5
R331	7030016050	S.RES	RMC1/16S-102JTH (1 k)	T	7.1/76.7
R333	7030016090	S.RES	RMC1/16S-223JTH (22 k)	T	8.5/77.5
R334	7030015970	S.RES	RMC1/16S-103JTH (10 k)	B	32.0/41.4
R338	7030016000	S.RES	RMC1/16S-823JTH (82 k)	T	9.2/119.6
R349	7030015640	S.RES	RMC1/10JPTP	B	39.6/88.5
R352	7030016270	S.RES	RMC1/16S-151JTH (150)	B	32.2/80.6
R353	7030016560	S.RES	RMC1/16SJPTH	B	31.2/90.8
R355	7030016240	S.RES	RMC1/16S-684JTH (680 k)	B	45.1/72.3
R357	7030016050	S.RES	RMC1/16S-102JTH (1 k)	B	45.1/78.7
R359	7030016050	S.RES	RMC1/16S-102JTH (1 k)	B	21.5/39.7
R361	7030016090	S.RES	RMC1/16S-223JTH (22 k)	B	27.0/82.6
R363	7030016090	S.RES	RMC1/16S-223JTH (22 k)	B	28.8/93.4
R366	7030015910	S.RES	RMC1/16S-101JTH (100)	B	23.5/81.7
R367	7030015910	S.RES	RMC1/16S-101JTH (100)	B	22.8/91.8
R368	7030015970	S.RES	RMC1/16S-103JTH (10 k)	B	14.7/54.7
R369	7030016050	S.RES	RMC1/16S-102JTH (1 k)	B	25.6/76.4
R370	7030016050	S.RES	RMC1/16S-102JTH (1 k)	B	12.2/102.0
R374	7030016330	S.RES	RMC1/16S-153JTH (15 k)	B	39.5/77.2
R375	7030016360	S.RES	RMC1/16S-123JTH (12 k)	T	27.1/87.2
R376	7030016330	S.RES	RMC1/16S-153JTH (15 k)	B	30.7/66.6
R377	7030016360	S.RES	RMC1/16S-123JTH (12 k)	T	39.4/71.7
R378	7030016270	S.RES	RMC1/16S-151JTH (150)	B	15.4/57.9
R379	7030016470	S.RES	RMC1/16S-390JTH (39)	B	14.5/57.9
R380	7030016270	S.RES	RMC1/16S-151JTH (150)	B	15.9/59.1
R381	7030016050	S.RES	RMC1/16S-102JTH (1 k)	B	29.0/73.1
R388	7030016360	S.RES	RMC1/16S-123JTH (12 k)	T	43.3/71.3
R389	7030016360	S.RES	RMC1/16S-123JTH (12 k)	T	28.5/69.3
R390	7030016050	S.RES	RMC1/16S-102JTH (1 k)	T	31.1/68.1
R391	7030016050	S.RES	RMC1/16S-105JTH (1 M)	B	33.3/36.5
R393	7030016450	S.RES	RMC1/16S-824JTH (820 k)	B	29.4/37.6
R394	7030016400	S.RES	RMC1/16S-564JTH (560 k)	B	30.8/37.0
R397	7030016560	S.RES	RMC1/16SJPTH	B	24.3/95.7
R398	7030016020	S.RES	RMC1/16S-104JTH (100 k)	B	26.5/66.3
R399	7030008270	S.RES	RR0510P-104-D (100 k)	B	21.1/65.4
R400	7030005840	S.RES	RR0510P-473-D (47 k)	B	23.7/62.4
R401	7030016560	S.RES	RMC1/16SJPTH	B	25.0/61.9
R405	7030015970	S.RES	RMC1/16S-103JTH (10 k)	B	42.8/79.0
R407	7030016110	S.RES	RMC1/16S-473JTH (47 k)	B	22.9/38.4
R417	7030016020	S.RES	RMC1/16S-104JTH (100 k)	B	40.6/39.5
R419	7030016290	S.RES	RMC1/16S-222JTH (2.2 k)	B	10.1/111.6
R426	7030015910	S.RES	RMC1/16S-101JTH (100)	B	24.1/73.7
R427	7030016060	S.RES	RMC1/16S-105JTH (1 M)	B	20.7/76.2
R428	7030016300	S.RES	RMC1/16S-332JTH (3.3 k)	B	23.2/70.8
R431	7030016560	S.RES	RMC1/16SJPTH	B	23.2/69.1
R432	7030016110	S.RES	RMC1/16S-473JTH (47 k)	T	41.2/71.7
R433	7030016110	S.RES	RMC1/16S-473JTH (47 k)	T	28.9/71.4
R434	7030015640	S.RES	RMC1/10JPTP	T	37.2/18.6
R443	7030016380	S.RES	RMC1/16S-183JTH (18 k)	T	35.3/102.9
R444	7030005830	S.RES	RR0510P-223-D (22 k)	B	26.9/42.3

The underlined parts have been updated from the previous version of the addendum, or the original page.

[MAIN-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
R456	7030015910	S.RES RMC1/16S-101JTH (100)	B	20.6/50.1
R457	7410001130	S.ARR EXB28V102JX	B	30.7/48.5
R458	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	22.6/43.9
R459	7030015990	S.RES RMC1/16S-683JTH (68 k)	B	32.9/46.4
R460	7030016250	S.RES RMC1/16S-220JTH (22)	B	34.2/46.0
R461	7030016560	S.RES RMC1/16SJPTH	B	35.3/37.5
R462	7410001140	S.ARR EXB28V104JX	T	27.9/49.3
R463	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	21.1/49.1
R464	7030016000	S.RES RMC1/16S-683JTH (82 k)	B	22.9/36.8
R465	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	42.4/68.8
R466	7030016560	S.RES RMC1/16SJPTH	B	43.5/62.9
R467	7030015990	S.RES RMC1/16S-683JTH (68 k)	B	40.5/63.0
R468	7030015930	S.RES RMC1/16S-471JTH (470)	T	21.0/62.9
R469	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	21.8/57.4
R470	7030016560	S.RES RMC1/16SJPTH	T	28.0/58.4
R472	7030015930	S.RES RMC1/16S-471JTH (470)	T	31.4/34.7
R473	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	26.4/41.2
R478	7030016780	S.RES RMC1/16SK224DTH (220 k) <u>#13</u>	B	9.2/35.1
	7030016780	S.RES RMC1/16SK224DTH (220 k) <u>#14</u>		
	7030016560	S.RES RMC1/16SJPTH <u>#16</u>		
	7030016560	S.RES RMC1/16SJPTH <u>#17</u>		
	7030016780	S.RES RMC1/16SK224DTH (220 k) <u>#23</u>		
	7030016780	S.RES RMC1/16SK224DTH (220 k) <u>#24</u>		
	7030016560	S.RES RMC1/16SJPTH <u>#27</u>		
	7030016780	S.RES RMC1/16SK224DTH (220 k) <u>#33</u>		
	7030016780	S.RES RMC1/16SK224DTH (220 k) <u>#34</u>		
	7030016560	S.RES RMC1/16SJPTH <u>#36</u>		
R479	7030017390	S.RES RMC1/16SK184FTH (180 k) <u>#13</u>	B	8.0/34.5
	7030017390	S.RES RMC1/16SK184FTH (180 k) <u>#14</u>		
	7030016780	S.RES RMC1/16SK224DTH (220 k) <u>#16</u>		
	7030016780	S.RES RMC1/16SK224DTH (220 k) <u>#17</u>		
	7030017390	S.RES RMC1/16SK184FTH (180 k) <u>#23</u>		
	7030017390	S.RES RMC1/16SK184FTH (180 k) <u>#24</u>		
	7030016780	S.RES RMC1/16SK224DTH (220 k) <u>#27</u>		
	7030017390	S.RES RMC1/16SK184FTH (180 k) <u>#33</u>		
	7030017390	S.RES RMC1/16SK184FTH (180 k) <u>#34</u>		
	7030016780	S.RES RMC1/16SK224DTH (220 k) <u>#36</u>		
R480	7030005850	S.RES RR0510P-563-D (56 k) <u>#13</u>	B	6.8/33.2
	7030005850	S.RES RR0510P-563-D (56 k) <u>#14</u>		
	7030017390	S.RES RMC1/16SK184FTH (180 k) <u>#16</u>		
	7030017390	S.RES RMC1/16SK184FTH (180 k) <u>#17</u>		
	7030005850	S.RES RR0510P-563-D (56 k) <u>#23</u>		
	7030017390	S.RES RMC1/16SK184FTH (180 k) <u>#27</u>		
	7030005850	S.RES RR0510P-563-D (56 k) <u>#33</u>		
	7030005850	S.RES RR0510P-563-D (56 k) <u>#34</u>		
	7030017390	S.RES RMC1/16SK184FTH (180 k) <u>#36</u>		
R481	7030008270	S.RES RR0510P-104-D (100 k)	B	7.4/29.0
R482	7030008270	S.RES RR0510P-104-D (100 k)	B	7.4/27.9
R483	7030008270	S.RES RR0510P-104-D (100 k)	B	5.8/24.3
R484	7030008270	S.RES RR0510P-104-D (100 k)	B	6.2/23.0
R485	7030008270	S.RES RR0510P-104-D (100 k)	B	5.8/17.7
R486	7030008270	S.RES RR0510P-104-D (100 k)	B	4.9/16.1
R487	7030016930	S.RES RMC1/16SK274DTH (270 k)	B	10.1/35.1
R488	7030018520	S.RES RMC1/16SK564FTH (560 k)	B	11.3/34.4
R489	7030016930	S.RES RMC1/16SK274DTH (270 k)	B	12.1/33.2
R490	7030005850	S.RES RR0510P-563-D (56 k)	B	13.9/29.9
R491	7030007610	S.RES RR0510P-683-D (68 k)	B	12.4/27.6
R492	7030008270	S.RES RR0510P-104-D (100 k)	B	13.9/25.4
R493	7030016750	S.RES RMC1/16SK124DTH (120 k)	B	13.0/22.6
R494	7030016750	S.RES RMC1/16SK124DTH (120 k)	B	13.0/21.0
R495	7030016750	S.RES RMC1/16SK124DTH (120 k)	B	13.0/19.1
R497	7030015980	S.RES RMC1/16S-333JTH (33 k)	B	12.1/8.8
R498	7030016400	S.RES RMC1/16S-564JTH (560 k)	T	43.2/35.3
R499	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	T	43.3/36.2
R500	7030015980	S.RES RMC1/16S-333JTH (33 k)	T	42.3/25.6
R501	7030016250	S.RES RMC1/16S-220JTH (22)	T	34.6/34.6
R502	7030016560	S.RES RMC1/16SJPTH	T	35.1/39.1
R503	7030016200	S.RES RMC1/16S-274JTH (270 k)	T	21.2/125.0
R504	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	23.0/125.0
R505	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	33.0/121.1
R515	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	7.9/21.7
R519	7030012340	S.RES RR0510P-821-D	B	26.6/14.8
R520	7030016750	S.RES RMC1/16SK124DTH (120 k)	B	27.5/9.3
R521	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	32.2/13.7
R524	7030016560	S.RES RMC1/16SJPTH	T	26.8/33.7
R526	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	13.5/8.4
R527	7030015980	S.RES RMC1/16S-333JTH (33 k)	B	40.4/24.6
R528	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	B	37.7/23.0
R529	7030015910	S.RES RMC1/16S-101JTH (100)	B	36.6/23.9
R530	7030016420	S.RES RMC1/16S-182JTH (1.8 k)	B	19.9/24.3
R532	7030016560	S.RES RMC1/16SJPTH	B	21.5/24.3
R537	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	23.2/99.3
R540	7030016330	S.RES RMC1/16S-153JTH (15 k)	T	48.0/42.0
R541	7030016100	S.RES RMC1/16S-334JTH (330 k)	T	48.0/40.1
R542	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	42.1/39.0
R543	7030016320	S.RES RMC1/16S-225JTH (2.2 M)	T	44.7/38.6
R544	7030016330	S.RES RMC1/16S-153JTH (15 k)	T	43.0/38.1
R545	7030016100	S.RES RMC1/16S-334JTH (330 k)	T	46.6/37.3
R546	7030016060	S.RES RMC1/16S-105JTH (1 M)	T	48.5/38.5
R548	7030016070	S.RES RMC1/16S-474JTH (470 k)	T	34.9/28.5
R549	7030016220	S.RES RMC1/16S-563JTH (56 k)	T	34.3/24.4
R550	7030016560	S.RES RMC1/16SJPTH	T	32.5/36.7
R551	7030016560	S.RES RMC1/16SJPTH	T	32.5/37.6
R552	7030016560	S.RES RMC1/16SJPTH	T	32.0/38.7
R554	7030016560	S.RES RMC1/16SJPTH	T	29.1/41.6
R555	7030016560	S.RES RMC1/16SJPTH	T	26.7/64.0
R556	7030016560	S.RES RMC1/16SJPTH	T	25.7/64.0
R558	7030016560	S.RES RMC1/16SJPTH	T	23.5/63.6
R559	7030016560	S.RES RMC1/16SJPTH	T	21.0/61.1

[MAIN-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
R561	7030016560	S.RES RMC1/16SJPTH	T	27.7/62.1
R562	7030016560	S.RES RMC1/16SJPTH	T	28.4/60.0
R563	7030016380	S.RES RMC1/16S-183JTH (18 k)	B	10.0/8.0
R564	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	11.1/4.0
R565	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	9.6/5.0
R566	7030015980	S.RES RMC1/16S-333JTH (33 k)	B	11.7/7.6
R568	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	13.3/7.5
R569	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	35.7/48.1
R571	7030006020	S.RES RR0510P-682-D (6.8 k)	B	27.8/14.4
R572	7030016500	S.RES RMC1/16S-562JTH (5.6 k)	T	15.4/12.2
R573	7030019630	S.RES RL1220S-1R8-F (1.8)	T	20.3/10.6
R574	7030019630	S.RES RL1220S-1R8-F (1.8)	T	22.0/10.6
R575	7030019630	S.RES RL1220S-1R8-F (1.8)	T	27.5/7.6
R577	7030015940	S.RES RMC1/16S-681JTH (680)	T	23.8/12.7
R578	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	24.6/14.7
R580	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	16.8/19.4
R581	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	21.1/18.5
R582	7030019580	S.RES RG1005P-104-B-T5 (100 k)	T	29.8/12.2
R583	7030006020	S.RES RR0510P-682-D (6.8 k)	T	30.0/13.8
R584	7030019580	S.RES RG1005P-104-B-T5 (100 k)	T	30.4/15.0
R585	7030019600	S.RES RG1005P-103-B-T5 (10 k)	T	14.3/16.6
R588	7030019630	S.RES RL1220S-1R8-F (1.8)	T	28.3/5.1
R589	7030019600	S.RES RG1005P-103-B-T5 (10 k)	T	15.6/18.3
R590	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	14.7/15.3
R591	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	16.3/11.7
R593	7030016560	S.RES RMC1/16SJPTH	B	38.6/27.2
R594	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	47.2/45.3
R595	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	43.1/44.7
R596	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	21.7/57.4
R597	7030016060	S.RES RMC1/16S-105JTH (1 M)	B	25.7/55.8
R600	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	35.5/51.8
R601	7030016560	S.RES RMC1/16SJPTH	B	20.2/65.4
R602	7030016560	S.RES RMC1/16SJPTH	T	22.1/98.4
R604	7030016560	S.RES RMC1/16SJPTH	T	26.9/90.2
R605	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	38.9/77.7
R606	7520000241	S.POS PRF18BC471QB5RB	T	14.8/79.1
R607	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	T	18.9/78.3
R608	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	20.3/6.8
R609	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	18.4/9.4
R610	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	18.1/10.7
R612	7030015910	S.RES RMC1/16S-101JTH (100)	T	15.9/20.4
R613	7030016560	S.RES RMC1/16SJPTH	T	21.7/118.8
R617	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	B	29.4/79.2
R619	7030016560	S.RES RMC1/16SJPTH	B	9.3/61.7
R620	7030015910	S.RES RMC1/16S-101JTH (100)	T	44.8/36.2
R621	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	15.4/18.4
R622	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	15.4/21.3
R623	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	10.2/28.3
R624	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	14.3/31.2
R626	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	6.0/16.1
R627	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	6.9/21.5
R629	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	6.9/25.6
R632	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	6.9/31.3
R635	7030015900	S.RES RMC1/16S-470JTH (47 k)	B	7.5/67.2
R637	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	40.0/64.2
R638	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	B	31.9/77.7
R639	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	24.8/78.0
R641	7030016110	S.RES RMC1/16S-473JTH (47 k)	T	46.3/44.7
R642	7030015940	S.RES RMC1/16S-681JTH (680)	T	23.3/13.9
R644	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	39.7/45.4
R645	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	39.7/47.0
R646	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	38.8/47.6
R647	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	37.9/47.6
R648	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	41.8/46.6
R649	7030016360	S.RES RMC1/16S-123JTH (12 k) <u>#13</u>	T	32.3/85.4
	7030016360	S.RES RMC1/16S-123JTH (12 k) <u>#14</u>		
	7030016360	S.RES RMC1/16S-123JTH (12 k) <u>#16</u>		
	7030016360	S.RES RMC1/16S-123JTH (12 k) <u>#17</u>		
R650	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	31.1/69.0
R651	7030016560	S.RES RMC1/16SJPTH	B	36.5/79.5
R652	7030016090	S.RES RMC1/16S-223JTH (22 k)	T	21.2/72.2
R653	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	20.3/75.7
R654	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	T	23.9/79.2
R655	7030016030	S.RES RMC1/16S-154JTH (150 k)	B	32.6/64.9
R656	7030016190	S.RES RMC1/16S-273JTH (27 k)	B	27.3/61.1
R657	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	28.0/59.6
R658	7030015930	S.RES RMC1/16S-471JTH (470)	B	15.4/105.8
R660	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	31.4/

The underlined parts have been updated from the previous version of the addendum, or the original page.

[MAIN-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
C9	4030023850	S.CER 0603B102K500CT	T	12.7/108.5
C10	4030023850	S.CER 0603B102K500CT	T	9.0/103.8
C11	4030022610	S.CER 0402N0R3B500CT	T	11.5/103.8
C13	4030023580	S.CER 0603N220J500CT	T	7.1/102.6
C14	4030023580	S.CER 0603N220J500CT	T	9.0/98.7
C15	4030022610	S.CER 0402N0R3B500CT	T	11.2/98.5
C17	4030023200	S.CER 0402B471K500CT	T	7.2/74.0
C19	4030023590	S.CER 0603N221J500CT	T	9.0/97.5
C20	4030023090	S.CER 0402B102K500CT	T	14.5/109.4
C23	4030023130	S.CER 0402B222K500CT	T	9.2/71.8
C24	4030023010	S.CER 0402B104K160CT	T	14.5/91.0
C25	4030023090	S.CER 0402B102K500CT	T	8.5/83.8
C28	4030023030	S.CER 0402B103K250CT	T	9.7/68.4
C29	4030023090	S.CER 0402B102K500CT	B	14.7/63.0
C30	4030022900	S.CER 0402N680J500CT	T	13.4/78.0
C31	4030023030	S.CER 0402B103K250CT	T	17.6/75.9
C32	4030023090	S.CER 0402B102K500CT	T	8.7/76.2
C33	4030023090	S.CER 0402B102K500CT	B	14.4/61.7
C34	4030022630	S.CER 0402N100C500CT	T	14.6/69.4
C35	4030022880	S.CER 0402N560J500CT	T	15.5/69.4
C37	4550007360	S.TAN F931A226MABAMA	T	19.6/69.7
C38	4030023090	S.CER 0402B102K500CT	T	18.8/73.7
C39	4030022700	S.CER 0402N180J500CT	B	6.0/64.3
C40	4030023090	S.CER 0402B102K500CT	B	11.0/57.6
C48	4030023090	S.CER 0402B102K500CT	T	19.9/57.6
C49	4550007390	S.TAN F931C225MAABAMA	T	10.4/56.3
C50	4030023820	S.CER 0603B104K250CT	T	19.1/55.6
C51	4030023090	S.CER 0402B102K500CT	T	10.1/59.7
C52	4030023010	S.CER 0402B104K160CT	T	10.1/60.7
C53	4030023580	S.CER 0603N220J500CT	T	3.2/106.3
C54	4030022740	S.CER 0402N220J500CT	T	11.7/111.2
C56	4030023090	S.CER 0402B102K500CT	T	12.9/110.7
C57	4030023090	S.CER 0402B102K500CT	B	16.4/107.1
C58	4030023090	S.CER 0402B102K500CT	B	12.7/107.1
C60	4030023090	S.CER 0402B102K500CT	B	21.2/100.6
C61	4030023010	S.CER 0402B104K160CT	B	24.0/92.5
C62	4030022700	S.CER 0402N180J500CT	B	27.9/107.0
C63	4030023090	S.CER 0402B102K500CT	B	11.0/109.9
C64	4030023090	S.CER 0402B102K500CT	B	12.1/100.3
C65	4030023090	S.CER 0402B102K500CT	B	37.1/106.7
C66	4030023010	S.CER 0402B104K160CT	B	36.5/105.0
C67	4030023090	S.CER 0402B102K500CT	B	34.7/102.6
C68	4030023090	S.CER 0402B102K500CT	B	29.6/103.9
C69	4030020000	S.CER C1005 JB 1A 105K-T	B	36.5/103.1
C71	4030022660	S.CER 0402N120J500CT	B	17.0/104.1
C72	4030022520	S.CER 0402N1R0B500CT	B	31.8/105.1
C73	4030022790	S.CER 0402N2R5B500CT	B	32.9/102.4
C74	4030022720	S.CER 0402N1R5B500CT	B	35.3/101.0
C75	4030023090	S.CER 0402B102K500CT	B	29.6/102.3
C76	4030023090	S.CER 0402B102K500CT	B	39.1/108.4
C77	4030022530	S.CER 0402N2R0B500CT	B	33.6/98.9
C78	4030022700	S.CER 0402N180J500CT	B	31.7/98.1
C79	4030023090	S.CER 0402B102K500CT	B	30.3/100.9
C80	4030023090	S.CER 0402B102K500CT	B	24.4/93.7
C81	4030023090	S.CER 0402B102K500CT	B	28.2/94.7
C82	4030023030	S.CER 0402B103K250CT	B	32.9/92.6
C83	4030023090	S.CER 0402B102K500CT	B	33.8/92.6
C84	4030023090	S.CER 0402B102K500CT	B	33.8/93.8
C85	4030022700	S.CER 0402N180J500CT	B	34.1/95.1
C86	4030022580	S.CER 0402N7R0C500CT	B	20.1/85.3
C87	4030022560	S.CER 0402N5R0B500CT	B	13.7/99.9
C88	4030023030	S.CER 0402B103K250CT	B	25.7/78.0
C90	4030023090	S.CER 0402B102K500CT	B	29.0/76.2
C91	4030022590	S.CER 0402N8R0C500CT	B	38.5/67.7
C92	4030023020	S.CER 0402B473K160CT	B	35.6/64.9
C93	4030023090	S.CER 0402B102K500CT	B	31.7/67.9
C95	4030023030	S.CER 0402B103K250CT	B	31.6/68.8
C97	4550007520	S.TAN F931A106MAABAMA	B	36.6/81.0
C98	4030022640	S.CER 0402N101J500CT	B	29.1/71.8
C99	4030023030	S.CER 0402B103K250CT	B	28.6/70.6
C100	4030023200	S.CER 0402B471K500CT	B	29.9/69.0
C101	4030019560	S.CER GRM21BB31C106KE15L	B	36.5/78.1
C102	4030023200	S.CER 0402B471K500CT	B	28.6/69.3
C103	4030022540	S.CER 0402N3R0B500CT	B	43.0/74.1
C104	4030023030	S.CER 0402B103K250CT	B	37.0/68.2
C106	4030023010	S.CER 0402B104K160CT	B	40.1/70.6
C107	4030020000	S.CER C1005 JB 1A 105K-T	T	42.6/67.4
C110	4030023090	S.CER 0402B102K500CT	B	36.5/104.1
C113	4030023010	S.CER 0402B104K160CT	B	42.8/80.9
C115	4030023010	S.CER 0402B104K160CT	B	29.3/63.3
C116	4030023090	S.CER 0402B102K500CT	T	18.5/75.9
C117	4030023090	S.CER 0402B102K500CT	T	19.5/80.9
C118	4030023030	S.CER 0402B103K250CT	T	18.6/80.9
C121	4030019560	S.CER GRM21BB31C106KE15L	T	35.3/110.2
C125	4030023030	S.CER 0402B103K250CT	T	21.9/109.5
C126	4030023010	S.CER 0402B104K160CT	T	26.6/122.4
C127	4030023090	S.CER 0402B102K500CT	T	33.9/109.6
C130	4510009700	S.ELE EEEFKC101P	T	37.9/115.5
C150	4030022680	S.CER 0402N150J500CT	B	11.0/55.0
C151	4030022600	S.CER 0402N9R0C500CT	B	11.9/51.8
C152	4030023090	S.CER 0402B102K500CT	B	14.6/53.8
C153	4030023090	S.CER 0402B102K500CT	B	14.1/49.0
C155	4030022810	S.CER 0402N330J500CT	T	12.5/50.7
C156	4030023090	S.CER 0402B102K500CT	B	15.9/48.9
C168	4550007550	S.TAN F931V334MAABAMA	T	17.6/38.3
C169	4550007390	S.TAN F931C225MAABAMA	B	25.0/48.6
C170	4030022720	S.CER 0402N1R5B500CT	T	19.2/42.6
C171	4030023090	S.CER 0402B102K500CT	B	12.8/59.1
C172	4030023010	S.CER 0402B104K160CT	B	8.3/52.0
C173	4550008160	S.TAN F931A226MAA	B	7.7/55.0

[MAIN-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
C174	4030023010	S.CER 0402B104K160CT	B	22.2/50.1
C176	4030023010	S.CER 0402B104K160CT	T	16.4/109.4
C180	4030023010	S.CER 0402B104K160CT	T	34.7/18.7
C186	4030023010	S.CER 0402B104K160CT	B	18.9/28.4
C187	4030023010	S.CER 0402B104K160CT	B	17.0/25.9
C188	4030017480	S.CER C1608 JB 1A 474K-T	B	18.0/26.4
C190	4030022750	S.CER 0402N221J500CT	B	14.4/104.1
C191	4030023030	S.CER 0402B103K250CT	B	31.5/103.5
C192	4030023090	S.CER 0402B102K500CT	B	26.9/99.6
C193	4030023090	S.CER 0402B102K500CT	B	26.8/98.7
C196	4030023010	S.CER 0402B104K160CT	B	22.6/28.8
C197	4030023020	S.CER 0402B473K160CT	B	27.3/62.2
C201	4030022840	S.CER 0402N390J500CT	B	38.5/68.6
C202	4030023010	S.CER 0402B104K160CT	B	15.0/6.8
C211	4030023330	S.CER 0603N4R0B500CT	T	13.2/119.4
C212	4030023720	S.CER 0603N470J500CT	T	6.7/96.3
C223	4030024520	S.CER C1005 JB 1C 474K-T	B	33.3/21.5
C225	4030024050	S.CER 0603B473K500CT	B	6.8/12.9
C229	4030023030	S.CER 0402B103K250CT	T	44.6/68.8
C232	4030022530	S.CER 0402N2R0B500CT	B	24.1/91.6
C235	4030020000	S.CER C1005 JB 1A 105K-T	B	8.2/108.9
C237	4030023090	S.CER 0402B102K500CT	B	40.8/118.2
C238	4550007270	S.TAN F931A475MAABMA	T	38.5/120.9
C239	4030022980	S.CER 0402B473K100CT	B	44.7/116.2
C240	4030023090	S.CER 0402B102K500CT	B	40.3/116.3
C241	4030023090	S.CER 0402B102K500CT	B	45.3/114.2
C242	4030023010	S.CER 0402B104K160CT	B	37.7/24.7
C243	4030023090	S.CER 0402B102K500CT	B	40.4/114.5
C245	4030023010	S.CER 0402B104K160CT	T	35.3/103.8
C249	4030023090	S.CER 0402B102K500CT	T	27.2/52.8
C274	4030023090	S.CER 0402B102K500CT	B	36.2/84.6
C293	4030023090	S.CER 0402B102K500CT	B	12.7/4.0
C294	4030020000	S.CER C1005 JB 1A 105K-T	B	29.6/55.7
C296	4030023760	S.CER 0603N680J500CT	T	9.2/87.2
C297	4030023570	S.CER 0603N201J500CT	T	6.7/95.1
C301	4030023090	S.CER 0402B102K500CT	B	13.1/43.6
C302	4030022810	S.CER 0402N330J500CT	T	20.9/42.6
C306	4030023670	S.CER 0603N330J500CT	T	16.7/45.0
C307	4030022570	S.CER 0402N6R0C500CT	T	11.7/42.3
C308	4030023090	S.CER 0402B102K500CT	B	11.8/44.2
C309	4030023090	S.CER 0402B102K500CT	B	11.4/46.5
C310	4030023670	S.CER 0603N330J500CT	T	19.5/48.0
C311	4030023790	S.CER 0603N820J500CT	T	9.5/45.2
C312	4030023090	S.CER 0402B102K500CT	T	16.4/46.3
C313	4030023090	S.CER 0402B102K500CT	T	12.5/48.6
C315	4030023670	S.CER 0603N330J500CT	T	12.2/45.2
C316	4030024490	S.CER 0402NR75B500CT	T	16.3/48.4
C317	4030024490	S.CER 0402NR75B500CT	T	12.4/49.7
C319	4030023090	S.CER 0402B102K500CT	T	19.6/49.8
C321	4030023030	S.CER 0402B103K250CT	B	36.1/68.2
C323	4030023030	S.CER 0402B103K250CT	B	27.3/94.7
C327	4030023090	S.CER 0402B102K500CT	B	28.7/103.3
C328	4030023090	S.CER 0402B102K500CT	B	26.9/101.1
C329	4030022530	S.CER 0402N2R0B500CT	B	21.2/104.9
C330	4030023030	S.CER 0402B103K250CT	B	31.1/58.4
C331	4030023010	S.CER 0402B104K160CT	B	12.5/10.2
C333	4030023090	S.CER 0402B102K500CT	B	6.8/97.0
C335	4030023670	S.CER 0603N330J500CT	T	12.9/46.4
C336	4030022860	S.CER 0402N470J500CT	T	10.5/42.2
C338	4030023670	S.CER 0603N330J500CT	T	18.6/44.4
C347	4030023010	S.CER 0402B104K160CT	B	36.5/76.7
C349	4550007550	S.TAN F931V334MAABMA	B	24.9/41.1
C350	4030022860	S.CER 0402N470J500CT	T	16.7/75.9
C351	4030022750	S.CER 0402N221J500CT	T	7.2/67.1
C352	4030023090	S.CER 0402B102K500CT	T	9.2/72.7
C354	4030023090	S.CER 0402B102K500CT	B	36.2/61.6
C355	4030021240	S.CER C1005 JB 1C 105K-T	B	30.8/38.8
C356	4030023010	S.CER 0402B104K160CT	B	40.1/72.5
C357	4030022980	S.CER 0402B473K100CT	B	35.1/66.9
C361	4030022550	S.CER 0402N4R0B500CT	B	30.3/81.1
C364	4030022540	S.CER 0402N3R0B500CT	B	32.5/90.4
C365	4030022680	S.CER 0402N150J500CT	B	33.5/84.2
C372	4030023090	S.CER 0402B102K500CT	T	15.4/91.0
C373	4030023090	S.CER 0402B102K500CT	T	11.1/66.7
C375	4030022610	S.CER 0402N0R3B500CT	T	9.7/112.8
C376	4030023090	S.CER 0402B102K500CT	B	32.9/50.0
C377	4030022620	S.CER 0402N0R5B500CT	T	10.2/49.3
C379	4030023330	S.CER 0603N4R0B500CT	T	16.8/43.8
C381	4030023090	S.CER 0402B102K500CT	B	36.2/62.8
C383	4030023330	S.CER 0603N4R0B500CT	T	11.4/43.6
C384	4030021520	S.CER GRM31CB31H106KA12L	T	25.0/109.6
C385	4030021240	S.CER C1005 JB 1C 105K-T	T	21.6/106.1
C386	4030022560	S.CER 0402N5R0B500CT	T	11.7/41.2
C387	4030023090	S.CER 0402B102K500CT	B	28.4/41.5
C388	4030023090	S.CER 0402B102K500CT	T	20.3/90.4
C389	4030022560	S.CER 0402N5R0B500CT	T	12.1/39.0
C390	4030023090	S.CER 0402B102K500CT	B	32.8/76.8
C391	4030022900	S.CER 0402N680J500CT	B	26.5/76.4
C392	4030023090	S.CER 0402B102K500CT	B	23.6/75.2
C393	4030020000	S.CER C1005 JB 1A 105K-T	B	24.7/76.4
C394	4030023030	S.CER 0402B103K250CT	B	23.8/76.4
C395	4030023090	S.CER 0402B102K500CT	B	15.9/54.2
C396	4030022660	S.CER 0402N120J500CT	B	15.1/56.7
C397	4030022680	S.CER 0402N150J500CT	B	16.2/60.5
C398	4030022860	S.CER 0402N470J500CT	B	42.1/74.1
C399	4030022650	S.CER 0402N110J500CT	B	42.8/75.6
C400	4030022640	S.CER 0402N101J500CT	B	41.2/74.1
C401	4030022550	S.CER 0402N4R0B500CT	B	41.2/75.5
C402	4030022880	S.CER 0402N560J500CT	B	40.3/74.1
C403	4030023090	S.CER 0402B102K500CT	B	33.0/43.9

The underlined parts have been updated from the previous version of the addendum, or the original page.

[MAIN-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
C405	4030023090	S.CER 0402B102K500CT	B	19.4/99.2
C407	4030020450	S.CER C1005 JB 0J 475M-T	B	16.3/105.4
C418	4030023090	S.CER 0402B102K500CT	T	40.3/12.6
C420	4030023090	S.CER 0402B102K500CT	T	37.3/104.8
C429	4030022860	S.CER 0402N470J500CT	T	16.4/91.0
C430	4030021240	S.CER C1005 JB 1C 105K-T	B	22.7/78.8
C431	4030023090	S.CER 0402B102K500CT	T	37.2/16.9
C432	4030023090	S.CER 0402B102K500CT	B	38.1/106.7
C438	4030022630	S.CER 0402N100C500CT	B	32.9/41.4
C439	4030022640	S.CER 0402N101J500CT	B	43.7/69.2
C440	4030023090	S.CER 0402B102K500CT	B	33.8/41.4
C441	4030020000	S.CER C1005 JB 1A 105K-T	B	34.8/38.9
C443	4030023090	S.CER 0402B102K500CT	B	23.1/39.7
C444	4030023010	S.CER 0402B104K160CT	B	35.4/46.5
C445	4030021240	S.CER C1005 JB 1C 105K-T	B	34.8/44.3
C446	4030023030	S.CER 0402B103K250CT	B	45.1/79.6
C451	4030023010	S.CER 0402B104K160CT	B	24.4/81.3
C458	4030023010	S.CER 0402B104K160CT	B	29.9/91.1
C459	4030023010	S.CER 0402B104K160CT	B	31.0/80.1
C460	4030023010	S.CER 0402B104K160CT	B	40.0/75.8
C461	4030023010	S.CER 0402B104K160CT	T	25.3/85.9
C462	4030023010	S.CER 0402B104K160CT	T	38.2/72.1
C463	4030023010	S.CER 0402B104K160CT	T	26.2/72.1
C464	4030023010	S.CER 0402B104K160CT	T	44.5/71.7
C466	4030023010	S.CER 0402B104K160CT	T	28.9/72.3
C467	4030023010	S.CER 0402B104K160CT	T	42.1/71.7
C468	4030023010	S.CER 0402B104K160CT	T	26.2/86.8
C469	4030023010	S.CER 0402B104K160CT	B	26.7/84.2
C470	4030023010	S.CER 0402B104K160CT	B	26.6/89.5
C471	4030023010	S.CER 0402B104K160CT	B	33.7/90.8
C472	4030023010	S.CER 0402B104K160CT	B	33.1/80.6
C473	4030022560	S.CER 0402N5R0B500CT	B	41.6/70.4
C474	4030022570	S.CER 0402N6R0C500CT	B	43.9/72.8
C475	4030022880	S.CER 0402N560J500CT	B	41.3/71.7
C476	4030023090	S.CER 0402B102K500CT	B	26.8/80.2
C477	4030023090	S.CER 0402B102K500CT	B	29.7/94.7
C478	4030023030	S.CER 0402B103K250CT	B	22.0/64.9
C479	4030023030	S.CER 0402B103K250CT	B	24.9/62.8
C481	4030019560	S.CER GRM21BB31C106KE15L	B	9.6/109.5
C484	4030023030	S.CER 0402B103K250CT	B	8.7/52.9
C485	4030023090	S.CER 0402B102K500CT	T	25.7/66.2
C486	4030023090	S.CER 0402B102K500CT	T	26.7/66.2
C487	4030023090	S.CER 0402B102K500CT	T	27.7/66.2
C488	4030019560	S.CER GRM21BB31C106KE15L	B	9.5/106.0
C489	4030020000	S.CER C1005 JB 1A 105K-T	B	24.2/72.3
C490	4030023010	S.CER 0402B104K160CT	B	35.7/38.9
C491	4030023090	S.CER 0402B102K500CT	B	31.5/57.5
C492	4030020450	S.CER C1005 JB 0J 475M-T	T	28.9/70.5
C493	4030020450	S.CER C1005 JB 0J 475M-T	T	40.3/71.7
C495	4030021520	S.CER GRM31CB31H106KA12L	T	19.6/82.7
C496	4030021520	S.CER GRM31CB31H106KA12L	T	21.3/107.7
C508	4030023090	S.CER 0402B102K500CT	T	14.4/41.4
C509	4030023090	S.CER 0402B102K500CT	T	13.9/38.5
C510	4030023090	S.CER 0402B102K500CT	B	26.6/45.7
C511	4030022640	S.CER 0402N101J500CT	B	29.4/40.4
C512	4030024500	S.CER C1005 JB 1C 224K-T	B	30.3/40.4
C513	4030019560	S.CER GRM21BB31C106KE15L	B	27.6/38.7
C514	4030023010	S.CER 0402B104K160CT	B	33.9/44.3
C515	4030023010	S.CER 0402B104K160CT	B	32.4/48.1
C516	4030019560	S.CER GRM21BB31C106KE15L	B	28.4/49.8
C517	4030023010	S.CER 0402B104K160CT	B	29.9/38.8
C518	4030023090	S.CER 0402B102K500CT	B	26.3/50.7
C519	4030023090	S.CER 0402B102K500CT	B	28.7/47.7
C520	4030023090	S.CER 0402B102K500CT	B	15.5/42.4
C521	4030023090	S.CER 0402B102K500CT	B	16.4/47.7
C522	4030023090	S.CER 0402B102K500CT	T	19.5/50.7
C523	4030023090	S.CER 0402B102K500CT	B	21.9/38.5
C524	4030023090	S.CER 0402B102K500CT	B	21.5/37.3
C525	4030023090	S.CER 0402B102K500CT	B	44.1/67.8
C526	4030022630	S.CER 0402N100C500CT	B	42.4/67.8
C527	4030021240	S.CER C1005 JB 1C 105K-T	B	40.5/65.4
C528	4030023010	S.CER 0402B104K160CT	B	39.6/65.4
C529	4030023010	S.CER 0402B104K160CT	B	44.5/64.6
C530	4030021240	S.CER C1005 JB 1C 105K-T	B	41.9/63.1
C531	4030023010	S.CER 0402B104K160CT	T	21.0/62.0
C532	4030019560	S.CER GRM21BB31C106KE15L	T	26.5/54.9
C533	4030023010	S.CER 0402B104K160CT	T	24.8/54.9
C534	4030023090	S.CER 0402B102K500CT	T	32.5/33.3
C535	4030023010	S.CER 0402B104K160CT	T	24.8/36.0
C536	4030019560	S.CER GRM21BB31C106KE15L	T	27.4/34.0
C537	4030023010	S.CER 0402B104K160CT	T	30.5/33.8
C538	4520000020	S.NIO NOJC227M006RWJV	T	30.3/24.2
C539	4030023090	S.CER 0402B102K500CT	B	41.3/96.4
C541	4030021240	S.CER C1005 JB 1C 105K-T	B	34.8/27.6
C542	4030023010	S.CER 0402B104K160CT	B	34.5/23.2
C543	4030023090	S.CER 0402B102K500CT	T	15.9/9.5
C544	4030023090	S.CER 0402B102K500CT	T	13.0/6.6
C548	4030022930	S.CER 0402N821J500CT	B	8.0/35.4
	4030022930	S.CER 0402N821J500CT	[#13]	
	4030022930	S.CER 0402N821J500CT	[#14]	
	4030022930	S.CER 0402N821J500CT	[#23]	
	4030022930	S.CER 0402N821J500CT	[#24]	
	4030022930	S.CER 0402N821J500CT	[#33]	
	4030022930	S.CER 0402N821J500CT	[#34]	

[MAIN-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION			M.	H/V LOCATION		
C549	4030020170	S.CER	C1608 CH 1H 472J-T	[#13]	B	5.6/31.1		
	4030020170	S.CER	C1608 CH 1H 472J-T	[#14]				
	4030017810	S.CER	C1608 CH 1H 102J-T	[#16]				
	4030017810	S.CER	C1608 CH 1H 102J-T	[#17]				
	4030020170	S.CER	C1608 CH 1H 472J-T	[#23]				
	4030020170	S.CER	C1608 CH 1H 472J-T	[#24]				
	4030017810	S.CER	C1608 CH 1H 102J-T	[#27]				
	4030020170	S.CER	C1608 CH 1H 472J-T	[#33]				
	4030020170	S.CER	C1608 CH 1H 472J-T	[#34]				
	4030017810	S.CER	C1608 CH 1H 102J-T	[#36]				
C550	4030022710	S.CER	0402N181J500CT	[#13]	B	8.7/33.2		
	4030022710	S.CER	0402N181J500CT	[#14]				
	4030022910	S.CER	0402N681J500CT	[#16]				
	4030022910	S.CER	0402N681J500CT	[#17]				
	4030022710	S.CER	0402N181J500CT	[#23]				
	4030022710	S.CER	0402N181J500CT	[#24]				
	4030022910	S.CER	0402N681J500CT	[#27]				
	4030022710	S.CER	0402N181J500CT	[#33]				
	4030022710	S.CER	0402N181J500CT	[#34]				
	4030022910	S.CER	0402N681J500CT	[#36]				
C551	4030018620	S.CER	C1608 CH 1H 222J-T		B	6.0/28.1		
C552	4030022690	S.CER	0402N151J500CT	[#13]	B	9.0/28.0		
	4030022690	S.CER	0402N151J500CT	[#14]				
	4030022820	S.CER	0402N331J500CT	[#16]				
	4030022820	S.CER	0402N331J500CT	[#17]				
	4030022690	S.CER	0402N151J500CT	[#23]				
	4030022690	S.CER	0402N151J500CT	[#24]				
	4030022820	S.CER	0402N331J500CT	[#27]				
	4030022690	S.CER	0402N151J500CT	[#33]				
	4030022690	S.CER	0402N151J500CT	[#34]				
	4030022820	S.CER	0402N331J500CT	[#36]				
C553	4030019570	S.CER	C1608 CH 1H 332J-T		B	5.6/19.4		
	4030022880	S.CER	0402N560J500CT	[#13]			B	8.0/23.4
	4030022880	S.CER	0402N560J500CT	[#14]				
	4030022670	S.CER	0402N121J500CT	[#16]				
	4030022670	S.CER	0402N121J500CT	[#17]				
	4030022880	S.CER	0402N560J500CT	[#23]				
	4030022880	S.CER	0402N560J500CT	[#24]				
	4030022670	S.CER	0402N121J500CT	[#27]				
	4030022880	S.CER	0402N560J500CT	[#33]				
	4030022880	S.CER	0402N560J500CT	[#34]				
C555	4030022670	S.CER	0402N121J500CT	[#36]	B	5.5/14.7		
	4030020160	S.CER	C1608 CH 1H 103J-T	[#13]				
	4030020160	S.CER	C1608 CH 1H 103J-T	[#14]				
	4030022350	S.CER	C1608 CH 1H 822J-T	[#16]				
	4030022350	S.CER	C1608 CH 1H 822J-T	[#17]				
	4030020160	S.CER	C1608 CH 1H 103J-T	[#23]				
	4030020160	S.CER	C1608 CH 1H 103J-T	[#24]				
	4030022350	S.CER	C1608 CH 1H 822J-T	[#27]				
	4030020160	S.CER	C1608 CH 1H 103J-T	[#33]				
	4030020160	S.CER	C1608 CH 1H 103J-T	[#34]				
C556	4030022350	S.CER	C1608 CH 1H 822J-T	[#36]	B	7.6/18.5		
	4030022630	S.CER	0402N100C500CT	[#13]				
	4030022630	S.CER	0402N100C500CT	[#14]				
	4030022630	S.CER	0402N100C500CT	[#23]				
	4030022630	S.CER	0402N100C500CT	[#24]				
	4030022630	S.CER	0402N100C500CT	[#33]				
C557	4030022630	S.CER	0402N100C500CT	[#34]	B	11.4/35.3		
	4030022930	S.CER	0402N821J500CT					
	4030022930	S.CER	0402N821J500CT					
	4030022690	S.CER	0402N151J500CT					
	4030020170	S.CER	C1608 CH 1H 472J-T					
	4030022870	S.CER	0402N471J500CT					
	4030020940	S.CER	C1608 CH 1H 392J-T					
	4030022640	S.CER	0402N101J500CT					
	4030020160	S.CER	C1608 CH 1H 103J-T					
	4030022680	S.CER	0402N150J500CT					
C558	4030021240	S.CER	C1005 JB 1C 105K-T		T	41.5/35.4		
C567	4030021240	S.CER	C1005 JB 1C 105K-T		T	41.9/36.8		
C568	4030021240	S.CER	C1005 JB 1C 105K-T		T	40.9/25.9		
C569	4030023010	S.CER	0402B104K160CT		T	42.6/26.5		
C570	4030023010	S.CER	0402B104K160CT		T	39.6/26.3		
C571	4030019560	S.CER	GRM21BB31C106KE15L		T	35.0/37.1		
C572	4030019560	S.CER	GRM21BB31C106KE15L		T	37.6/34.9		
C573	4030023090	S.CER	0402B102K500CT		T	9.1/21.3		
C574	4030022900	S.CER	0402N680J500CT		B	27.5/10.2		
C577	4030021520	S.CER	GRM31CB31H106KA12L		B	21.7/9.3		
C579	4030021520	S.CER	GRM31CB31H106KA12L		B	23.8/9.3		
C580	4030021520	S.CER	GRM31CB31H106KA12L		B	34.9/6.7		
C585	4030023010	S.CER	0402B104K160CT		B	25.4/9.5		
C586	4030023030	S.CER	0402B103K250CT		B	26.3/9.5		
C587	4030022870	S.CER	0402N471J500CT		B	40.4/23.7		
C588	4030022860	S.CER	0402N470J500CT		B	41.6/21.9		
C589	4030021240	S.CER	C1005 JB 1C 105K-T		B	39.1/22.5		
C590	4030023090	S.CER	0402B102K500CT		B	35.2/87.5		
C591	4030022640	S.CER	0402N101J500CT		B	36.9/88.1		
C592	4030022640	S.CER	0402N101J500CT		B	40.1/96.7		
C593	4030023090	S.CER	0402B102K500CT		B	41.5/94.8		
C596	4030023090	S.CER	0402B102K500CT		T	11.7/10.7		
C597	4030023010	S.CER	0402B104K160CT		B	26.6/26.3		
C598	4030021240	S.CER	C1005 JB 1C 105K-T		B	25.7/26.3		
C599	4030023090	S.CER	0402B102K500CT		T	23.4/118.8		
C602	4030023090	S.CER	0402B102K500CT		T	21.2/120.6		
C605	4030022640	S.CER	0402N101J500CT		T	28.2/123.0		
C608	4030019560	S.CER	GRM21BB31C106KE15L		B	21.2/29.9		
C610	4030023090	S.CER	0402B102K500CT		T	23.0/97.1		
C612	4030019560	S.CER	GRM21BB31C106KE15L		T	27.8/91.6		
C613	4030023090	S.CER	0402B102K500CT		T	22.1/100.3		
C614	4030023010	S.CER	0402B104K160CT		T	25.7/92.4		
C615	4030023010	S.CER	0402B104K160CT		T	23.9/97.1		

The underlined parts have been updated from the previous version of the addendum, or the original page.

[MAIN-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
C616	4030023090	S.CER 0402B102K500CT	T	24.8/92.4
C622	4030023060	S.CER 0402B183K250CT	T	46.7/42.3
C623	4030023060	S.CER 0402B183K250CT	T	46.7/40.7
C624	4030023010	S.CER 0402B104K160CT	T	46.6/38.4
C627	4030023010	S.CER 0402B104K160CT	B	10.8/9.2
C628	4030023010	S.CER 0402B104K160CT	B	13.9/5.3
C629	4050000340	S.FEE NFM21PC224R1C3D	B	32.9/6.7
C631	4030022590	S.CER 0402N8R0C500CT	B	10.2/18.3
	<u>4030022590</u>	<u>S.CER 0402N8R0C500CT</u>	[#13]	
	<u>4030022560</u>	<u>S.CER 0402N5R0B500CT</u>	[#14]	
	<u>4030022560</u>	<u>S.CER 0402N5R0B500CT</u>	[#16]	
	<u>4030022560</u>	<u>S.CER 0402N5R0B500CT</u>	[#17]	
	<u>4030022590</u>	<u>S.CER 0402N8R0C500CT</u>	[#23]	
	<u>4030022590</u>	<u>S.CER 0402N8R0C500CT</u>	[#24]	
	<u>4030022560</u>	<u>S.CER 0402N5R0B500CT</u>	[#27]	
	<u>4030022590</u>	<u>S.CER 0402N8R0C500CT</u>	[#33]	
	<u>4030022590</u>	<u>S.CER 0402N8R0C500CT</u>	[#34]	
	<u>4030022560</u>	<u>S.CER 0402N5R0B500CT</u>	[#36]	
C632	4030022720	S.CER 0402N1R5B500CT	B	7.6/17.6
	<u>4030022720</u>	<u>S.CER 0402N1R5B500CT</u>	[#13]	
	<u>4030022720</u>	<u>S.CER 0402N1R5B500CT</u>	[#14]	
	<u>4030022810</u>	<u>S.CER 0402N330J500CT</u>	[#16]	
	<u>4030022810</u>	<u>S.CER 0402N330J500CT</u>	[#17]	
	<u>4030022720</u>	<u>S.CER 0402N1R5B500CT</u>	[#23]	
	<u>4030022720</u>	<u>S.CER 0402N1R5B500CT</u>	[#24]	
	<u>4030022810</u>	<u>S.CER 0402N330J500CT</u>	[#27]	
	<u>4030022720</u>	<u>S.CER 0402N1R5B500CT</u>	[#33]	
	<u>4030022720</u>	<u>S.CER 0402N1R5B500CT</u>	[#34]	
	<u>4030022810</u>	<u>S.CER 0402N330J500CT</u>	[#36]	
C633	4030023010	S.CER 0402B104K160CT	B	11.1/18.7
C634	4030023010	S.CER 0402B104K160CT	B	13.0/24.2
C635	4030023010	S.CER 0402B104K160CT	B	12.1/28.8
C636	4030023010	S.CER 0402B104K160CT	B	13.1/15.0
C637	4030023010	S.CER 0402B104K160CT	B	12.2/13.7
C638	4030023010	S.CER 0402B104K160CT	B	25.5/57.0
C639	4030023090	S.CER 0402B102K500CT	B	40.6/108.4
C640	4030023090	S.CER 0402B102K500CT	B	45.6/104.3
C641	4030023010	S.CER 0402B104K160CT	T	43.6/46.2
C642	4030023010	S.CER 0402B104K160CT	T	47.9/39.2
C643	4030023010	S.CER 0402B104K160CT	T	41.7/43.5
C644	4030023200	S.CER 0402B471K500CT	T	48.0/41.1
C645	4030023010	S.CER 0402B104K160CT	T	42.1/50.2
C646	4030019560	S.CER GRM21BB31C106KE15L	T	32.8/91.3
C647	4030023010	S.CER 0402B104K160CT	T	28.1/89.8
C648	4030023090	S.CER 0402B102K500CT	B	12.2/60.3
C649	4030023090	S.CER 0402B102K500CT	B	10.2/61.7
C650	4030023010	S.CER 0402B104K160CT	T	19.8/15.8
C651	4030023010	S.CER 0402B104K160CT	T	13.8/21.2
C652	4030023010	S.CER 0402B104K160CT	T	11.7/15.2
C653	4030021240	S.CER C1005 JB 1C 105K-T	T	22.0/97.1
C656	4030023090	S.CER 0402B102K500CT	T	15.6/7.8
C660	4030023090	S.CER 0402B102K500CT	B	6.6/67.2
C661	4030023010	S.CER 0402B104K160CT	T	40.6/46.4
C662	4030023010	S.CER 0402B104K160CT	T	41.2/44.9
C663	4030023010	S.CER 0402B104K160CT	T	33.2/85.4
C664	4030023010	S.CER 0402B104K160CT	B	36.5/41.7
C665	4030023070	S.CER 0402B223K250CT	B	20.7/75.2
C666	4030023010	S.CER 0402B104K160CT	T	34.3/22.5
C667	4030023090	S.CER 0402B102K500CT	B	14.0/15.0
C668	4030023090	S.CER 0402B102K500CT	B	12.0/18.7
C669	4030023090	S.CER 0402B102K500CT	B	13.9/24.2
C670	4030023090	S.CER 0402B102K500CT	B	13.0/29.4
C671	4030022640	S.CER 0402N101J500CT	B	6.0/21.5
C672	4030022640	S.CER 0402N101J500CT	B	6.9/16.1
C673	4030023090	S.CER 0402B102K500CT	T	42.4/45.6
C674	4030023090	S.CER 0402B102K500CT	T	16.1/22.4
C675	4030023090	S.CER 0402B102K500CT	T	6.5/15.7
C676	4030023090	S.CER 0402B102K500CT	T	19.3/79.5
C677	4030019560	S.CER GRM21BB31C106KE15L	B	24.5/68.6
	<u>4030019560</u>	<u>S.CER GRM21BB31C106KE15L</u>	[#13]	
	<u>4030019560</u>	<u>S.CER GRM21BB31C106KE15L</u>	[#14]	
	<u>4030019560</u>	<u>S.CER GRM21BB31C106KE15L</u>	[#16]	
	<u>4030019560</u>	<u>S.CER GRM21BB31C106KE15L</u>	[#17]	
C680	4030023010	S.CER 0402B104K160CT	T	32.7/86.6
	<u>4030023010</u>	<u>S.CER 0402B104K160CT</u>	[#13]	
	<u>4030023010</u>	<u>S.CER 0402B104K160CT</u>	[#14]	
	<u>4030023010</u>	<u>S.CER 0402B104K160CT</u>	[#16]	
	<u>4030023010</u>	<u>S.CER 0402B104K160CT</u>	[#17]	
C681	4030023010	S.CER 0402B104K160CT	T	35.2/81.9
	<u>4030023010</u>	<u>S.CER 0402B104K160CT</u>	[#13]	
	<u>4030023010</u>	<u>S.CER 0402B104K160CT</u>	[#14]	
	<u>4030023010</u>	<u>S.CER 0402B104K160CT</u>	[#16]	
	<u>4030023010</u>	<u>S.CER 0402B104K160CT</u>	[#17]	
C682	4030023010	S.CER 0402B104K160CT	T	30.1/71.4
C683	4030023090	S.CER 0402B102K500CT	B	43.1/94.4
C684	4030023090	S.CER 0402B102K500CT	B	38.9/95.7
C694	4030023090	S.CER 0402B102K500CT	T	36.7/58.4
C704	4030023090	S.CER 0402B102K500CT	T	40.1/58.6
C706	4030023090	S.CER 0402B102K500CT	T	38.3/58.6
C712	4030023820	S.CER 0603B104K250CT	T	7.1/19.1
C713	4550008850	S.TAN F931C227MNC	T	25.8/29.5
C715	4030023010	S.CER 0402B104K160CT	T	47.2/43.6
J1	6450000870	CON HEC2711-01-020		
J2	6450000131	CON HSJ1102-018540		
J4	6510021901	S.CON BM02B-ASRS-TF (LF) (SN)	T	13.0/4.0
J5	6450001060	CON HSJ1493-01-010		
J6	6510031230	S.CON 50P4.5-JMCS-G-TF (N) (1)	T	35.7/54.3
MC1	7700003060	MIC F6027AP-SBC-462		
S1	2260003640	SWI SKHLLCA010		

[MAIN-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
EP3	6910014640	S.BEA MPZ2012S221A-T	T	39.3/14.4
EP4	6910014640	S.BEA MPZ2012S221A-T	T	19.5/121.0
EP5	6910014730	S.BEA MPZ2012S331A-T	T	37.0/102.8
EP6	6910014730	S.BEA MPZ2012S331A-T	B	40.2/110.9
EP7	6910014730	S.BEA MPZ2012S331A-T	B	41.8/106.3
EP10	6910014730	S.BEA MPZ2012S331A-T	T	13.9/8.6
EP11	6910014730	S.BEA MPZ2012S331A-T	B	39.7/103.7
EP13	6910020610	S.BEA BLM15BD102SN1D	T	15.7/47.5
EP14	6910020610	S.BEA BLM15BD102SN1D	T	12.5/47.6
EP15	6910014640	S.BEA MPZ2012S221A-T	T	39.7/18.7
EP16	6910014640	S.BEA MPZ2012S221A-T	T	18.5/89.0
EP18	6910020610	S.BEA BLM15BD102SN1D	T	27.7/56.8
EP19	6910020610	S.BEA BLM15BD102SN1D	T	23.5/54.5
EP20	6910020610	S.BEA BLM15BD102SN1D	T	26.6/42.9
EP21	6910020610	S.BEA BLM15BD102SN1D	T	32.6/34.2
EP23	6910014730	S.BEA MPZ2012S331A-T	T	12.2/8.6
EP24	6910014730	S.BEA MPZ2012S331A-T	B	42.4/92.3
EP25	6910020610	S.BEA BLM15BD102SN1D	B	36.5/87.2
EP26	6910020610	S.BEA BLM15BD102SN1D	B	40.1/95.7
EP28	6910020610	S.BEA BLM15BD102SN1D	T	26.9/110.8
EP29	6910014640	S.BEA MPZ2012S221A-T	T	30.3/110.0
EP30	6910014640	S.BEA MPZ2012S221A-T	B	34.9/10.9
EP31	6910020610	S.BEA BLM15BD102SN1D	T	19.5/111.2

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

M.= Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)
H/V LOCATION=See the BOARD LAYOUTS for details.

SECTION 6**MECHANICAL PARTS**

The underlined parts have been updated from the previous version of the addendum, or the original page.

[CHASSIS UNIT]

REF NO.	PART NO.	DESCRIPTION	QTY.
SP1	2510002150	C36N07M-7	1
W1	<u>8900009641</u>	<u>OPC-963-1</u>	1
EP1	3310005090	GNBA-A13A	[#11] 1
	3310005090	GNBA-A13A	[#12] 1
	3310005090	GNBA-A13A	[#13] 1
	3310005090	GNBA-A13A	[#14] 1
	<u>3310005090</u>	<u>GNBA-A13A</u>	[#16] 1
	<u>3310005090</u>	<u>GNBA-A13A</u>	[#17] 1
EP2	<u>8940000081</u>	<u>3699 KEY P.C.B.-1</u>	1
MP1	8010024120	3699 CHASSIS	1
MP2	8210032970	3699 FRONT PANEL ASSEMBLY	[#11] 1
	8210032970	3699 FRONT PANEL ASSEMBLY	[#12] 1
	8210032970	3699 FRONT PANEL ASSEMBLY	[#13] 1
	8210032970	3699 FRONT PANEL ASSEMBLY	[#14] 1
	8210032970	3699 FRONT PANEL ASSEMBLY	[#16] 1
	<u>8210032970</u>	<u>3699 FRONT PANEL ASSEMBLY</u>	[#17] 1
	8210032960	3699 FRONT PANEL (A) ASSEMBLY	[#21] 1
	8210032960	3699 FRONT PANEL (A) ASSEMBLY	[#22] 1
	8210032960	3699 FRONT PANEL (A) ASSEMBLY	[#23] 1
	8210032960	3699 FRONT PANEL (A) ASSEMBLY	[#24] 1
	<u>8210032960</u>	<u>3699 FRONT PANEL (A) ASSEMBLY</u>	[#27] 1
	<u>8210032960</u>	<u>3699 FRONT PANEL (A) ASSEMBLY</u>	[#31] 1
	<u>8210032960</u>	<u>3699 FRONT PANEL (A) ASSEMBLY</u>	[#33] 1
	<u>8210032960</u>	<u>3699 FRONT PANEL (A) ASSEMBLY</u>	[#34] 1
	<u>8210032960</u>	<u>3699 FRONT PANEL (A) ASSEMBLY</u>	[#36] 1
MP5	8310091150	3699 WINDOW PLATE	1
MP6	8610016330	KNOB N-449	1
MP7	8610016340	KNOB N-450	1
MP10	8930096800	3699 JACK CAP (KOB)	1
MP11	8930096810	3699 DC CAP	1
MP12	8930096820	3699 MAIN SEAL (SHJ)	1
MP13	8930096830	3699 MIC RUBBER (TOP)	1
MP14	8930096840	3699 CONTACT RUBBER (TOP)	1
MP15	8930098760	INSULATION SHEET (OP)	[#11] 1
	8930098760	INSULATION SHEET (OP)	[#12] 1
	8930098760	INSULATION SHEET (OP)	[#13] 1
	8930098760	INSULATION SHEET (OP)	[#14] 1
	<u>8930098760</u>	<u>INSULATION SHEET (OP)</u>	[#16] 1
	<u>8930098760</u>	<u>INSULATION SHEET (OP)</u>	[#17] 1
MP16	8930096850	3699 WINDOW SHEET	1
MP18	8930083690	3322 GPS SPONGE	[#11] 1
	8930083690	3322 GPS SPONGE	[#12] 1
	8930083690	3322 GPS SPONGE	[#13] 1
	8930083690	3322 GPS SPONGE	[#14] 1
	<u>8930083690</u>	<u>3322 GPS SPONGE</u>	[#16] 1
	<u>8930083690</u>	<u>3322 GPS SPONGE</u>	[#17] 1
MP20	8830004260	3776 ANT NUT	1
MP21	8830003900	VR NUT (AF)	1
MP23	8930074350	O-RING (BW) (KSK)	1
MP24	8930088050	O-RING (CS) (TOT)	1
MP25	8930090100	O-RING (CX) (TOT)	1
MP26	8850003421	SEALING WASHER (AA)-1 (TOT)	1
MP27	8930098360	3699 VOL RUBBER (TOP)	1
MP28	8930084870	3384 REAR SHEET	1
MP29	8930088670	3521 VENT SHEET	1
MP30	8930068980	2905 VENT SHEET	1
MP32	8930083700	DOUBLE SIDE TAPE (BM)	[#11] 1
	8930083700	DOUBLE SIDE TAPE (BM)	[#12] 1
	8930083700	DOUBLE SIDE TAPE (BM)	[#13] 1
	8930083700	DOUBLE SIDE TAPE (BM)	[#14] 1
	<u>8930083700</u>	<u>DOUBLE SIDE TAPE (BM)</u>	[#16] 1
	<u>8930083700</u>	<u>DOUBLE SIDE TAPE (BM)</u>	[#17] 1
MP34	8810011050	BT O M2×3 NI-ZC3	11
MP35	8810009181	BT M2×5 NI-ZC3	2
MP36	8810009511	PH BT M2×4 NI-ZC3 (3.6-4.0)	6
MP37	8810011050	BT O M2×3 NI-ZC3	1
MP38	8810010850	PH BT B0 M2×8 SUS SSBC	2
MP39	8810011830	TAPPING SCREW B0 2×4 SUS SSBC	1
MP40	8850003250	PLAIN WASHER (AU)	1
MP41	8950009290	3766 T-KEY (B) (YTP)	[#11] 1
	8950009290	3766 T-KEY (B) (YTP)	[#12] 1
	8950009300	3766 T-KEY (C) (YTP)	[#13] 1
	8950009300	3766 T-KEY (C) (YTP)	[#14] 1
	<u>8950009290</u>	<u>3766 T-KEY (B) (YTP)</u>	[#16] 1
	<u>8950009290</u>	<u>3766 T-KEY (B) (YTP)</u>	[#17] 1
	8950009310	3766 T-KEY (D) (YTP)	[#21] 1
	8950009310	3766 T-KEY (D) (YTP)	[#22] 1
	8950009320	3766 T-KEY (E) (YTP)	[#23] 1
	8950009320	3766 T-KEY (E) (YTP)	[#24] 1
	<u>8950009310</u>	<u>3766 T-KEY (D) (YTP)</u>	[#27] 1
	<u>8950009310</u>	<u>3766 T-KEY (D) (YTP)</u>	[#31] 1
	<u>8950009320</u>	<u>3766 T-KEY (E) (YTP)</u>	[#33] 1
	<u>8950009320</u>	<u>3766 T-KEY (E) (YTP)</u>	[#34] 1
	<u>8950009310</u>	<u>3766 T-KEY (D) (YTP)</u>	[#36] 1
MP42	8930097220	3699 SP HOLDER	1
MP43	8930097830	3699 SPONGE	2

[CHASSIS UNIT]

REF NO.	PART NO.	DESCRIPTION	QTY.
MP44	8930098420	SPONGE (PK)	2
MP45	8930098420	SPONGE (PK)	1
MP46	8930098430	SPONGE (PL)	3
MP47	8930098410	SPONGE (PJ)	1
MP49	8930098420	SPONGE (PK)	2

[LOGIC UNIT] (for #11, #12, #21, #22, and #31)

REF NO.	PART NO.	DESCRIPTION	QTY.
DS5	5030004360	TM128160D1CIWUGND	1
S23*	2260003320	SKRTLAE010	1
S24*	2260003320	SKRTLAE010	1
S25*	2260003320	SKRTLAE010	1
MP1*	8510022120	3699 VCO CASE	[#11] 1
	8510022120	3699 VCO CASE	[#12] 1
MP2	8930096860	3699 WHITE SHEET	1
MP3	8930096870	3699 LCD FILTER	1
MP4	8930094680	DOUBLE SIDE TAPE (CC)	2
MP5	8210032890	3699 REFLECTOR	1
MP6	8510022280	3699 CPU SHIELD	1
MP7	8930097820	3699 LCD HOLDER	1
MP8	8930083700	DOUBLE SIDE TAPE (BM)	1

[MAIN UNIT] (for #11, #12, #21, #22, and #31)

REF NO.	PARTS NO.	DESCRIPTION	QTY.
MC1	7700003060	F6027AP-SBC-462	1
S1	2260003640	SKHLLCA010	1
MP1*	8410003040	3699 PA HEATSINK	1
MP3*	8510022120	3699 VCO CASE	1
MP5	8950009230	3699 CONTACT SPRING	1
MP10	8930097700	3699 JACK SHEET	1
MP11	8510022270	3699 ANT SHIELD	1
MP12	8510022260	3699 PA CASE	1
MP20	8930070581	SHIELD SPONGE (BA)-1	1
MP21	8930085101	SHIELD SPONGE (CW)-1	1
MP22	8930085111	SHIELD SPONGE (CX)-1	1
MP23	8930058510	INSULATION SHEETHC	1
MP24	8930084910	THERMAL SHEET (CB)	2

*: Refer to "BOARD LAYOUTS" for the location.

Screw abbreviations A, B0, BT: Self-tapping PH: Pan head BS: Brass NI: Nickel ZU: Zinc SUS: Stainless

The underlined parts have been updated from the previous version of the addendum, or the original page.

[LOGIC-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION	QTY.
DS5	5030004360	TM128160D1CIWUGND	1
S23*	2260003320	SKRTLAE010	1
S24*	2260003320	SKRTLAE010	1
S25*	2260003320	SKRTLAE010	1
MP1*	8510022120	3699 VCO CASE	[#13] 1
	8510022120	3699 VCO CASE	[#14] 1
	8510022120	3699 VCO CASE	[#16] 1
	8510022120	3699 VCO CASE	[#17] 1
MP2	8930096860	3699 WHITE SHEET	1
MP3	8930096870	3699 LCD FILTER	1
MP4	8930094680	DOUBLE SIDE TAPE (CC)	2
MP5	8210032890	3699 REFLECTOR	1
MP6	8510022280	3699 CPU SHIELD	1
MP7	8930097820	3699 LCD HOLDER	1
MP8	8930083700	DOUBLE SIDE TAPE (BM)	1


[MAIN-1 UNIT]**(for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36)**

REF NO.	PART NO.	DESCRIPTION	QTY.
MC1	7700003060	F6027AP-SBC-462	1
S1	2260003640	SKHLLCA010	1
MP1*	8410003040	3699 PA HEATSINK	1
MP3*	8510022120	3699 VCO CASE	1
MP5	8950009230	3699 CONTACT SPRING	1
MP10	8930097700	3699 JACK SHEET	1
MP11	8510022270	3699 ANT SHIELD	1
MP12	8510022260	3699 PA CASE	1
MP20	8930070581	SHIELD SPONGE (BA)-1	1
MP21	8930072061	SHIELD SPONGE (BU)-1	1
MP22	8930085111	SHIELD SPONGE (CX)-1	1
MP23	8930058510	INSULATION SHEETHC	1

[ACCESSORIES]

REF NO.	PART NO.	DESCRIPTION	QTY.
W1	—	OPC-2379†	[#11] 1
	—	OPC-2379†	[#13] 1
	—	OPC-2379†	[#14] 1
	—	OPC-2379†	[#16] 1
	—	OPC-2379†	[#21] 1
	—	OPC-2379†	[#23] 1
	—	OPC-2379†	[#24] 1
	—	OPC-2379†	[#31] 1
	—	OPC-2379†	[#34] 1
	—	OPC-2379†	[#36] 1
EP1	3310002130	FA-B02AR (125)	1
EP2	6910028080	BLACK NYLON STRAP	1
EP3	—	BP-288†	[#11] 1
	—	BP-288†	[#12] 1
	—	BP-288†	[#13] 1
	—	BP-288†	[#14] 1
	—	BP-288†	[#16] 1
	—	BP-288†	[#17] 1
	—	BP-288†	[#21] 1
	—	BP-288†	[#22] 1
	—	BP-288†	[#23] 1
	—	BP-288†	[#24] 1
	—	BP-288†	[#27] 1
	—	BP-288†	[#33] 1
	—	BP-288†	[#34] 1
EP5	—	BC-123SA†	[#11] 1
	—	BC-123SE†	[#12] 1
	—	BC-123SE†	[#13] 1
	—	BC-123SV†	[#14] 1
	—	BC-123SA†	[#16] 1
	—	BC-123SE†	[#17] 1
	—	BC-123SA†	[#21] 1
	—	BC-123SE†	[#22] 1
	—	BC-123SE†	[#23] 1
	—	BC-123SV†	[#24] 1
	—	BC-123SE†	[#27] 1
	—	BC-123SE†	[#33] 1
	—	BC-123SV†	[#34] 1
EP7	—	BC-224†	[#11] 1
	—	BC-224†	[#12] 1
	—	BC-224†	[#13] 1
	—	BC-224†	[#14] 1
	—	BC-224†	[#16] 1
	—	BC-224†	[#17] 1
	—	BC-224†	[#21] 1
	—	BC-224†	[#22] 1
	—	BC-224†	[#23] 1
	—	BC-224†	[#24] 1
	—	BC-224†	[#27] 1
	—	BC-224†	[#33] 1
	—	BC-224†	[#34] 1
EP8	—	BP-289†	[#11] 1
	—	BP-289†	[#13] 1
	—	BP-289†	[#14] 1
	—	BP-289†	[#16] 1
	—	BP-289†	[#21] 1
	—	BP-289†	[#23] 1
	—	BP-289†	[#24] 1
	—	BP-289†	[#31] 1
	—	BP-289†	[#36] 1
MP1	—	MB-133†	1


† Sold as an option.

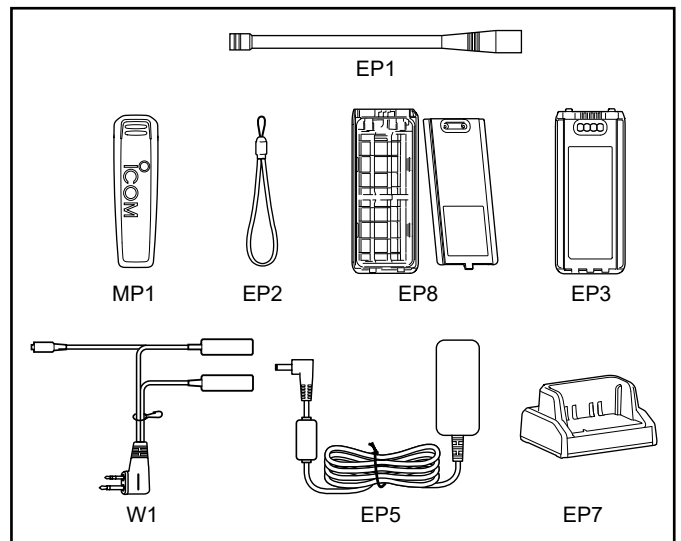

*: Refer to "BOARD LAYOUTS" for the location.

Screw abbreviations A, B0, BT: Self-tapping PH: Pan head BS: Brass NI: Nickel ZU: Zinc SUS: Stainless

The underlined parts have been updated from the previous version of the addendum, or the original page.

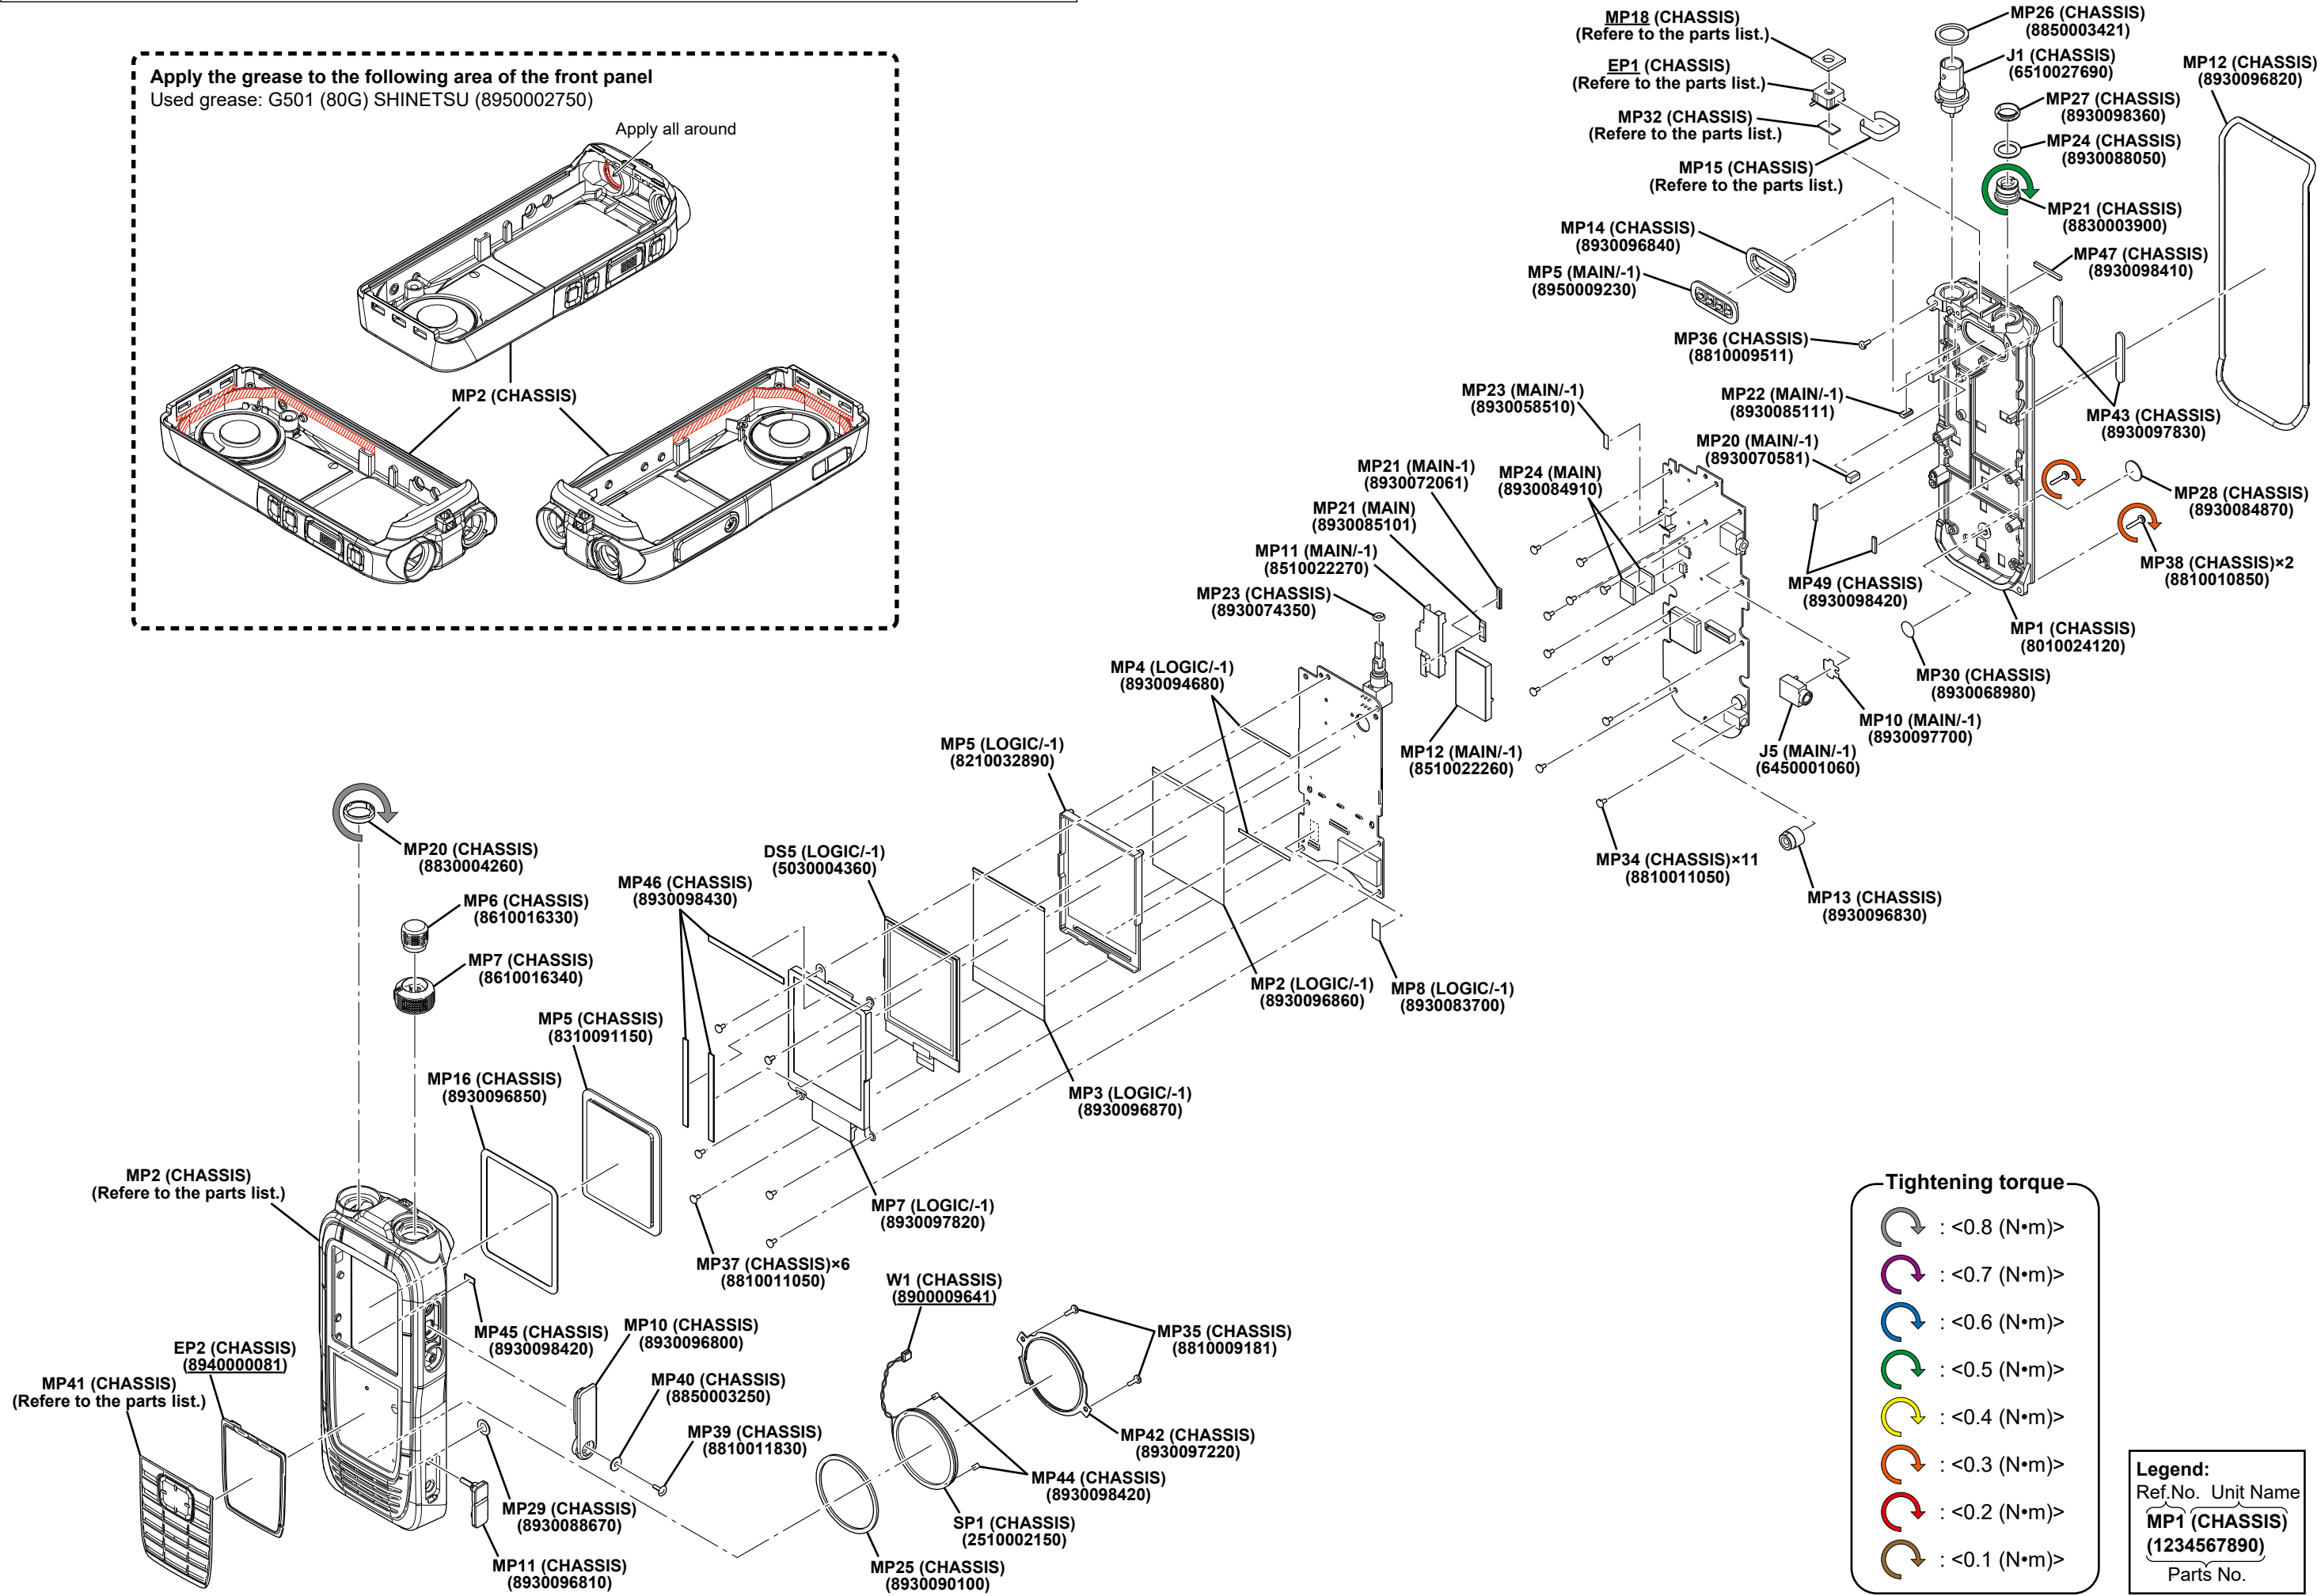


BOARD LAYOUTS

The actual configuration of the PC board can be seen by viewing the top and bottom BOARD LAYOUT pages together.

The underlined parts have been updated from the previous version of the addendum, or the original page.

• LOGIC UNIT (B-8813 for #11, #12, #21, #22, and #31: TOP VIEW)

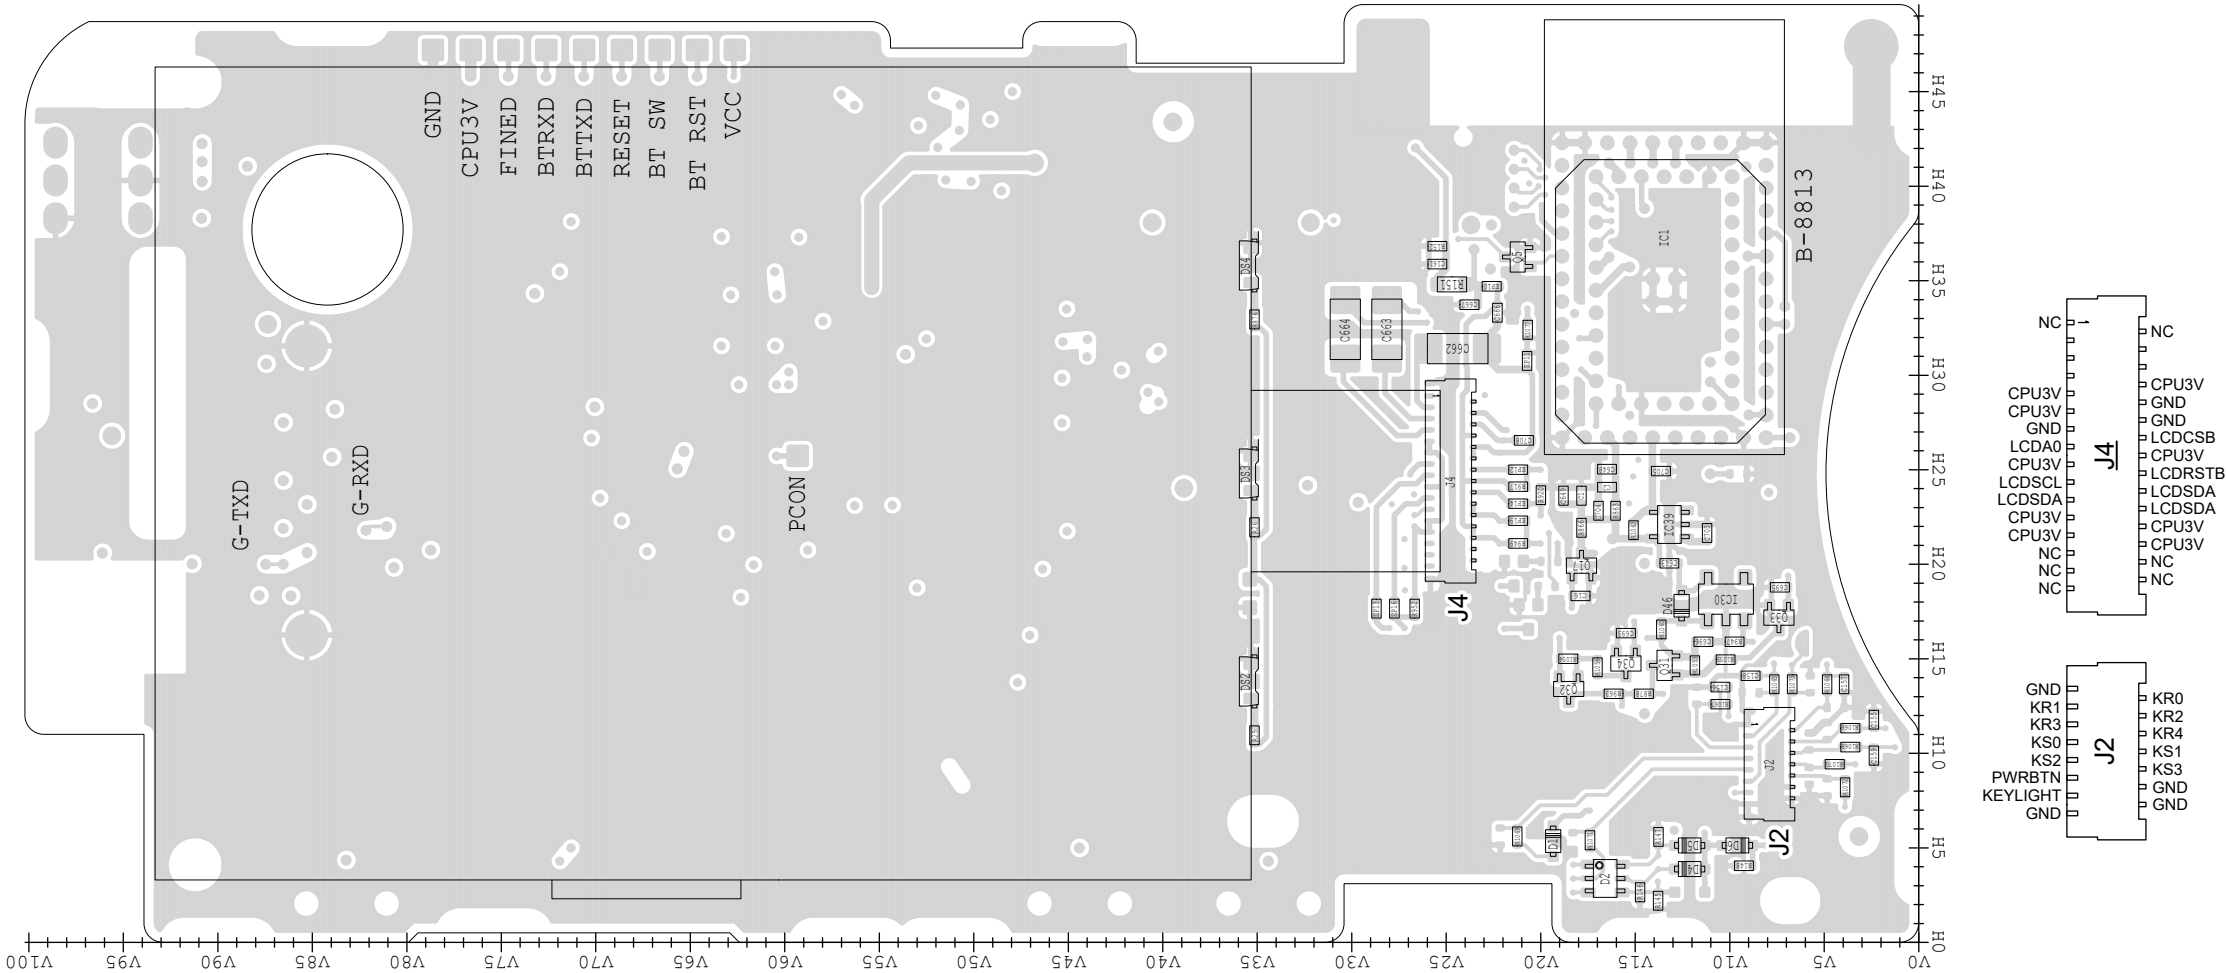


See the PARTS LIST H/V location on the PARTS LIST for location details.

The actual configuration of the PC board can be seen by viewing the top and bottom BOARD LAYOUT pages together.

The underlined parts have been updated from the previous version of the addendum, or the original page.

• LOGIC UNIT (B-8813 for #11, #12, #21, #22, and #31: BOTTOM VIEW)

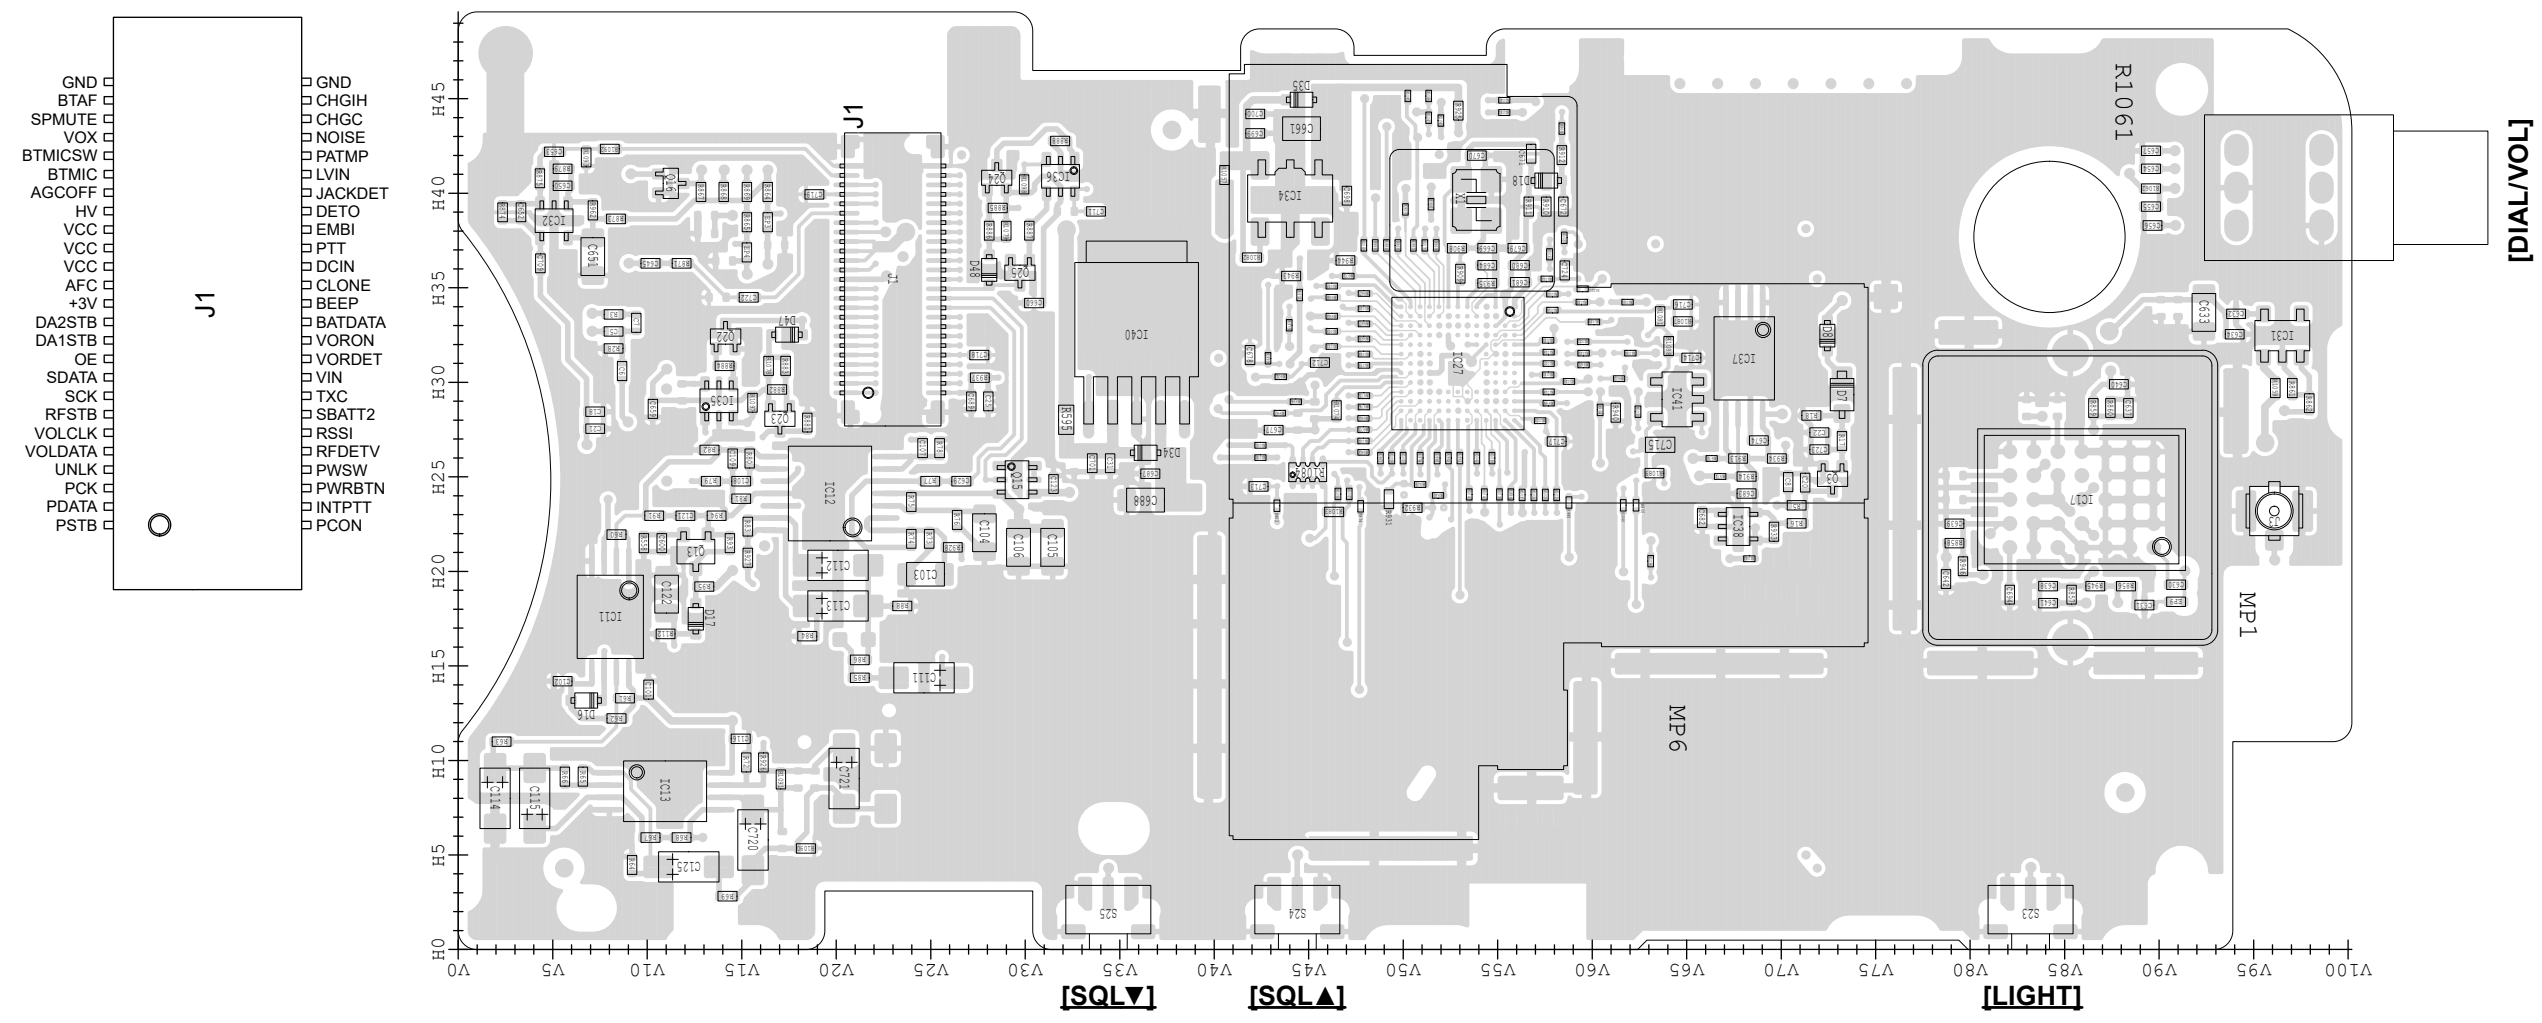


See the PARTS LIST H/V location on the PARTS LIST for location details.

The underlined parts have been updated from the previous version of the addendum, or the original page.

The actual configuration of the PC board can be seen by viewing the top and bottom BOARD LAYOUT pages together.

The underlined parts have been updated from the previous version of the addendum, or the original page.

• MAIN UNIT (B-8812 for #11, #12, #21, #22, and #31: BOTTOM VIEW)

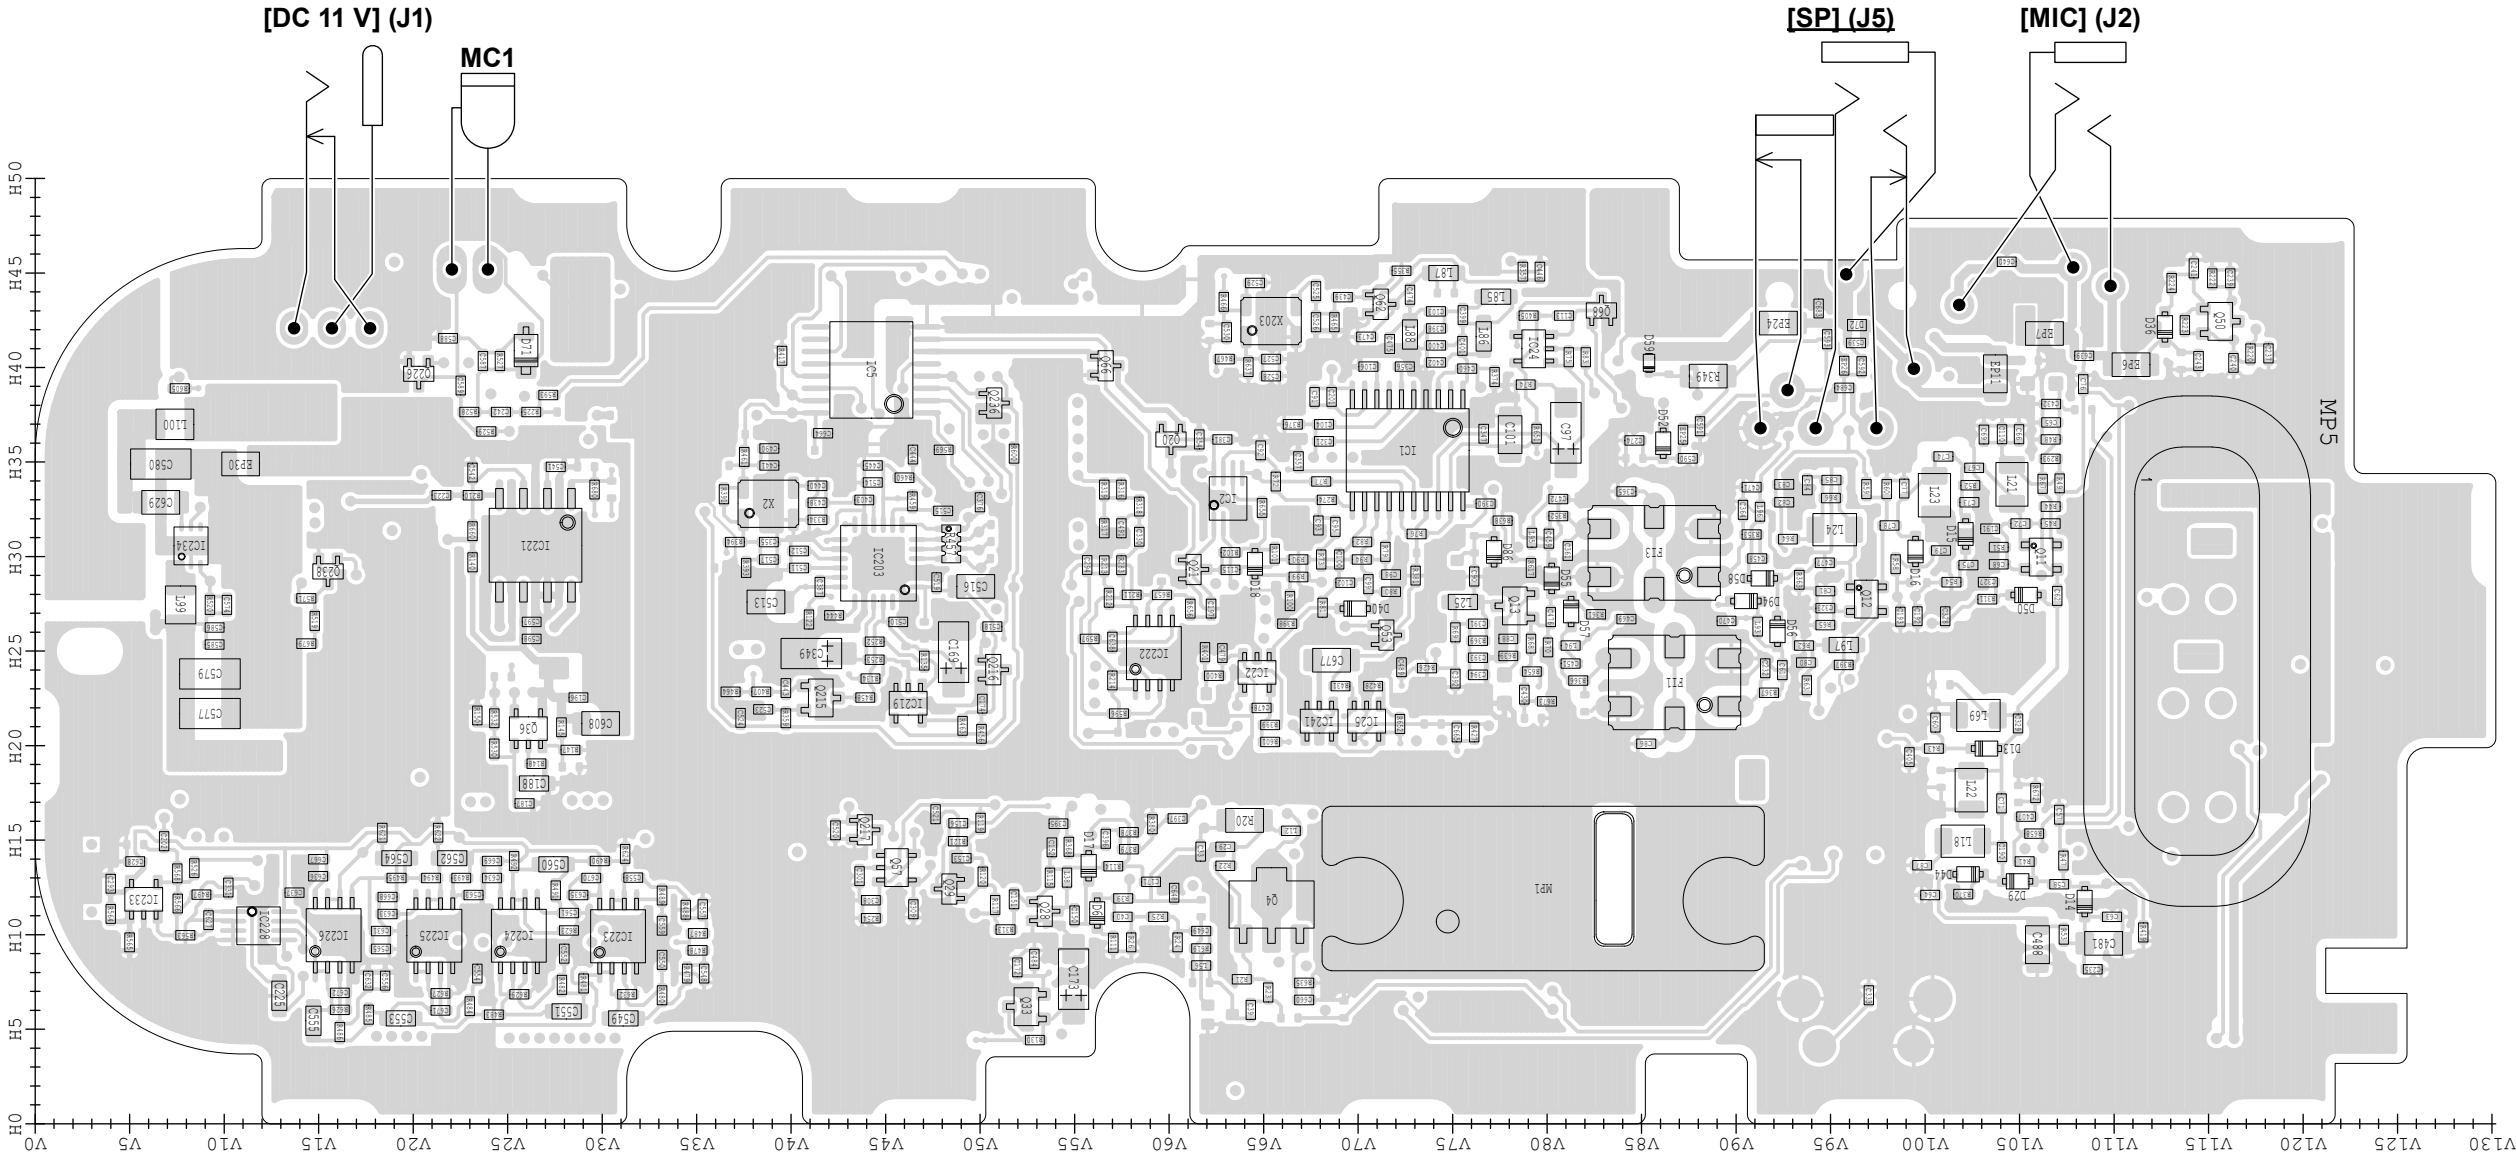


See the PARTS LIST H/V location on the PARTS LIST for location details.

The actual configuration of the PC board can be seen by viewing the top and bottom BOARD LAYOUT pages together.

The underlined parts have been updated from the previous version of the addendum, or the original page.

• LOGIC-1 UNIT (B-8848 for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36: TOP VIEW)

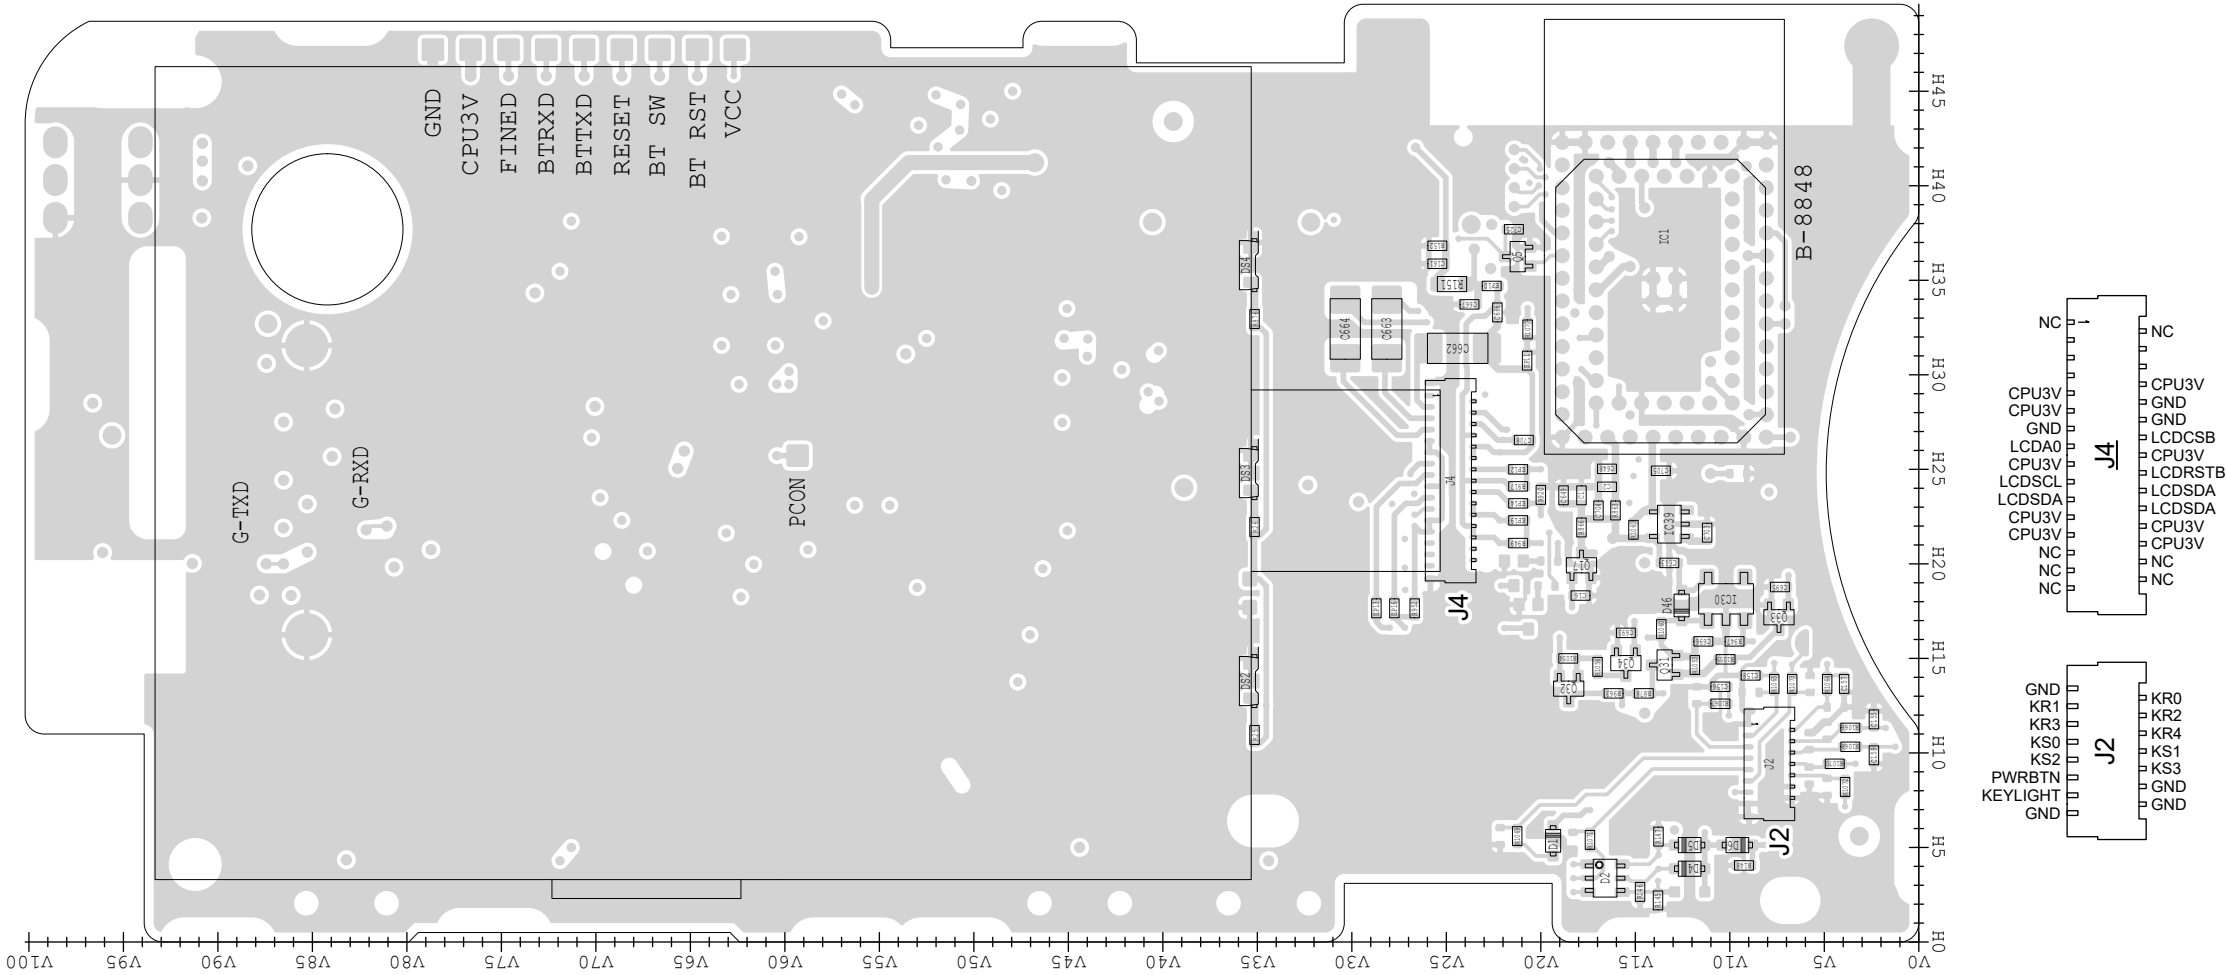


The serial numbers of transceivers used this PCB.

<u>VERSION NUMBER</u>	<u>SERIAL NUMBERS</u>
<u>#13</u>	<u>13002001 and above</u>
<u>#14</u>	<u>14001051 and above</u>
<u>#16</u>	<u>Future production</u> <u>(Plan: 16001001 and above)</u>
<u>#17</u>	<u>Future production</u> <u>(Plan: 17001001 and above)</u>
<u>#23</u>	<u>23001901and above</u>
<u>#24</u>	<u>Future production</u> <u>(Plan: 24001001 and above)</u>
<u>#27</u>	<u>Future production</u> <u>(Plan: 27001001 and above)</u>
<u>#33</u>	<u>33001001 and above</u>
<u>#34</u>	<u>Future production</u> <u>(Plan: 34001001 and above)</u>
<u>#36</u>	<u>Future production</u> <u>(Plan: 36001001 and above)</u>

The actual configuration of the PC board can be seen by viewing the top and bottom BOARD LAYOUT pages together.

The underlined parts have been updated from the previous version of the addendum, or the original page.


• LOGIC-1 UNIT (B-8848 for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36: BOTTOM VIEW)

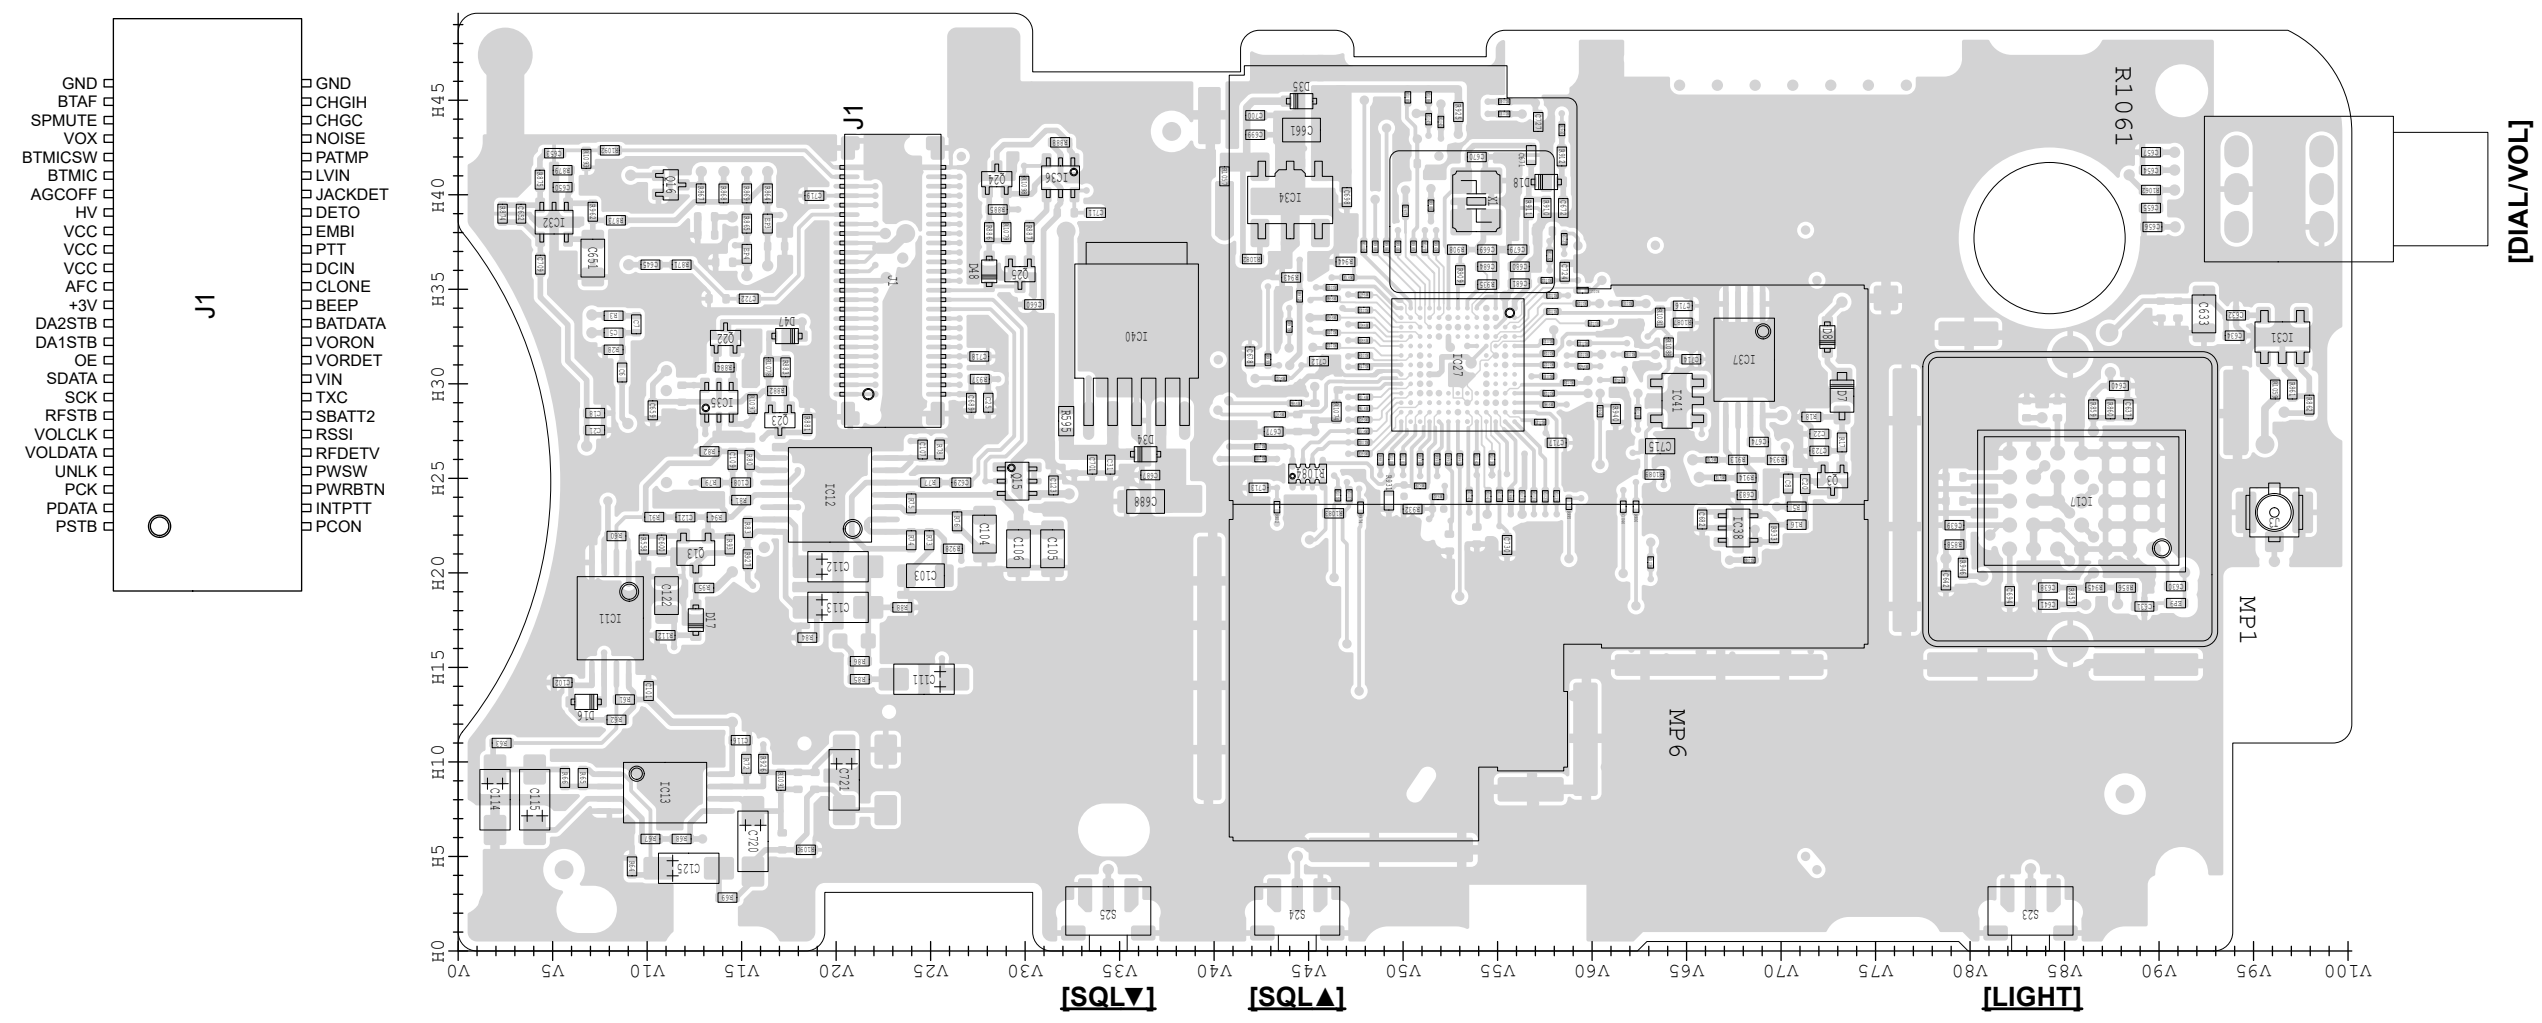

The actual configuration of the PC board can be seen by viewing the top and bottom BOARD LAYOUT pages together.

The underlined parts have been updated from the previous version of the addendum, or the original page.

• MAIN-1 UNIT (B-8847 for #13, #14, #16, #17, #23, #24, #27, #33, #34, and #36: TOP VIEW)

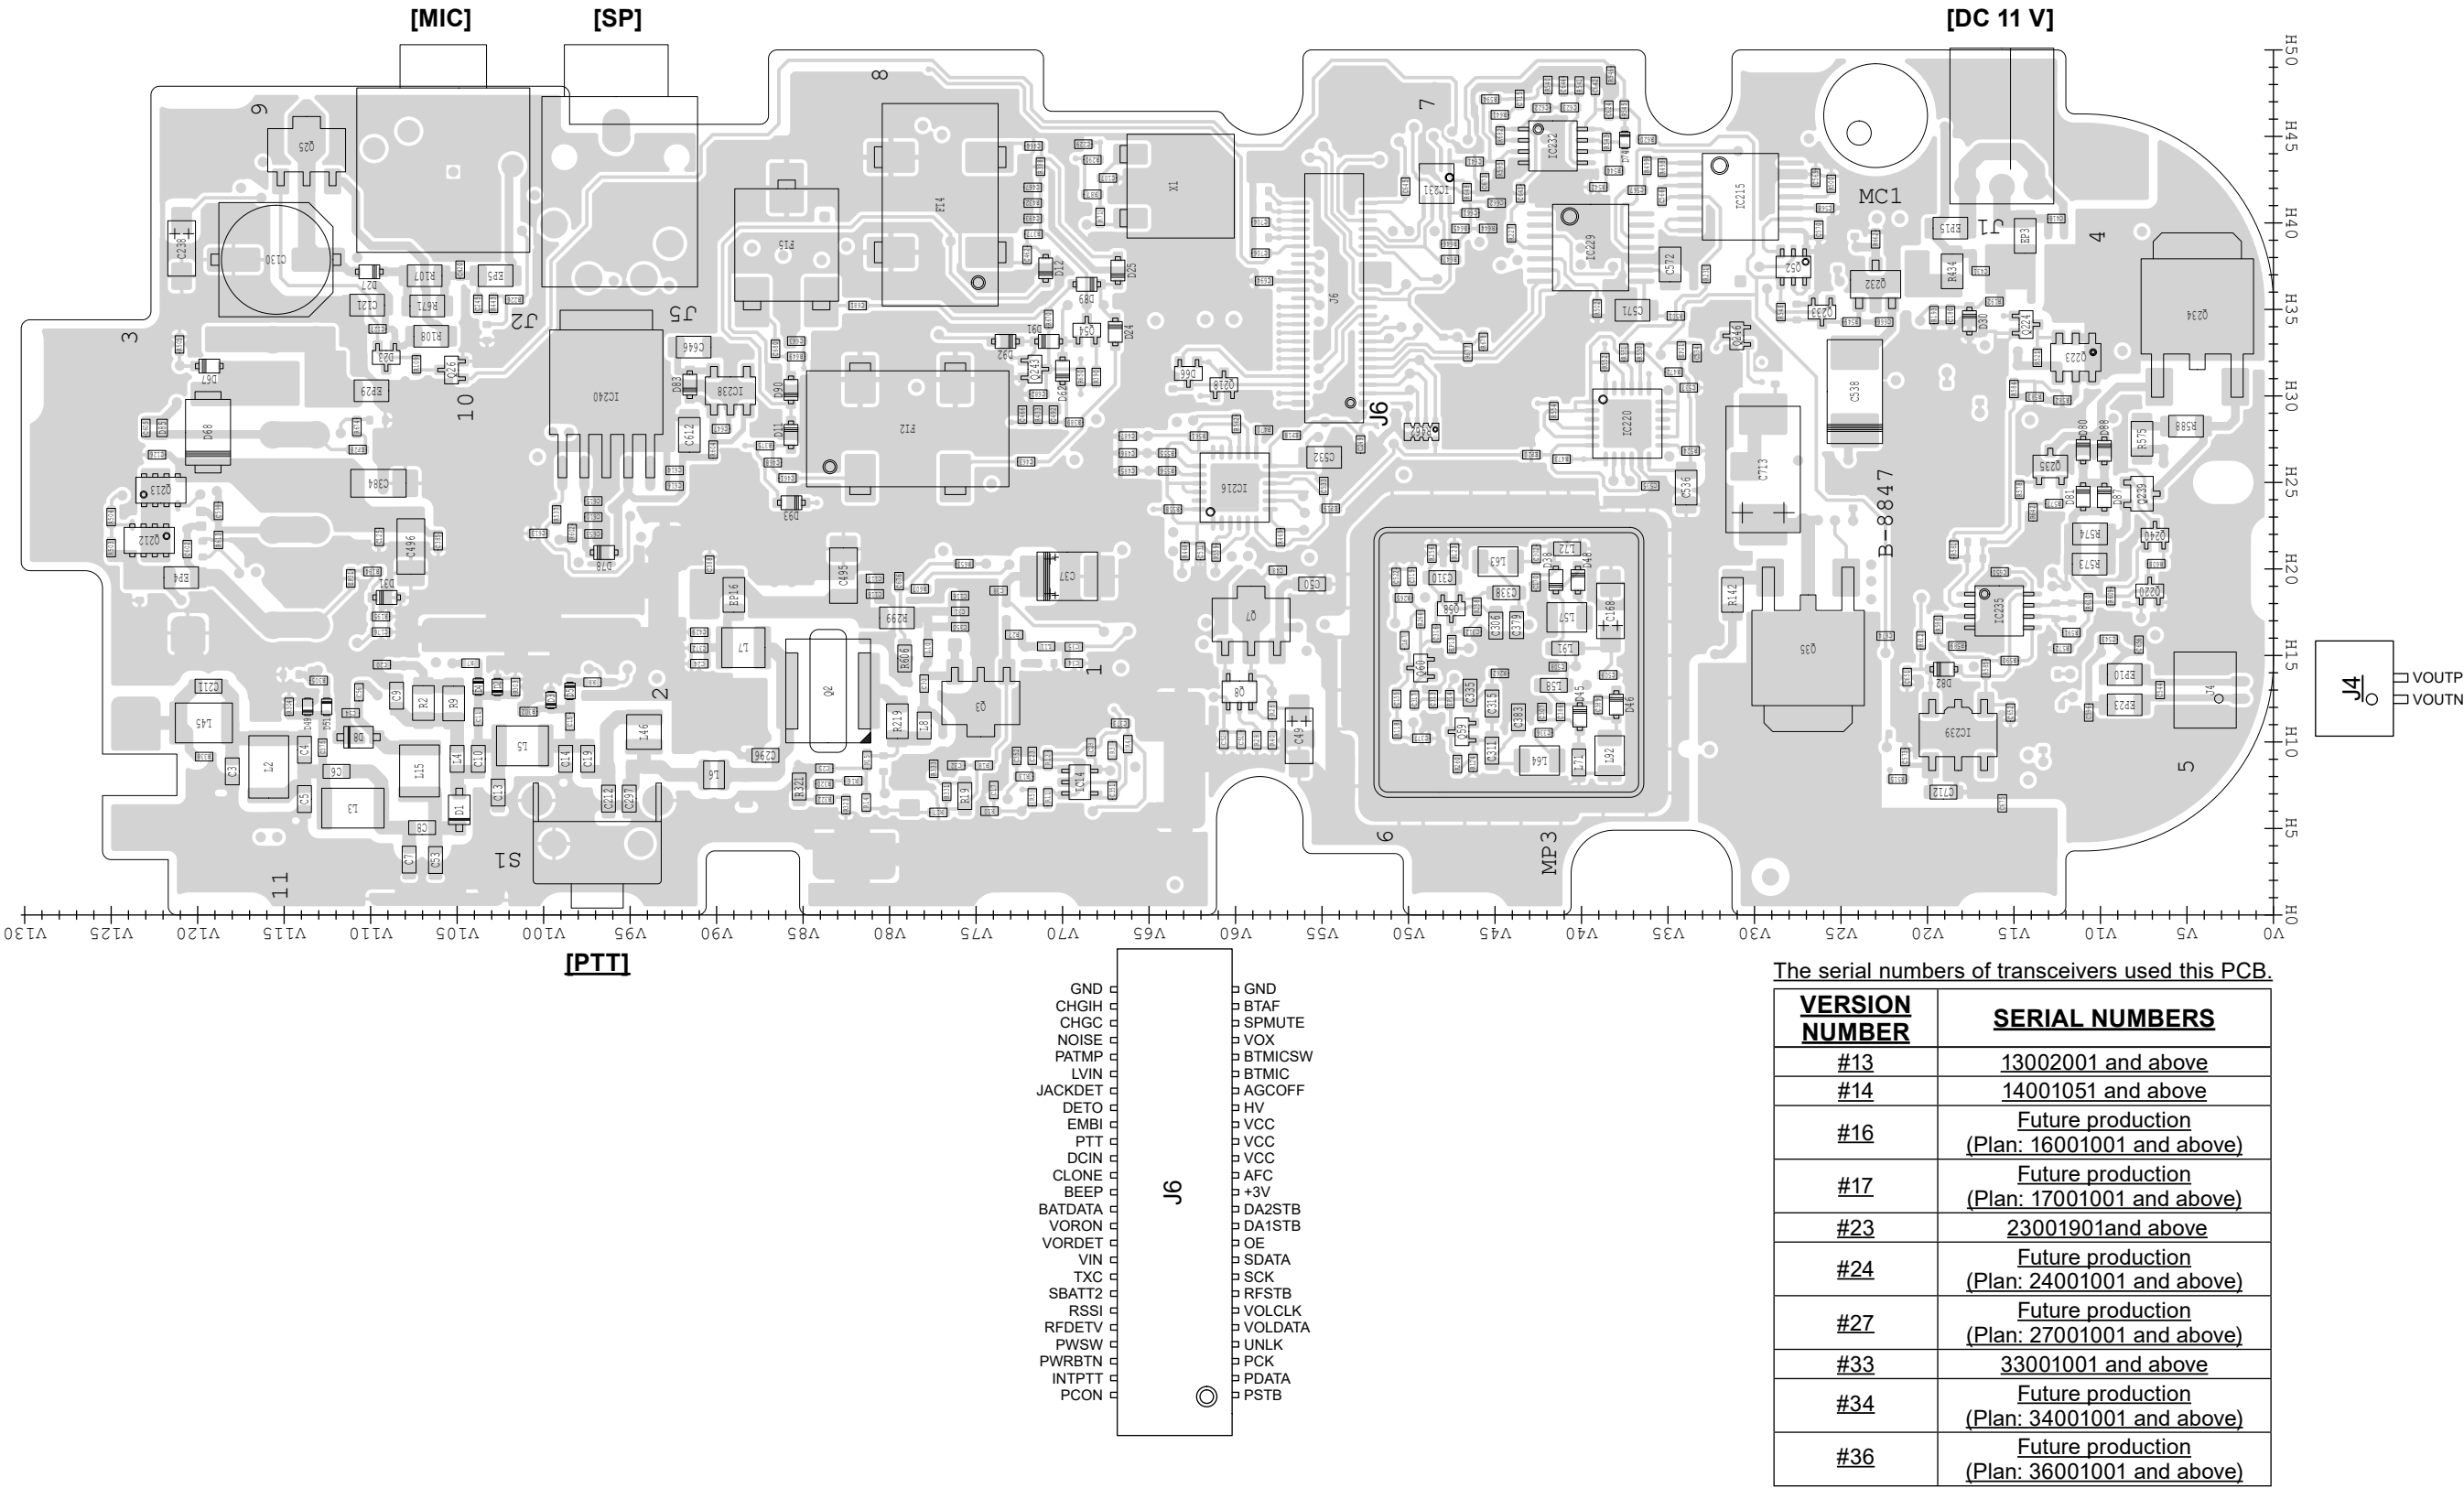


See the PARTS LIST H/V location on the PARTS LIST for location details.

The underlined parts have been updated from the previous version of the addendum, or the original page.

[DC 11 V] (J1)

MC1

[MIC] (J2)

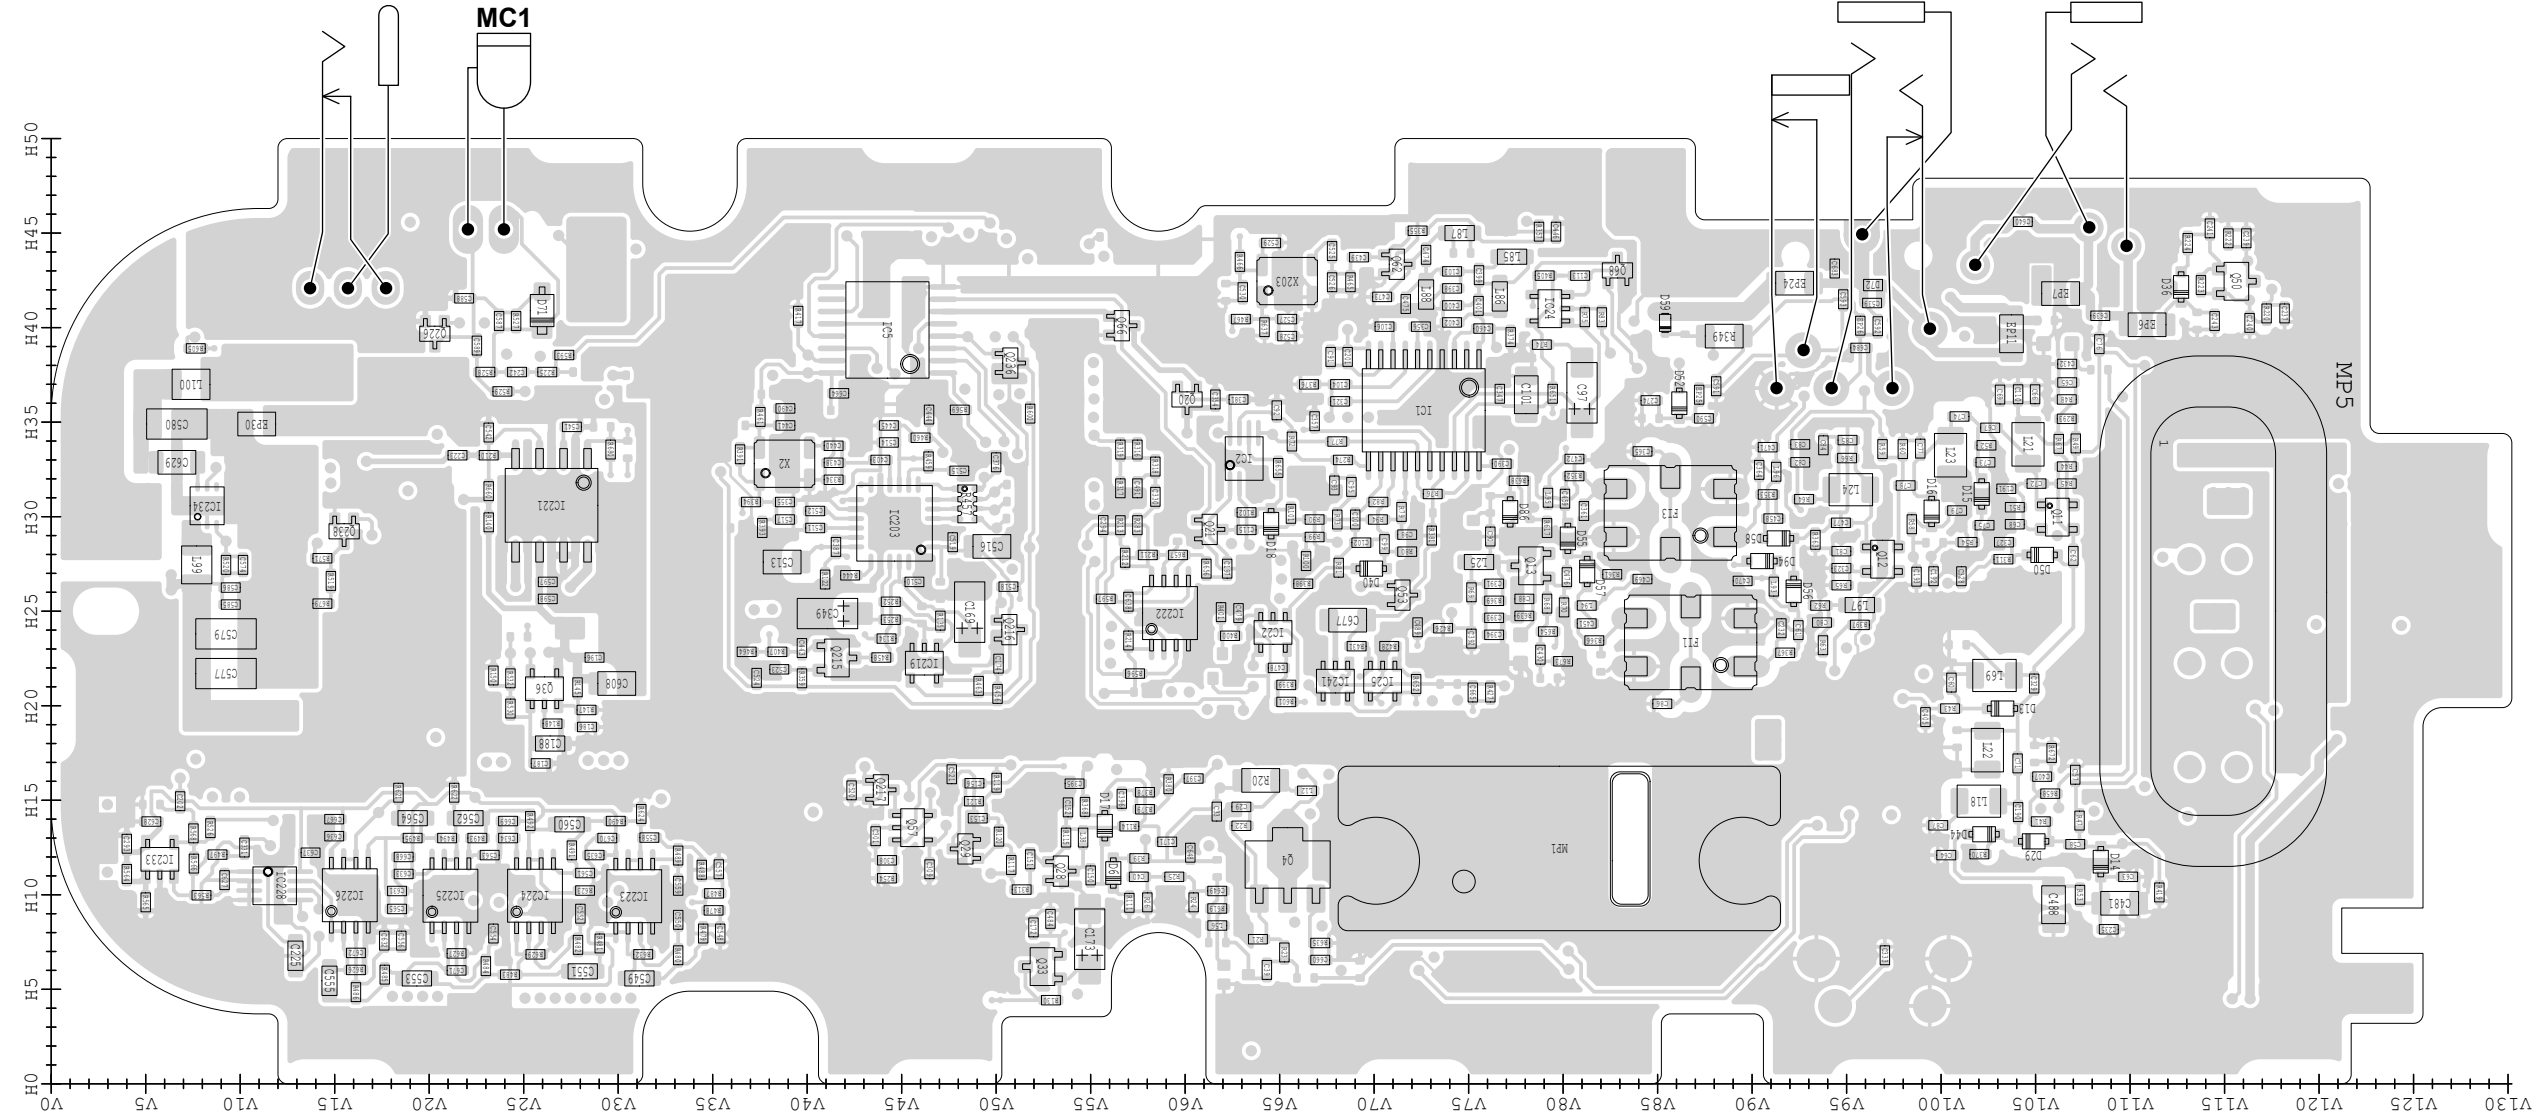

7-8a



SERVICE MANUAL

VHF AIR BAND TRANSCEIVERS

IC-A25N

IC-A25C

IC-A25NE

IC-A25CE

S-15419XZ-C1
December 2017

Icom Inc.

INTRODUCTION

This service manual describes the latest technical information for the IC-A25N, IC-A25NE, IC-A25C, and IC-A25CE VHF air band transceivers at the time of publication.

MODEL	VERSION	VERSION NUMBER	VOR/GPS	Bluetooth	WX
IC-A25N	USA-01	#11	✓	✓	✓
	EXP-01	#12	✓	✓	✓
IC-A25NE	EUR-01	#13	✓	✓	—
	AUS-01	#14	✓	✓	—
IC-A25C	USA-01	#21	—	—	✓
	EXP-01	#22	—	—	✓
IC-A25CE	EUR-01	#23	—	—	—
	AUS-01	#24	—	—	—

To upgrade quality, any electrical or mechanical parts and internal circuits are subject to change without notice or obligation.

SERVICE CAUTION

NEVER connect the transceiver to a DC power supply that uses more than the specified voltage. This will ruin the transceiver.

DO NOT reverse the polarities of the power supply when directly applying power to the transceiver/circuit.

DO NOT apply an RF signal of more than 20 dBm (100 mW) to the antenna connector. This could damage the transceiver's front-end.



▲ IC-A25N

▲ IC-A25C

ORDERING PARTS

Be sure to include the following four points when ordering replacement parts:

1. 10-digit Icom part number
2. Component name
3. Equipment model name and unit name
4. Quantity required

<ORDER EXAMPLE>

1110006490	LMV321IDCKR	IC-A25 MAIN UNIT	5 pieces
8610016330	N-449	IC-A25 CHASSIS	1 piece

REPAIR NOTES

1. Make sure that the problem is internal before disassembling the transceiver.
2. **DO NOT** open the transceiver until the transceiver is disconnected from its power source.
3. **DO NOT** short any circuits or electronic parts.
4. **DO NOT** keep power ON for a long time when the transceiver is defective.
5. **NEVER** directly transmit power into any test equipment such as Standard Signal Generator or a Sweep Generator, otherwise the RF power may damage them.
6. **ALWAYS** connect a 30 dB to 40 dB attenuator between the transceiver and such test equipment.
7. **READ** the instructions of the test equipment thoroughly before connecting it to the transceiver.

TABLE OF CONTENTS

SECTION 1	SPECIFICATIONS	
SECTION 2	INSIDE VIEWS	
SECTION 3	DISASSEMBLY INSTRUCTION	
SECTION 4	ADJUSTMENT PROCEDURES	
	4-1 PREPARATION	4-1
	4-2 FREQUENCY AND TRANSMIT ADJUSTMENTS	4-3
	4-3 RECEIVE ADJUSTMENTS	4-4
SECTION 5	PARTS LIST	
SECTION 6	MECHANICAL PARTS	
SECTION 7	BOARD LAYOUT	
SECTION 8	BLOCK DIAGRAM	
SECTION 9	VOLTAGE DIAGRAM	

DISTRIBUTOR ADDRESS


SECTION 1

SPECIFICATIONS

			IC-A25N	IC-A25C	IC-A25NE	IC-A25CE
GENERAL	Frequency coverage (Unit: MHz)	TX	118.000~136.99166			
		RX	108.000~ 136.99166	118.000~ 136.99166	108.000~ 136.99166	118.000~ 136.99166
		WX	161.650~163.275		—	
	Channel spacing		25 kHz/8.33 kHz			
	Type of emission		6K00A3E/5K60A3E, 16K0G3E (WX)		6K80A3E/5K00A3E	
	Number of memory channels		300 channels			
	Usable temperature range		-10°C~+60°C, +14°F~+140°F		-20°C~+55°C	
	Frequency stability		±0.4 kHz		±1 ppm	
	Power supply		7.2 V DC standard or 11.0 V DC at the external DC jack			
	Current drain (at 7.2 V DC)* Transmit Receive (Maximum AF output) (Standby)		Less than 1.8 A			
			Less than 500 mA			
			90 mA typical			
	Antenna connector		BNC (50 Ω)			
	Dimensions (projections not included)		58.9 (W)×148.4 (H)×31.8 (D) mm, 2.3(W)×5.8 (H)×1.3 (D) inches			
Weight (approximately)		200 g, 7.1 oz (Without battery pack, battery case, and antenna)				
TRANSMITTER	Modulation system		Low level modulation			
	Output power (at 7.2 V DC)	PEP	6.0 W			
		Carrier Wave	1.8 W			
	Modulation limiting		70~100%		—	
	Modulation depth		—		85%	
	Spurious emissions (AM: fc±62.5 kHz excluded, AM-N: fc±20.825 kHz excluded)		More than 46 dB		—	
	Harmonics spurious emissions (except ±1 MHz of the operating frequency)		—		Less than -36 dBm	
	Audio harmonic distortion		Less than 10% (at 60% Mod.)		Less than 10% (at 85% Mod. +3dB)	
	Ham and noise ratio		More than 35dB		—	
Microphone impedance		150 Ω				
RECEIVER	Receive system		Double Conversion Superheterodyne			
	Intermediate frequencies	1st IF	46.35 MHz			
		2nd IF	450 kHz			
	Sensitivity	COM	Less than 0 dBμ (at 6 dB S/N)		Less than 0 dBμ (at 12 dB SINAD: with CCITT)	
		VOR	Less than 0 dBμ (at 6 dB S/N)	—	Less than 0 dBμ (at 6 dB S/N)	—
		WX	Less than -8 dBμ (at 12 dB SINAD)		—	
		Audio output power		More than 350 mW with 60% Mod. at 10% distortion into an 8 Ω load		
	Adjacent Channel rejection		—		More than 60 dB	
	Ham and noise		More than 35 dB at 30% Mod.		More than 40 dB at 90% Mod.	
	Spurious response rejection ratio	AM	More than 60 dB		More than 70 dB	
		FM (WX)	More than 30 dB		—	
Squelch Sensitivity (threshold)	COM/VOR	Less than 0 dBμ				
	WX	Less than -5 dBu		—		


*When GPS, Bluetooth, and backlight are OFF.

• LOGIC/LOGIC-1 UNIT (TOP VIEW)

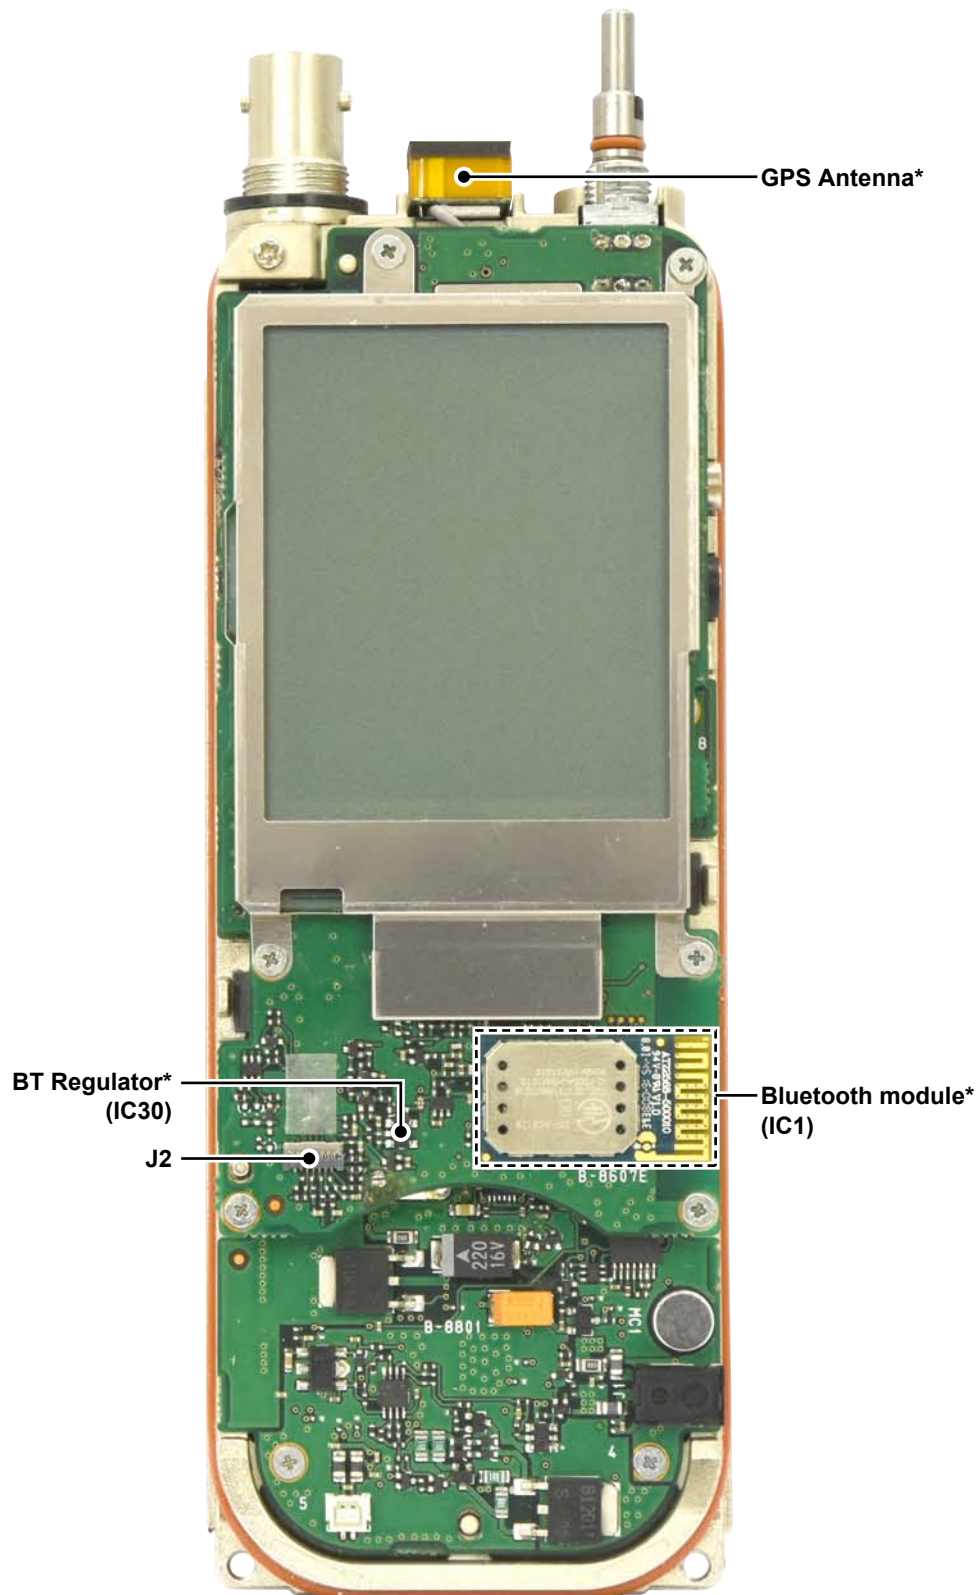


*Only for IC-A25N

• LOGIC/LOGIC-1 UNIT (BOTTOM VIEW)

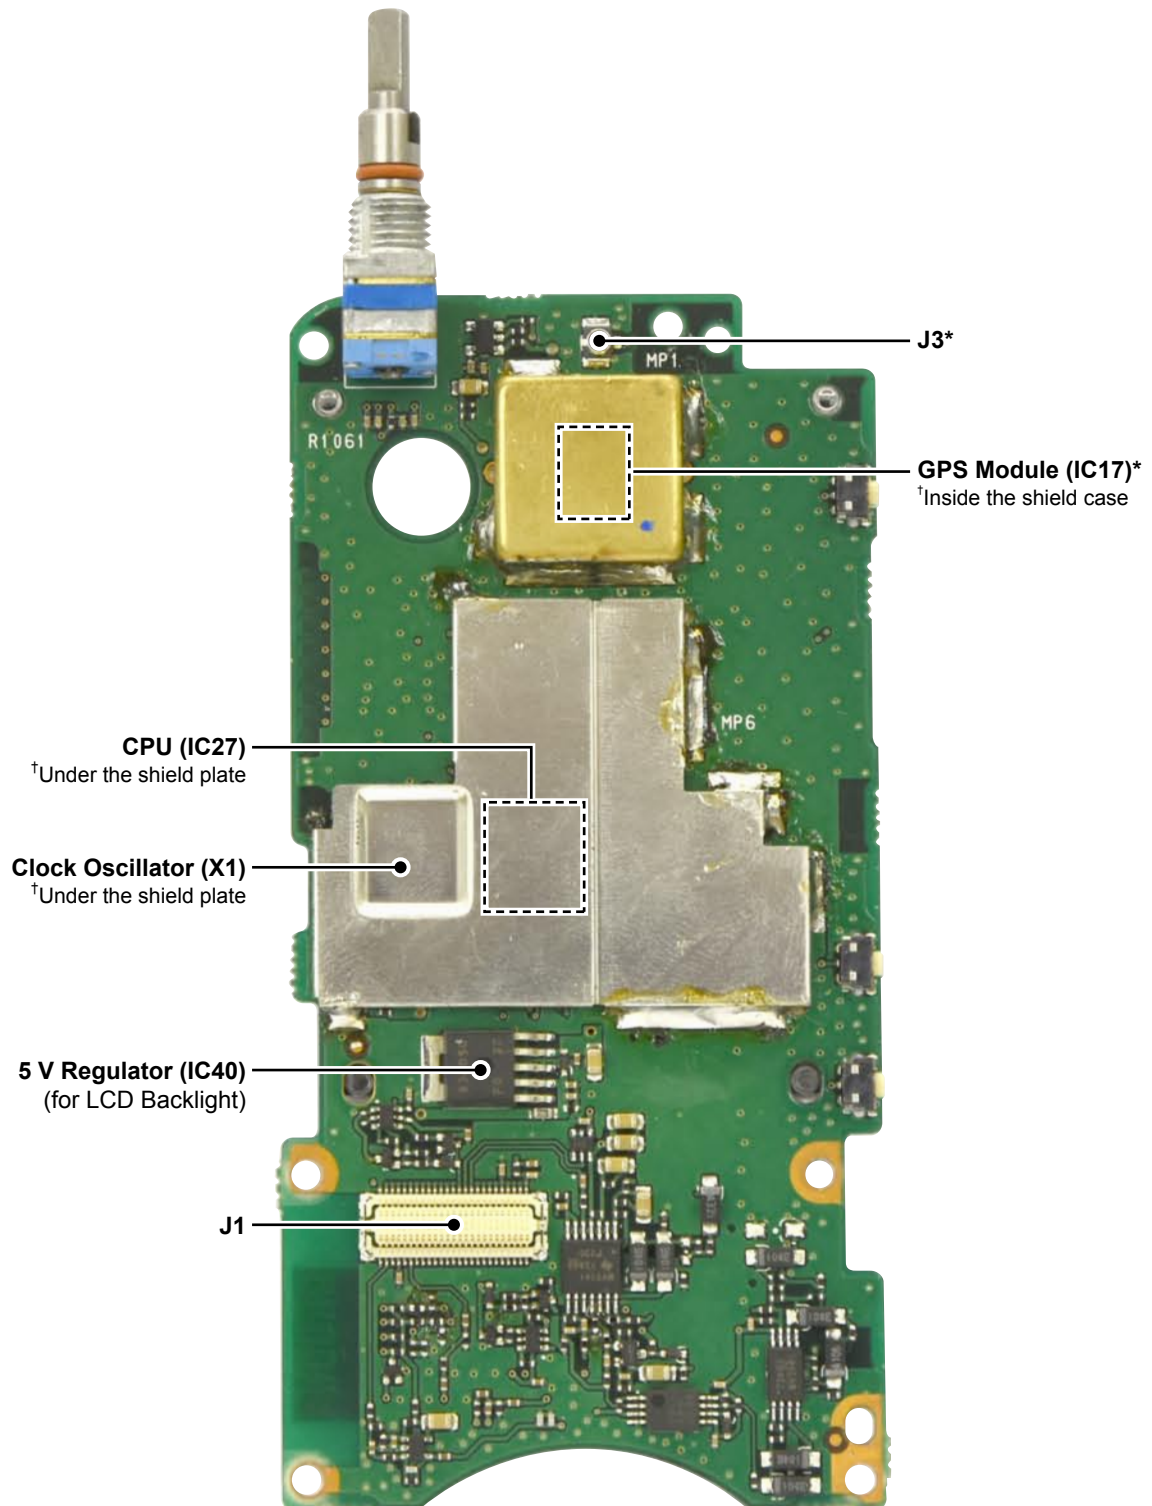


*Only for IC-A25N

• MAIN/MAIN-1 UNIT (TOP VIEW)

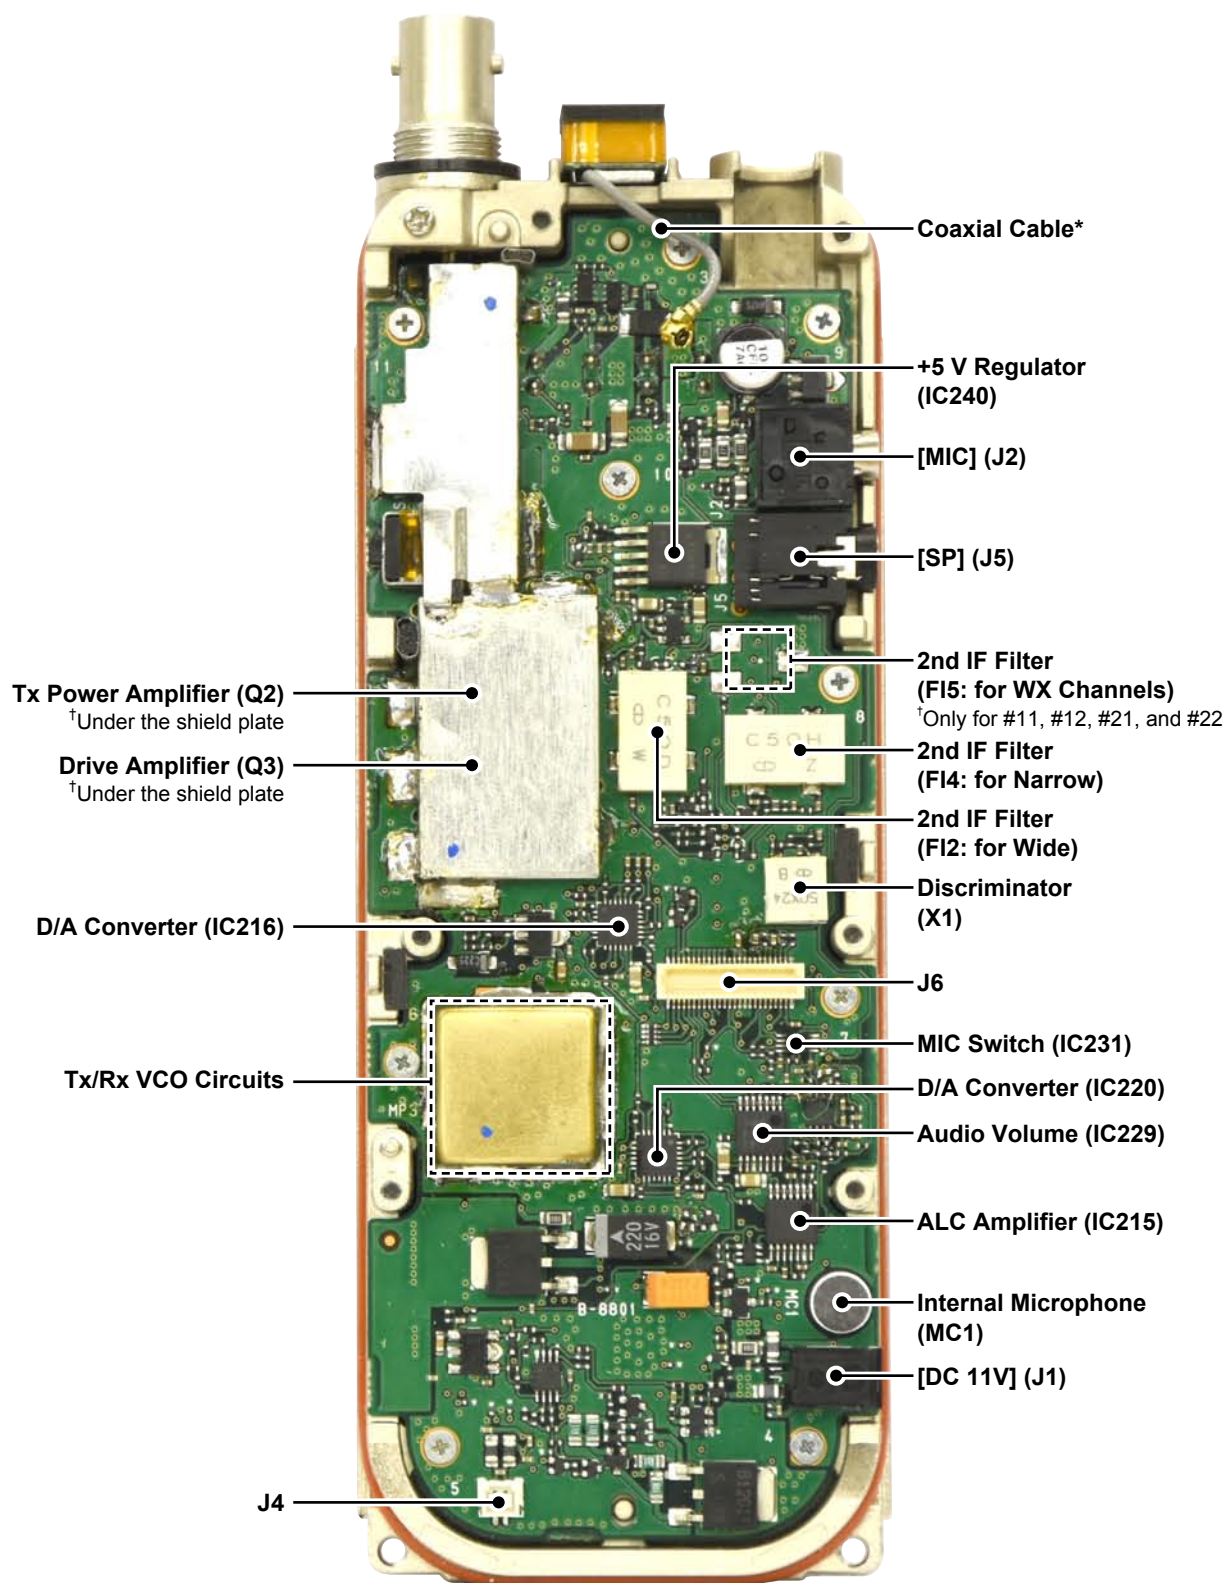

*Only for IC-A25N

• MAIN-A UNIT (BOTTOM VIEW)

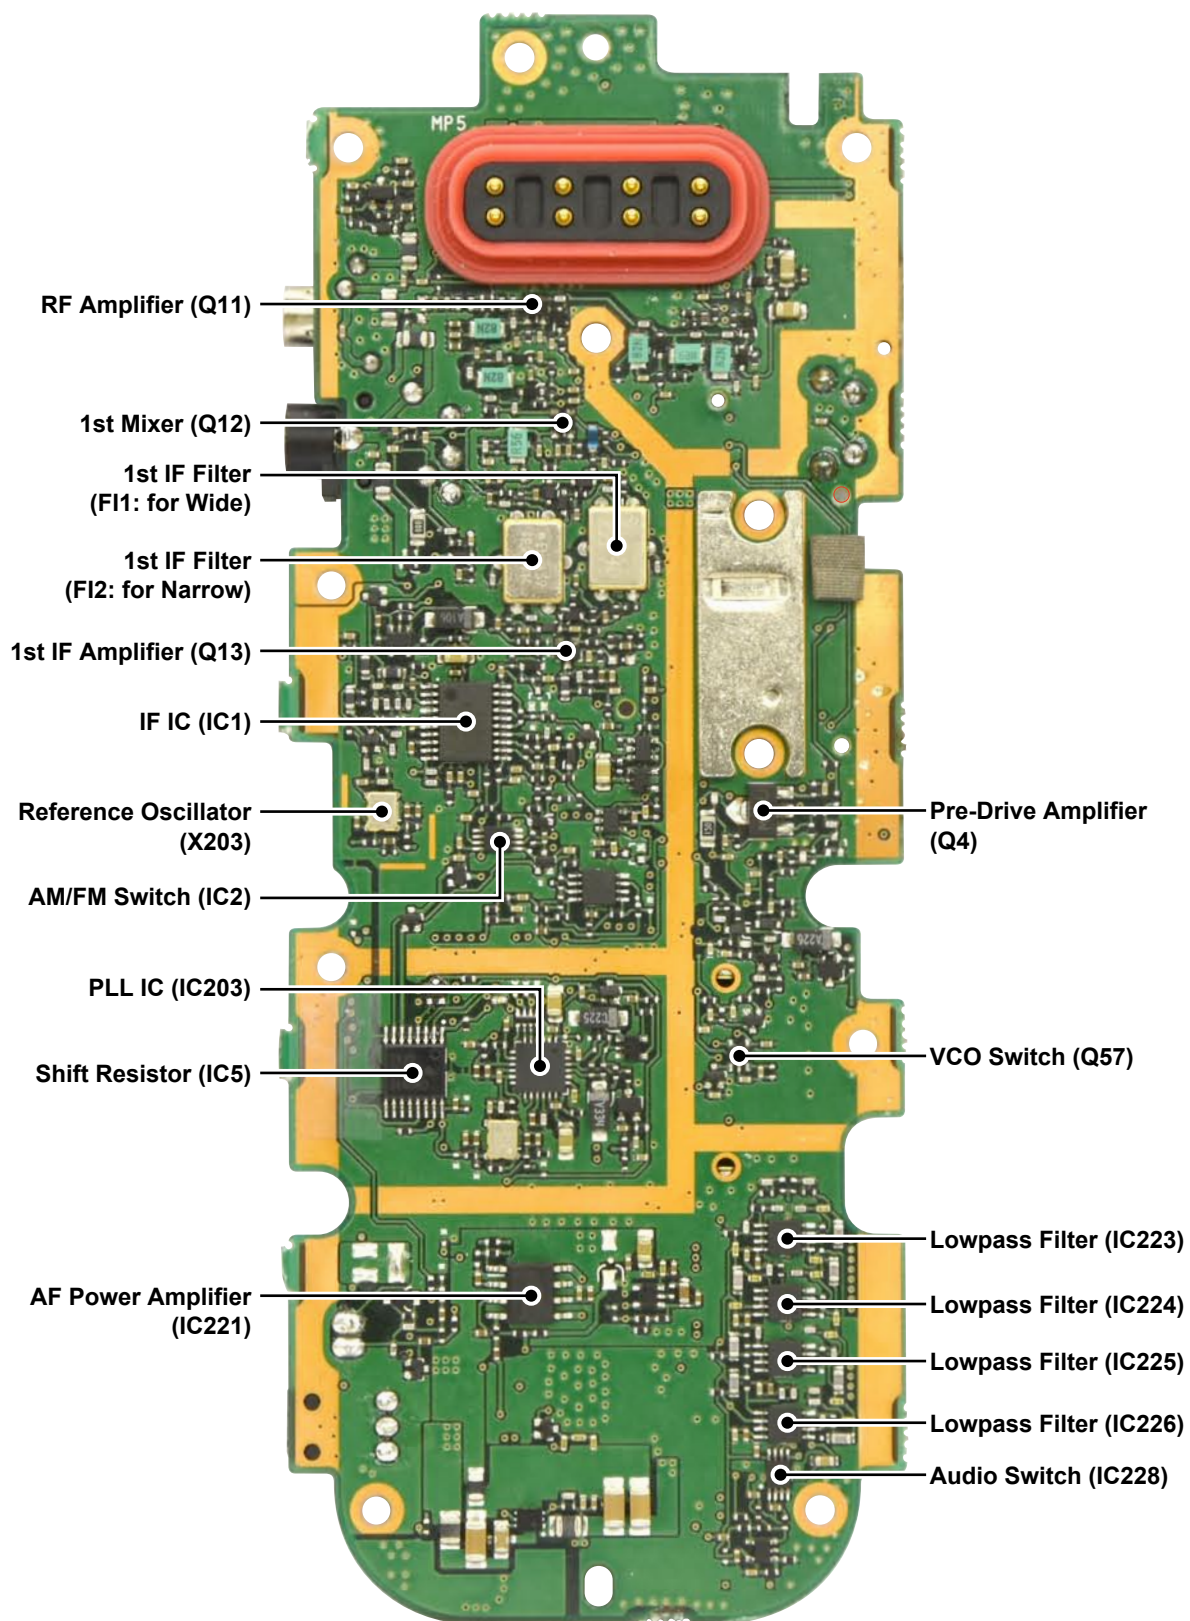


SECTION 3


DISASSEMBLY INSTRUCTION

1. REMOVING THE LOGIC/-1 UNIT


- 1) Remove 2 dial knobs and antenna nut from the front panel.

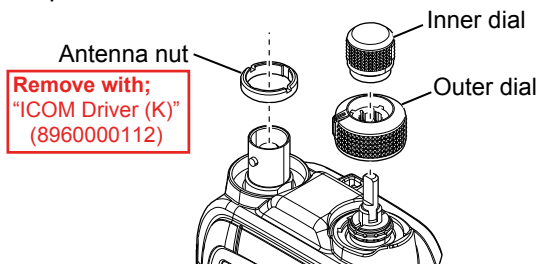


- 2) Remove 2 screws from the bottom of chassis.

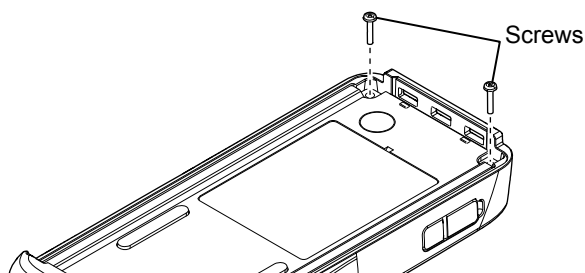

- 3) Separate the chassis from the front panel, then disconnect flat and speaker cables.

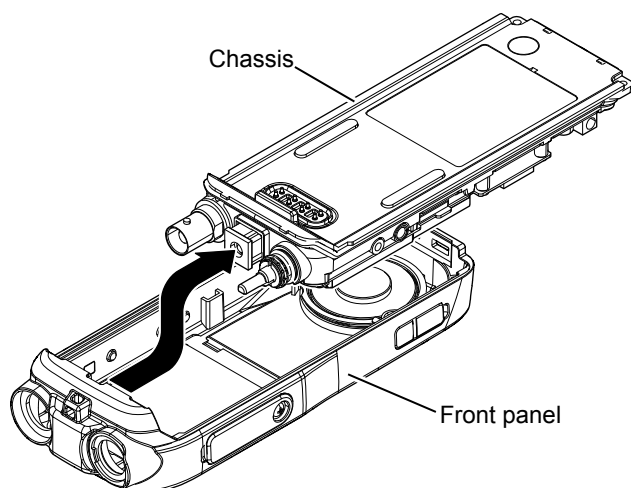


BE CAREFUL about the flat and speaker cables when separating the chassis from the front panel.

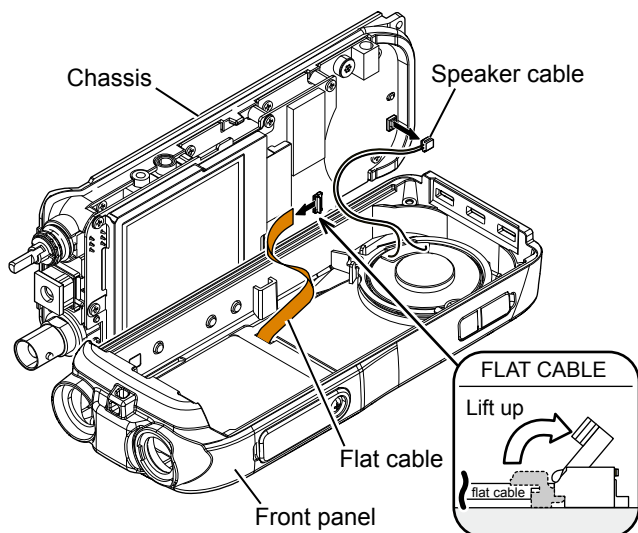


For easy separation of the CHASSIS

Use a suction lifter to lift the bottom of the CHASSIS up.

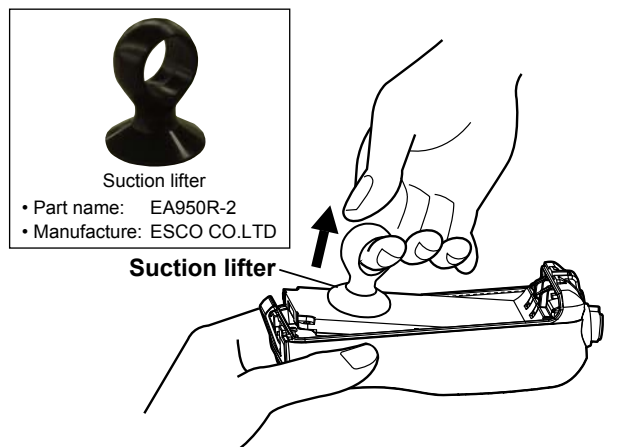


- 4) Remove dial nut and 6 screws from the LOGIC/-1 UNIT.

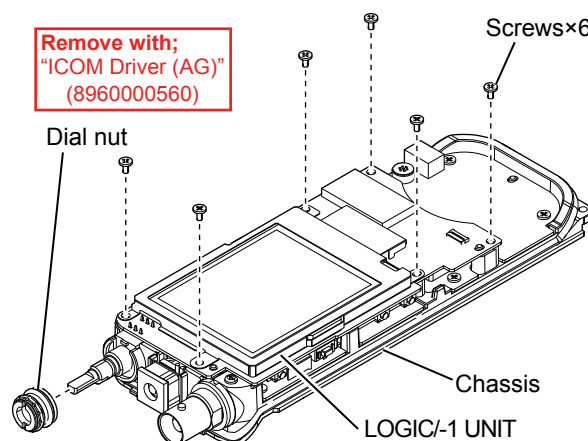


- 5) Separate the LOGIC/-1 UNIT from the MAIN/-1 UNIT, and then disconnect the coaxial cable from the LOGIC-A UNIT.

BE CAREFUL about the coaxial cable when separating the LOGIC/-1 UNIT from the MAIN/-1 UNIT.

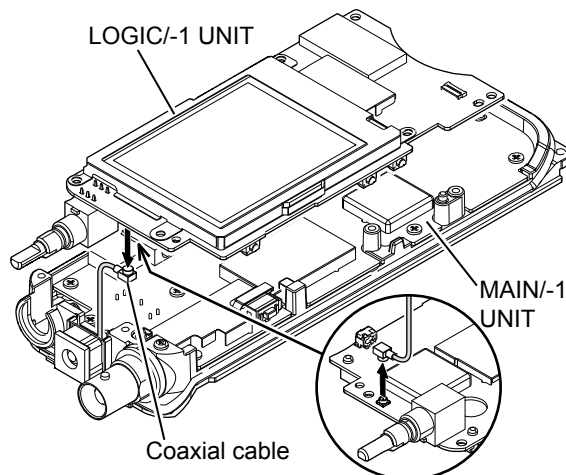


2. REMOVING THE MAIN/-1 UNIT


- 1) Unsolder 11 points on the shield plate, and then remove it.

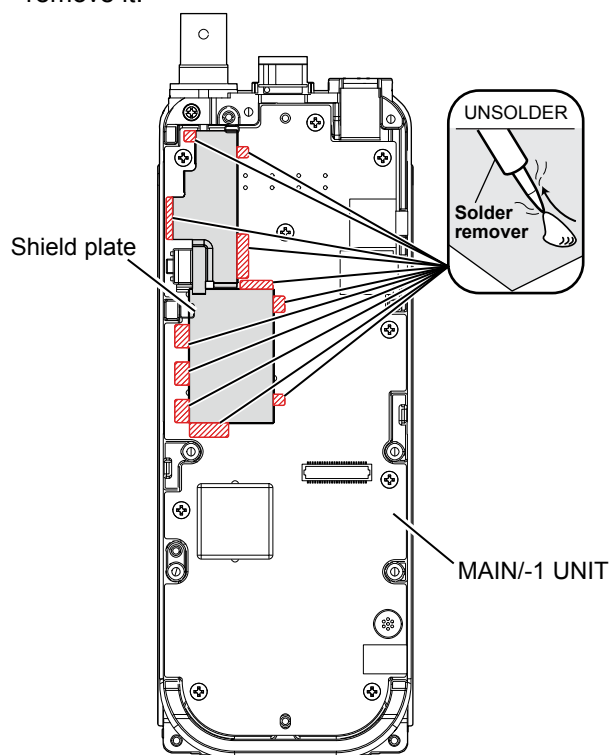

- 2) Unsolder a point at the antenna connector.

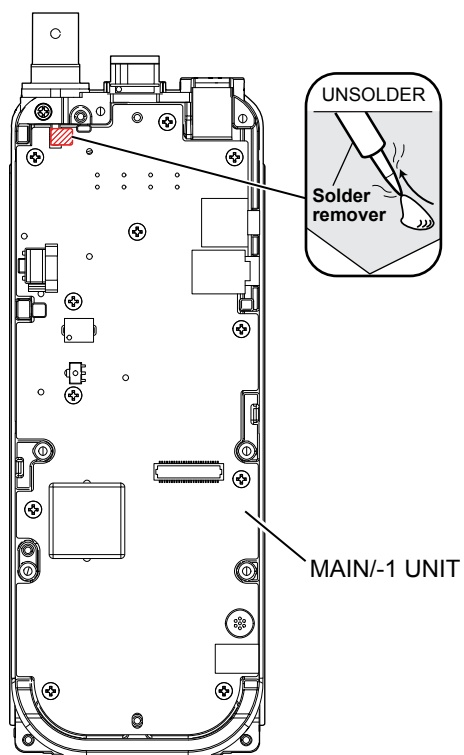

- 3) Remove 11 screws from the MAIN/-1 UNIT, and then remove it from the chassis.

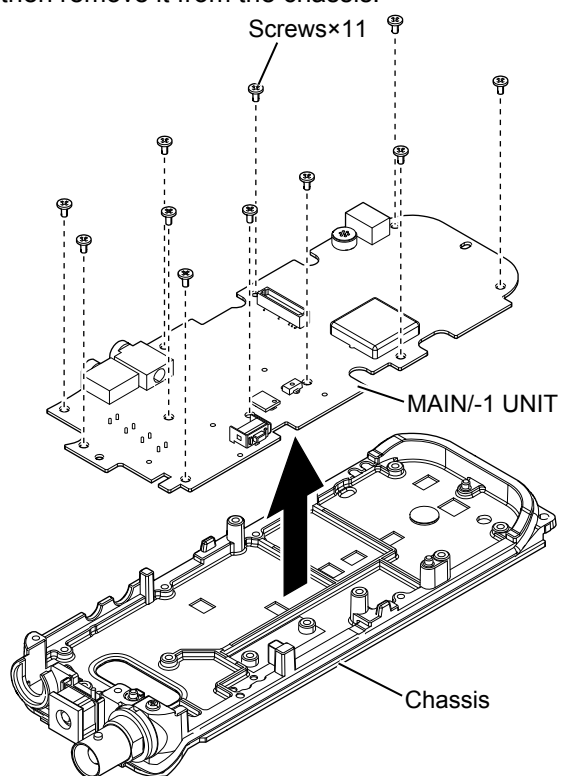


SECTION 4 ADJUSTMENT PROCEDURE

4-1 PREPARATION


■ REQUIRED EQUIPMENT

EQUIPMENT	SPECIFICATIONS	EQUIPMENT	SPECIFICATIONS
DC power supply	Output voltage: 11 V Current capacity: 5 A or more	Programming software	CS-A25 Programming software (Revision 1.0 or later)
Battery pack	BP-288 (Fully charged)	Programming cable	OPC-478UC
RF power meter (50 Ω terminated)	Measuring range: 0.1~5 W Frequency range: 100~300 MHz SWR: Less than 1.2 : 1	Standard signal generator (SSG)	Frequency range: 0.1~300 MHz Output level: -20 dB μ to 90 dB μ (-127 to -17 dBm)
Frequency counter	Range: 0.1~300 MHz Accuracy: ± 1 ppm or better Input level: Less than 1 mW	Audio generator (AG)	Frequency range: 300~3000 Hz Output level: 1~500 mV
Modulation Analyzer	Frequency range: 30~300 MHz Measuring range: 0~100%	JIG cable	See the illustration below.
Attenuator	Attenuation: 30~40 dB Capacity: More than 10 W	AC millivoltmeter	Measuring range: 10 mV to 10 V
		VOR tester	Frequency range: 108~118 MHz Output level: -20 dB μ to 90 dB μ (-127 to -17 dBm)

■ JIG CABLE

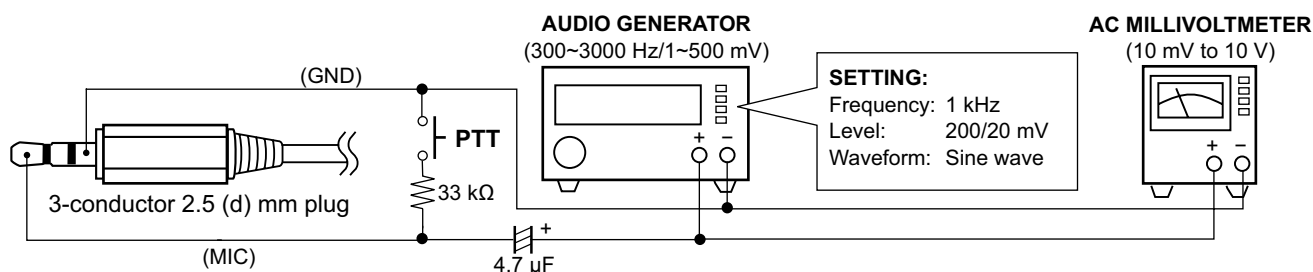


■ CONNECTIONS

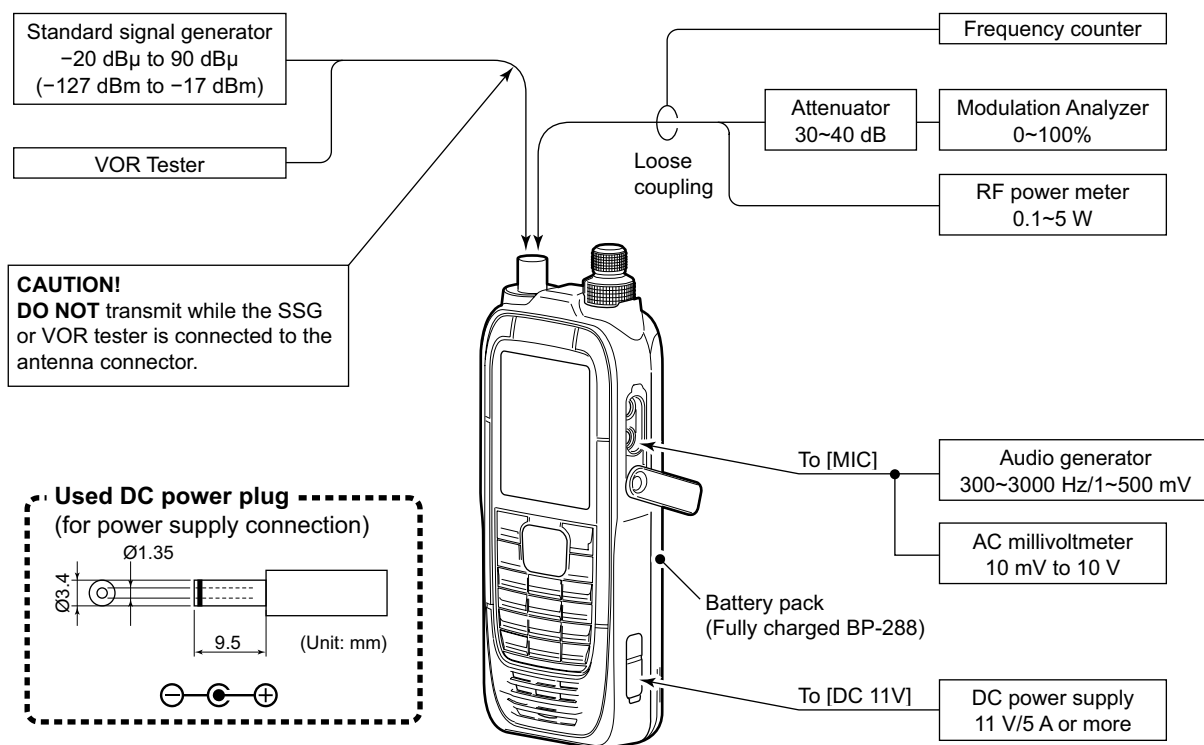


■ ENTERING THE ADJUSTMENT MODE


1. Right click the CS-A25's icon on the desktop and select the "Properties."
- The CS-A25 properties window appears.
2. Append " /Expert" to the end of the contents of the Target field, and then click [OK].
- A space is necessary before slash.

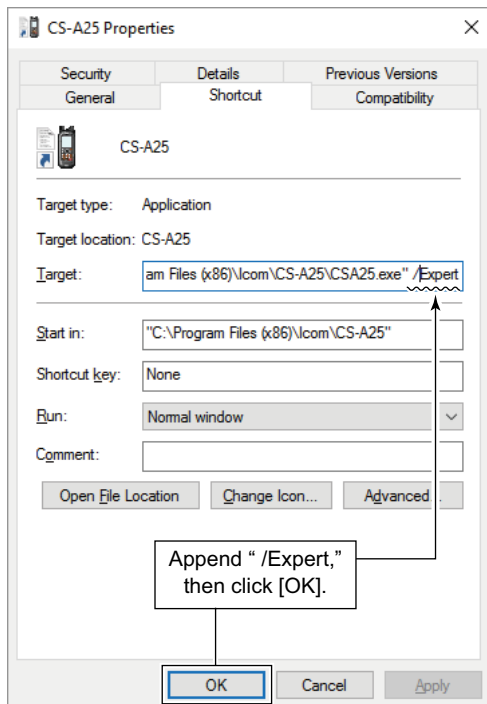


3. Boot up the programming software, CS-A25.
4. Connect the transceiver and the PC using with the OPC-478UC, and then turn the power ON.
5. Read the transceiver data into the PC.
6. Set "Adjustment Mode" in the "Expert" to "Enable."

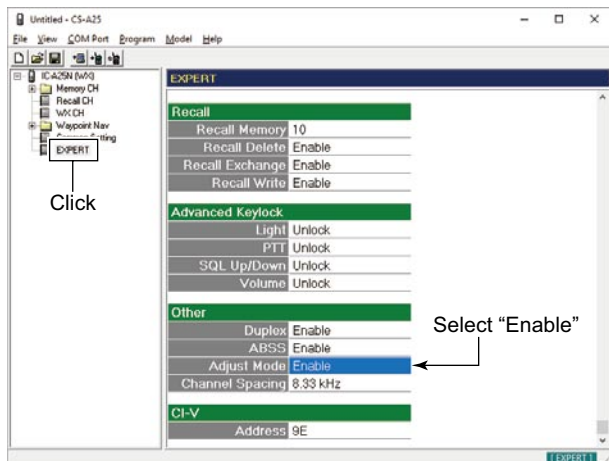

7. Write the data to the transceiver.
8. Turn the power OFF, and then disconnect the OPC-478UC from the transceiver.
9. While holding down [F] and [CLR], turn ON the power.
- Enters to the adjustment mode.

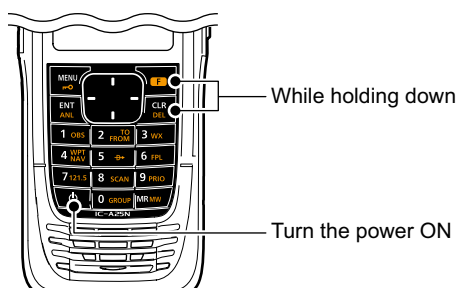


■ ADJUSTMENT MODE SCREEN

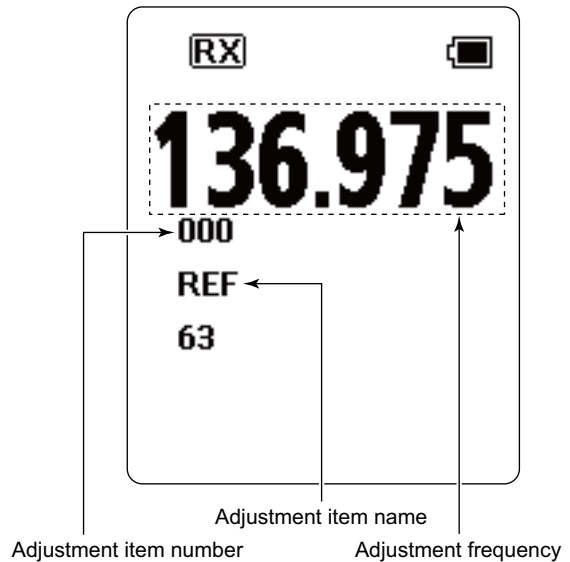

■ KEY ASSIGNMENTS FOR THE ADJUSTMENT MODE

- Push [▲] to select the next adjustment item, push [▼] to select the previous adjustment item.
- Rotate [DIAL] to set or modify the adjustment value.
- Push [ENT] to store the adjusted value, and select the next adjustment item.

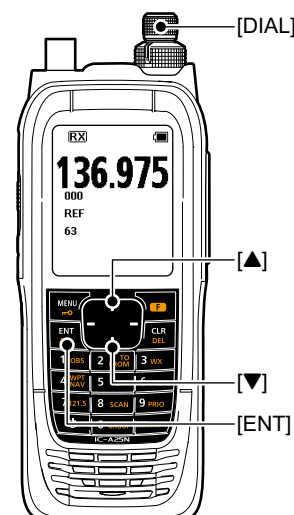

4-2 FREQUENCY AND TRANSMIT ADJUSTMENTS

1. Select an adjustment item by pushing [▲]/[▼].
2. Set or modify the adjustment value as specified by rotating [DIAL], and then push [ENT].

ADJUSTMENT		ADJUSTMENT ITEM		TRANSCIEVER'S CONDITION	OPERATION	VALUE
		NO.	NAME			
REFERENCE FREQUENCY	1	000	REF	• Frequency: 136.975 MHz • Transmitting	• Connect the RF power meter to the antenna connector. • Loosely couple the frequency counter to the antenna connector.	136.975 MHz (±100 Hz)
TX OUTPUT POWER (at 7.2 V)	1	013	BATT PL	• Frequency: 118.000 MHz • Transmitting	• Attach the fully charged battery pack. • Connect the RF power meter to the antenna connector. • No audio applied to [MIC].	1.8 W
	2	014	BATT PM	• Frequency: 127.500 MHz • Transmitting		
	3	015	BATT PH	• Frequency: 136.975 MHz • Transmitting		
TX OUTPUT POWER (at 11.0 V)	1	016	EXT PL	• Frequency: 118.000 MHz • Transmitting	• Detach the battery pack. • Connect the DC power supply to [DC 11 V]. • While transmitting, adjust the power supply voltage to 11.0 V. • No audio applied to [MIC].	
	2	017	EXT PM	• Frequency: 127.500 MHz • Transmitting		
	3	018	EXT PH	• Frequency: 136.975 MHz • Transmitting		
MODULATION (at 7.2 V)	1	019	BATT 25MML	• Frequency: 118.000 MHz • Transmitting	• Disconnect the DC power supply. • Attach the fully charged battery pack. • Connect the modulation analyzer to the antenna connector, through the attenuator. • Connect the audio generator to [MIC], and set as shown below: Frequency: 1 kHz Level: 200 mV rms Waveform: Sine wave	90% (±2%)
	2	020	BATT 25MMM	• Frequency: 127.500 MHz • Transmitting		
	3	021	BATT 25MMH	• Frequency: 136.975 MHz • Transmitting		
	4	022	BATT 8MML	• Frequency: 118.005 MHz • Transmitting		
	5	023	BATT 8MMM	• Frequency: 127.505 MHz • Transmitting		
	6	024	BATT MMH	• Frequency: 136.980 MHz • Transmitting		
	7	031	BATT 25NML	• Frequency: 118.000 MHz • Transmitting	Set the audio generator to: Level: 20 mV rms	30% (±5%)
	8	032	BATT 25NMM	• Frequency: 127.500 MHz • Transmitting		
	9	033	BATT 25NMH	• Frequency: 136.975 MHz • Transmitting		
	10	034	BATT 8NML	• Frequency: 118.005 MHz • Transmitting		
	11	035	BATT 8NMM	• Frequency: 127.505 MHz • Transmitting		
	12	036	BATT 8NMH	• Frequency: 136.980 MHz • Transmitting		
MODULATION (at 11.0 V)	1	025	EXT 25MML	• Frequency: 118.000 MHz • Transmitting	• Detach the battery pack. • Connect the DC power supply to [DC 11 V]. • While transmitting, adjust the power supply voltage to 11.0 V. • Connect the modulation analyzer to the antenna connector, through the attenuator. • Connect the audio generator to [MIC], and set as shown below: Frequency: 1 kHz Level: 200 mV rms Waveform: Sine wave	USA, EXP: 87% (±2%) EUR, AUS: 90% (±2%)
	2	026	EXT 25MMM	• Frequency: 127.500 MHz • Transmitting		
	3	027	EXT 25MMH	• Frequency: 136.975 MHz • Transmitting		
	4	028	EXT 8MML	• Frequency: 118.005 MHz • Transmitting		
	5	029	EXT 8MMM	• Frequency: 127.505 MHz • Transmitting		
	6	030	EXT 8MMH	• Frequency: 136.980 MHz • Transmitting		
	7	037	EXT 25NML	• Frequency: 118.000 MHz • Transmitting	Set the audio generator to: Level: 20 mV rms	30% (±5%)
	8	038	EXT 25NMM	• Frequency: 127.500 MHz • Transmitting		
	9	039	EXT 25NMH	• Frequency: 136.975 MHz • Transmitting		
	10	040	EXT 8NML	• Frequency: 118.005 MHz • Transmitting		
	11	041	EXT 8NMM	• Frequency: 127.505 MHz • Transmitting		
	12	042	EXT 8NMH	• Frequency: 136.980 MHz • Transmitting		

4-3 RECEIVE ADJUSTMENTS

1. Select an adjustment item by pushing [▲]/[▼].
2. Set or modify the adjustment value as specified by rotating [DIAL], and then push [ENT].

ADJUSTMENT		ADJUSTMENT ITEM		TRANSCIEVER'S CONDITION	OPERATION	VALUE
		NO.	NAME			
RECEIVE SENSITIVITY - AM -	1	044	BPF1	• Frequency: 108.025 MHz IC-A25N: 108.025 MHz IC-A25C: 118.025 MHz • Receiving	Connect the SSG to the antenna connector, and set as shown below: Frequency: 108.025 MHz IC-A25N: 108.025 MHz IC-A25C: 118.025 MHz Modulation: None Level: +10 dBμ [†] (−97 dBm)	Push [ENT] (Automatic adjustment)
	2	045	BPF2	• Frequency: 127.500 MHz • Receiving	Set the SSG to: Frequency: 127.500 MHz Level: +5 dBμ [†] (−102 dBm)	
	3	046	BPF3	• Frequency: 136.975 MHz • Receiving	Set the SSG to: Frequency: 136.975 MHz	
	4	047	BPF4	• Frequency: 161.650 MHz • Receiving	Set the SSG to: Frequency: 161.650 MHz	
	5	048	BPF5	• Frequency: 163.275 MHz • Receiving	Set the SSG to: Frequency: 163.275 MHz	
- FM -						
SQUELCH LEVEL - Wide -	1	050	WSO_S	• Frequency: 118.025 MHz • Receiving	Connect the SSG to the antenna connector, and set as shown below: Frequency: 118.025 MHz Modulation: None Level: −10 dBμ [†] (−117 dBm)	Push [ENT] (Automatic adjustment)
	2	051	WSC_S		Set the SSG to: Level: −13 dBμ [†] (−120 dBm)	
	3	052	WSO_T		Set the SSG to: Level: +13 dBμ [†] (−94 dBm)	
	4	053	WSC_T		Set the SSG to: Level: +10 dBμ [†] (−97 dBm)	
	5	054	NSO_S	• Frequency: 118.030 MHz • Receiving	Set the SSG to: Level: −10 dBμ [†] (−117 dBm)	
	6	055	NSC_S		Set the SSG to: Level: −13 dBμ [†] (−120 dBm)	
	7	056	NSO_T		Set the SSG to: Level: +13 dBμ [†] (−94 dBm)	
	8	057	NSC_T		Set the SSG to: Level: +10 dBμ [†] (−97 dBm)	
	9	058	SO_S	• Frequency: 162.550 MHz • Receiving	Set the SSG to: Frequency: 162.550 MHz Level: −10 dBμ [†] (−117 dBm)	
	10	059	SC_S		Set the SSG to: Level: −13 dBμ [†] (−120 dBm)	
	11	060	SO_T		Set the SSG to: Level: +13 dBμ [†] (−94 dBm)	
	12	061	SC_T		Set the SSG to: Level: +10 dBμ [†] (−97 dBm)	
- Narrow -						
- FM -						
VOR 0° (Only for IC-A25N)	1	063	VOR0	• Frequency: 108.000 MHz • Receiving	Connect the VOR tester to the antenna connector, and set as shown below: Frequency: 108.000 MHz Level: +47 dBμ [†] (−60 dBm) Modulation: 30 Hz 30% 9960 Hz 30% Bearing: 0°	Push [ENT] (Automatic adjustment)
2nd LO FREQUENCY	1	066	LO	• Frequency: 127.510 MHz • Receiving	Connect the SSG to the antenna connector, and set as shown below: Frequency: 127.50833 MHz Modulation: None Level: +90 dBμ [†] (−17 dBm)	Push [ENT] (Automatic adjustment)

[†]The output level of the standard signal generator (SSG) is indicated as the SSG's open circuit.

SECTION 5

PARTS LIST

[LOGIC UNIT] (for #11, #12, #21, and #22)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
IC1	1190004712	S.IC HRM1016-010022	[#11] T	37.3/13.5
	1190004712	S.IC HRM1016-010022	[#12]	
IC11	1110003790	S.IC NJM2903V-TE1-#FMZB	[#11] B	17.6/8.1
	1110003790	S.IC NJM2903V-TE1-#FMZB	[#12]	
IC12	1110006470	S.IC LMV3241PWR	[#11] B	24.1/19.7
	1110006470	S.IC LMV3241PWR	[#12]	
IC13	1110006740	S.IC LMV3581PWR	[#11] B	8.4/11.0
	1110006740	S.IC LMV3581PWR	[#12]	
IC17	1190004620	S.IC GSU-141A-098A	[#11] B	23.8/85.9
	1190004620	S.IC GSU-141A-098A	[#12]	
IC27	1140018060	S.IC R5F52108BDLK	B	31.0/52.9
IC30	1180004760	S.REG S-1200B33-M5T1U	[#11] T	18.2/10.2
	1180004760	S.REG S-1200B33-M5T1U	[#12]	
IC31	1180004760	S.REG S-1200B33-M5T1U	[#11] B	32.5/96.5
	1180004760	S.REG S-1200B33-M5T1U	[#12]	
IC32	1110006490	S.IC LMV321IDCKR	[#11] B	38.6/5.1
	1110006490	S.IC LMV321IDCKR	[#12]	
IC34	1180003570	S.REG NJM2830U1-33-TE1-#ZZZB	B	39.7/44.0
IC35	1130014260	S.IC SN74LVC2GU04DCKR	B	29.0/13.8
IC36	1130014260	S.IC SN74LVC2GU04DCKR	B	40.9/31.9
IC37	1130016621	S.IC GT24C128B-22LI-TR	B	31.3/68.1
IC38	1110007780	S.IC NJU7704F3-28A-TE1-#ZZZH	B	22.4/67.7
IC39	1110007780	S.IC NJU7704F3-28A-TE1-#ZZZH	[#11] T	22.1/13.2
	1110007780	S.IC NJU7704F3-28A-TE1-#ZZZH	[#12]	
IC40	1180005110	S.REG NJM2836DL3-05-TE1	B	31.8/35.9
IC41	1180003460	S.REG NJM2831F05-TE1-#ZZZB	B	29.1/64.5
Q3	1530004190	S.TRA L2SC4617ST1G	B	24.9/72.7
Q5	1590004070	S.TRA LDTC144EET1G	[#11] T	36.3/21.2
	1590004070	S.TRA LDTC144EET1G	[#12]	
Q13	1530004140	S.TRA L2SC4081RT1G	[#11] B	21.1/12.6
	1530004140	S.TRA L2SC4081RT1G	[#12]	
Q15	1590004530	S.TRA DMG564050R	[#11] B	24.9/29.6
	1590004530	S.TRA DMG564050R	[#12]	
Q16	1590004070	S.TRA LDTC144EET1G	[#11] B	40.5/11.3
	1590004070	S.TRA LDTC144EET1G	[#12]	
Q17	1590004070	S.TRA LDTC144EET1G	[#11] T	19.9/17.9
	1590004070	S.TRA LDTC144EET1G	[#12]	
Q22	1530004000	S.TRA 2SC4738-GR (TE85LF)	B	32.4/14.2
Q23	1510001100	S.TRA 2SA1832-GR (TE85RF)	B	28.1/17.0
Q24	1510001100	S.TRA 2SA1832-GR (TE85RF)	B	40.8/28.5
Q25	1560001730	S.FET RUE002N02 TL	B	35.8/29.7
Q31	1510001100	S.TRA 2SA1832-GR (TE85RF)	T	14.7/13.5
Q32	1510001100	S.TRA 2SA1832-GR (TE85RF)	T	13.4/18.5
Q33	1590004070	S.TRA LDTC144EET1G	T	17.2/7.4
Q34	1590004070	S.TRA LDTC144EET1G	T	14.8/15.5
D1	1750001810	S.DIO L1SS400T1G	T	5.4/19.4
D2	1750002220	S.DIO DA6J101KOR	T	3.4/16.6
D4	1750001810	S.DIO L1SS400T1G	[#21] T	3.9/12.1
	1750001810	S.DIO L1SS400T1G	[#22]	
D6	1750001810	S.DIO L1SS400T1G	[#12] B	11.2/56.2
	1750001810	S.DIO L1SS400T1G	[#22]	
D8	1750001810	S.DIO L1SS400T1G	B	32.5/72.5
D16	1750001810	S.DIO L1SS400T1G	[#11] B	13.2/6.8
	1750001810	S.DIO L1SS400T1G	[#12]	
D17	1750001810	S.DIO L1SS400T1G	[#11] B	17.5/12.6
	1750001810	S.DIO L1SS400T1G	[#12]	
D18	1750001790	S.DIO 1SS390 TE61	B	40.7/57.6
D34	1750001810	S.DIO L1SS400T1G	B	26.3/36.4
D35	1750001810	S.DIO L1SS400T1G	B	45.0/44.6
D46	1750001810	S.DIO L1SS400T1G	[#11] T	17.8/12.6
	1750001810	S.DIO L1SS400T1G	[#12]	
D47	1750001810	S.DIO L1SS400T1G	B	32.5/17.4
D48	1750001810	S.DIO L1SS400T1G	B	36.0/28.1
X1	6050013790	S.XTA CR-981 (19.6608 MHz)	B	39.7/53.9
R3	7030015910	S.RES RMC1/16S-101JTH (100)	[#11] B	33.6/8.2
	7030015910	S.RES RMC1/16S-101JTH (100)	[#12]	
R5	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	23.5/70.8
R16	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	22.6/70.8
R17	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	26.9/73.2
R18	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	28.3/71.6
R25	7030016160	S.RES RMC1/16S-820JTH (82)	T	11.0/35.2
R26	7030016160	S.RES RMC1/16S-820JTH (82)	T	22.0/35.2
R28	7030016560	S.RES RMC1/16SJPTH	[#11] B	31.8/8.2
	7030016560	S.RES RMC1/16SJPTH	[#12]	
R60	7030016340	S.RES RMC1/16S-393JTH (39 k)	[#11] B	22.0/8.4
	7030016340	S.RES RMC1/16S-393JTH (39 k)	[#12]	
R61	7030016110	S.RES RMC1/16S-473JTH (47 k)	[#11] B	13.3/8.8
	7030016110	S.RES RMC1/16S-473JTH (47 k)	[#12]	
R62	7030016020	S.RES RMC1/16S-104JTH (100 k)	[#11] B	12.2/8.4
	7030016020	S.RES RMC1/16S-104JTH (100 k)	[#12]	
R63	7030016330	S.RES RMC1/16S-153JTH (15 k)	[#11] B	11.0/2.3
	7030016330	S.RES RMC1/16S-153JTH (15 k)	[#12]	
R64	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	[#11] B	4.5/9.2
	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	[#12]	
R65	7030016040	S.RES RMC1/16S-224JTH (220 k)	[#11] B	9.2/6.6
	7030016040	S.RES RMC1/16S-224JTH (220 k)	[#12]	
R66	7030016040	S.RES RMC1/16S-224JTH (220 k)	[#11] B	9.2/5.7
	7030016040	S.RES RMC1/16S-224JTH (220 k)	[#12]	

[LOGIC UNIT] (for #11, #12, #21, and #22)

REF NO.	PART NO.	DESCRIPTION				M.	H/V LOCATION
R67	7030015970	S.RES	RMC1/16S-103JTH (10 k)	[#11]	B	5.9/10.2	
	7030015970	S.RES	RMC1/16S-103JTH (10 k)	[#12]			
R68	7030016200	S.RES	RMC1/16S-274JTH (270 k)	[#11]	B	5.9/11.8	
	7030016200	S.RES	RMC1/16S-274JTH (270 k)	[#12]			
R69	7030016360	S.RES	RMC1/16S-123JTH (12 k)	[#11]	B	2.8/14.3	
	7030016360	S.RES	RMC1/16S-123JTH (12 k)	[#12]			
R72	7030015960	S.RES	RMC1/16S-472JTH (4.7 k)	[#11]	B	9.9/15.3	
	7030015960	S.RES	RMC1/16S-472JTH (4.7 k)	[#12]			
R73	7030015960	S.RES	RMC1/16S-472JTH (4.7 k)	[#11]	B	21.7/24.9	
	7030015960	S.RES	RMC1/16S-472JTH (4.7 k)	[#12]			
R74	7030016040	S.RES	RMC1/16S-224JTH (220 k)	[#11]	B	21.7/24.0	
	7030016040	S.RES	RMC1/16S-224JTH (220 k)	[#12]			
R75	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#11]	B	23.7/24.0	
	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#12]			
R76	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#11]	B	22.7/26.4	
	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#12]			
R77	7030016040	S.RES	RMC1/16S-224JTH (220 k)	[#11]	B	24.8/25.0	
	7030016040	S.RES	RMC1/16S-224JTH (220 k)	[#12]			
R78	7030015960	S.RES	RMC1/16S-472JTH (4.7 k)	[#11]	B	26.5/25.5	
	7030015960	S.RES	RMC1/16S-472JTH (4.7 k)	[#12]			
R79	7030016120	S.RES	RMC1/16S-682JTH (6.8 k)	[#11]	B	24.8/13.4	
	7030016120	S.RES	RMC1/16S-682JTH (6.8 k)	[#12]			
R80	7030016030	S.RES	RMC1/16S-154JTH (150 k)	[#11]	B	26.0/15.4	
	7030016030	S.RES	RMC1/16S-154JTH (150 k)	[#12]			
R81	7030016290	S.RES	RMC1/16S-222JTH (2.2 k)	[#11]	B	23.9/15.0	
	7030016290	S.RES	RMC1/16S-222JTH (2.2 k)	[#12]			
R82	7030015960	S.RES	RMC1/16S-472JTH (4.7 k)	[#11]	B	26.4/13.3	
	7030015960	S.RES	RMC1/16S-472JTH (4.7 k)	[#12]			
R83	7030016040	S.RES	RMC1/16S-224JTH (220 k)	[#11]	B	22.4/15.3	
	7030016040	S.RES	RMC1/16S-224JTH (220 k)	[#12]			
R84	7030015960	S.RES	RMC1/16S-472JTH (4.7 k)	[#11]	B	16.6/18.5	
	7030015960	S.RES	RMC1/16S-472JTH (4.7 k)	[#12]			
R85	7030016360	S.RES	RMC1/16S-123JTH (12 k)	[#11]	B	14.4/21.3	
	7030016360	S.RES	RMC1/16S-123JTH (12 k)	[#12]			
R86	7030016560	S.RES	RMC1/16SJPTH	[#11]	B	15.3/21.3	
	7030016560	S.RES	RMC1/16SJPTH	[#12]			
R88	7030016000	S.RES	RMC1/16S-823JTH (82 k)	[#11]	B	18.2/23.5	
	7030016000	S.RES	RMC1/16S-823JTH (82 k)	[#12]			
R91	7030016100	S.RES	RMC1/16S-334JTH (330 k)	[#11]	B	23.0/10.4	
	7030016100	S.RES	RMC1/16S-334JTH (330 k)	[#12]			
R93	7030016070	S.RES	RMC1/16S-474JTH (470 k)	[#11]	B	21.5/14.4	
	7030016070	S.RES	RMC1/16S-474JTH (470 k)	[#12]			
R94	7030016450	S.RES	RMC1/16S-824JTH (820 k)	[#11]	B	23.0/13.7	
	7030016450	S.RES	RMC1/16S-824JTH (820 k)	[#12]			
R95	7030016090	S.RES	RMC1/16S-223JTH (22 k)	[#11]	B	19.2/13.0	
	7030016090	S.RES	RMC1/16S-223JTH (22 k)	[#12]			
R112	7030016320	S.RES	RMC1/16S-225JTH (2.2 M)	[#11]	B	16.7/11.0	
	7030016320	S.RES	RMC1/16S-225JTH (2.2 M)	[#12]			
R145	7030016060	S.RES	RMC1/16S-105JTH (1 M)		T	2.2/13.8	
R146	7030016060	S.RES	RMC1/16S-105JTH (1 M)		T	2.7/14.8	
R147	7030016060	S.RES	RMC1/16S-105JTH (1 M)		T	5.6/13.8	
R148	7030016060	S.RES	RMC1/16S-105JTH (1 M)		T	4.1/9.3	
R151	7510001661	S.THR	NTCG16 4LH 473JT		T	34.8/24.7	
R152	7030008270	S.RES	RR0510P-104-D (100 k)		T	36.8/25.5	
R558	7030016360	S.RES	RMC1/16S-123JTH (12 k)	[#11]	B	21.5/9.8	
	7030016360	S.RES	RMC1/16S-123JTH (12 k)	[#12]			
R595	7030015520	S.RES	RMC1/16JPTH		B	28.0/32.2	
R856	7030015900	S.RES	RMC1/16S-470JTH (47 k)	[#11]	B	19.2/88.3	
	7030015900	S.RES	RMC1/16S-470JTH (47 k)	[#12]			
R857	7030016560	S.RES	RMC1/16SJPTH	[#11]	B	18.8/85.4	
	7030016560	S.RES	RMC1/16SJPTH	[#12]			
R858	7030016560	S.RES	RMC1/16SJPTH	[#11]	B	21.5/79.2	
	7030016560	S.RES	RMC1/16SJPTH	[#12]			
R859	7030016560	S.RES	RMC1/16SJPTH	[#11]	B	28.7/86.5	
	7030016560	S.RES	RMC1/16SJPTH	[#12]			
R860	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#11]	B	28.7/87.4	
	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#12]			
R861	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#11]	B	29.7/97.1	
	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#12]			
R862	7030016560	S.RES	RMC1/16SJPTH	[#11]	B	28.9/98.0	
	7030016560	S.RES	RMC1/16SJPTH	[#12]			
R863	7030016560	S.RES	RMC1/16SJPTH	[#11]	T	22.8/16.1	
	7030016560	S.RES	RMC1/16SJPTH	[#12]			
R864	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#11]	B	40.1/16.4	
	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#12]			
R865	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#11]	B	38.5/15.3	
	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#12]			
R866	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#11]	T	21.9/17.9	
	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#12]			
R867	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#11]	B	40.1/12.9	
	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#12]			
R868	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#11]	B	40.1/14.1	
	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#12]			
R869	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#11]	B	40.1/15.3	
	7030016110	S.RES	RMC1/16S-473JTH (47 k)	[#12]			
R871	7030015970	S.RES	RMC1/16S-103JTH (10 k)	[#11]	B	36.3/11.8	
	7030015970	S.RES	RMC1/16S-103JTH (10 k)	[#12]			
R873	7030016050	S.RES	RMC1/16S-102JTH (1 k)	[#11]	B	38.7/8.4	
	7030016050	S.RES	RMC1/16S-102JTH (1 k)	[#12]			
R874	7030016190	S.RES	RMC1/16S-273JTH (27 k)	[#11]	B	39.0/2.4	
	7030016190	S.RES	RMC1/16S-273JTH (27 k)	[#12]			
R875	7030016190	S.RES	RMC1/16S-273JTH (27 k)	[#11]	B	40.8/4.3	
	7030016190	S.RES	RMC1/16S-273JTH (27 k)	[#12]			
R876	7030016160	S.RES	RMC1/16S-820JTH (82)		T	33.0/35.2	
R878	7030015920	S.RES	RMC1/16S-221JTH (220)		T	13.2/14.6	
R879	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#11]	B	41.3/5.5	
	7030016020	S.RES	RMC1/16S-104JTH (100 k)	[#12]			
R881	7030016110	S.RES	RMC1/16S-473JTH (47 k)		B	27.9/18.5	

[LOGIC UNIT] (for #11, #12, #21, and #22)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
R882	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	29.6/16.9
R883	7030016380	S.RES RMC1/16S-183JTH (18 k)	B	30.9/17.3
R884	7030016360	S.RES RMC1/16S-123JTH (12 k)	B	30.9/14.1
R885	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	39.2/28.6
R886	7030016380	S.RES RMC1/16S-183JTH (18 k)	B	38.0/28.1
R887	7030016560	S.RES RMC1/16SJPTH	B	38.0/30.2
R888	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	42.8/31.9
R901	7030014460	S.RES MCR006YZPJ 101 (100)	B	30.3/43.5
R902	7030014460	S.RES MCR006YZPJ 101 (100)	B	23.5/43.3
R903	7030014460	S.RES MCR006YZPJ 101 (100)	B	30.2/61.4
R906	7030014460	S.RES MCR006YZPJ 101 (100)	B	23.5/62.3
R907	7030014460	S.RES MCR006YZPJ 101 (100)	B	39.2/50.1
R908	7030016060	S.RES RMC1/16S-105JTH (1 M)	B	37.1/52.9
R909	7030016150	S.RES RMC1/16S-100JTH (10)	B	35.8/53.0
R910	7030016360	S.RES RMC1/16S-123JTH (12 k)	B	39.3/57.6
R911	7030016090	S.RES RMC1/16S-223JTH (22 k)	B	39.3/56.7
R912	7030016360	S.RES RMC1/16S-123JTH (12 k)	B	42.0/58.4
R913	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	26.0/67.7
R914	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	25.0/68.2
R917	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	24.1/21.2
R920	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	23.7/20.0
R925	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	44.4/52.9
R926	7030016560	S.RES RMC1/16SJPTH	B	9.9/16.2
R927	7030016560	S.RES RMC1/16SJPTH	B	20.7/15.3
	7030016560	S.RES RMC1/16SJPTH		
	7030016560	S.RES RMC1/16SJPTH		
R928	7030016560	S.RES RMC1/16SJPTH	B	21.3/26.2
	7030016560	S.RES RMC1/16SJPTH		
	7030016560	S.RES RMC1/16SJPTH		
R929	7030014460	S.RES MCR006YZPJ 101 (100)	B	24.6/50.9
	7030014460	S.RES MCR006YZPJ 101 (100)		
	7030014460	S.RES MCR006YZPJ 101 (100)		
R930	7030014460	S.RES MCR006YZPJ 101 (100)	B	24.0/51.9
	7030014460	S.RES MCR006YZPJ 101 (100)		
	7030014460	S.RES MCR006YZPJ 101 (100)		
R931	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	23.8/49.3
R932	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	23.4/50.5
R933	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	22.1/69.6
R934	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	26.0/69.8
R935	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	35.3/54.5
R937	7030016560	S.RES RMC1/16SJPTH	B	30.3/27.6
R940	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	28.4/61.3
R943	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	35.6/44.1
R944	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	36.5/47.0
R945	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	19.2/86.6
R946	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	20.3/79.6
	7030016020	S.RES RMC1/16S-104JTH (100 k)		
	7030016020	S.RES RMC1/16S-104JTH (100 k)		
R947	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	15.9/9.8
	7030016020	S.RES RMC1/16S-104JTH (100 k)		
	7030016020	S.RES RMC1/16S-104JTH (100 k)		
R949	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	21.1/21.2
R952	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	17.7/26.7
R962	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	39.1/7.1
R963	7030016210	S.RES RMC1/16S-121JTH (120)	T	13.2/16.2
	7030014400	S.RES MCR006YZPJ 100 (10)		
	7030014400	S.RES MCR006YZPJ 100 (10)		
R966	7030014400	S.RES MCR006YZPJ 100 (10)	B	43.4/58.4
R967	7030014400	S.RES MCR006YZPJ 100 (10)	B	34.7/47.9
R968	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/49.7
R969	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/51.8
R970	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/66.3
R971	7030014400	S.RES MCR006YZPJ 100 (10)	B	25.0/66.8
R972	7030014400	S.RES MCR006YZPJ 100 (10)	B	34.6/44.5
R973	7030014400	S.RES MCR006YZPJ 100 (10)	B	35.6/47.1
R974	7030014400	S.RES MCR006YZPJ 100 (10)	B	23.5/47.8
R975	7030014400	S.RES MCR006YZPJ 100 (10)	B	29.3/47.9
R976	7030014400	S.RES MCR006YZPJ 100 (10)	B	28.7/47.9
R977	7030014400	S.RES MCR006YZPJ 100 (10)	B	27.5/47.9
R978	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/50.9
R979	7030014400	S.RES MCR006YZPJ 100 (10)	B	33.0/44.0
R980	7030014400	S.RES MCR006YZPJ 100 (10)	B	39.4/51.5
R981	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/48.8
R982	7030014400	S.RES MCR006YZPJ 100 (10)	B	28.1/47.9
R983	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.3/47.9
R984	7030014400	S.RES MCR006YZPJ 100 (10)	B	24.1/55.7
R985	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/50.6
R986	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/49.1
R987	7030014400	S.RES MCR006YZPJ 100 (10)	B	33.1/47.9
R988	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/48.5
R989	7030014400	S.RES MCR006YZPJ 100 (10)	B	32.3/47.9
R990	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/51.8
R991	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/53.0
R992	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/52.4
R993	7030014400	S.RES MCR006YZPJ 100 (10)	B	33.5/46.2
R994	7030014400	S.RES MCR006YZPJ 100 (10)	B	28.9/57.7
R995	7030014400	S.RES MCR006YZPJ 100 (10)	B	23.7/58.8
R996	7030014400	S.RES MCR006YZPJ 100 (10)	B	29.0/44.3
R997	7030014400	S.RES MCR006YZPJ 100 (10)	B	28.4/43.5
R998	7030014400	S.RES MCR006YZPJ 100 (10)	B	34.5/46.2
R999	7030014380	S.RES MCR006YZPJ 103 (10 k)	B	31.3/42.9
R1000	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/42.5
R1001	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.7/42.5
R1002	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.9/47.9
R1003	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/50.0
R1004	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/47.9
R1005	7030014400	S.RES MCR006YZPJ 100 (10)	B	32.7/46.2
R1006	7030014380	S.RES MCR006YZPJ 103 (10 k)	B	31.5/47.9
R1007	7030014400	S.RES MCR006YZPJ 100 (10)	B	24.1/47.2
R1008	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/49.4
R1009	7030014400	S.RES MCR006YZPJ 100 (10)	B	35.1/46.2
R1010	7030014400	S.RES MCR006YZPJ 100 (10)	B	33.9/47.9
R1011	7030014400	S.RES MCR006YZPJ 100 (10)	B	31.9/46.2
R1012	7030014400	S.RES MCR006YZPJ 100 (10)	B	35.5/57.6
R1013	7030014400	S.RES MCR006YZPJ 100 (10)	B	34.7/57.9
R1014	7030014400	S.RES MCR006YZPJ 100 (10)	B	33.8/57.9
R1015	7030014400	S.RES MCR006YZPJ 100 (10)	B	32.2/57.7
R1016	7030014400	S.RES MCR006YZPJ 100 (10)	B	31.6/57.7

[LOGIC UNIT] (for #11, #12, #21, and #22)

REF NO.	PART NO.	DESCRIPTION		M.	H/V LOCATION
R1017	7030014400	S.RES	MCR006YZPJ 100 (10)	B	31.0/57.7
R1018	7030014400	S.RES	MCR006YZPJ 100 (10)	B	29.5/57.7
R1019	7030014400	S.RES	MCR006YZPJ 100 (10)	B	24.1/58.1
R1020	7030014400	S.RES	MCR006YZPJ 100 (10)	B	24.1/57.5
R1021	7030014400	S.RES	MCR006YZPJ 100 (10)	B	35.0/59.5
R1022	7030014400	S.RES	MCR006YZPJ 100 (10)	B	32.2/59.5
R1023	7030014400	S.RES	MCR006YZPJ 100 (10)	B	31.6/59.6
R1024	7030014400	S.RES	MCR006YZPJ 100 (10)	B	30.1/58.8
R1025	7030014400	S.RES	MCR006YZPJ 100 (10)	B	28.0/57.3
R1026	7030014400	S.RES	MCR006YZPJ 100 (10)	B	24.1/56.9
R1027	7030014400	S.RES	MCR006YZPJ 100 (10)	B	37.7/58.5
R1028	7030014400	S.RES	MCR006YZPJ 100 (10)	B	34.3/59.5
R1029	7030014400	S.RES	MCR006YZPJ 100 (10)	B	33.2/60.1
R1030	7030014400	S.RES	MCR006YZPJ 100 (10)	B	28.5/62.4
R1031	7030014400	S.RES	MCR006YZPJ 100 (10)	B	44.3/55.4
R1032	7030014400	S.RES	MCR006YZPJ 100 (10)	B	36.8/57.8
R1033	7030014400	S.RES	MCR006YZPJ 100 (10)	B	34.3/61.9
R1034	7030014400	S.RES	MCR006YZPJ 100 (10)	B	31.6/62.0
R1035	7030014400	S.RES	MCR006YZPJ 100 (10)	B	30.4/57.7
R1036	7030014400	S.RES	MCR006YZPJ 100 (10)	B	20.6/63.1
R1037	7030014390	S.RES	MCR006YZPJ 102 (1 k)	B	24.1/56.3
R1038	7030014400	S.RES	MCR006YZPJ 100 (10)	B	24.1/55.1
R1039	7030014390	S.RES	MCR006YZPJ 102 (1 k)	B	26.0/54.7
R1040	7030014400	S.RES	MCR006YZPJ 100 (10)	B	44.9/55.4
R1041	7030014400	S.RES	MCR006YZPJ 100 (10)	B	24.1/54.3
R1042	7030014400	S.RES	MCR006YZPJ 100 (10)	B	26.0/53.9
R1043	7030014400	S.RES	MCR006YZPJ 100 (10)	B	24.1/53.5
R1044	7030014400	S.RES	MCR006YZPJ 100 (10)	B	20.7/68.3
R1045	7030014400	S.RES	MCR006YZPJ 100 (10)	B	43.9/52.0
R1046	7030014400	S.RES	MCR006YZPJ 100 (10)	B	23.5/61.7
R1047	7030014400	S.RES	MCR006YZPJ 100 (10)	B	44.0/51.4
R1050	7030014400	S.RES	MCR006YZPJ 100 (10)	B	24.1/46.6
R1053	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	14.7/11.9
R1054	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	15.0/18.6
R1055	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	15.0/10.2
R1056	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	14.6/17.0
R1057	7030016150	S.RES	RMC1/16S-100JTH (10)	B	41.0/40.6
R1059	7030016560	S.RES	RMC1/16SJPTH	B	29.7/96.2
R1060	7030016560	S.RES	RMC1/16SJPTH	T	16.6/13.6
	7030016560	S.RES	RMC1/16SJPTH		
	7030016560	S.RES	RMC1/16SJPTH		
R1061	7210003820	VAR	TP76D1190E20-20.5F -10KB-3699		
R1062	7030016560	S.RES	RMC1/16SJPTH	B	40.3/89.6
R1063	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	21.8/15.1
R1064	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	13.7/4.9
	7030016560	S.RES	RMC1/16SJPTH		
	7030016560	S.RES	RMC1/16SJPTH		
R1065	7030016560	S.RES	RMC1/16SJPTH	T	13.7/7.7
R1066	7030016560	S.RES	RMC1/16SJPTH	T	11.3/3.6
R1067	7030016560	S.RES	RMC1/16SJPTH	T	12.6/10.5
R1068	7030016560	S.RES	RMC1/16SJPTH	T	10.3/3.6
R1069	7030016560	S.RES	RMC1/16SJPTH	T	5.6/21.3
R1070	7030016560	S.RES	RMC1/16SJPTH	T	9.4/4.5
R1071	7030016560	S.RES	RMC1/16SJPTH	T	5.4/17.4
R1072	7030016560	S.RES	RMC1/16SJPTH	T	8.2/3.9
R1073	7030016560	S.RES	RMC1/16SJPTH	T	13.7/6.7
R1074	7030016020	S.RES	RMC1/16S-104JTH (100 k)	B	28.5/46.5
R1075	7030014400	S.RES	MCR006YZPJ 100 (10)	B	37.3/51.2
R1076	7030014400	S.RES	MCR006YZPJ 100 (10)	B	30.9/47.9
R1077	7030016560	S.RES	RMC1/16SJPTH	T	32.4/20.7
R1078	7030016560	S.RES	RMC1/16SJPTH	B	30.9/16.4
	7030016090	S.RES	RMC1/16S-223JTH (22 k)		
	7030016290	S.RES	RMC1/16S-222JTH (2.2 k)		
R1081	7030016060	S.RES	RMC1/16S-105JTH (1 M)	B	33.5/63.6
R1082	7030016050	S.RES	RMC1/16S-102JTH (1 k)	B	36.6/42.0
R1083	7030016110	S.RES	RMC1/16S-473JTH (47 k)	B	23.2/46.4
R1084	7410001340	S.ARR	EXB28V473JX	B	25.3/45.0
R1085	7030014380	S.RES	MCR006YZPJ 103 (10 k)	B	45.2/50.3
R1086	7030014380	S.RES	MCR006YZPJ 103 (10 k)	B	45.2/51.4
	7030014380	S.RES	MCR006YZPJ 103 (10 k)		
	7030014380	S.RES	MCR006YZPJ 103 (10 k)		
R1087	7030016320	S.RES	RMC1/16S-225JTH (2.2 M)	B	33.2/64.8
R1088	7030016240	S.RES	RMC1/16S-684JTH (680 k)	B	31.9/64.1
R1089	7030016110	S.RES	RMC1/16S-473JTH (47 k)	B	25.2/63.5
R1090	7030016000	S.RES	RMC1/16S-823JTH (82 k)	B	5.4/18.4
R1091	7030016000	S.RES	RMC1/16S-823JTH (82 k)	B	9.0/17.1
	7030016040	S.RES	RMC1/16S-224JTH (220 k)		
	7030016040	S.RES	RMC1/16S-224JTH (220 k)		
R1092	7030016050	S.RES	RMC1/16S-102JTH (1 k)	B	42.4/8.0
R1093	7030016050	S.RES	RMC1/16S-102JTH (1 k)	B	41.9/6.8
	7030016410	S.RES	RMC1/16S-561JTH (560)		
	7030016410	S.RES	RMC1/16S-561JTH (560)		
R1097	7030016020	S.RES	RMC1/16S-104JTH (100 k)	B	28.9/15.6
R1098	7030016020	S.RES	RMC1/16S-104JTH (100 k)	B	40.5/30.0
C1	4030021240	S.CER	C1005 JB 1C 105K-T	T	23.6/17.9
	4030021240	S.CER	C1005 JB 1C 105K-T		
	4030021240	S.CER	C1005 JB 1C 105K-T		
C2	4030021240	S.CER	C1005 JB 1C 105K-T	T	24.1/16.5
	4030021240	S.CER	C1005 JB 1C 105K-T		
	4030021240	S.CER	C1005 JB 1C 105K-T		
C5	4030021240	S.CER	C1005 JB 1C 105K-T	B	32.7/8.2
	4030021240	S.CER	C1005 JB 1C 105K-T		
	4030021240	S.CER	C1005 JB 1C 105K-T		
C6	4030021240	S.CER	C1005 JB 1C 105K-T	B	30.6/8.7
	4030021240	S.CER	C1005 JB 1C 105K-T		
	4030021240	S.CER	C1005 JB 1C 105K-T		
C7	4030021240	S.CER	C1005 JB 1C 105K-T	B	33.2/9.4
	4030021240	S.CER	C1005 JB 1C 105K-T		
	4030021240	S.CER	C1005 JB 1C 105K-T		
C8	4030023090	S.CER	0402B102K500CT	B	24.7/70.4
	4030023090	S.CER	0402B102K500CT		
	4030023090	S.CER	0402B102K500CT		
C18	4030022640	S.CER	0402N101J500CT	B	28.5/7.3
	4030022640	S.CER	0402N101J500CT		
	4030022640	S.CER	0402N101J500CT		
C20	4030023090	S.CER	0402B102K500CT	B	24.7/71.3
	4030022540	S.CER	0402N3R0B500CT		
	4030022540	S.CER	0402N3R0B500CT		
C21	4030022540	S.CER	0402N3R0B500CT	B	27.6/7.3
C22	4030023090	S.CER	0402B102K500CT	B	27.4/72.0

[LOGIC UNIT] (for #11, #12, #21, and #22)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
C25	4030023010	S.CER 0402B104K160CT	B	29.0/28.1
C31	4030023010	S.CER 0402B104K160CT	B	25.7/34.5
C101	4030023090	S.CER 0402B102K500CT	B	13.8/10.1
	4030023090	S.CER 0402B102K500CT	[#11]	
	4030023090	S.CER 0402B102K500CT	[#12]	
C102	4030023200	S.CER 0402B471K500CT	B	14.2/5.5
	4030023200	S.CER 0402B471K500CT	[#11]	
	4030023200	S.CER 0402B471K500CT	[#12]	
C103	4030019560	S.CER GRM21BB31C106KE15L	B	19.9/24.7
	4030019560	S.CER GRM21BB31C106KE15L	[#11]	
	4030019560	S.CER GRM21BB31C106KE15L	[#12]	
C104	4030019560	S.CER GRM21BB31C106KE15L	B	22.1/27.9
	4030019560	S.CER GRM21BB31C106KE15L	[#11]	
	4030019560	S.CER GRM21BB31C106KE15L	[#12]	
C105	4030019560	S.CER GRM21BB31C106KE15L	B	21.3/31.5
	4030019560	S.CER GRM21BB31C106KE15L	[#11]	
	4030019560	S.CER GRM21BB31C106KE15L	[#12]	
C106	4030019560	S.CER GRM21BB31C106KE15L	B	21.3/29.7
	4030019560	S.CER GRM21BB31C106KE15L	[#11]	
	4030019560	S.CER GRM21BB31C106KE15L	[#12]	
C107	4030022940	S.CER 0402B104K100CT	B	26.5/24.6
	4030022940	S.CER 0402B104K100CT	[#11]	
	4030022940	S.CER 0402B104K100CT	[#12]	
C108	4030023090	S.CER 0402B102K500CT	B	24.8/15.0
	4030023090	S.CER 0402B102K500CT	[#11]	
	4030023090	S.CER 0402B102K500CT	[#12]	
C109	4030023090	S.CER 0402B102K500CT	B	26.0/14.5
	4030023090	S.CER 0402B102K500CT	[#11]	
	4030023090	S.CER 0402B102K500CT	[#12]	
C111	4550007300	S.TAN F931A335MAABMA	B	14.4/24.7
	4550007300	S.TAN F931A335MAABMA	[#11]	
	4550007300	S.TAN F931A335MAABMA	[#12]	
C112	4550008210	S.TAN 267M3502 104MR	B	20.3/20.1
	4550008210	S.TAN 267M3502 104MR	[#11]	
	4550008210	S.TAN 267M3502 104MR	[#12]	
C113	4550008210	S.TAN 267M3502 104MR	B	18.2/20.1
	4550008210	S.TAN 267M3502 104MR	[#11]	
	4550008210	S.TAN 267M3502 104MR	[#12]	
C114	4550008210	S.TAN 267M3502 104MR	B	8.0/2.0
	4550008210	S.TAN 267M3502 104MR	[#11]	
	4550008210	S.TAN 267M3502 104MR	[#12]	
C115	4550008210	S.TAN 267M3502 104MR	B	8.0/4.1
	4550008210	S.TAN 267M3502 104MR	[#11]	
	4550008210	S.TAN 267M3502 104MR	[#12]	
C116	4030023090	S.CER 0402B102K500CT	B	11.2/15.0
	4030023090	S.CER 0402B102K500CT	[#11]	
	4030023090	S.CER 0402B102K500CT	[#12]	
C121	4030023030	S.CER 0402B103K250CT	B	23.0/12.0
	4030023030	S.CER 0402B103K250CT	[#11]	
	4030023030	S.CER 0402B103K250CT	[#12]	
C122	4030019560	S.CER GRM21BB31C106KE15L	B	18.8/11.0
	4030019560	S.CER GRM21BB31C106KE15L	[#11]	
	4030019560	S.CER GRM21BB31C106KE15L	[#12]	
C123	4030023090	S.CER 0402B102K500CT	B	24.6/31.5
C125	4550007520	S.TAN F931A106MAABMA	B	4.4/12.2
	4550007520	S.TAN F931A106MAABMA	[#11]	
	4550007520	S.TAN F931A106MAABMA	[#12]	
C155	4030023090	S.CER 0402B102K500CT	T	11.8/2.4
C156	4030023090	S.CER 0402B102K500CT	T	13.5/10.5
C157	4030023090	S.CER 0402B102K500CT	T	13.7/4.0
C158	4030023090	S.CER 0402B102K500CT	T	14.1/8.9
C159	4030023090	S.CER 0402B102K500CT	T	9.9/2.4
C161	4030023090	S.CER 0402B102K500CT	T	35.9/25.5
C600	4030023030	S.CER 0402B103K250CT	B	21.5/10.8
	4030023030	S.CER 0402B103K250CT	[#11]	
	4030023030	S.CER 0402B103K250CT	[#12]	
C629	4030023010	S.CER 0402B104K160CT	B	24.8/26.6
	4030023010	S.CER 0402B104K160CT	[#11]	
	4030023010	S.CER 0402B104K160CT	[#12]	
C630	4030022640	S.CER 0402N101J500CT	B	19.3/90.9
	4030022640	S.CER 0402N101J500CT	[#11]	
	4030022640	S.CER 0402N101J500CT	[#12]	
C631	4050000380	S.FEE NFM15PC104R1A3D	B	18.2/89.2
	4050000380	S.FEE NFM15PC104R1A3D	[#11]	
	4050000380	S.FEE NFM15PC104R1A3D	[#12]	
C632	4050000380	S.FEE NFM15PC104R1A3D	B	33.6/94.1
	4050000380	S.FEE NFM15PC104R1A3D	[#11]	
	4050000380	S.FEE NFM15PC104R1A3D	[#12]	
C633	4030019560	S.CER GRM21BB31C106KE15L	B	33.7/92.4
	4030019560	S.CER GRM21BB31C106KE15L	[#11]	
	4030019560	S.CER GRM21BB31C106KE15L	[#12]	
C634	4030023090	S.CER 0402B102K500CT	B	32.6/94.0
	4030023090	S.CER 0402B102K500CT	[#11]	
	4030023090	S.CER 0402B102K500CT	[#12]	
C637	4030023090	S.CER 0402B102K500CT	B	28.7/88.4
	4030023090	S.CER 0402B102K500CT	[#11]	
	4030023090	S.CER 0402B102K500CT	[#12]	
C638	4030023090	S.CER 0402B102K500CT	B	19.2/84.1
	4030023090	S.CER 0402B102K500CT	[#11]	
	4030023090	S.CER 0402B102K500CT	[#12]	
C639	4030023090	S.CER 0402B102K500CT	B	22.5/79.2
	4030023090	S.CER 0402B102K500CT	[#11]	
	4030023090	S.CER 0402B102K500CT	[#12]	
C640	4030023090	S.CER 0402B102K500CT	B	29.9/87.9
	4030023090	S.CER 0402B102K500CT	[#11]	
	4030023090	S.CER 0402B102K500CT	[#12]	
C641	4030023090	S.CER 0402B102K500CT	B	18.3/84.1
	4030023090	S.CER 0402B102K500CT	[#11]	
	4030023090	S.CER 0402B102K500CT	[#12]	
C642	4030023090	S.CER 0402B102K500CT	B	19.6/78.7
	4030023090	S.CER 0402B102K500CT	[#11]	
	4030023090	S.CER 0402B102K500CT	[#12]	
C643	4050000380	S.FEE NFM15PC104R1A3D	T	20.1/13.2
	4050000380	S.FEE NFM15PC104R1A3D	[#11]	
	4050000380	S.FEE NFM15PC104R1A3D	[#12]	
C645	4030021240	S.CER C1005 JB 1C 105K-T	B	36.3/10.2
	4030021240	S.CER C1005 JB 1C 105K-T	[#11]	
	4030021240	S.CER C1005 JB 1C 105K-T	[#12]	
C648	4030022540	S.CER 0402N3R0B500CT	T	25.0/16.5
	4030022540	S.CER 0402N3R0B500CT	[#11]	
	4030022540	S.CER 0402N3R0B500CT	[#12]	
C649	4030022540	S.CER 0402N3R0B500CT	T	23.6/18.8
	4030022540	S.CER 0402N3R0B500CT	[#11]	
	4030022540	S.CER 0402N3R0B500CT	[#12]	
C650	4030023010	S.CER 0402B104K160CT	B	40.4/5.5
	4030023010	S.CER 0402B104K160CT	[#11]	
	4030023010	S.CER 0402B104K160CT	[#12]	
C651	4030019560	S.CER GRM21BB31C106KE15L	B	36.7/7.1
	4030019560	S.CER GRM21BB31C106KE15L	[#11]	
	4030019560	S.CER GRM21BB31C106KE15L	[#12]	
C652	4030022640	S.CER 0402N101J500CT	B	39.0/3.3
	4030022640	S.CER 0402N101J500CT	[#11]	
	4030022640	S.CER 0402N101J500CT	[#12]	
C653	4030023010	S.CER 0402B104K160CT	B	42.2/5.1
	4030023010	S.CER 0402B104K160CT	[#11]	
	4030023010	S.CER 0402B104K160CT	[#12]	
C654	4030023090	S.CER 0402B102K500CT	B	41.3/89.6
C655	4030023090	S.CER 0402B102K500CT	B	39.3/89.6
C656	4030023090	S.CER 0402B102K500CT	B	38.3/89.7
C657	4030023090	S.CER 0402B102K500CT	B	42.3/89.6
C659	4030023010	S.CER 0402B104K160CT	B	28.6/10.3
C660	4030023010	S.CER 0402B104K160CT	B	34.2/30.5
C661	4030019560	S.CER GRM21BB31C106KE15L	B	43.4/44.6
C662	4030021520	S.CER GRM31CB31H106KA12L	T	31.4/24.4
C663	4030021520	S.CER GRM31CB31H106KA12L	T	32.4/28.2
C664	4030021520	S.CER GRM31CB31H106KA12L	T	32.4/30.4
C666	4030023010	S.CER 0402B104K160CT	T	33.3/22.3
C667	4030023010	S.CER 0402B104K160CT	T	33.7/23.8
C669	4030022630	S.CER 0402N100C500CT	B	37.1/54.5
C670	4030022520	S.CER 0402N1R0B500CT	B	42.0/53.9
C671	4030022640	S.CER 0402N101J500CT	B	42.1/56.8
C672	4030023010	S.CER 0402B104K160CT	B	39.3/58.5
C674	4030023030	S.CER 0402B103K250CT	B	26.9/68.8
C677	4030022940	S.CER 0402B104K100CT	B	27.5/43.2

[LOGIC UNIT] (for #11, #12, #21, and #22)

REF NO.	PART NO.	DESCRIPTION		M.	H/V LOCATION
C678	4030023090	S.CER	0402B102K500CT	B	31.5/41.9
C679	4030023090	S.CER	0402B102K500CT	B	37.1/56.1
C680	4030023090	S.CER	0402B102K500CT	B	36.2/56.2
C681	4030022940	S.CER	0402B104K100CT	B	35.3/56.2
C682	4030023000	S.CER	0402B683K100CT	B	22.8/65.8
C683	4030022940	S.CER	0402B104K100CT	B	24.1/68.2
C684	4030023010	S.CER	0402B104K160CT	B	36.2/54.5
C687	4030023010	S.CER	0402B104K160CT	B	25.2/36.6
C688	4030019560	S.CER	GRM21BB31C106KE15L	B	23.8/36.4
C689	4030023090	S.CER	0402B102K500CT	B	29.0/27.2
C693	4030022940	S.CER	0402B104K100CT	T	16.4/15.5
C694	4030023090	S.CER	0402B102K500CT	[#11] [#12]	B 18.8/82.1
C695	4030023010	S.CER	0402B104K160CT	T	18.8/7.4
C696	4030023010	S.CER	0402B104K160CT	T	15.9/11.4
C698	4030023010	S.CER	0402B104K160CT	B	39.9/47.0
C699	4030023010	S.CER	0402B104K160CT	B	43.2/42.2
C700	4030023090	S.CER	0402B102K500CT	B	44.2/42.2
C701	4030023090	S.CER	0402B102K500CT	B	25.7/33.6
C703	4030023000	S.CER	0402B683K100CT	[#11] [#12]	T 21.7/11.2
C704	4030023090	S.CER	0402B102K500CT	[#11] [#12]	T 22.8/17.0
C705	4030023090	S.CER	0402B102K500CT	[#11] [#12]	T 24.9/13.7
C708	4030023090	S.CER	0402B102K500CT	T	26.6/20.9
C709	4030021240	S.CER	C1005 JB 1C 105K-T	[#11] [#12]	B 36.3/4.4
C711	4030023090	S.CER	0402B102K500CT	B	39.1/33.8
C712	4030022920	S.CER	0402N820J500CT	B	31.1/45.6
C713	4030022920	S.CER	0402N820J500CT	B	24.5/42.4
C714	4030020000	S.CER	C1005 JB 1A 105K-T	B	31.3/65.3
C715	4030023820	S.CER	0603B104K250CT	B	26.7/63.6
C716	4030023210	S.CER	0402B472K500CT	B	34.1/64.8
C717	4030023210	S.CER	0402B472K500CT	B	26.9/58.1
C718	4030023210	S.CER	0402B472K500CT	B	31.5/27.6
C719	4030023210	S.CER	0402B472K500CT	B	40.0/18.9
C720	4550008210	S.TAN	267M3502 104MR	[#11] [#12]	B 5.8/15.6
C721	4550008210	S.TAN	267M3502 104MR	[#11] [#12]	B 9.1/20.4
C722	4030021240	S.CER	C1005 JB 1C 105K-T	[#11] [#12]	B 34.5/15.4
C723	4030021240	S.CER	C1005 JB 1C 105K-T	B	26.5/72.0
C724	4030023090	S.CER	0402B102K500CT	B	35.9/58.6
J1	6510030220	S.CON	50RF-JMCS-G		
J2	6510031390	S.CON	15FXVL-RSM1-GAN-TF-1 (HF)	B T	35.5/23.0 9.4/7.9
J3	6510023480	S.CON	AYU1-1P-02676-120-TF	[#11] [#12]	B 23.2/96.1
J4	6510031380	S.CON	31FXVL-RSM1-GAN-TF-1 (HF)	T	24.4/24.8
DS2	5040003550	S.LED	NSSW208T	T	13.8/35.5
DS3	5040003550	S.LED	NSSW208T	T	24.8/35.5
DS4	5040003550	S.LED	NSSW208T	T	35.8/35.5
DS5	5030004360	LCD	TM128160D1CIWUGND		
S23	2260003320	S.SWI	SKRTLAE010	B	2.1/83.2
S24	2260003320	S.SWI	SKRTLAE010	B	2.1/44.4
S25	2260003320	S.SWI	SKRTLAE010	B	2.1/34.4
EP3	6910023920	S.BEA	BLM15GA750SN1D	[#11] [#12]	B 38.5/16.4
EP4	6910023920	S.BEA	BLM15GA750SN1D	[#11] [#12]	B 36.9/15.3
EP9	6910023920	S.BEA	BLM15GA750SN1D	[#11] [#12]	B 18.4/90.9
EP10	6910020610	S.BEA	BLM15BD102SN1D	[#11] [#12]	T 34.7/22.6
EP11	6910020610	S.BEA	BLM15BD102SN1D	T	30.8/20.7
EP12	6910020610	S.BEA	BLM15BD102SN1D	T	25.0/21.2
EP13	6910020610	S.BEA	BLM15BD102SN1D	T	17.7/28.7
EP14	6910020610	S.BEA	BLM15BD102SN1D	T	23.2/21.2
EP16	6910020610	S.BEA	BLM15BD102SN1D	T	17.7/27.8
EP19	6910020610	S.BEA	BLM15BD102SN1D	T	22.3/21.2

[MAIN UNIT] (for #11, #12, #21, and #22)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
IC1	1110007300	S.IC NJM2552V-TE1-#ZZZB	B	35.6/72.6
IC2	1130009981	S.IC TC7W53FK (TE85LF)	B	33.1/63.1
IC5	1130011760	S.IC CD4094BPWR	B	39.9/44.3
IC14	1110006490	S.IC LMV321IDCKR	T	7.7/69.0
IC22	1110006490	S.IC LMV321IDCKR	B	23.9/64.7
IC24	1130007021	S.IC TC7S66FU (TE85LF)	B	41.0/79.3
IC25	1110006490	S.IC LMV321IDCKR	B	21.3/70.5
IC203	1130017460	S.IC AK1542A-L	B	29.7/44.6
IC215	1110007630	S.IC NJM2783V-TE1-#ZZZH	T	41.5/30.8
IC216	1110007291	S.IC AK2330P7-L	T	24.7/60.1
IC219	1130007021	S.IC TC7S66FU (TE85LF)	B	22.3/46.2
IC220	1110007291	S.IC AK2330P7-L	T	28.4/37.4
IC221	1110008450	S.IC ISD8102SVI T&R	B	30.6/26.5
IC222	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	B	24.9/59.2
IC223	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	B	9.9/30.9
IC224	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	B	10.0/25.6
IC225	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	B	10.0/21.1
IC226	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	B	10.0/15.8
IC228	1130009981	S.IC TC7W53FK (TE85LF)	B	10.5/11.8
IC229	1110008680	S.IC NJU72341V-TE2-#UZZH	T	38.6/39.5
IC231	1130009981	S.IC TC7W53FK (TE85LF)	T	42.3/48.4
IC232	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	T	44.5/41.7
IC233	1110006490	S.IC LMV321IDCKR	B	11.9/5.8
IC234	6910026630	S.DC XC9263B75DER-G	B	30.6/8.3
IC235	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	T	17.6/15.9
IC238	1180004760	S.REG S-1200B33-M5T1U	T	30.3/89.2
IC239	1180004420	S.REG NJM2830U1-08-TE1-#ZGZB	T	10.4/18.2
IC240	1180005110	S.REG NJM2836DL3-05-TE1	T	29.3/96.4
IC241	1130007021	S.IC TC7S66FU (TE85LF)	B	21.3/68.0
	1130007021	S.IC TC7S66FU (TE85LF)	[#11] [#12]	
Q2	1560002350	S.FET RD12MVS1-T214	T	13.0/83.6
Q3	1560002420	S.FET RD01MUS2B-T513	T	12.3/74.7
Q4	1530004100	S.TRA MT3S20P (TE12LF)	B	11.6/65.4
Q7	1520000201	S.TRA 2SB798-T1-AZ DK	T	17.0/59.1
Q8	1590004410	S.TRA DMC501010R	T	12.9/59.8
Q11	1580000731	S.FET 3SK293(TE85LF)	B	30.0/106.2
Q12	1580000731	S.FET 3SK293(TE85LF)	B	27.8/96.9
Q13	1530002381	S.TRA 2SC4215-Y (TE85LF)	B	27.4/78.3
Q20	1590004300	S.TRA DRA9114T0L	B	36.2/60.1
Q21	1590004100	S.TRA LDTC144TET1G	B	29.3/61.3
Q25	1520000201	S.TRA 2SB798-T1-AZ DK	T	44.2/113.7
Q26	1590004330	S.TRA DRC9114E0L	T	31.5/105.3
Q28	1530003322	S.TRA 2SC5108-YLF	B	11.3/53.4
Q29	1530003322	S.TRA 2SC5108-YLF	B	12.4/48.4
Q33	1530002851	S.TRA 2SC4116-BL (TE85RF)	B	6.2/52.5
Q35	1520000651	S.TRA 2SB1201S-TL-E	T	16.1/26.9
Q36	1590004410	S.TRA DMC501010R	B	20.9/26.1
Q50	1510001151	S.TRA L2SA1576AST1G	B	42.5/115.6
Q52	1590004530	S.TRA DMG564050R	T	37.5/27.8
Q53	1590004070	S.TRA LDTC144EET1G	B	25.9/71.5
Q54	1590004050	S.TRA LDTC144EET1G	T	33.8/68.6
Q57	1590004520	S.TRA DMA561030R	B	13.6/45.6
Q58	1530004610	S.TRA 2SC5086-OLF	T	17.7/47.5
Q59	1530004610	S.TRA 2SC5086-OLF	T	10.6/46.9
Q60	1530003322	S.TRA 2SC5108-YLF	T	14.3/49.3
Q62	1530004190	S.TRA L2SC4617ST1G	B	43.4/71.2
Q66	1590004070	S.TRA LDTC144EET1G	B	40.1/56.7
Q68	1590004070	S.TRA LDTC144EET1G	B	43.0/82.9
Q212	1550000240	S.FET TPCF8107 (TE85LF)	T	21.7/122.8
Q213	1550000240	S.FET TPCF8107 (TE85LF)	T	24.6/122.1
Q215	1560000531	S.FET 2SK880-GR (TE85RF)	B	22.5/41.6
Q216	1590004070	S.TRA LDTC144EET1G	B	24.0/50.7
Q217	1590004070	S.TRA LDTC144EET1G	B	15.6/43.9
Q218	1590004070	S.TRA LDTC144EET1G	T	30.7/60.7
Q220	1590004070	S.TRA LDTC144EET1G	T	18.7/7.2
Q223	1550000090	S.FET RSQ035P03TR	T	32.2/11.4
Q224	1590004070	S.TRA LDTC144EET1G	T	34.1/14.3
Q226	1590004070	S.TRA LDTC144EET1G	B	39.7/20.3
Q232	1560001330	S.FET RSR025N03	T	36.5/23.0
Q233	1590004060	S.TRA LDTC144EET1G	T	34.9/26.1
Q234	1520000651	S.TRA 2SB1201S-TL-E	T	33.9/4.4
Q235	1530002280	S.TRA 2SC4081 T106 S	T	25.9/12.9
Q236	1590004070	S.TRA LDTC144EET1G	B	38.1/50.8
Q238	1590004070	S.TRA LDTC144EET1G	B	29.2/15.5
Q239	1510000671	S.TRA 2SA1588-GR (TE85R F)	T	24.4/7.6
Q240	1590004070	S.TRA LDTC144EET1G	T	22.0/6.9
Q243	1590004070	S.TRA LDTC144EET1G	T	31.6/71.6
Q245	1590004050	S.TRA LDTC144EET1G	T	31.3/31.0
Q246	1590004070	S.TRA LDTC144EET1G	T	33.5/31.0
D1	1750000581	S.DIO 1SV307 (TPH3F)	T	5.4/19.4
D2	1750001800	S.DIO RB886CS T2RA	T	13.2/102.7
D3	1750001800	S.DIO RB886CS T2RA	T	12.4/99.6
D4	1750001800	S.DIO RB886CS T2RA	T	13.2/103.8
D5	1750001800	S.DIO RB886CS T2RA	T	5.1/12.1
D6	1750001790	S.DIO 1SS390 TE61	T	5.1/9.6
D8	1750000581	S.DIO 1SV307 (TPH3F)	T	10.3/110.7
D11	1750001790	S.DIO 1SS390 TE61	T	27.8/85.7
D12	1750001790	S.DIO 1SS390 TE61	T	37.4/71.0
D13	1720000702	S.VAR 1SV305H3F	B	19.9/103.3
D14	1790001622	S.DIO 1SV308L3F	B	11.8/108.5
D15	1720000702	S.VAR 1SV305H3F	B	31.2/102.2
D16	1720000702	S.VAR 1SV305H3F	B	30.3/99.5
D17	1750001790	S.DIO 1SS390 TE61	B	13.7/55.8
D18	1750002170	S.DIO DB2S31400L	B	29.6/64.6
D23	1790001980	S.DIO DA3S101F0L	T	32.2/109.1
D24	1750001790	S.DIO 1SS390 TE61	T	33.7/67.0
D25	1750001790	S.DIO 1SS390 TE61	T	37.3/66.8
D27	1750001810	S.DIO L1SS400T1G	T	37.2/110.1
D29	1790001622	S.DIO 1SV308L3F	B	12.8/104.9
D30	1750001810	S.DIO L1SS400T1G	T	34.3/17.6
D31	1750001810	S.DIO L1SS400T1G	T	18.4/109.1

[MAIN UNIT] (for #11, #12, #21, and #22)

REF NO.	PART NO.	DESCRIPTION		M.	H/V LOCATION
D36	1750001810	S.DIO	L1SS400T1G	B	42.2/112.7
D38	1750001771	S.VAR	1SV323H3F	T	19.4/41.5
D40	1750002170	S.DIO	DB2S31400L	B	27.3/69.9
D44	1790001622	S.DIO	1SV308L3F	B	13.2/102.3
D45	1750001771	S.VAR	1SV323H3F	T	11.5/40.1
D46	1750001771	S.VAR	1SV323H3F	T	12.2/38.0
D48	1750001771	S.VAR	1SV323H3F	T	19.4/40.2
D49	1750001800	S.DIO	RB886CS T2RA	T	12.0/113.6
D50	1720000702	S.VAR	1SV305H3F	B	28.0/105.4
D51	1750001800	S.DIO	RB886CS T2RA	T	12.0/112.5
D52	1750001810	S.DIO	L1SS400T1G	B	36.0/86.2
D55	1750001790	S.DIO	1SS390 TE61	B	28.9/80.3
D56	1750001790	S.DIO	1SS390 TE61	B	26.1/92.2
D57	1750001790	S.DIO	1SS390 TE61	B	27.1/81.3
D58	1750001790	S.DIO	1SS390 TE61	B	28.9/91.4
D59	1750001800	S.DIO	RB886CS T2RA	B	40.3/85.4
D62	1750002170	S.DIO	DB2S31400L	T	31.5/70.0
D66	1750000520	S.DIO	DAN222TL	T	31.3/62.7
D67	1750001810	S.DIO	L1SS400T1G	T	31.7/119.3
D68	1750001690	S.DIO	RB050LA-40	T	27.9/119.4
D71	1730002830	S.ZEN	DZ2J051M0L	B	40.9/26.0
D72	1790002160	S.VAR	TPD1E10B06DPYR	B	42.3/96.4
D74	1750001800	S.DIO	RB886CS T2RA	T	44.8/37.5
D78	1750001810	S.DIO	L1SS400T1G	T	21.0/96.5
D80	1750001810	S.DIO	L1SS400T1G	T	26.9/11.0
D81	1750001810	S.DIO	L1SS400T1G	T	24.2/11.0
D82	1750001810	S.DIO	L1SS400T1G	T	14.2/19.1
D83	1750001810	S.DIO	L1SS400T1G	T	30.7/91.6
D85	1790002160	S.VAR	TPD1E10B06DPYR	T	28.2/122.1
D86	1790001622	S.DIO	1SV308L3F	B	30.3/77.2
D87	1750001810	S.DIO	L1SS400T1G	T	24.2/9.8
D88	1750001810	S.DIO	L1SS400T1G	T	26.8/9.8
D89	1750001790	S.DIO	1SS390 TE61	T	36.5/68.6
D90	1750001790	S.DIO	1SS390 TE61	[#11] [#12] [#11] [#12]	30.4/85.7
	1750001790	S.DIO	1SS390 TE61		
	1750001790	S.DIO	1SS390 TE61		
D91	1750001810	S.DIO	L1SS400T1G	T	33.2/70.8
D92	1750001810	S.DIO	L1SS400T1G	T	33.2/73.3
D93	1750002170	S.DIO	DB2S31400L	T	23.8/85.7
D94	1750002170	S.DIO	DB2S31400L	B	27.7/90.5
F11	2030000970	S.MON	FL-455 (46.35 MHz)	B	23.4/86.8
F12	2020002720	S.CER	LTWC450D	T	28.1/79.0
F13	2030000860	S.MON	FL-439 (46.350 MHz)	B	30.2/85.7
F14	2020002520	S.CER	LTWC450H	T	41.1/77.1
F15	2020002770	S.CER	LTUCG450C	[#11] [#12]	38.7/86.0
	2020002770	S.CER	LTUCG450C		
X1	6070000300	S.DIS	JTBM450CX24	T	42.1/63.4
X2	6050013940	S.XTA	CR-994 (12.8 MHz)	B	32.8/38.8
X203	6050013930	S.XTA	CR-993 (15.3 MHz)	B	42.5/65.4
L2	6200013110	S.COI	0.35-1.6-9TL 52.0N	T	8.6/115.9
L3	6200013110	S.COI	0.35-1.6-9TL 52.0N	T	6.2/111.0
L4	6200004480	S.COI	MLF1608D R82K-T	T	9.0/105.0
L5	6200012460	S.COI	0.30-1.7-8TL 54N	T	9.8/101.2
L6	6200012850	S.COI	0.40-0.8-2TL 2.5N	T	8.1/90.2
L7	6200013030	S.COI	0.35-1.6-6TL 31.0N	T	15.5/88.5
L8	6200009280	S.COI	LQW18AN27NG00D	T	11.0/78.0
L10	6200013800	S.COI	MLK1005S39NJT	T	15.4/77.8
L11	6200013790	S.COI	MLK1005S47NJT	T	15.5/71.2
L12	6200013780	S.COI	MLK1005S56NJT	B	15.5/66.5
L15	6200012460	S.COI	0.30-1.7-8TL 54N	T	8.3/107.2
L18	6200009890	S.COI	C2012C-82NG-A	B	15.0/102.0
L21	6200009890	S.COI	C2012C-82NG-A	B	33.8/104.6
L22	6200009930	S.COI	C2012C-68NG-A	B	17.7/102.5
L23	6200009890	S.COI	C2012C-82NG-A	B	33.3/100.5
L24	6200011090	S.COI	C2012C-R56J-A	B	31.4/95.2
L25	6200004600	S.COI	MLF1608D R15K-T	B	27.6/75.6
L38	6200014760	S.COI	MLK1005SR22JT	B	13.0/54.6
L45	6200012910	S.COI	0.35-1.6-8TL 45.5N	T	11.1/119.6
L46	6200012870	S.COI	0.30-1.4-5TR 23.5N	T	10.6/94.2
L56	6200013760	S.COI	MLK1005S82NJT	B	8.4/61.7
L57	6200010540	S.COI	C2012C-47NG-A	T	17.2/40.9
L58	6200003550	S.COI	MLF1608A 4R7K-T	T	13.3/41.6
L63	6200011050	S.COI	C2012C-R12G-A	T	20.4/44.8
L64	6200011050	S.COI	C2012C-R12G-A	T	8.9/42.4
L67	6200013760	S.COI	MLK1005S82NJT	T	15.9/50.2
L69	6200009890	S.COI	C2012C-82NG-A	B	21.6/102.8
L71	6200003640	S.COI	MLF1608E 100K-T	T	8.8/40.2
L72	6200003640	S.COI	MLF1608E 100K-T	T	21.2/40.8
L85	6200004600	S.COI	MLF1608D R15K-T	B	43.8/77.3
L86	6200004590	S.COI	MLF1608D R18K-T	B	41.7/76.7
L87	6200003960	S.COI	MLF1608A 1R0K-T	B	45.0/74.5
L88	6200004590	S.COI	MLF1608D R18K-T	B	41.8/72.8
L91	6200003550	S.COI	MLF1608A 4R7K-T	T	15.4/40.9
L92	6200011050	S.COI	C2012C-R12G-A	T	9.2/38.4
L93	6200014370	S.COI	MLF1005L 2R2K-T	B	26.3/91.2
L94	6200014370	S.COI	MLF1005L 2R2K-T	B	25.3/81.3
L95	6200014370	S.COI	MLF1005L 2R2K-T	B	31.0/79.2
L96	6200014370	S.COI	MLF1005L 2R2K-T	B	32.4/91.3
L97	6200011650	S.COI	LQW18AN68NG00D	B	25.3/95.7
L99	6200014260	S.COI	LQM2MPN2R2NG0L	B	27.5/7.7
L100	6200014260	S.COI	LQM2MPN2R2NG0L	B	37.0/7.4
R2	7030015780	S.RES	RMC1/10-331JTP (330)	T	12.3/107.0
R3	7030016090	S.RES	RMC1/16S-223JTH (22 k)	T	9.5/67.1
R4	7030015910	S.RES	RMC1/16S-101JTH (100)	T	9.9/66.2
R5	7030016020	S.RES	RMC1/16S-104JTH (100 k)	T	6.8/71.8
R7	7030016290	S.RES	RMC1/16S-222JTH (2.2 k)	T	14.6/104.2
R8	7030016290	S.RES	RMC1/16S-222JTH (2.2 k)	T	13.5/97.2

[MAIN UNIT] (for #11, #12, #21, and #22)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
R9	7030015780	S.RES RMC1/10-331JTP (330)	T	12.2/105.2
R10	7030015930	S.RES RMC1/16S-471JTH (470)	T	6.0/74.2
R11	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	T	6.8/70.9
R12	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	T	9.0/70.9
R13	7030016090	S.RES RMC1/16S-223JTH (22 k)	T	8.0/72.2
R14	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	T	6.5/81.4
R15	7030015910	S.RES RMC1/16S-101JTH (100)	T	9.0/81.3
R16	7030015980	S.RES RMC1/16S-333JTH (33 k)	T	7.8/82.1
R17	7030016110	S.RES RMC1/16S-473JTH (47 k)	T	5.9/77.2
R18	7030015920	S.RES RMC1/16S-221JTH (220)	T	8.7/74.6
R19	7510001461	S.THE NTCG16 3NH 471JT	T	6.9/75.7
R20	7030015680	S.RES RMC1/10-150JTP (15)	B	16.1/64.0
R21	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	7.7/63.9
R22	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	13.7/63.0
R23	7030016150	S.RES RMC1/16S-100JTH (10)	B	7.0/65.3
R24	7030016170	S.RES RMC1/16S-560JTH (56)	B	9.6/60.5
R25	7030016270	S.RES RMC1/16S-151JTH (150)	B	11.0/59.4
R26	7030016170	S.RES RMC1/16S-560JTH (56)	B	9.6/58.0
R27	7030016510	S.RES RMC1/16S-477JTH (4.7)	T	15.5/72.8
R28	7030016080	S.RES RMC1/16S-822JTH (8.2 k)	T	11.8/57.9
R29	7030015950	S.RES RMC1/16S-152JTH (1.5 k)	T	10.1/58.8
R39	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	11.9/57.6
R40	7030016330	S.RES RMC1/16S-153JTH (15 k)	T	10.1/57.9
R41	7030015930	S.RES RMC1/16S-471JTH (470)	B	13.9/105.3
R43	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	19.9/100.5
R44	7030016000	S.RES RMC1/16S-823JTH (82 k)	B	32.7/106.7
R45	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	31.8/106.7
R47	7030016500	S.RES RMC1/16S-562JTH (5.6 k)	B	13.9/107.3
R48	7030016540	S.RES RMC1/16SK334FTH (330 k)	B	36.2/106.7
R49	7030015900	S.RES RMC1/16S-470JTH (47)	B	33.9/107.1
R51	7030016370	S.RES RMC1/16S-271JTH (270)	B	30.5/103.9
R52	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	33.8/102.4
R53	7030015910	S.RES RMC1/16S-101JTH (100)	B	10.0/107.4
R54	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	28.7/101.4
R58	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	29.6/98.5
R59	7030016030	S.RES RMC1/16S-154JTH (150 k)	B	33.6/96.9
R60	7030015990	S.RES RMC1/16S-683JTH (68 k)	B	33.6/98.0
R62	7030016390	S.RES RMC1/16S-184JTH (180 k)	B	25.3/93.6
R63	7030015990	S.RES RMC1/16S-683JTH (68 k)	B	23.2/93.8
R64	7030015910	S.RES RMC1/16S-101JTH (100)	B	30.9/92.8
R65	7030016180	S.RES RMC1/16S-680JTH (68)	B	26.4/94.7
R66	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	33.1/95.0
R67	7030016560	S.RES RMC1/16SJPTH	B	33.9/106.2
R68	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	25.4/79.2
R69	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	26.0/75.2
R70	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	25.2/80.1
R71	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	40.4/67.8
R72	7030016220	S.RES RMC1/16S-563JTH (56 k)	T	34.0/65.7
R73	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	29.9/68.1
R74	7030016150	S.RES RMC1/16S-100JTH (10)	B	39.1/78.9
R75	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	40.6/81.2
R76	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	31.2/73.1
R77	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	34.0/68.1
R79	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	30.3/71.5
R80	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	28.2/71.8
R81	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	B	27.3/68.1
R82	7030016070	S.RES RMC1/16S-474JTH (470 k)	B	30.8/70.2
R83	7030016090	S.RES RMC1/16S-223JTH (22 k)	B	40.6/82.1
R87	7030015910	S.RES RMC1/16S-101JTH (100)	T	41.7/68.3
R90	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	29.9/66.9
R94	7030016560	S.RES RMC1/16SJPTH	B	29.9/70.2
R99	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	28.9/66.9
R100	7030016000	S.RES RMC1/16S-823JTH (82 k)	B	27.7/66.4
R101	7030016100	S.RES RMC1/16S-334JTH (330 k)	B	30.2/65.6
R102	7030016320	S.RES RMC1/16S-225JTH (2.2 M)	B	30.2/63.3
R107	7030015780	S.RES RMC1/10-331JTP (330)	T	37.0/106.9
R108	7030015690	S.RES RMC1/10-180JTP (18)	T	33.5/106.5
R109	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	31.8/107.4
R111	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	9.6/57.1
R114	7030016370	S.RES RMC1/16S-271JTH (270)	B	13.6/57.1
R115	7030016090	S.RES RMC1/16S-223JTH (22 k)	B	13.0/53.7
R117	7030015920	S.RES RMC1/16S-221JTH (220)	B	11.6/50.8
R118	7030016130	S.RES RMC1/16S-150JTH (15)	T	10.7/50.7
R119	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	15.9/50.0
R120	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	13.1/50.2
R121	7030015910	S.RES RMC1/16S-101JTH (100)	B	15.0/48.8
R122	7030016170	S.RES RMC1/16S-560JTH (56)	B	26.7/41.0
R123	7030011000	S.RES RR0510P-392-D (3.9 k)	T	20.9/47.3
R124	7030011000	S.RES RR0510P-392-D (3.9 k)	T	8.8/46.3
R130	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	B	4.4/52.9
R134	7030015930	S.RES RMC1/16S-471JTH (470)	B	23.6/44.2
R135	7030016480	S.RES RMC1/16S-821JTH (820)	B	24.5/47.1
R140	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	29.7/23.2
R142	7030015640	S.RES RMC1/10JPTP	T	18.5/31.3
R145	7030005820	S.RES RR0510P-103-D (10 k)	B	21.0/27.9
R147	7030005950	S.RES RR0510P-123-D (12 k)	B	19.8/28.3
R148	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	19.1/26.5
R150	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	21.6/23.4
R192	7030016740	S.RES RMC1/16SK474DTH (470 k)	T	35.5/16.1
R193	7030016750	S.RES RMC1/16SK124DTH (120 k)	T	34.7/19.6
R194	7030016740	S.RES RMC1/16SK474DTH (470 k)	T	19.9/109.9
R195	7030016750	S.RES RMC1/16SK124DTH (120 k)	T	17.3/109.4
R210	7030016560	S.RES RMC1/16SJPTH	B	33.3/23.2
R211	7030016390	S.RES RMC1/16S-184JTH (180 k)	B	28.0/58.0
R212	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	27.8/56.8
R213	7030016340	S.RES RMC1/16S-393JTH (39 k)	B	29.6/56.6
R214	7030016450	S.RES RMC1/16S-824JTH (820 k)	B	23.5/57.0
R219	7030015660	S.RES RMC1/10-2R7JTP (2.7)	T	11.2/79.6
R220	7030015930	S.RES RMC1/16S-471JTH (470)	B	40.8/117.2
R222	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	44.7/115.2
R223	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	42.3/113.8
R224	7030016330	S.RES RMC1/16S-153JTH (15 k)	B	44.5/113.1
R225	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	37.7/26.3
R226	7030016090	S.RES RMC1/16S-223JTH (22 k)	T	35.6/101.7
R227	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	39.4/44.1

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN UNIT] (for #11, #12, #21, and #22)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
R231	7030016560	S.RES RMC1/16SJPTH	T	37.1/32.8
R252	7030016560	S.RES RMC1/16SJPTH	B	25.5/44.4
R253	7030016490	S.RES RMC1/16S-391JTH (390)	B	24.6/44.4
R254	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	10.9/44.2
R256	7030011920	S.RES RR0510P-561-D (560)	T	20.9/48.6
R258	7030008340	S.RES RR0510P-182-D (1.8 k)	T	17.8/46.1
R260	7030008340	S.RES RR0510P-182-D (1.8 k)	T	8.7/47.2
R262	7030011920	S.RES RR0510P-561-D (560)	T	14.0/44.7
R265	7030015930	S.RES RMC1/16S-471JTH (470)	T	18.3/50.3
R266	7030015990	S.RES RMC1/16S-683JTH (68 k)	T	17.1/49.3
R274	7030015930	S.RES RMC1/16S-471JTH (470)	B	33.0/68.4
R283	7030016390	S.RES RMC1/16S-184JTH (180 k)	B	29.6/57.5
R290	7030015900	S.RES RMC1/16S-470JTH (47)	T	43.7/68.3
R293	7030016000	S.RES RMC1/16S-823JTH (82 k)	B	35.2/106.7
R299	7030015640	S.RES RMC1/10JPTP	T	17.2/79.6
R302	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	11.8/100.9
R303	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	13.2/101.6
R304	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	12.0/114.7
R305	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	T	13.6/113.0
R311	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	27.8/103.3
R313	7030015900	S.RES RMC1/16S-470JTH (47)	B	10.3/51.4
R316	7030016090	S.RES RMC1/16S-223JTH (22 k)	B	33.6/57.5
R317	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	31.5/56.6
R318	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	32.7/58.4
R319	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	33.6/56.6
R320	7030016300	S.RES RMC1/16S-332JTH (3.3 k)	T	7.6/83.8
R321	7510001661	S.THR NTCG16 4LH 473JT	T	7.4/85.2
R322	7030016190	S.RES RMC1/16S-273JTH (27 k)	T	6.7/83.8
R323	7030016440	S.RES RMC1/16S-272JTH (2.7 k)	T	6.4/82.5
R331	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	7.1/76.7
R333	7030016190	S.RES RMC1/16S-273JTH (27 k)	T	8.5/77.5
R334	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	32.0/41.4
R338	7030016000	S.RES RMC1/16S-823JTH (82 k)	T	9.2/119.6
R349	7030015640	S.RES RMC1/10JPTP	B	39.6/88.5
R352	7030016270	S.RES RMC1/16S-151JTH (150)	B	32.2/80.6
R353	7030016560	S.RES RMC1/16SJPTH	B	31.2/90.8
R355	7030016240	S.RES RMC1/16S-684JTH (680 k)	B	45.1/72.3
R357	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	45.1/78.7
R359	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	21.5/39.7
R361	7030016090	S.RES RMC1/16S-223JTH (22 k)	B	27.0/82.6
R363	7030016090	S.RES RMC1/16S-223JTH (22 k)	B	28.8/93.4
R366	7030015910	S.RES RMC1/16S-101JTH (100)	B	23.5/81.7
R367	7030015910	S.RES RMC1/16S-101JTH (100)	B	22.8/91.8
R368	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	14.7/54.7
R369	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	25.6/76.4
R370	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	12.2/102.0
R374	7030016330	S.RES RMC1/16S-153JTH (15 k)	B	39.5/77.2
R375	7030016360	S.RES RMC1/16S-123JTH (12 k)	T	27.1/87.2
R376	7030016330	S.RES RMC1/16S-153JTH (15 k)	B	37.0/66.6
R377	7030016360	S.RES RMC1/16S-123JTH (12 k)	T	39.4/71.7
R378	7030016270	S.RES RMC1/16S-151JTH (150)	B	15.4/57.9
R379	7030016470	S.RES RMC1/16S-390JTH (39)	B	14.5/57.9
R380	7030016270	S.RES RMC1/16S-151JTH (150)	B	15.9/59.1
R381	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	29.0/73.1
R388	7030016360	S.RES RMC1/16S-123JTH (12 k)	T	43.3/71.3
R389	7030016360	S.RES RMC1/16S-123JTH (12 k)	T	28.5/69.3
R390	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	31.1/68.1
R391	7030016060	S.RES RMC1/16S-105JTH (1 M)	B	33.3/36.5
R393	7030016450	S.RES RMC1/16S-824JTH (820 k)	B	29.4/37.6
R394	7030016400	S.RES RMC1/16S-564JTH (560 k)	B	30.8/37.0
R397	7030016560	S.RES RMC1/16SJPTH	B	24.3/95.7
R398	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	26.5/66.3
R399	7030008270	S.RES RR0510P-104-D (100 k)	B	21.1/65.4
R400	7030005840	S.RES RR0510P-473-D (47 k)	B	23.7/62.4
R401	7030016560	S.RES RMC1/16SJPTH	B	25.0/61.9
R405	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	42.8/79.0
R407	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	22.9/38.4
R417	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	40.6/39.5
R419	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	B	10.1/111.6
R426	7030015910	S.RES RMC1/16S-101JTH (100)	B	2

[MAIN UNIT] (for #11, #12, #21, and #22)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
R488	7030018520	S.RES RMC1/16SK564FTH (560 k)	B	11.3/34.4
R489	7030016930	S.RES RMC1/16SK274DTH (270 k)	B	12.1/33.2
R490	7030005850	S.RES RR0510P-563-D (56 k)	B	13.9/29.9
R491	7030007610	S.RES RR0510P-683-D (68 k)	B	12.4/27.6
R492	7030008270	S.RES RR0510P-104-D (100 k)	B	13.9/25.4
R493	7030016750	S.RES RMC1/16SK124DTH (120 k)	B	13.0/22.6
R494	7030016750	S.RES RMC1/16SK124DTH (120 k)	B	13.0/21.0
R495	7030016750	S.RES RMC1/16SK124DTH (120 k)	B	13.0/19.1
R497	7030015980	S.RES RMC1/16S-333JTH (33 k)	B	12.1/8.8
R498	7030016400	S.RES RMC1/16S-564JTH (560 k)	T	43.2/35.3
R499	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	T	43.3/36.2
R500	7030015980	S.RES RMC1/16S-333JTH (33 k)	T	42.3/25.6
R501	7030016250	S.RES RMC1/16S-220JTH (22)	T	34.6/34.6
R502	7030016560	S.RES RMC1/16SJPTH	T	35.1/39.1
R503	7030016200	S.RES RMC1/16S-274JTH (270 k)	T	21.2/125.0
R504	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	23.0/125.0
R505	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	33.0/121.1
R515	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	7.9/21.7
R519	7030012340	S.RES RR0510P-821-D	B	26.6/14.8
R520	7030016750	S.RES RMC1/16SK124DTH (120 k)	B	27.5/9.3
R521	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	32.2/13.7
R524	7030016560	S.RES RMC1/16SJPTH	T	26.8/33.7
R526	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	13.5/8.4
R527	7030015980	S.RES RMC1/16S-333JTH (33 k)	B	40.4/24.6
R528	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	B	37.7/23.0
R529	7030015910	S.RES RMC1/16S-101JTH (100)	B	36.6/23.9
R530	7030016420	S.RES RMC1/16S-182JTH (1.8 k)	B	19.9/24.3
R532	7030016560	S.RES RMC1/16SJPTH	B	21.5/24.3
R537	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	23.2/99.3
R540	7030016330	S.RES RMC1/16S-153JTH (15 k)	T	48.0/42.0
R541	7030016100	S.RES RMC1/16S-334JTH (330 k)	T	48.0/40.1
R542	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	42.1/39.0
R543	7030016320	S.RES RMC1/16S-225JTH (2.2 M)	T	44.7/38.6
R544	7030016220	S.RES RMC1/16S-563JTH (56 k)	T	43.0/38.1
R545	7030016100	S.RES RMC1/16S-334JTH (330 k)	T	46.6/37.5
R546	7030016060	S.RES RMC1/16S-105JTH (1 M)	T	48.5/38.3
R548	7030016070	S.RES RMC1/16S-474JTH (470 k)	T	34.9/28.5
R549	7030016220	S.RES RMC1/16S-563JTH (56 k)	T	34.3/24.4
R550	7030016560	S.RES RMC1/16SJPTH	T	32.5/36.7
R551	7030016560	S.RES RMC1/16SJPTH	T	32.5/37.6
R552	7030016560	S.RES RMC1/16SJPTH	T	32.0/38.7
R554	7030016560	S.RES RMC1/16SJPTH	T	29.1/41.6
R555	7030016560	S.RES RMC1/16SJPTH	T	26.7/64.0
R556	7030016560	S.RES RMC1/16SJPTH	T	25.7/64.0
R558	7030016560	S.RES RMC1/16SJPTH	T	23.5/63.6
R559	7030016560	S.RES RMC1/16SJPTH	T	21.0/61.1
R561	7030016560	S.RES RMC1/16SJPTH	T	27.7/62.1
R562	7030016560	S.RES RMC1/16SJPTH	T	28.4/60.0
R563	7030016380	S.RES RMC1/16S-183JTH (18 k)	B	10.0/8.0
R564	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	11.1/4.0
R565	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	9.6/5.0
R566	7030015980	S.RES RMC1/16S-333JTH (33 k)	B	11.7/7.6
R568	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	13.3/7.5
R569	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	35.7/48.1
R571	7030006020	S.RES RR0510P-682-D (6.8 k)	B	27.8/14.4
R572	7030016500	S.RES RMC1/16S-562JTH (5.6 k)	T	15.4/12.2
R573	7030019630	S.RES RL1220S-1R8-F (1.8)	T	20.3/10.6
R574	7030019630	S.RES RL1220S-1R8-F (1.8)	T	22.0/10.6
R575	7030019630	S.RES RL1220S-1R8-F (1.8)	T	27.5/7.6
R577	7030015940	S.RES RMC1/16S-681JTH (680)	T	23.8/12.7
R578	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	24.6/14.7
R580	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	16.8/19.4
R581	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	21.1/18.5
R582	7030019580	S.RES RG1005P-104-B-T5 (100 k)	T	29.8/12.2
R583	7030006020	S.RES RR0510P-682-D (6.8 k)	T	30.0/13.8
R584	7030019580	S.RES RG1005P-104-B-T5 (100 k)	T	30.4/15.0
R585	7030019600	S.RES RG1005P-103-B-T5 (10 k)	T	14.3/16.6
R588	7030019630	S.RES RL1220S-1R8-F (1.8)	T	28.3/5.1
R589	7030019600	S.RES RG1005P-103-B-T5 (10 k)	T	15.6/18.3
R590	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	14.7/15.3
R591	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	16.3/11.7
R593	7030016560	S.RES RMC1/16SJPTH	B	38.6/27.2
R594	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	46.1/44.8
R595	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	43.1/44.7
R596	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	21.7/57.4
R597	7030016060	S.RES RMC1/16S-105JTH (1 M)	B	25.7/55.8
R600	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	35.5/51.8
R601	7030016560	S.RES RMC1/16SJPTH	B	20.2/65.4
R602	7030016560	S.RES RMC1/16SJPTH	T	22.1/98.4
R604	7030016560	S.RES RMC1/16SJPTH	T	26.9/90.2
R605	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	38.9/7.7
R606	7520000241	S.POS PRF18BC471QB5RB	T	14.8/79.1
R607	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	T	18.9/78.3
R608	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	20.3/6.8
R609	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	18.4/9.4
R610	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	18.1/10.7
R612	7030015910	S.RES RMC1/16S-101JTH (100)	T	15.9/20.4
R613	7030016560	S.RES RMC1/16SJPTH	T	21.7/118.8
R617	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	B	29.4/79.2
R619	7030016560	S.RES RMC1/16SJPTH	B	9.3/61.7
R620	7030015910	S.RES RMC1/16S-101JTH (100)	T	44.8/36.2
R621	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	15.4/18.4
R622	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	15.4/21.3
R623	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	10.2/28.3
R624	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	14.3/31.2
R626	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	6.0/16.1
R627	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	6.9/21.5
R629	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	6.9/25.6
R632	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	6.9/31.3
R635	7030015900	S.RES RMC1/16S-470JTH (47)	B	7.5/67.2
R637	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	40.0/64.2
R638	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	B	31.9/77.7
R639	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	24.8/78.0
R642	7030015940	S.RES RMC1/16S-681JTH (680)	T	23.3/13.9
R644	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	39.7/45.4

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN UNIT] (for #11, #12, #21, and #22)

REF NO.	PART NO.	DESCRIPTION		M.	H/V LOCATION
R645	7030016020	S.RES	RMC1/16S-104JTH (100 k)	T	39.7/47.0
R646	7030016020	S.RES	RMC1/16S-104JTH (100 k)	T	38.8/47.6
R647	7030016020	S.RES	RMC1/16S-104JTH (100 k)	T	37.9/47.6
R648	7030016020	S.RES	RMC1/16S-104JTH (100 k)	T	41.8/46.6
R649	7030016360	S.RES	RMC1/16S-123JTH (12 k) #11	T	32.3/85.4
	7030016360	S.RES	RMC1/16S-123JTH (12 k) #12		
R650	7030016050	S.RES	RMC1/16S-102JTH (1 k)	T	31.1/69.0
R651	7030016560	S.RES	RMC1/16SJPTH	B	36.5/79.5
R652	7030016090	S.RES	RMC1/16S-223JTH (22 k)	B	21.2/72.2
R653	7030016050	S.RES	RMC1/16S-102JTH (1 k)	T	20.3/75.7
R654	7030015960	S.RES	RMC1/16S-472JTH (4.7 k)	B	23.9/79.2
R655	7030016030	S.RES	RMC1/16S-154JTH (150 k)	B	32.6/64.9
R656	7030016190	S.RES	RMC1/16S-273JTH (27 k)	B	27.3/61.1
R657	7030016040	S.RES	RMC1/16S-224JTH (220 k)	B	28.0/59.6
R658	7030015930	S.RES	RMC1/16S-471JTH (470)	B	15.4/105.8
R660	7030016020	S.RES	RMC1/16S-104JTH (100 k)	B	31.4/23.2
R662	7030016050	S.RES	RMC1/16S-102JTH (1 k)	T	39.1/23.0
R670	7030016360	S.RES	RMC1/16S-123JTH (12 k) #11	T	34.5/70.8
	7030016360	S.RES	RMC1/16S-123JTH (12 k) #12		
R671	7030017740	S.RES	RMC1/10-271JTP (270)	T	35.2/106.7
R672	7030015900	S.RES	RMC1/16S-470JTH (47)	B	17.5/105.9
R673	7030015930	S.RES	RMC1/16S-471JTH (470)	B	22.4/80.0
R674	7030016460	S.RES	RMC1/16S-181JTH (180)	T	28.2/101.6
R677	7030015960	S.RES	RMC1/16S-472JTH (4.7 k)	T	32.5/46.6
R678	7030016020	S.RES	RMC1/16S-104JTH (100 k)	T	33.1/45.7
R679	7030010990	S.RES	RR0510P-272-D (2.7 k)	B	25.4/14.4
R680	7030016090	S.RES	RMC1/16S-223JTH (22 k)	B	33.6/29.6
C3	4030023580	S.CER	0603N220J500CT	T	8.3/118.0
C4	4030023410	S.CER	0603N9R0D500CT	T	9.6/113.8
C5	4030023620	S.CER	0603N270J500CT	T	6.7/113.8
C6	4030023350	S.CER	0603N5R0B500CT	T	8.3/112.0
C7	4030023580	S.CER	0603N220J500CT	T	3.2/107.8
C8	4030023850	S.CER	0603B102K500CT	T	5.1/107.0
C9	4030023850	S.CER	0603B102K500CT	T	12.7/108.5
C10	4030023850	S.CER	0603B102K500CT	T	9.0/103.8
C11	4030022610	S.CER	0402N0R3B500CT	T	11.5/103.8
C13	4030023580	S.CER	0603N220J500CT	T	7.1/102.6
C14	4030023580	S.CER	0603N220J500CT	T	9.0/98.7
C15	4030022610	S.CER	0402N0R3B500CT	T	11.2/98.5
C17	4030023200	S.CER	0402B471K500CT	T	7.2/74.0
C19	4030023590	S.CER	0603N221J500CT	T	9.0/97.5
C20	4030023090	S.CER	0402B102K500CT	T	14.5/109.4
C23	4030023130	S.CER	0402B222K500CT	T	9.2/71.8
C24	4030023010	S.CER	0402B104K160CT	T	14.5/91.0
C25	4030023090	S.CER	0402B102K500CT	T	8.5/83.8
C28	4030023030	S.CER	0402B103K250CT	T	9.7/68.4
C29	4030023090	S.CER	0402B102K500CT	B	14.7/63.0
C30	4030022880	S.CER	0402N560J500CT	T	13.4/78.0
C31	4030023030	S.CER	0402B103K250CT	T	17.6/75.9
C32	4030023090	S.CER	0402B102K500CT	T	8.7/76.2
C33	4030023090	S.CER	0402B102K500CT	B	14.4/61.7
C34	4030022630	S.CER	0402N100C500CT	T	14.6/70.3
C35	4030022880	S.CER	0402N560J500CT	T	15.5/69.4
C37	4550007360	S.TAN	F931A226MABABMA	T	19.6/69.7
C38	4030023090	S.CER	0402B102K500CT	T	18.8/73.7
C39	4030022700	S.CER	0402N180J500CT	B	6.0/64.3
C40	4030023090	S.CER	0402B102K500CT	B	11.0/57.6
C48	4030023090	S.CER	0402B102K500CT	T	19.9/57.6
C49	4550007390	S.TAN	F931C225MABABMA	T	10.4/56.3
C50	4030023820	S.CER	0603B104K250CT	T	19.1/55.6
C51	4030023090	S.CER	0402B102K500CT	T	10.1/59.7
C52	4030023010	S.CER	0402B104K160CT	T	10.1/60.7
C53	4030023580	S.CER	0603N220J500CT	T	3.2/106.3
C54	4030022740	S.CER	0402N220J500CT	T	11.7/111.2
C56	4030023090	S.CER	0402B102K500CT	T	12.9/101.2
C57	4030023090	S.CER	0402B102K500CT	B	16.4/107.1
C58	4030023090	S.CER	0402B102K500CT	B	12.7/107.1
C60	4030023090	S.CER	0402B102K500CT	B	21.2/100.6
C61	4030023010	S.CER	0402B104K160CT	B	24.0/92.5
C62	4030022700	S.CER	0402N180J500CT	B	27.9/107.0
C63	4030023090	S.CER	0402B102K500CT	B	11.0/109.9
C64	4030023090	S.CER	0402B102K500CT	B	12.1/100.3
C65	4030023090	S.CER	0402B102K500CT	B	37.1/106.7
C66	4030023010	S.CER	0402B104K160CT	B	36.5/105.0
C67	4030023090	S.CER	0402B102K500CT	B	34.7/102.6
C68	4030023090	S.CER	0402B102K500CT	B	29.6/103.9
C69	4030020000	S.CER	C1005 JB 1A 105K-T	B	36.5/103.1
C71	4030022660	S.CER	0402N120J500CT	B	17.0/104.1
C72	4030022520	S.CER	0402N1R0B500CT	B	31.8/105.1
C73	4030022790	S.CER	0402N2R5B500CT	B	32.9/102.4
C74	4030022720	S.CER	0402N1R5B500CT	B	35.3/101.0
C75	4030023090	S.CER	0402B102K500CT	B	29.6/102.3
C76	4030023090	S.CER	0402B102K500CT	B	39.1/108.4
C77	4030022530	S.CER	0402N2R0B500CT	B	33.6/98.9
C78	4030022700	S.CER	0402N180J500CT	B	31.7/98.1
C79	4030023090	S.CER	0402B102K500CT	B	30.3/100.9
C80	4030023090	S.CER	0402B102K500CT	B	24.4/93.7
C81	4030023090	S.CER	0402B102K500CT	B	28.2/94.7
C82	4030023030	S.CER	0402B103K250CT	B	32.9/92.6
C83	4030023090	S.CER	0402B102K500CT	B	33.8/92.6
C84	4030023090	S.CER	0402B102K500CT	B	33.8/93.8
C85	4030022700	S.CER	0402N180J500CT	B	34.1/95.1
C86	4030022580	S.CER	0402N7R0C500CT	B	20.1/85.3
C87	4030022560	S.CER	0402N5R0B500CT	B	13.7/99.9
C88	4030023030	S.CER	0402B103K250CT	B	25.7/77.8
C90	4030023090	S.CER	0402B102K500CT	B	29.0/76.2
C91	4030022590	S.CER	0402N8R0C500CT	B	38.5/67.7
C92	4030023020	S.CER	0402B473K160CT	B	35.6/64.9
C93	4030023090	S.CER	0402B102K500CT	B	31.7/67.9
C95	4030023030	S.CER	0402B103K250CT	B	31.6/68.8
C97	4550007520	S.TAN	F931A106MABABMA	B	36.6/81.0
C98	4030022640	S.CER	0402N101J500CT	B	29.1/71.8
C99	4030023030	S.CER	0402B103K250CT	B	28.6/70.6

[MAIN UNIT] (for #11, #12, #21, and #22)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
C100	4030023200	S.CER 0402B471K500CT	B	29.9/69.0
C101	4030019560	S.CER GRM21BB31C106KE15L	B	36.5/78.1
C102	4030023200	S.CER 0402B471K500CT	B	28.6/69.3
C103	4030022540	S.CER 0402N3R0B500CT	B	43.0/74.1
C104	4030023030	S.CER 0402B103K250CT	B	37.0/68.2
C106	4030023010	S.CER 0402B104K160CT	B	40.1/70.6
C107	4030020000	S.CER C1005 JB 1A 105K-T	T	42.6/67.4
C110	4030023090	S.CER 0402B102K500CT	B	36.5/104.1
C113	4030023010	S.CER 0402B104K160CT	B	42.8/80.9
C115	4030023010	S.CER 0402B104K160CT	B	29.3/63.3
C116	4030023090	S.CER 0402B102K500CT	T	18.5/75.9
C117	4030023090	S.CER 0402B102K500CT	T	19.5/80.9
C118	4030023030	S.CER 0402B103K250CT	T	18.6/80.9
C121	4030019560	S.CER GRM21BB31C106KE15L	T	35.3/110.2
C125	4030023030	S.CER 0402B103K250CT	T	21.9/109.5
C126	4030023010	S.CER 0402B104K160CT	T	26.6/122.4
C127	4030023090	S.CER 0402B102K500CT	T	33.9/109.6
C130	4510009700	S.ELE EEEFK1C101P	T	37.9/115.5
C150	4030022680	S.CER 0402N150J500CT	B	11.0/55.0
C151	4030022600	S.CER 0402N9R0C500CT	B	11.9/51.8
C152	4030023090	S.CER 0402B102K500CT	B	14.6/53.8
C153	4030023090	S.CER 0402B102K500CT	B	14.1/49.0
C155	4030022810	S.CER 0402N330J500CT	T	12.5/50.7
C156	4030023090	S.CER 0402B102K500CT	B	15.9/48.9
C168	4550007550	S.TAN F931V334MAABMA	T	17.6/38.3
C169	4550007390	S.TAN F931C225MAABMA	B	25.0/48.6
C170	4030022720	S.CER 0402N1R5B500CT	T	19.2/42.6
C171	4030023090	S.CER 0402B102K500CT	B	12.8/59.1
C172	4030023010	S.CER 0402B104K160CT	B	8.3/52.0
C173	4550008160	S.TAN F931A226MAA	B	7.7/55.0
C174	4030023010	S.CER 0402B104K160CT	B	22.2/50.1
C176	4030023010	S.CER 0402B104K160CT	T	16.4/109.4
C180	4030023010	S.CER 0402B104K160CT	T	34.7/18.7
C187	4030023010	S.CER 0402B104K160CT	B	17.0/25.9
C188	4030017480	S.CER C1608 JB 1A 474K-T	B	18.0/26.4
C190	4030022750	S.CER 0402N221J500CT	B	14.4/104.1
C191	4030023030	S.CER 0402B103K250CT	B	31.5/103.5
C192	4030023090	S.CER 0402B102K500CT	B	26.9/99.6
C193	4030023090	S.CER 0402B102K500CT	B	26.8/98.7
C196	4030023010	S.CER 0402B104K160CT	B	22.6/28.8
C197	4030023020	S.CER 0402B473K160CT	B	27.3/62.2
C201	4030022840	S.CER 0402N390J500CT	B	38.5/68.6
C202	4030023010	S.CER 0402B104K160CT	B	15.0/6.8
C211	4030023330	S.CER 0603N4R0B500CT	T	13.2/119.4
C212	4030023700	S.CER 0603N390J500CT	B	6.7/96.3
C223	4030024520	S.CER C1005 JB 1C 474K-T	B	33.3/21.5
C225	4030024050	S.CER 0603B473K500CT	B	6.8/12.9
C229	4030023030	S.CER 0402B103K250CT	T	44.6/68.8
C232	4030022530	S.CER 0402N2R0B500CT	B	24.1/91.6
C235	4030020000	S.CER C1005 JB 1A 105K-T	B	8.2/108.9
C237	4030023090	S.CER 0402B102K500CT	B	40.8/118.2
C238	4550007270	S.TAN F931A475MAABMA	T	38.5/120.9
C239	4030022980	S.CER 0402B473K100CT	B	44.7/116.2
C240	4030023090	S.CER 0402B102K500CT	B	40.3/116.3
C241	4030023090	S.CER 0402B102K500CT	B	45.3/114.2
C242	4030023010	S.CER 0402B104K160CT	B	37.7/24.7
C243	4030023090	S.CER 0402B102K500CT	B	40.4/114.5
C245	4030023010	S.CER 0402B104K160CT	T	35.3/103.8
C249	4030023090	S.CER 0402B102K500CT	T	27.2/52.8
C274	4030023090	S.CER 0402B102K500CT	B	36.2/84.6
C293	4030023090	S.CER 0402B102K500CT	B	12.7/4.0
C294	4030020000	S.CER C1005 JB 1A 105K-T	B	29.6/55.7
C296	4030023760	S.CER 0603N680J500CT	T	9.2/87.2
C297	4030023530	S.CER 0603N181J500CT	T	6.7/95.1
C301	4030023090	S.CER 0402B102K500CT	B	13.1/43.6
C302	4030022810	S.CER 0402N330J500CT	T	20.9/42.6
C306	4030023670	S.CER 0603N330J500CT	T	16.7/45.0
C307	4030022570	S.CER 0402N6R0C500CT	T	11.7/42.3
C308	4030023090	S.CER 0402B102K500CT	B	11.8/44.2
C309	4030023090	S.CER 0402B102K500CT	B	11.4/46.5
C310	4030023670	S.CER 0603N330J500CT	T	19.5/48.0
C311	4030023790	S.CER 0603N820J500CT	T	9.5/45.2
C312	4030023090	S.CER 0402B102K500CT	T	16.4/46.3
C313	4030023090	S.CER 0402B102K500CT	T	12.5/48.6
C315	4030023670	S.CER 0603N330J500CT	T	12.2/45.2
C316	4030024490	S.CER 0402NR75B500CT	T	16.3/48.4
C317	4030024490	S.CER 0402NR75B500CT	T	12.4/49.7
C319	4030023090	S.CER 0402B102K500CT	T	19.6/49.8
C321	4030023030	S.CER 0402B103K250CT	B	36.1/68.2
C323	4030023030	S.CER 0402B103K250CT	B	27.3/94.7
C327	4030023090	S.CER 0402B102K500CT	B	28.7/103.3
C328	4030023090	S.CER 0402B102K500CT	B	26.9/101.1
C329	4030022530	S.CER 0402N2R0B500CT	B	21.2/104.9
C330	4030023030	S.CER 0402B103K250CT	B	31.1/58.4
C331	4030023010	S.CER 0402B104K160CT	B	12.5/10.2
C333	4030023090	S.CER 0402B102K500CT	B	6.8/97.0
C335	4030023670	S.CER 0603N330J500CT	T	12.9/46.4
C336	4030022860	S.CER 0402N470J500CT	T	10.5/42.2
C338	4030023670	S.CER 0603N330J500CT	T	18.6/44.4
C347	4030023010	S.CER 0402B104K160CT	B	36.5/76.7
C349	4550007550	S.TAN F931V334MAABMA	B	24.9/41.1
C350	4030022860	S.CER 0402N470J500CT	T	16.7/75.9
C351	4030022750	S.CER 0402N221J500CT	T	7.2/67.1
C352	4030023090	S.CER 0402B102K500CT	T	9.2/72.7
C354	4030023090	S.CER 0402B102K500CT	B	36.2/61.6
C355	4030021240	S.CER C1005 JB 1C 105K-T	B	30.8/38.8
C356	4030023010	S.CER 0402B104K160CT	B	40.1/72.5
C357	4030022980	S.CER 0402B473K100CT	B	35.1/66.9
C361	4030022550	S.CER 0402N4R0B500CT	B	30.3/81.1
C364	4030022540	S.CER 0402N3R0B500CT	B	32.5/90.4
C365	4030022680	S.CER 0402N150J500CT	B	33.5/84.2
C372	4030023090	S.CER 0402B102K500CT	T	15.4/91.0
C373	4030023090	S.CER 0402B102K500CT	T	11.1/66.7
C375	4030022610	S.CER 0402N0R3B500CT	T	9.7/112.8
C376	4030023090	S.CER 0402B102K500CT	B	32.9/50.0

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN UNIT] (for #11, #12, #21, and #22)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
C377	4030022620	S.CER 0402N0R5B500CT	T	10.2/49.3
C379	4030023330	S.CER 0603N4R0B500CT	T	16.8/43.8
C381	4030023090	S.CER 0402B102K500CT	B	36.2/62.8
C383	4030023330	S.CER 0603N4R0B500CT	T	11.4/43.6
C384	4030021520	S.CER GRM31CB31H106KA12L	T	25.0/109.6
C385	4030021240	S.CER C1005 JB 1C 105K-T	T	21.6/106.1
C386	4030022560	S.CER 0402N5R0B500CT	T	11.7/41.2
C387	4030023090	S.CER 0402B102K500CT	B	28.4/41.5
C388	4030023090	S.CER 0402B102K500CT	T	20.3/90.4
C389	4030022560	S.CER 0402N5R0B500CT	T	12.1/39.0
C390	4030023090	S.CER 0402B102K500CT	B	32.8/76.8
C391	4030022900	S.CER 0402N680J500CT	B	26.5/76.4
C392	4030023090	S.CER 0402B102K500CT	B	23.6/75.2
C393	4030020000	S.CER C1005 JB 1A 105K-T	B	24.7/76.4
C394	4030023030	S.CER 0402B103K250CT	B	23.8/76.4
C395	4030023090	S.CER 0402B102K500CT	B	15.9/54.2
C396	4030022660	S.CER 0402N120J500CT	B	15.1/56.7
C397	4030022680	S.CER 0402N150J500CT	B	16.2/60.5
C398	4030022860	S.CER 0402N470J500CT	B	42.1/74.1
C399	4030022650	S.CER 0402N110J500CT	B	42.8/75.6
C400	4030022640	S.CER 0402N101J500CT	B	41.2/74.1
C401	4030022550	S.CER 0402N4R0B500CT	B	41.2/75.5
C402	4030022880	S.CER 0402N560J500CT	B	40.3/74.1
C403	4030023090	S.CER 0402B102K500CT	B	33.0/43.9
C405	4030023090	S.CER 0402B102K500CT	B	19.4/99.2
C407	4030020450	S.CER C1005 JB 0J 475M-T	B	16.3/105.4
C418	4030023090	S.CER 0402B102K500CT	T	40.3/12.6
C420	4030023090	S.CER 0402B102K500CT	T	37.3/104.8
C429	4030022860	S.CER 0402N470J500CT	T	16.4/91.0
C430	4030021240	S.CER C1005 JB 1C 105K-T	B	22.7/78.8
C431	4030023090	S.CER 0402B102K500CT	T	37.2/16.9
C432	4030023090	S.CER 0402B102K500CT	B	38.1/106.7
C438	4030022630	S.CER 0402N100C500CT	B	32.9/41.4
C439	4030022640	S.CER 0402N101J500CT	B	43.7/69.2
C440	4030023090	S.CER 0402B102K500CT	B	33.8/41.4
C441	4030020000	S.CER C1005 JB 1A 105K-T	B	34.8/38.9
C443	4030023090	S.CER 0402B102K500CT	B	23.1/39.7
C444	4030023010	S.CER 0402B104K160CT	B	35.4/46.5
C445	4030021240	S.CER C1005 JB 1C 105K-T	B	34.8/44.3
C446	4030023030	S.CER 0402B103K250CT	B	45.1/79.6
C451	4030023010	S.CER 0402B104K160CT	B	24.4/81.3
C458	4030023010	S.CER 0402B104K160CT	B	29.9/91.1
C459	4030023010	S.CER 0402B104K160CT	B	31.0/80.1
C460	4030023010	S.CER 0402B104K160CT	B	40.0/75.8
C461	4030023010	S.CER 0402B104K160CT	T	25.3/85.9
C462	4030023010	S.CER 0402B104K160CT	T	38.2/72.1
C463	4030023010	S.CER 0402B104K160CT	T	26.2/72.1
C464	4030023010	S.CER 0402B104K160CT	T	44.5/71.7
C466	4030023010	S.CER 0402B104K160CT	T	28.9/72.3
C467	4030023010	S.CER 0402B104K160CT	T	42.1/77.1
C468	4030023010	S.CER 0402B104K160CT	T	26.2/86.8
C469	4030023010	S.CER 0402B104K160CT	B	26.7/84.2
C470	4030023010	S.CER 0402B104K160CT	B	26.6/89.5
C471	4030023010	S.CER 0402B104K160CT	B	33.7/90.8
C472	4030023010	S.CER 0402B104K160CT	B	33.1/80.6
C473	4030022560	S.CER 0402N5R0B500CT	B	41.6/70.4
C474	4030022570	S.CER 0402N6R0C500CT	B	43.9/72.8
C475	4030022880	S.CER 0402N560J500CT	B	41.3/71.7
C476	4030023090	S.CER 0402B102K500CT	B	26.8/80.2
C477	4030023090	S.CER 0402B102K500CT	B	29.7/94.7
C478	4030023030	S.CER 0402B103K250CT	B	22.0/64.9
C479	4030023030	S.CER 0402B103K250CT	B	24.9/62.8
C481	4030019560	S.CER GRM21BB31C106KE15L	B	9.6/109.5
C484	4030023030	S.CER 0402B103K250CT	B	8.7/52.9
C485	4030023090	S.CER 0402B102K500CT	T	25.7/66.2
C486	4030023090	S.CER 0402B102K500CT	T	26.7/66.2
C487	4030023090	S.CER 0402B102K500CT	T	27.7/66.2
C488	4030019560	S.CER GRM21BB31C106KE15L	B	9.5/106.0
C489	4030020000	S.CER C1005 JB 1A 105K-T	B	24.2/72.3
C490	4030023010	S.CER 0402B104K160CT	B	35.7/38.9
C491	4030023090	S.CER 0402B102K500CT	B	31.5/57.5
C492	4030020450	S.CER C1005 JB 0J 475M-T	T	28.9/70.5
C493	4030020450	S.CER C1005 JB 0J 475M-T	T	40.3/71.7
C495	4030021520	S.CER GRM31CB31H106KA12L	T	19.6/82.7
C496	4030021520	S.CER GRM31CB31H106KA12L	T	21.3/107.7
C508	4030023090	S.CER 0402B102K500CT	T	14.4/41.4
C509	4030023090	S.CER 0402B102K500CT	T	13.9/38.5
C510	4030023090	S.CER 0402B102K500CT	B	26.6/45.7
C511	4030022640	S.CER 0402N101J500CT	B	29.4/40.4
C512	4030024500	S.CER C1005 JB 1C 224K-T	B	30.3/40.4
C513	4030019560	S.CER GRM21BB31C106KE15L	B	27.6/38.7
C514	4030023010	S.CER 0402B104K160CT	B	33.9/44.3
C515	4030023010	S.CER 0402B104K160CT	B	32.4/48.1
C516	4030019560	S.CER GRM21BB31C106KE15L	B	28.4/49.8
C517	4030023010	S.CER 0402B104K160CT	B	29.9/38.8
C518	4030023090	S.CER 0402B102K500CT	B	26.3/50.7
C519	4030023090	S.CER 0402B102K500CT	B	28.7/47.7
C520	4030023090	S.CER 0402B102K500CT	B	15.5/42.4
C521	4030023090	S.CER 0402B102K500CT	B	16.4/47.7
C522	4030023090	S.CER 0402B102K500CT	T	19.5/50.7
C523	4030023090	S.CER 0402B102K500CT	B	21.9/38.5
C524	4030023090	S.CER 0402B102K500CT	B	21.5/37.3
C525	4030023090	S.CER 0402B102K500CT	B	44.1/67.8
C526	4030022630	S.CER 0402N100C500CT	B	42.6/67.8
C527	4030021240	S.CER C1005 JB 1C 105K-T	B	40.5/65.4
C528	4030023010	S.CER 0402B104K160CT	B	39.6/65.4
C529	4030023010	S.CER 0402B104K160CT	B	44.5/64.6
C530	4030021240	S.CER C1005 JB 1C 105K-T	B	41.9/63.1
C531	4030023010	S.CER 0402B104K160CT	T	21.0/62.0
C532	4030019560	S.CER GRM21BB31C106KE15L	T	26.5/54.9
C533	4030023010	S.CER 0402B104K160CT	T	24.8/54.9
C534	4030023090	S.CER 0402B102K500CT	T	32.5/33.3
C535	4030023010	S.CER 0402B104K160CT	T	24.8/36.0
C536	4030019560	S.CER GRM21BB31C106KE15L	T	24.7/34.0
C537	4030023010	S.CER 0402B104K160CT	T	30.5/33.8

[MAIN UNIT] (for #11, #12, #21, and #22)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
C538	4520000020	S.NIO NOJC227M006RWJV	T	30.3/26.1
C539	4030023090	S.CER 0402B102K500CT	B	41.3/96.4
C541	4030021240	S.CER C1005 JB 1C 105K-T	B	34.8/27.6
C542	4030023010	S.CER 0402B104K160CT	B	34.5/23.2
C543	4030023090	S.CER 0402B102K500CT	T	15.9/9.5
C544	4030023090	S.CER 0402B102K500CT	T	13.0/6.6
C549	4030017810	S.CER C1608 CH 1H 102J-T	B	5.6/31.1
C550	4030022910	S.CER 0402N681J500CT	B	8.7/33.2
C551	4030018620	S.CER C1608 CH 1H 222J-T	B	6.0/28.1
C552	4030022820	S.CER 0402N331J500CT	B	9.0/28.0
C553	4030019570	S.CER C1608 CH 1H 332J-T	B	5.6/19.4
C554	4030022670	S.CER 0402N121J500CT	B	8.0/23.4
C555	4030022350	S.CER C1608 CH 1H 822JT	B	5.5/14.7
C557	4030022930	S.CER 0402N821J500CT	B	11.4/35.3
C558	4030022930	S.CER 0402N821J500CT	B	13.0/31.7
C559	4030022690	S.CER 0402N151J500CT	B	10.5/33.2
C560	4030020170	S.CER C1608 CH 1H 472J-T	B	13.7/27.4
C561	4030022870	S.CER 0402N471J500CT	B	11.2/28.3
C562	4030020940	S.CER C1608 CH 1H 392JT	B	14.1/22.1
C563	4030022640	S.CER 0402N101J500CT	B	12.1/23.2
C564	4030020160	S.CER C1608 CH 1H 103J-T	B	14.1/19.1
C565	4030022680	S.CER 0402N150J500CT	B	9.3/18.3
C566	4030021240	S.CER C1005 JB 1C 105K-T	T	41.5/35.4
C567	4030021240	S.CER C1005 JB 1C 105K-T	T	41.9/36.8
C568	4030021240	S.CER C1005 JB 1C 105K-T	T	40.9/25.9
C569	4030023010	S.CER 0402B104K160CT	T	42.6/26.5
C570	4030023010	S.CER 0402B104K160CT	T	39.6/26.3
C571	4030019560	S.CER GRM21BB31C106KE15L	T	35.0/37.1
C572	4030019560	S.CER GRM21BB31C106KE15L	T	37.6/34.9
C573	4030023090	S.CER 0402B102K500CT	T	9.1/21.3
C574	4030022900	S.CER 0402N680J500CT	B	27.5/10.2
C577	4030021520	S.CER GRM31CB31H106KA12L	B	21.7/9.3
C579	4030021520	S.CER GRM31CB31H106KA12L	B	23.8/9.3
C580	4030021520	S.CER GRM31CB31H106KA12L	B	34.9/6.7
C585	4030023010	S.CER 0402B104K160CT	B	25.4/9.5
C586	4030023030	S.CER 0402B103K250CT	B	26.3/9.5
C587	4030022870	S.CER 0402N471J500CT	B	40.4/23.7
C588	4030022860	S.CER 0402N470J500CT	B	41.6/21.9
C589	4030021240	S.CER C1005 JB 1C 105K-T	B	39.1/22.5
C590	4030023090	S.CER 0402B102K500CT	B	35.2/87.5
C591	4030022640	S.CER 0402N101J500CT	B	36.9/88.1
C592	4030022640	S.CER 0402N101J500CT	B	40.1/96.7
C593	4030023090	S.CER 0402B102K500CT	B	41.5/94.8
C596	4030023090	S.CER 0402B102K500CT	T	11.7/10.7
C597	4030023010	S.CER 0402B104K160CT	B	26.6/26.3
C598	4030021240	S.CER C1005 JB 1C 105K-T	B	25.7/26.3
C599	4030023090	S.CER 0402B102K500CT	T	23.4/118.8
C602	4030023090	S.CER 0402B102K500CT	T	21.2/120.6
C605	4030022640	S.CER 0402N101J500CT	T	28.2/123.0
C608	4030019560	S.CER GRM21BB31C106KE15L	B	21.2/29.9
C610	4030023090	S.CER 0402B102K500CT	T	23.0/97.1
C612	4030019560	S.CER GRM21BB31C106KE15L	T	27.8/91.6
C613	4030023090	S.CER 0402B102K500CT	T	22.1/100.3
C614	4030023010	S.CER 0402B104K160CT	T	25.7/92.4
C615	4030023010	S.CER 0402B104K160CT	T	23.9/97.1
C616	4030023090	S.CER 0402B102K500CT	T	24.8/92.4
C622	4030023060	S.CER 0402B183K250CT	T	46.7/42.3
C623	4030023060	S.CER 0402B183K250CT	T	46.7/40.7
C624	4030023010	S.CER 0402B104K160CT	T	46.6/38.4
C627	4030023010	S.CER 0402B104K160CT	B	10.8/9.2
C628	4030023010	S.CER 0402B104K160CT	B	13.9/5.3
C629	4050000340	S.FEE NFM21PC224R1C3D	B	32.9/6.7
C631	4030022560	S.CER 0402N5R0B500CT	B	10.2/18.3
C632	4030022810	S.CER 0402N330J500CT	B	7.6/17.6
C633	4030023010	S.CER 0402B104K160CT	B	11.1/18.7
C634	4030023010	S.CER 0402B104K160CT	B	13.0/24.2
C635	4030023010	S.CER 0402B104K160CT	B	12.1/28.8
C636	4030023010	S.CER 0402B104K160CT	B	13.1/15.0
C637	4030023010	S.CER 0402B104K160CT	B	12.2/13.7
C638	4030023010	S.CER 0402B104K160CT	B	25.5/57.0
C639	4030023090	S.CER 0402B102K500CT	B	40.6/108.4
C640	4030023090	S.CER 0402B102K500CT	B	45.6/104.3
C641	4030023010	S.CER 0402B104K160CT	T	43.6/46.2
C642	4030023010	S.CER 0402B104K160CT	T	47.9/39.2
C643	4030023010	S.CER 0402B104K160CT	T	41.7/43.5
C644	4030023200	S.CER 0402B471K500CT	T	48.0/41.1
C645	4030023010	S.CER 0402B104K160CT	T	42.1/50.2
C646	4030019560	S.CER GRM21BB31C106KE15L	T	32.8/91.3
C647	4030023010	S.CER 0402B104K160CT	T	28.1/89.8
C648	4030023090	S.CER 0402B102K500CT	B	12.2/60.3
C649	4030023090	S.CER 0402B102K500CT	B	10.2/61.7
C650	4030023010	S.CER 0402B104K160CT	T	19.8/15.8
C651	4030023010	S.CER 0402B104K160CT	T	13.8/21.2
C652	4030023010	S.CER 0402B104K160CT	T	11.7/15.2
C653	4030021240	S.CER C1005 JB 1C 105K-T	T	22.0/97.1
C656	4030023090	S.CER 0402B102K500CT	T	15.6/7.8
C660	4030023090	S.CER 0402B102K500CT	B	6.6/67.2
C661	4030023010	S.CER 0402B104K160CT	T	40.6/46.4
C662	4030023010	S.CER 0402B104K160CT	T	41.2/44.9
C663	4030023010	S.CER 0402B104K160CT	T	33.2/85.4
C664	4030023010	S.CER 0402B104K160CT	B	36.5/41.7
C665	4030023070	S.CER 0402B223K250CT	B	20.7/75.2
C666	4030023010	S.CER 0402B104K160CT	T	34.3/22.5
C667	4030023090	S.CER 0402B102K500CT	B	14.0/15.0
C668	4030023090	S.CER 0402B102K500CT	B	12.0/18.7
C669	4030023090	S.CER 0402B102K500CT	B	13.9/24.2
C670	4030023090	S.CER 0402B102K500CT	B	13.0/29.4
C671	4030022640	S.CER 0402N101J500CT	B	6.0/21.5
C672	4030022640	S.CER 0402N101J500CT	B	6.9/16.1
C673	4030023090	S.CER 0402B102K500CT	T	42.4/45.6
C674	4030023090	S.CER 0402B102K500CT	T	16.1/22.4
C675	4030023090	S.CER 0402B102K500CT	T	6.5/15.7
C676	4030023090	S.CER 0402B102K500CT	T	19.3/79.5
C677	4030019560	S.CER GRM21BB31C106KE15L	[#11] B	24.5/68.6
	4030019560	S.CER GRM21BB31C106KE15L	[#12] B	

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN UNIT] (for #11, #12, #21, and #22)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
C680	4030023010	S.CER 0402B104K160CT	[#11] T	32.7/86.6
	4030023010	S.CER 0402B104K160CT	[#12] T	
C681	4030023010	S.CER 0402B104K160CT	[#11] T	35.2/81.9
	4030023010	S.CER 0402B104K160CT	[#12] T	
C682	4030023010	S.CER 0402B104K160CT	T	30.1/71.4
C683	4030023090	S.CER 0402B102K500CT	B	43.1/94.4
C684	4030023090	S.CER 0402B102K500CT	B	38.9/95.7
J1	6450000870	CON HEC2711-01-020		
J2	6450000131	CON HSJ1102-018540		
J4	6510021901	S.CON BM02B-ASRS-TF (LF) (SN)	T	13.0/4.0
J5	6450001060	CON HSJ1493-01-010		
J6	6510031230	S.CON 50P4.5-JMCS-G-TF (N) (1)	T	35.7/54.3
MC1	7700003060	MIC F6027AP-SBC-462		
S1	2260003640	SWI SKHLLCA010		
EP3	6910014640	S.BEA MPZ2012S221A-T	T	39.3/14.4
EP4	6910014640	S.BEA MPZ2012S221A-T	T	19.5/121.0
EP5	6910014730	S.BEA MPZ2012S331A-T	T	37.0/102.8
EP6	6910014730	S.BEA MPZ2012S331A-T	B	40.2/110.9
EP7	6910014730	S.BEA MPZ2012S331A-T	B	41.8/106.3
EP10	6910014730	S.BEA MPZ2012S331A-T	T	13.9/8.6
EP11	6910014730	S.BEA MPZ2012S331A-T	B	39.7/103.7
EP13	6910020610	S.BEA BLM15BD102SN1D	T	15.7/47.5
EP14	6910020610	S.BEA BLM15BD102SN1D	T	12.5/47.6
EP15	6910014640	S.BEA MPZ2012S221A-T	T	39.7/18.7
EP16	6910014640	S.BEA MPZ2012S221A-T	T	18.5/89.0
EP18	6910020610	S.BEA BLM15BD102SN1D	T	27.7/56.8
EP19	6910020610	S.BEA BLM15BD102SN1D	T	23.5/54.5
EP20	6910020610	S.BEA BLM15BD102SN1D	T	26.6/42.9
EP21	6910020610	S.BEA BLM15BD102SN1D	T	32.6/34.2
EP23	6910014730	S.BEA MPZ2012S331A-T	T	12.2/8.6
EP24	6910014730	S.BEA MPZ2012S331A-T	B	42.4/92.3
EP25	6910020610	S.BEA BLM15BD102SN1D	B	36.5/87.2
EP26	6910020610	S.BEA BLM15BD102SN1D	B	40.1/95.7
EP28	6910020610	S.BEA BLM15BD102SN1D	T	26.9/110.8
EP29	6910014640	S.BEA MPZ2012S221A-T	T	30.3/110.0
EP30	6910014640	S.BEA MPZ2012S221A-T	B	34.9/10.9
EP31	6910020610	S.BEA BLM15BD102SN1D	T	19.5/111.2

M.= Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)
H/V LOCATION= See the BOARD LAYOUTS for details

[LOGIC-1 UNIT] (for #13, #14, #23, and #24)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
IC1	1190004712	S.IC HRM1016-010022	[#13] T	37.3/13.5
	1190004712	S.IC HRM1016-010022	[#14]	
IC11	1110003790	S.IC NJM2903V-TE1-#FMZB	[#13] B	17.6/8.1
	1110003790	S.IC NJM2903V-TE1-#FMZB	[#14]	
IC12	1110006470	S.IC LVM3241PWR	[#13] B	24.1/19.7
	1110006470	S.IC LVM3241PWR	[#14]	
IC13	1110006740	S.IC LMV3581PWR	[#13] B	8.4/11.0
	1110006740	S.IC LMV3581PWR	[#14]	
IC17	1190004620	S.IC GSU-141A-098A	[#13] B	23.8/85.9
	1190004620	S.IC GSU-141A-098A	[#14]	
IC27	1140018060	S.IC R5F52108BDLK	B	31.0/52.9
IC30	1180004760	S.REG S-1200B33-M5T1U	[#13] T	18.2/10.2
	1180004760	S.REG S-1200B33-M5T1U	[#14]	
IC31	1180004760	S.REG S-1200B33-M5T1U	[#13] B	32.5/96.5
	1180004760	S.REG S-1200B33-M5T1U	[#14]	
IC32	1110006490	S.IC LMV321IDCKR	[#13] B	38.6/5.1
	1110006490	S.IC LMV321IDCKR	[#14]	
IC34	1180003570	S.REG NJM2830U1-33-TE1-#ZZZB	B	39.7/44.0
IC35	1130014260	S.IC SN74LVC2GU04DCKR	B	29.0/13.8
IC36	1130014260	S.IC SN74LVC2GU04DCKR	B	40.9/31.9
IC37	1130016621	S.IC GT24C128B-22LI-TR	B	31.3/68.1
IC38	1110007780	S.IC NJU7704F3-28A-TE1-#ZZZH	B	22.4/67.7
IC39	1110007780	S.IC NJU7704F3-28A-TE1-#ZZZH	[#13] T	22.1/13.2
	1110007780	S.IC NJU7704F3-28A-TE1-#ZZZH	[#14]	
IC40	1180005110	S.REG NJM2836DL3-05-TE1	B	31.8/35.9
IC41	1180003460	S.REG NJM2831F05-TE1-#ZZZB	B	29.1/64.5
Q3	1530004190	S.TRA L2SC4617ST1G	B	24.9/72.7
Q5	1590004070	S.TRA LDTC144EET1G	[#13] T	36.3/21.2
	1590004070	S.TRA LDTC144EET1G	[#14]	
Q13	1530004140	S.TRA L2SC4081RT1G	[#13] B	21.1/12.6
	1530004140	S.TRA L2SC4081RT1G	[#14]	
Q15	1590004530	S.TRA DMG564050R	[#13] B	24.9/29.6
	1590004530	S.TRA DMG564050R	[#14]	
Q16	1590004070	S.TRA LDTC144EET1G	[#13] B	40.5/11.3
	1590004070	S.TRA LDTC144EET1G	[#14]	
Q17	1590004070	S.TRA LDTC144EET1G	[#13] T	19.9/17.9
	1590004070	S.TRA LDTC144EET1G	[#14]	
Q22	1530004000	S.TRA 2SC4738-GR (TE85LF)	B	32.4/14.2
Q23	1510001100	S.TRA 2SA1832-GR (TE85RF)	B	28.1/17.0
Q24	1510001100	S.TRA 2SA1832-GR (TE85RF)	B	40.8/28.5
Q25	1560001730	S.FET RUE002N02 TL	B	35.8/29.7
Q31	1510001100	S.TRA 2SA1832-GR (TE85RF)	T	14.7/13.5
Q32	1510001100	S.TRA 2SA1832-GR (TE85RF)	T	13.4/18.5
Q33	1590004070	S.TRA LDTC144EET1G	T	17.2/7.4
Q34	1590004070	S.TRA LDTC144EET1G	T	14.8/15.5
D1	1750001810	S.DIO L1SS400T1G	T	6.1/104.9
D2	1750002220	S.DIO DA6J101KOR	T	3.4/16.6
D4	1750001810	S.DIO L1SS400T1G	[#23] T	3.9/12.1
	1750001810	S.DIO L1SS400T1G	[#24]	
D5	1750001810	S.DIO L1SS400T1G	T	13.0/98.5
D6	1750001810	S.DIO L1SS400T1G	[#14] B	11.2/56.2
	1750001810	S.DIO L1SS400T1G	[#24]	
D7	1750001970	S.ZEN D2ZJ082M0L	B	29.4/73.2
D8	1750001810	S.DIO L1SS400T1G	B	32.5/72.5
D16	1750001810	S.DIO L1SS400T1G	[#13] B	13.2/6.8
	1750001810	S.DIO L1SS400T1G	[#14]	
D17	1750001810	S.DIO L1SS400T1G	[#13] B	17.5/12.6
	1750001810	S.DIO L1SS400T1G	[#14]	
D18	1750001790	S.DIO 1SS390 TE61	B	40.7/57.6
D34	1750001810	S.DIO L1SS400T1G	B	26.3/36.4
D35	1750001810	S.DIO L1SS400T1G	B	45.0/44.6
D46	1750001810	S.DIO L1SS400T1G	[#13] T	17.8/12.6
	1750001810	S.DIO L1SS400T1G	[#14]	
D47	1750001810	S.DIO L1SS400T1G	B	32.5/17.4
D48	1750001810	S.DIO L1SS400T1G	B	36.0/28.1
X1	6050013790	S.XTA CR-981 (19.6608 MHz)	B	39.7/53.9
R3	7030015910	S.RES RMC1/16S-101JTH (100)	[#13] B	33.6/8.2
	7030015910	S.RES RMC1/16S-101JTH (100)	[#14]	
R5	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	23.5/70.8
R16	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	22.6/70.8
R17	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	26.9/73.2
R18	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	28.3/71.6
R25	7030016160	S.RES RMC1/16S-820JTH (82)	T	11.0/35.2
R26	7030016160	S.RES RMC1/16S-820JTH (82)	T	22.0/35.2
R28	7030016560	S.RES RMC1/16SJPTH	[#13] B	31.8/8.2
	7030016560	S.RES RMC1/16SJPTH	[#14]	
R60	7030016340	S.RES RMC1/16S-393JTH (39 k)	[#13] B	22.0/8.4
	7030016340	S.RES RMC1/16S-393JTH (39 k)	[#14]	
R61	7030016110	S.RES RMC1/16S-473JTH (47 k)	[#13] B	13.3/8.8
	7030016110	S.RES RMC1/16S-473JTH (47 k)	[#14]	
R62	7030016020	S.RES RMC1/16S-104JTH (100 k)	[#13] B	12.2/8.4
	7030016020	S.RES RMC1/16S-104JTH (100 k)	[#14]	
R63	7030016330	S.RES RMC1/16S-153JTH (15 k)	[#13] B	11.0/2.3
	7030016330	S.RES RMC1/16S-153JTH (15 k)	[#14]	
R64	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	[#13] B	4.5/9.2
	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	[#14]	
R65	7030016040	S.RES RMC1/16S-224JTH (220 k)	[#13] B	9.2/6.6
	7030016040	S.RES RMC1/16S-224JTH (220 k)	[#14]	
R66	7030016040	S.RES RMC1/16S-224JTH (220 k)	[#13] B	9.2/5.7
	7030016040	S.RES RMC1/16S-224JTH (220 k)	[#14]	
R67	7030015970	S.RES RMC1/16S-103JTH (10 k)	[#13] B	5.9/10.2
	7030015970	S.RES RMC1/16S-103JTH (10 k)	[#14]	
R68	7030016200	S.RES RMC1/16S-274JTH (270 k)	[#13] B	5.9/11.8
	7030016200	S.RES RMC1/16S-274JTH (270 k)	[#14]	

[LOGIC-1 UNIT] (for #13, #14, #23, and #24)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
R69	7030016360	S.RES RMC1/16S-123JTH (12 k)	[#13] B	2.8/14.3
	7030016360	S.RES RMC1/16S-123JTH (12 k)	[#14]	
R72	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	[#13] B	9.9/15.3
	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	[#14]	
R73	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	[#13] B	21.7/24.9
	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	[#14]	
R74	7030016040	S.RES RMC1/16S-224JTH (220 k)	[#13] B	21.7/24.0
	7030016040	S.RES RMC1/16S-224JTH (220 k)	[#14]	
R75	7030016110	S.RES RMC1/16S-473JTH (47 k)	[#13] B	23.7/24.0
	7030016110	S.RES RMC1/16S-473JTH (47 k)	[#14]	
R76	7030016110	S.RES RMC1/16S-473JTH (47 k)	[#13] B	22.7/26.4
	7030016110	S.RES RMC1/16S-473JTH (47 k)	[#14]	
R77	7030016040	S.RES RMC1/16S-224JTH (220 k)	[#13] B	24.8/25.0
	7030016040	S.RES RMC1/16S-224JTH (220 k)	[#14]	
R78	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	[#13] B	26.5/25.5
	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	[#14]	
R79	7030016120	S.RES RMC1/16S-682JTH (6.8 k)	[#13] B	24.8/13.4
	7030016120	S.RES RMC1/16S-682JTH (6.8 k)	[#14]	
R80	7030016030	S.RES RMC1/16S-154JTH (150 k)	[#13] B	26.0/15.4
	7030016030	S.RES RMC1/16S-154JTH (150 k)	[#14]	
R81	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	[#13] B	23.9/15.0
	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	[#14]	
R82	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	[#13] B	26.4/13.3
	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	[#14]	
R83	7030016040	S.RES RMC1/16S-224JTH (220 k)	[#13] B	22.4/15.3
	7030016040	S.RES RMC1/16S-224JTH (220 k)	[#14]	
R84	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	[#13] B	16.6/18.5
	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	[#14]	
R85	7030016360	S.RES RMC1/16S-123JTH (12 k)	[#13] B	14.4/21.3
	7030016360	S.RES RMC1/16S-123JTH (12 k)	[#14]	
R86	7030016560	S.RES RMC1/16SJPTH	[#13] B	15.3/21.3
	7030016560	S.RES RMC1/16SJPTH	[#14]	
R88	7030016000	S.RES RMC1/16S-823JTH (82 k)	[#13] B	18.2/23.5
	7030016000	S.RES RMC1/16S-823JTH (82 k)	[#14]	
R91	7030016100	S.RES RMC1/16S-334JTH (330 k)	[#13] B	23.0/10.4
	7030016100	S.RES RMC1/16S-334JTH (330 k)	[#14]	
R93	7030016070	S.RES RMC1/16S-474JTH (470 k)	[#13] B	21.5/14.4
	7030016070	S.RES RMC1/16S-474JTH (470 k)	[#14]	
R94	7030016450	S.RES RMC1/16S-824JTH (820 k)	[#13] B	23.0/13.7
	7030016450	S.RES RMC1/16S-824JTH (820 k)	[#14]	
R95	7030016090	S.RES RMC1/16S-223JTH (22 k)	[#13] B	19.2/13.0
	7030016090	S.RES RMC1/16S-223JTH (22 k)	[#14]	
R112	7030016320	S.RES RMC1/16S-225JTH (2.2 M)	[#13] B	16.7/11.0
	7030016320	S.RES RMC1/16S-225JTH (2.2 M)	[#14]	
R145	7030016060	S.RES RMC1/16S-105JTH (1 M)	T	2.2/13.8
R146	7030016060	S.RES RMC1/16S-105JTH (1 M)	T	2.7/14.8
R147	7030016060	S.RES RMC1/16S-105JTH (1 M)	T	5.6/13.8
R148	7030016060	S.RES RMC1/16S-105JTH (1 M)	T	4.1/9.3
R151	7510001661	S.THR NTCG16 4LH 473JT	T	34.8/24.7
R152	7030008270	S.RES R0510P-104-D (100 k)	T	36.8/25.5
R558	7030016360	S.RES RMC1/16S-123JTH (12 k)	[#13] B	21.5/9.8
	7030016360	S.RES RMC1/16S-123JTH (12 k)	[#14]	
R595	7030015520	S.RES RMC1/16JPTH	B	28.0/32.2
R856	7030015900	S.RES RMC1/16S-470JTH (47)	[#13] B	19.2/88.3
	7030015900	S.RES RMC1/16S-470JTH (47)	[#14]	
R857	7030016560	S.RES RMC1/16SJPTH	[#13] B	18.8/85.4
	7030016560	S.RES RMC1/16SJPTH	[#14]	
R858	7030016560	S.RES RMC1/16SJPTH	[#13] B	21.5/79.2
	7030016560	S.RES RMC1/16SJPTH	[#14]	
R859	7030016560	S.RES RMC1/16SJPTH	[#13] B	28.7/86.5
	7030016560	S.RES RMC1/16SJPTH	[#14]	
R860	7030016020	S.RES RMC1/16S-104JTH (100 k)	[#13] B	28.7/87.4
	7030016020	S.RES RMC1/16S-104JTH (100 k)	[#14]	
R861	7030016020	S.RES RMC1/16S-104JTH (100 k)	[#13] B	29.7/97.1
	7030016020	S.RES RMC1/16S-104JTH (100 k)	[#14]	
R862	7030016560	S.RES RMC1/16SJPTH	[#13] B	28.9/98.0
	7030016560	S.RES RMC1/16SJPTH	[#14]	
R863	7030016560	S.RES RMC1/16SJPTH	[#13] T	22.8/16.1
	7030016560	S.RES RMC1/16SJPTH	[#14]	
R864	7030016110	S.RES RMC1/16S-473JTH (47 k)	[#13] B	40.1/16.4
	7030016110	S.RES RMC1/16S-473JTH (47 k)	[#14]	
R865	7030016110	S.RES RMC1/16S-473JTH (47 k)	[#13] B	38.5/15.3
	7030016110	S.RES RMC1/16S-473JTH (47 k)	[#14]	
R866	7030016020	S.RES RMC1/16S-104JTH (100 k)	[#13] T	21.9/17.9
	7030016020	S.RES RMC1/16S-104JTH (100 k)	[#14]	
R867	7030016020	S.RES RMC1/16S-104JTH (100 k)	[#13] B	40.1/12.9
	7030016020	S.RES RMC1/16S-104JTH (100 k)	[#14]	
R868	7030016110	S.RES RMC1/16S-473JTH (47 k)	[#13] B	40.1/14.1
	7030016110	S.RES RMC1/16S-473JTH (47 k)	[#14]	
R869	7030016110	S.RES RMC1/16S-473JTH (47 k)	[#13] B	40.1/15.3
	7030016110	S.RES RMC1/16S-473JTH (47 k)	[#14]	
R871	7030015970	S.RES RMC1/16S-103JTH (10 k)	[#13] B	36.3/11.8
	7030015970	S.RES RMC1/16S-103JTH (10 k)	[#14]	
R873	7030016050	S.RES RMC1/16S-102JTH (1 k)	[#13] B	38.7/8.4
	7030016050	S.RES RMC1/16S-102JTH (1 k)	[#14]	
R874	7030016190	S.RES RMC1/16S-273JTH (27 k)	[#13] B	39.0/2.4
	7030016190	S.RES RMC1/16S-273JTH (27 k)	[#14]	
R875	7030016190	S.RES RMC1/16S-273JTH (27 k)	[#13] B	40.8/4.3
	7030016190	S.RES RMC1/16S-273JTH (27 k)	[#14]	
R876	7030016160	S.RES RMC1/16S-820JTH (82)	T	33.0/35.2
R878	7030015920	S.RES RMC1/16S-221JTH (220)	T	13.2/14

[LOGIC-1 UNIT] (for #13, #14, #23, and #24)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
R907	7030014460	S.RES MCR006YZPJ 101 (100)	B	39.2/50.1
R908	7030016060	S.RES RMC1/16S-105JTH (1 M)	B	37.1/52.9
R909	7030016150	S.RES RMC1/16S-100JTH (10)	B	35.8/53.0
R910	7030016360	S.RES RMC1/16S-123JTH (12 k)	B	39.3/57.6
R911	7030016090	S.RES RMC1/16S-223JTH (22 k)	B	39.3/56.7
R912	7030016360	S.RES RMC1/16S-123JTH (12 k)	B	42.0/58.4
R913	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	26.0/67.7
R914	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	25.0/68.2
R917	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	24.1/21.2
R920	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	23.7/20.0
R925	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	44.4/52.9
R926	7030016560	S.RES RMC1/16SJPTH [13]	B	9.9/16.2
	7030016560	S.RES RMC1/16SJPTH [14]		
R927	7030016560	S.RES RMC1/16SJPTH [13]	B	20.7/15.3
	7030016560	S.RES RMC1/16SJPTH [14]		
R928	7030016560	S.RES RMC1/16SJPTH [13]	B	21.3/26.2
	7030016560	S.RES RMC1/16SJPTH [14]		
R929	7030014460	S.RES MCR006YZPJ 101 (100) [13]	B	24.6/50.9
	7030014460	S.RES MCR006YZPJ 101 (100) [14]		
R930	7030014460	S.RES MCR006YZPJ 101 (100) [13]	B	24.0/51.9
	7030014460	S.RES MCR006YZPJ 101 (100) [14]		
R931	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	23.8/49.3
R932	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	23.4/50.5
R933	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	22.1/69.6
R934	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	26.0/69.8
R935	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	35.3/54.5
R937	7030016560	S.RES RMC1/16SJPTH	B	30.3/27.6
R940	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	28.4/61.3
R943	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	35.6/44.1
R944	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	36.5/47.0
R945	7030016020	S.RES RMC1/16S-104JTH (100 k) [13]	B	19.2/86.6
	7030016020	S.RES RMC1/16S-104JTH (100 k) [14]		
R946	7030016020	S.RES RMC1/16S-104JTH (100 k) [13]	B	20.3/79.6
	7030016020	S.RES RMC1/16S-104JTH (100 k) [14]		
R947	7030016020	S.RES RMC1/16S-104JTH (100 k) [13]	T	15.9/9.8
	7030016020	S.RES RMC1/16S-104JTH (100 k) [14]		
R949	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	21.1/21.2
R952	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	17.7/26.7
R962	7030016020	S.RES RMC1/16S-104JTH (100 k) [13]	B	39.1/7.1
	7030016020	S.RES RMC1/16S-104JTH (100 k) [14]		
R963	7030016210	S.RES RMC1/16S-121JTH (120)	T	13.2/16.2
R964	7030014400	S.RES MCR006YZPJ 100 (10)	B	28.6/60.4
R965	7030014400	S.RES MCR006YZPJ 100 (10)	B	30.9/59.6
R966	7030014400	S.RES MCR006YZPJ 100 (10)	B	43.4/58.4
R967	7030014400	S.RES MCR006YZPJ 100 (10)	B	34.7/47.9
R968	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/49.7
R969	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/51.8
R970	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/66.3
R971	7030014400	S.RES MCR006YZPJ 100 (10)	B	25.0/66.8
R972	7030014400	S.RES MCR006YZPJ 100 (10)	B	34.6/44.5
R973	7030014400	S.RES MCR006YZPJ 100 (10)	B	35.6/47.1
R974	7030014400	S.RES MCR006YZPJ 100 (10)	B	23.5/47.8
R975	7030014400	S.RES MCR006YZPJ 100 (10)	B	29.3/47.9
R976	7030014400	S.RES MCR006YZPJ 100 (10)	B	28.7/47.9
R977	7030014400	S.RES MCR006YZPJ 100 (10)	B	27.5/47.9
R978	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/50.9
R979	7030014400	S.RES MCR006YZPJ 100 (10)	B	33.0/44.0
R980	7030014400	S.RES MCR006YZPJ 100 (10)	B	39.4/51.5
R981	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/48.8
R982	7030014400	S.RES MCR006YZPJ 100 (10)	B	28.1/47.9
R983	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.3/47.9
R984	7030014400	S.RES MCR006YZPJ 100 (10)	B	24.1/55.7
R985	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/50.6
R986	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/49.1
R987	7030014400	S.RES MCR006YZPJ 100 (10)	B	33.1/47.9
R988	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/48.5
R989	7030014400	S.RES MCR006YZPJ 100 (10)	B	32.3/47.9
R990	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/51.8
R991	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/53.0
R992	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/52.4
R993	7030014400	S.RES MCR006YZPJ 100 (10)	B	33.5/46.2
R994	7030014400	S.RES MCR006YZPJ 100 (10)	B	28.9/57.7
R995	7030014400	S.RES MCR006YZPJ 100 (10)	B	23.7/58.8
R996	7030014400	S.RES MCR006YZPJ 100 (10)	B	29.0/44.3
R997	7030014400	S.RES MCR006YZPJ 100 (10)	B	28.4/43.5
R998	7030014400	S.RES MCR006YZPJ 100 (10)	B	34.5/46.2
R999	7030014380	S.RES MCR006YZPJ 103 (10 k)	B	31.3/42.9
R1000	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/42.5
R1001	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.7/42.5
R1002	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.9/47.9
R1003	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/50.0
R1004	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.3/47.9
R1005	7030014400	S.RES MCR006YZPJ 100 (10)	B	32.7/46.2
R1006	7030014380	S.RES MCR006YZPJ 103 (10 k)	B	31.5/47.9
R1007	7030014400	S.RES MCR006YZPJ 100 (10)	B	24.1/47.2
R1008	7030014400	S.RES MCR006YZPJ 100 (10)	B	26.0/49.4
R1009	7030014400	S.RES MCR006YZPJ 100 (10)	B	35.1/46.2
R1010	7030014390	S.RES MCR006YZPJ 102 (1 k)	B	33.9/47.9
R1011	7030014400	S.RES MCR006YZPJ 100 (10)	B	32.0/46.2
R1012	7030014400	S.RES MCR006YZPJ 100 (10)	B	35.5/57.6
R1013	7030014390	S.RES MCR006YZPJ 102 (1 k)	B	34.7/57.9
R1014	7030014400	S.RES MCR006YZPJ 100 (10)	B	33.8/57.9
R1015	7030014400	S.RES MCR006YZPJ 100 (10)	B	32.2/57.7
R1016	7030014590	S.RES MCR006YLPJ 000 (JPW)	B	31.6/57.7
R1017	7030014400	S.RES MCR006YZPJ 100 (10)	B	31.0/57.7
R1018	7030014400	S.RES MCR006YZPJ 100 (10)	B	29.5/57.7
R1019	7030014400	S.RES MCR006YZPJ 100 (10)	B	24.1/58.1
R1020	7030014400	S.RES MCR006YZPJ 100 (10)	B	24.1/57.5
R1021	7030014400	S.RES MCR006YZPJ 100 (10)	B	35.0/59.5
R1022	7030014400	S.RES MCR006YZPJ 100 (10)	B	32.2/59.5
R1023	7030014400	S.RES MCR006YZPJ 100 (10)	B	31.6/59.6
R1024	7030014400	S.RES MCR006YZPJ 100 (10)	B	30.1/58.8
R1025	7030014400	S.RES MCR006YZPJ 100 (10)	B	28.0/57.3
R1026	7030014400	S.RES MCR006YZPJ 100 (10)	B	24.1/56.9
R1027	7030014400	S.RES MCR006YZPJ 100 (10)	B	37.7/58.5

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[LOGIC-1 UNIT] (for #13, #14, #23, and #24)

REF NO.	PART NO.		DESCRIPTION		M.	H/V LOCATION
R1028	7030014400	S.RES	MCR006YZPJ 100 (10)		B	34.3/59.5
R1029	7030014400	S.RES	MCR006YZPJ 100 (10)		B	33.2/60.1
R1030	7030014400	S.RES	MCR006YZPJ 100 (10)		B	28.5/62.4
R1031	7030014390	S.RES	MCR006YZPJ 102 (1 k)		B	44.3/55.4
R1032	7030014400	S.RES	MCR006YZPJ 100 (10)		B	36.8/57.8
R1033	7030014400	S.RES	MCR006YZPJ 100 (10)		B	34.3/61.9
R1034	7030014390	S.RES	MCR006YZPJ 102 (1 k)		B	31.6/62.0
R1035	7030014400	S.RES	MCR006YZPJ 100 (10)		B	30.4/57.7
R1036	7030014400	S.RES	MCR006YZPJ 100 (10)		B	20.6/63.1
R1037	7030014390	S.RES	MCR006YZPJ 102 (1 k)		B	24.1/56.3
R1038	7030014390	S.RES	MCR006YZPJ 102 (1 k)		B	24.1/55.1
R1039	7030014390	S.RES	MCR006YZPJ 102 (1 k)		B	26.0/54.7
R1040	7030014390	S.RES	MCR006YZPJ 102 (1 k)		B	44.9/55.4
R1041	7030014400	S.RES	MCR006YZPJ 100 (10)		B	24.1/54.5
R1042	7030014400	S.RES	MCR006YZPJ 100 (10)		B	26.0/53.9
R1043	7030014400	S.RES	MCR006YZPJ 100 (10)		B	24.1/53.5
R1044	7030014400	S.RES	MCR006YZPJ 100 (10)		B	20.7/68.3
R1045	7030014400	S.RES	MCR006YZPJ 100 (10)		B	43.9/52.0
R1046	7030014400	S.RES	MCR006YZPJ 100 (10)		B	23.5/61.7
R1047	7030014400	S.RES	MCR006YZPJ 100 (10)		B	44.0/51.4
R1050	7030014400	S.RES	MCR006YZPJ 100 (10)		B	24.1/46.6
R1053	7030015970	S.RES	RMC1/16S-103JTH (10 k)		T	14.7/11.9
R1054	7030015970	S.RES	RMC1/16S-103JTH (10 k)		T	15.0/18.6
R1055	7030015970	S.RES	RMC1/16S-103JTH (10 k)		T	15.0/10.2
R1056	7030015970	S.RES	RMC1/16S-103JTH (10 k)		T	14.6/17.0
R1057	7030016150	S.RES	RMC1/16S-100JTH (10)		B	41.0/40.6
R1059	7030016560	S.RES	RMC1/16SJPTH	[13]	B	29.7/96.2
	7030016560	S.RES	RMC1/16SJPTH	[14]		
R1060	7030016560	S.RES	RMC1/16SJPTH	[13]	T	16.6/13.6
	7030016560	S.RES	RMC1/16SJPTH	[14]		
R1061	7210003820	VAR	TP76D1190E20-20.5F -10KB-3699			
R1062	7030016560	S.RES	RMC1/16SJPTH		B	40.3/89.6
R1063	7030015970	S.RES	RMC1/16S-103JTH (10 k)	[13]	T	21.8/15.1
	7030015970	S.RES	RMC1/16S-103JTH (10 k)	[14]		
R1064	7030016560	S.RES	RMC1/16SJPTH		T	13.7/4.9
R1065	7030016560	S.RES	RMC1/16SJPTH		T	13.7/7.7
R1066	7030016560	S.RES	RMC1/16SJPTH		T	11.3/3.6
R1067	7030016560	S.RES	RMC1/16SJPTH		T	12.6/10.5
R1068	7030016560	S.RES	RMC1/16SJPTH		T	10.3/3.6
R1069	7030016560	S.RES	RMC1/16SJPTH		T	5.6/21.3
R1070	7030016560	S.RES	RMC1/16SJPTH		T	9.4/4.5
R1071	7030016560	S.RES	RMC1/16SJPTH		T	5.4/17.4
R1072	7030016560	S.RES	RMC1/16SJPTH		T	8.2/3.9
R1073	7030016560	S.RES	RMC1/16SJPTH		T	13.7/6.7
R1074	7030016020	S.RES	RMC1/16S-104JTH (100 k)		B	28.5/46.5
R1075	7030014400	S.RES	MCR006YZPJ 100 (10)		B	37.3/51.2
R1076	7030014400	S.RES	MCR006YZPJ 100 (10)		B	30.9/47.9
R1077	7030016560	S.RES	RMC1/16SJPTH	[13]	T	32.4/20.7
	7030016560	S.RES	RMC1/16SJPTH	[14]		
R1078	7030016090	S.RES	RMC1/16S-223JTH (22 k)		B	30.9/16.4
R1079	7030016290	S.RES	RMC1/16S-222JTH (2.2 k)		B	38.0/29.0
R1081	7030016060	S.RES	RMC1/16S-105JTH (1 M)		B	33.5/63.6
R1082	7030016050	S.RES	RMC1/16S-102JTH (1 k)		B	36.6/42.0
R1083	7030016110	S.RES	RMC1/16S-473JTH (47 k)		B	23.2/46.4
R1084	7410001340	S.ARR	EXB28V473JX		B	25.3/45.0
R1085	7030014380	S.RES	MCR006YZPJ 103 (10 k)	[23]	B	45.2/50.3
	7030014380	S.RES	MCR006YZPJ 103 (10 k)	[24]		
R1086	7030014380	S.RES	MCR006YZPJ 103 (10 k)	[23]	B	45.2/51.4
	7030014380	S.RES	MCR006YZPJ 103 (10 k)	[24]		
R1087	7030016320	S.RES	RMC1/16S-225JTH (2.2 M)		B	33.2/64.8
R1088	7030016240	S.RES	RMC1/16S-684JTH (680 k)		B	31.9/64.1
R1089	7030016110	S.RES	RMC1/16S-473JTH (47 k)		B	25.2/63.3
R1090	7030016000	S.RES	RMC1/16S-823JTH (82 k)	[13]	B	5.4/18.4
	7030016000	S.RES	RMC1/16S-823JTH (82 k)	[14]		
R1091	7030016040	S.RES	RMC1/16S-224JTH (220 k)	[13]	B	9.0/17.1
	7030016040	S.RES	RMC1/16S-224JTH (220 k)	[14]		
R1092	7030016050	S.RES	RMC1/16S-102JTH (1 k)	[13]	B	42.4/8.0
	7030016050	S.RES	RMC1/16S-102JTH (1 k)	[14]		
R1093	7030016410	S.RES	RMC1/16S-561JTH (560)	[13]	B	41.9/6.8
	7030016410	S.RES	RMC1/16S-561JTH (560)	[14]		
R1097	7030016020	S.RES	RMC1/16S-104JTH (100 k)		B	28.9/15.6
R1098	7030016020	S.RES	RMC1/16S-104JTH (100 k)		B	40.5/30.0
C1	4030021240	S.CER	C1005 JB 1C 105K-T	[13]	T	23.6/17.9
	4030021240	S.CER	C1005 JB 1C 105K-T	[14]		
C2	4030021240	S.CER	C1005 JB 1C 105K-T	[13]	T	24.1/16.5
	4030021240	S.CER	C1005 JB 1C 105K-T	[14]		
C5	4030021240	S.CER	C1005 JB 1C 105K-T	[13]	B	32.7/8.2
	4030021240	S.CER	C1005 JB 1C 105K-T	[14]		
C6	4030021240	S.CER	C1005 JB 1C 105K-T	[13]	B	30.6/8.7
	4030021240	S.CER	C1005 JB 1C 105K-T	[14]		
C7	4030021240	S.CER	C1005 JB 1C 105K-T	[13]	B	33.2/9.4
	4030021240	S.CER	C1005 JB 1C 105K-T	[14]		
C8	4030023090	S.CER	0402B102K500CT		B	24.7/70.4
C16	4030023090	S.CER	0402B102K500CT	[13]	T	18.3/17.9
	4030023090	S.CER	0402B102K500CT	[14]		
C18	4030022640	S.CER	0402N101J500CT	[13]	B	28.5/7.3
	4030022640	S.CER	0402N101J500CT	[14]		
C20	4030023090	S.CER	0402B102K500CT		B	24.7/71.3
C21	4030022540	S.CER	0402N3R0B500CT	[13]	B	27.6/7.3
	4030022540	S.CER	0402N3R0B500CT	[14]		
C22	4030023090	S.CER	0402B102K500CT		B	27.4/72.0
C25	4030023010	S.CER	0402B104K160CT		B	29.0/28.1
C31	4030023010	S.CER	0402B104K160CT		B	25.7/34.5
C101	4030023090	S.CER	0402B102K500CT	[13]	B	13.8/10.1
	4030023090	S.CER	0402B102K500CT	[14]		
C102	4030023200	S.CER	0402B471K500CT	[13]	B	14.2/5.5
	4030023200	S.CER	0402B471K500CT	[14]		
C103	4030019560	S.CER	GRM21BB31C106KE15L	[13]	B	19.9/24.7
	4030019560	S.CER	GRM21BB31C106KE15L	[14]		
C104	4030019560	S.CER	GRM21BB31C106KE15L	[13]	B	22.1/27.9
	4030019560	S.CER	GRM21BB31C106KE15L	[14]		

[LOGIC-1 UNIT] (for #13, #14, #23, and #24)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
C105	4030019560	S.CER GRM21BB31C106KE15L	[#13]	B 21.3/31.5
	4030019560	S.CER GRM21BB31C106KE15L	[#14]	
C106	4030019560	S.CER GRM21BB31C106KE15L	[#13]	B 21.3/29.7
	4030019560	S.CER GRM21BB31C106KE15L	[#14]	
C107	4030022940	S.CER 0402B104K100CT	[#13]	B 26.5/24.6
	4030022940	S.CER 0402B104K100CT	[#14]	
C108	4030023090	S.CER 0402B102K500CT	[#13]	B 24.8/15.0
	4030023090	S.CER 0402B102K500CT	[#14]	
C109	4030023090	S.CER 0402B102K500CT	[#13]	B 26.0/14.5
	4030023090	S.CER 0402B102K500CT	[#14]	
C111	4550007300	S.TAN F931A335MAABMA	[#13]	B 14.4/24.7
	4550007300	S.TAN F931A335MAABMA	[#14]	
C112	4550008210	S.TAN 267M3502 104MR	[#13]	B 20.3/20.1
	4550008210	S.TAN 267M3502 104MR	[#14]	
C113	4550008210	S.TAN 267M3502 104MR	[#13]	B 18.2/20.1
	4550008210	S.TAN 267M3502 104MR	[#14]	
C114	4550008210	S.TAN 267M3502 104MR	[#13]	B 8.0/2.0
	4550008210	S.TAN 267M3502 104MR	[#14]	
C115	4550008210	S.TAN 267M3502 104MR	[#13]	B 8.0/4.1
	4550008210	S.TAN 267M3502 104MR	[#14]	
C116	4030023090	S.CER 0402B102K500CT	[#13]	B 11.2/15.0
	4030023090	S.CER 0402B102K500CT	[#14]	
C121	4030023030	S.CER 0402B103K250CT	[#13]	B 23.0/12.0
	4030023030	S.CER 0402B103K250CT	[#14]	
C122	4030019560	S.CER GRM21BB31C106KE15L	[#13]	B 18.8/11.0
	4030019560	S.CER GRM21BB31C106KE15L	[#14]	
C123	4030023090	S.CER 0402B102K500CT	[#13]	B 24.6/31.5
C125	4550007520	S.TAN F931A106MAABMA	[#13]	B 4.4/12.2
	4550007520	S.TAN F931A106MAABMA	[#14]	
C155	4030023090	S.CER 0402B102K500CT	[#13]	T 11.8/2.4
C156	4030023090	S.CER 0402B102K500CT	[#14]	T 13.5/10.5
C157	4030023090	S.CER 0402B102K500CT	[#13]	T 13.7/4.0
C158	4030023090	S.CER 0402B102K500CT	[#14]	T 14.1/8.9
C159	4030023090	S.CER 0402B102K500CT	[#13]	T 9.9/2.4
C161	4030023090	S.CER 0402B102K500CT	[#14]	T 35.9/25.5
C600	4030023030	S.CER 0402B103K250CT	[#13]	B 21.5/10.8
	4030023030	S.CER 0402B103K250CT	[#14]	
C629	4030023010	S.CER 0402B104K160CT	[#13]	B 24.8/26.6
	4030023010	S.CER 0402B104K160CT	[#14]	
C630	4030022640	S.CER 0402N101J500CT	[#13]	B 19.3/90.9
	4030022640	S.CER 0402N101J500CT	[#14]	
C631	4050000380	S.FEE NFM15PC104R1A3D	[#13]	B 18.2/89.2
	4050000380	S.FEE NFM15PC104R1A3D	[#14]	
C632	4050000380	S.FEE NFM15PC104R1A3D	[#13]	B 33.6/94.1
	4050000380	S.FEE NFM15PC104R1A3D	[#14]	
C633	4030019560	S.CER GRM21BB31C106KE15L	[#13]	B 33.7/92.4
	4030019560	S.CER GRM21BB31C106KE15L	[#14]	
C634	4030023090	S.CER 0402B102K500CT	[#13]	B 32.6/94.0
	4030023090	S.CER 0402B102K500CT	[#14]	
C637	4030023090	S.CER 0402B102K500CT	[#13]	B 28.7/88.4
	4030023090	S.CER 0402B102K500CT	[#14]	
C638	4030023090	S.CER 0402B102K500CT	[#13]	B 19.2/84.1
	4030023090	S.CER 0402B102K500CT	[#14]	
C639	4030023090	S.CER 0402B102K500CT	[#13]	B 22.5/79.2
	4030023090	S.CER 0402B102K500CT	[#14]	
C640	4030023090	S.CER 0402B102K500CT	[#13]	B 29.9/87.9
	4030023090	S.CER 0402B102K500CT	[#14]	
C641	4030023090	S.CER 0402B102K500CT	[#13]	B 18.3/84.1
	4030023090	S.CER 0402B102K500CT	[#14]	
C642	4030023090	S.CER 0402B102K500CT	[#13]	B 19.6/78.7
	4030023090	S.CER 0402B102K500CT	[#14]	
C643	4050000380	S.FEE NFM15PC104R1A3D	[#13]	T 20.1/13.2
	4050000380	S.FEE NFM15PC104R1A3D	[#14]	
C645	4030021240	S.CER C1005 JB 1C 105K-T	[#13]	B 36.3/10.2
	4030021240	S.CER C1005 JB 1C 105K-T	[#14]	
C648	4030022540	S.CER 0402N3R0B500CT	[#13]	T 25.0/16.5
	4030022540	S.CER 0402N3R0B500CT	[#14]	
C649	4030022540	S.CER 0402N3R0B500CT	[#13]	T 23.6/18.8
	4030022540	S.CER 0402N3R0B500CT	[#14]	
C650	4030023010	S.CER 0402B104K160CT	[#13]	B 40.4/5.5
	4030023010	S.CER 0402B104K160CT	[#14]	
C651	4030019560	S.CER GRM21BB31C106KE15L	[#13]	B 36.7/7.1
	4030019560	S.CER GRM21BB31C106KE15L	[#14]	
C652	4030022640	S.CER 0402N101J500CT	[#13]	B 39.0/3.3
	4030022640	S.CER 0402N101J500CT	[#14]	
C653	4030023010	S.CER 0402B104K160CT	[#13]	B 42.2/5.1
	4030023010	S.CER 0402B104K160CT	[#14]	
C654	4030023090	S.CER 0402B102K500CT	[#13]	B 41.3/89.6
C655	4030023090	S.CER 0402B102K500CT	[#14]	B 39.3/89.6
C656	4030023090	S.CER 0402B102K500CT	[#13]	B 38.3/89.7
C657	4030023090	S.CER 0402B102K500CT	[#14]	B 42.3/89.6
C659	4030023010	S.CER 0402B104K160CT	[#13]	B 28.6/10.3
C660	4030023010	S.CER 0402B104K160CT	[#14]	B 34.2/30.5
C661	4030019560	S.CER GRM21BB31C106KE15L	[#13]	B 43.4/44.6
C662	4030021520	S.CER GRM31CB31H106KA12L	[#13]	T 31.4/24.4
C663	4030021520	S.CER GRM31CB31H106KA12L	[#14]	T 32.4/28.2
C664	4030021520	S.CER GRM31CB31H106KA12L	[#13]	T 32.4/30.4
C666	4030023010	S.CER 0402B104K160CT	[#13]	T 33.3/22.3
C667	4030023010	S.CER 0402B104K160CT	[#14]	T 33.7/23.8
C669	4030022630	S.CER 0402N100C500CT	[#13]	B 37.1/54.5
C670	4030022520	S.CER 0402N1R0B500CT	[#13]	B 42.0/53.9
C671	4030022640	S.CER 0402N101J500CT	[#13]	B 42.1/56.8
C672	4030023010	S.CER 0402B104K160CT	[#13]	B 39.3/58.5
C674	4030023030	S.CER 0402B103K250CT	[#13]	B 26.9/68.8
C677	4030022940	S.CER 0402B104K100CT	[#13]	B 27.5/43.2
C678	4030023090	S.CER 0402B102K500CT	[#13]	B 31.5/41.9
C679	4030023090	S.CER 0402B102K500CT	[#14]	B 37.1/56.1
C680	4030023090	S.CER 0402B102K500CT	[#13]	B 36.2/56.2
C681	4030022940	S.CER 0402B104K100CT	[#13]	B 35.3/56.2
C682	4030023000	S.CER 0402B683K100CT	[#13]	B 22.8/65.8
C683	4030022940	S.CER 0402B104K100CT	[#13]	B 24.1/68.2
C684	4030023010	S.CER 0402B104K160CT	[#13]	B 36.2/54.5
C687	4030023010	S.CER 0402B104K160CT	[#13]	B 25.2/36.6
C688	4030019560	S.CER GRM21BB31C106KE15L	[#13]	B 23.8/36.4
C689	4030023090	S.CER 0402B102K500CT	[#13]	B 29.0/27.2

[LOGIC-1 UNIT] (for #13, #14, #23, and #24)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
C693	4030022940	S.CER 0402B104K100CT	[#13]	T 16.4/15.5
C694	4030023090	S.CER 0402B102K500CT	[#14]	B 18.8/82.1
	4030023090	S.CER 0402B102K500CT	[#13]	
C695	4030023010	S.CER 0402B104K160CT	[#14]	T 18.8/7.4
C696	4030023010	S.CER 0402B104K160CT	[#13]	T 15.9/11.4
C698	4030023010	S.CER 0402B104K160CT	[#14]	B 39.9/47.0
C699	4030023010	S.CER 0402B104K160CT	[#13]	B 43.2/42.2
C700	4030023090	S.CER 0402B102K500CT	[#14]	B 44.2/42.2
C701	4030023090	S.CER 0402B102K500CT	[#13]	B 25.7/33.6
C703	4030023000	S.CER 0402B683K100CT	[#13]	T 21.7/11.2
	4030023000	S.CER 0402B683K100CT	[#14]	
C704	4030023090	S.CER 0402B102K500CT	[#13]	T 22.8/17.0
	4030023090	S.CER 0402B102K500CT	[#14]	
C705	4030023090	S.CER 0402B102K500CT	[#13]	T 24.9/13.7
	4030023090	S.CER 0402B102K500CT	[#14]	
C708	4030023090	S.CER 0402B102K500CT	[#13]	T 26.6/20.9
C709	4030021240	S.CER C1005 JB 1C 105K-T	[#13]	B 36.3/4.4
	4030021240	S.CER C1005 JB 1C 105K-T	[#14]	
C711	4030023090	S.CER 0402B102K500CT	[#13]	B 39.1/33.8
C712	4030022920	S.CER 0402N820J500CT	[#13]	B 31.2/45.6
C713	4030022920	S.CER 0402N820J500CT	[#14]	B 24.5/42.4
C714	4030020000	S.CER C1005 JB 1A 105K-T	[#13]	B 31.3/65.3
C715	4030023820	S.CER 0603B104K250CT	[#13]	B 26.7/63.6
C716	4030023210	S.CER 0402B472K500CT	[#13]	B 34.1/64.8
C717	4030023210	S.CER 0402B472K500CT	[#14]	B 26.9/58.1
C718	4030023210	S.CER 0402B472K500CT	[#13]	B 31.5/27.6
C719	4030023210	S.CER 0402B472K500CT	[#14]	B 40.0/18.9
C720	4550008210	S.TAN 267M3502 104MR	[#13]	B 5.8/15.6
	4550008210	S.TAN 267M3502 104MR	[#14]	
C721	4550008210	S.TAN 267M3502 104MR	[#13]	B 9.1/20.4
	4550008210	S.TAN 267M3502 104MR	[#14]	
C722	4030021240	S.CER C1005 JB 1C 105K-T	[#13]	B 34.5/15.4
	4030021240	S.CER C1005 JB 1C 105K-T	[#14]	
C723	4030021240	S.CER C1005 JB 1C 105K-T	[#13]	B 26.5/72.0
C724	4030023090	S.CER 0402B102K500CT	[#13]	B 35.9/58.6
C725	4030023090	S.CER 0402B102K500CT	[#14]	T 37.7/21.4
C727	4030023090	S.CER 0402B102K500CT	[#13]	B 43.9/57.2
C730	4030023090	S.CER 0402B102K500CT	[#14]	B 21.5/55.5
J1	6510030220	S.CON 50RF-JMCS-G	[#13]	B 35.5/23.0
		-1B-TF (N) (LF) (SN)	[#14]	T 9.4/7.9
J2	6510031390	S.CON 15FXVL-RSM1-GAN-TF-1 (HF)	[#13]	B 23.2/96.1
J3	6510023480	S.CON AYU1-1P-02676-120-TF	[#14]	
J4	6510023480	S.CON AYU1-1P-02676-120-TF	[#13]	T 24.4/24.8
	6510031380	S.CON 31FXVL-RSM1-GAN-TF-1 (HF)	[#14]	
DS2	5040003550	S.LED NSSW208T	[#13]	T 13.8/35.5
DS3	5040003550	S.LED NSSW208T	[#14]	T 24.8/35.5
DS4	5040003550	S.LED NSSW208T	[#13]	T 35.8/35.5
DS5	5030004360	LCD TM128160D1CIWUGND	[#14]	
S23	2260003320	S.SWI SKRTLAE010	[#13]	B 2.1/83.2
S24	2260003320	S.SWI SKRTLAE010	[#14]	B 2.1/44.4
S25	2260003320	S.SWI SKRTLAE010	[#13]	B 2.1/34.4
EP3	6910023920	S.BEA BLM15GA750SN1D	[#13]	B 38.5/16.4
	6910023920	S.BEA BLM15GA750SN1D	[#14]	
EP4	6910023920	S.BEA BLM15GA750SN1D	[#13]	B 36.9/15.3
	6910023920	S.BEA BLM15GA750SN1D	[#14]	
EP9	6910020610	S.BEA BLM15BD102SN1D	[#13]	B 18.4/90.9
	6910020610	S.BEA BLM15BD102SN1D	[#14]	
EP10	6910020610	S.BEA BLM15BD102SN1D	[#13]	T 34.7/22.6
EP11	6910020610	S.BEA BLM15BD102SN1D	[#14]	T 30.8/20.7
EP12	6910020610	S.BEA BLM15BD102SN1D	[#13]	T 25.0/21.2
EP13	6910020610	S.BEA BLM15BD102SN1D	[#14]	T 17.7/28.7
EP14	6910020610	S.BEA BLM15BD102SN1D	[#13]	T 23.2/21.2
EP16	6910020610	S.BEA BLM15BD102SN1D	[#14]	T 17.7/27.8
EP19	6910020610	S.BEA BLM15BD102SN1D	[#13]	T 22.3/21.2

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

M.= Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)
H/V LOCATION= See the BOARD LAYOUTS for details

[MAIN-1 UNIT] (for #13, #14, #23, and #24)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
IC1	1110007300	S.IC NJM2552V-TE1-#ZZZB	B	35.6/72.6
IC2	1130009981	S.IC TC7W53FK (TE85LF)	B	33.1/63.1
IC5	1130011760	S.IC CD4094BPWR	B	39.9/44.3
IC14	1110006490	S.IC LMV321IDCKR	T	7.7/69.0
IC22	1110006490	S.IC LMV321IDCKR	B	23.9/64.7
IC24	1130007021	S.IC TC7S66FU (TE85LF)	B	41.0/79.3
IC25	1110006490	S.IC LMV321IDCKR	B	21.3/70.5
IC203	1130017460	S.IC AK1542A-L	B	29.7/44.6
IC215	1110007630	S.IC NJM2783V-TE1-#ZZZH	T	41.5/30.8
IC216	1110007291	S.IC AK2330P7-L	T	24.7/60.1
IC219	1130007021	S.IC TC7S66FU (TE85LF)	B	22.3/46.2
IC220	1110007291	S.IC AK2330P7-L	T	28.4/37.4
IC221	1110008450	S.IC ISD8102SVI T&R	B	30.6/26.5
IC222	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	B	24.9/59.2
IC223	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	B	9.9/30.9
IC224	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	B	10.0/25.6
IC225	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	B	10.0/21.1
IC226	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	B	10.0/15.8
IC228	1130009981	S.IC TC7W53FK (TE85LF)	B	10.5/11.8
IC229	1110008680	S.IC NJU72341V-TE2-#UZZH	T	38.6/39.5
IC231	1130009981	S.IC TC7W53FK (TE85LF)	T	42.3/48.4
IC232	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	T	44.5/41.7
IC233	1110006490	S.IC LMV321IDCKR	B	11.9/5.8
IC234	6910026630	S.DC XC9263B75DER-G	B	30.6/8.3
IC235	1110008550	S.IC NJM2904CRB1-TE1-#HMZR	T	17.6/15.9
IC238	1180004760	S.REG S-1200B33-M5T1U	T	30.3/89.2
IC239	1180004420	S.REG NJM2830U1-08-TE1-#ZGZB	T	10.4/18.2
IC240	1180005110	S.REG NJM2836DL3-05-TE1	T	29.3/96.4
IC241	1130007021	S.IC TC7S66FU (TE85LF)	B	21.3/68.0
	1130007021	S.IC TC7S66FU (TE85LF)	[#13] [#14]	
Q2	1560002350	S.FET RD12MVS1-T214	T	13.0/83.6
Q3	1560002420	S.FET RD01MUS2B-T513	T	12.3/74.7
Q4	1530004100	S.TRA MT3520P (TE12LF)	B	11.6/65.4
Q7	1520000201	S.TRA 2SB798-T1-AZ DK	T	17.0/59.1
Q8	1590004410	S.TRA DMC501010R	T	12.9/59.8
Q11	1580000731	S.FET 3SK293 (TE85LF)	B	30.0/106.2
Q12	1580000731	S.FET 3SK293 (TE85LF)	B	27.8/96.9
Q13	1530002381	S.TRA 2SC4215-Y (TE85LF)	B	27.4/78.3
Q20	1590004300	S.TRA DRA9114T0L	B	36.2/60.1
Q21	1590004100	S.TRA LDTC144TET1G	B	29.3/61.3
Q25	1520000201	S.TRA 2SB798-T1-AZ DK	T	44.2/113.7
Q26	1590004330	S.TRA DRC9114E0L	T	31.5/105.3
Q28	1530003322	S.TRA 2SC5108-YLF	B	11.3/53.4
Q29	1530003322	S.TRA 2SC5108-YLF	B	12.4/48.4
Q33	1530002851	S.TRA 2SC4116-BL (TE85RF)	B	6.2/52.5
Q35	1520000651	S.TRA 2SB1201S-TL-E	T	16.1/26.9
Q36	1590004410	S.TRA DMC501010R	B	20.9/26.1
Q50	1510001151	S.TRA L2SA1576AST1G	B	42.5/115.6
Q52	1590004530	S.TRA DMG564050R	T	37.5/27.8
Q53	1590004070	S.TRA LDTC144EET1G	B	25.9/71.5
Q54	1590004050	S.TRA LDTC144EET1G	T	33.8/68.6
Q57	1590004520	S.TRA DMA561030R	B	13.6/45.6
Q58	1530004610	S.TRA 2SC5086-OLF	T	17.7/47.5
Q59	1530004610	S.TRA 2SC5086-OLF	T	10.6/46.9
Q60	1530003322	S.TRA 2SC5108-YLF	T	14.3/49.3
Q62	1530004190	S.TRA L2SC4617ST1G	B	43.4/71.2
Q66	1590004070	S.TRA LDTC144EET1G	B	40.1/56.7
Q68	1590004070	S.TRA LDTC144EET1G	B	43.0/82.9
Q212	1550000240	S.FET TPCF8107 (TE85LF)	T	21.7/122.8
Q213	1550000240	S.FET TPCF8107 (TE85LF)	T	24.6/122.1
Q215	1560000531	S.FET 2SK880-GR (TE85RF)	B	22.5/41.6
Q216	1590004070	S.TRA LDTC144EET1G	B	24.0/50.7
Q217	1590004070	S.TRA LDTC144EET1G	B	15.6/43.9
Q218	1590004070	S.TRA LDTC144EET1G	T	30.7/60.7
Q220	1590004070	S.TRA LDTC144EET1G	T	18.7/7.2
Q223	1550000090	S.FET RSQ035P03TR	T	32.2/11.4
Q224	1590004070	S.TRA LDTC144EET1G	T	34.1/14.3
Q226	1590004070	S.TRA LDTC144EET1G	B	39.7/20.3
Q232	1560001330	S.FET RSR025N03	T	36.5/23.0
Q233	1590004060	S.TRA LDTC144EET1G	T	34.9/26.1
Q234	1520000651	S.TRA 2SB1201S-TL-E	T	33.9/4.4
Q235	1530002280	S.TRA 2SC4081 T106 S	T	25.9/12.9
Q236	1590004070	S.TRA LDTC144EET1G	B	38.1/50.8
Q238	1590004070	S.TRA LDTC144EET1G	B	29.2/15.5
Q239	1510000671	S.TRA 2SA1588-GR (TE85R F)	T	24.4/7.6
Q240	1590004070	S.TRA LDTC144EET1G	T	22.0/6.9
Q243	1590004070	S.TRA LDTC144EET1G	T	31.6/71.6
Q246	1590004070	S.TRA LDTC144EET1G	T	33.5/31.0
D2	1750001800	S.DIO RB886CS T2RA	T	13.2/102.7
D3	1750001800	S.DIO RB886CS T2RA	T	12.4/99.6
D4	1750001800	S.DIO RB886CS T2RA	T	13.2/103.8
D5	1750001800	S.DIO RB886CS T2RA	T	5.1/12.1
D6	1750001790	S.DIO 1SS390 TE61	T	5.1/9.6
D8	1750000581	S.DIO 1SV307 (TPH3F)	T	10.3/110.7
D11	1750001790	S.DIO 1SS390 TE61	T	27.8/85.7
D12	1750001790	S.DIO 1SS390 TE61	T	37.4/71.0
D13	1720000702	S.VAR 1SV305H3F	B	19.9/103.3
D14	1790001622	S.DIO 1SV308L3F	B	11.8/108.5
D15	1720000702	S.VAR 1SV305H3F	B	31.2/102.2
D16	1720000702	S.VAR 1SV305H3F	B	30.3/99.5
D17	1750001790	S.DIO 1SS390 TE61	B	13.7/55.8
D18	1750002170	S.DIO DB2S31400L	B	29.6/64.6
D23	1790001980	S.DIO DA3S101FOL	T	32.2/109.1
D24	1750001790	S.DIO 1SS390 TE61	T	33.7/67.0
D25	1750001790	S.DIO 1SS390 TE61	T	37.3/66.8
D27	1750001810	S.DIO L1SS400T1G	T	37.2/110.1
D29	1790001622	S.DIO 1SV308L3F	B	12.8/104.9
D30	1750001810	S.DIO L1SS400T1G	T	34.3/17.6
D31	1750001810	S.DIO L1SS400T1G	T	18.4/109.1
D36	1750001810	S.DIO L1SS400T1G	B	42.2/112.7
D38	1750001771	S.VAR 1SV323H3F	T	19.4/41.5

[MAIN-1 UNIT] (for #13, #14, #23, and #24)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
D40	1750002170	S.DIO DB2S31400L	B	27.3/69.9
D44	1790001622	S.DIO 1SV308L3F	B	13.2/102.3
D45	1750001771	S.VAR 1SV323H3F	T	11.5/40.1
D46	1750001771	S.VAR 1SV323H3F	T	12.2/38.0
D48	1750001771	S.VAR 1SV323H3F	T	19.4/40.2
D49	1750001800	S.DIO RB886CS T2RA	T	12.0/113.6
D50	1720000702	S.VAR 1SV305H3F	B	28.0/105.4
D51	1750001800	S.DIO RB886CS T2RA	T	12.0/112.5
D52	1750001810	S.DIO L1SS400T1G	B	36.0/86.2
D55	1750001790	S.DIO 1SS390 TE61	B	28.9/80.3
D56	1750001790	S.DIO 1SS390 TE61	B	26.1/92.2
D57	1750001790	S.DIO 1SS390 TE61	B	27.1/81.3
D58	1750001790	S.DIO 1SS390 TE61	B	28.9/91.4
D59	1750001800	S.DIO RB886CS T2RA	B	40.3/85.4
D62	1750002170	S.DIO DB2S31400L	T	31.5/70.0
D66	1750000520	S.DIO DAN222TL	T	31.3/62.7
D67	1750001810	S.DIO L1SS400T1G	T	31.7/119.3
D68	1750001690	S.DIO RB050LA-40	T	27.9/119.4
D71	1730002830	S.ZEN DZJ051M0L	B	40.9/26.0
D72	1790002160	S.VAR TPD1E10B06DPYR	B	42.3/96.4
D74	1750001800	S.DIO RB886CS T2RA	T	44.8/37.5
D78	1750001810	S.DIO L1SS400T1G	T	21.0/96.5
D80	1750001810	S.DIO L1SS400T1G	T	26.9/11.0
D81	1750001810	S.DIO L1SS400T1G	T	24.2/11.0
D82	1750001810	S.DIO L1SS400T1G	T	14.2/19.1
D83	1750001810	S.DIO L1SS400T1G	T	30.7/91.6
D85	1790002160	S.VAR TPD1E10B06DPYR	T	28.2/122.1
D86	1790001622	S.DIO 1SV308L3F	B	30.3/77.2
D87	1750001810	S.DIO L1SS400T1G	T	24.2/99.8
D88	1750001810	S.DIO L1SS400T1G	T	26.8/9.8
D89	1750001790	S.DIO 1SS390 TE61	[#13] [#14]	36.5/68.6
	1750001790	S.DIO 1SS390 TE61	[#13] [#14]	
D90	1750001790	S.DIO 1SS390 TE61	[#13] [#14]	30.4/85.7
	1750001790	S.DIO 1SS390 TE61	[#13] [#14]	
D91	1750001810	S.DIO L1SS400T1G	T	33.2/70.8
D92	1750001810	S.DIO L1SS400T1G	T	33.2/73.3
D93	1750002170	S.DIO DB2S31400L	T	23.8/85.7
D94	1750002170	S.DIO DB2S31400L	B	27.7/90.5
F11	2030000970	S.MON FL-455 (46.35 MHz)	B	23.4/86.8
F12	2020002720	S.CER LTWC450D	T	28.1/79.0
F13	2030000860	S.MON FL-439 (46.350 MHz)	B	30.2/85.7
F14	2020002520	S.CER LTWC450H	T	41.1/77.1
F15	2020002770	S.CER LTUCG450C	[#13] [#14]	38.7/86.0
	2020002770	S.CER LTUCG450C	[#13] [#14]	
X1	6070000300	S.DIS JTBM450CX24	T	42.1/63.4
X2	6050013940	S.XTA CR-994 (12.8 MHz)	B	32.8/38.8
X203	6050013930	S.XTA CR-993 (15.3 MHz)	B	42.5/65.4
L2	6200013110	S.COI 0.35-1.6-9TL 52.0N	T	8.6/115.9
L3	6200013110	S.COI 0.35-1.6-9TL 52.0N	T	6.2/111.0
L4	6200004480	S.COI MLF1608D R82K-T	T	9.0/105.0
L5	6200012460	S.COI 0.30-1.7-8TL 54N	T	9.8/101.2
L6	6200012850	S.COI 0.40-0.8-2TL 2.5N	T	8.1/90.2
L7	6200013030	S.COI 0.35-1.6-6TL 31.0N	T	15.5/88.5
L8	6200009220	S.COI LQW18AN15NG00D	T	11.0/78.0
L10	6200013820	S.COI MLK1005S27NJT	T	15.4/77.8
L11	6200013790	S.COI MLK1005S47NJT	T	15.5/71.0
L12	6200013780	S.COI MLK1005S56NJT	B	15.5/66.5
L15	6200012460	S.COI 0.30-1.7-8TL 54N	T	8.3/107.2
L18	6200009890	S.COI C2012C-82NG-A	B	15.0/102.0
L21	6200009890	S.COI C2012C-82NG-A	B	33.8/104.6
L22	6200009930	S.COI C2012C-68NG-A	B	17.7/102.5
L23	6200009890	S.COI C2012C-82NG-A	B	33.3/100.5
L24	6200011090	S.COI C2012C-R56J-A	B	31.4/95.2
L25	6200004600	S.COI MLF1608D R15K-T	B	27.6/75.6
L38	6200014760	S.COI MLK1005SR22JT	B	13.0/54.6
L45	6200012910	S.COI 0.35-1.6-8TL 45.5N	T	11.1/119.6
L46	6200012870	S.COI 0.30-1.4-5TR 23.5N	T	10.6/94.2
L56	6200013760	S.COI MLK1005S82NJT	B	8.4/61.7
L57	6200010540	S.COI C2012C-47NG-A	T	17.2/40.9
L58	6200003550	S.COI MLF1608A 4R7K-T	T	13.3/41.6
L63	6200011050	S.COI C2012C-R12G-A	T	20.4/44.8
L64	6200011050	S.COI C2012C-R12G-A	T	8.9/42.4
L67	6200013760	S.COI MLK1005S82NJT	T	15.9/50.2
L69	6200009890	S.COI C2012C-82NG-A	B	21.6/102.8
L71	6200003640	S.COI MLF1608E 100K-T	T	8.8/40.2
L72	6200003640	S.COI MLF1608E 100K-T	T	21.2/40.8
L85	6200004600	S.COI MLF1608D R15K-T	B	43.8/77.3
L86	6200004590	S.COI MLF1608D R18K-T	B	41.7/76.7
L87	6200003960	S.COI MLF1608A 1R0K-T	B	45.0/74.5
L88	6200004590	S.COI MLF1608D R18K-T	B	41.8/72.8
L91	6200003550	S.COI MLF1608A 4R7K-T	T	15.4/40.9
L92	6200011050	S.COI C2012C-R12G-A	T	9.2/38.4
L93	6200014370	S.COI MLF1005L 2R2K-T	B	26.3/91.2
L94	6200014370	S.COI MLF1005L 2R2K-T	B	25.3/81.3
L95	6200014370	S.COI MLF1005L 2R2K-T	B	31.0/79.2
L96	6200014370	S.COI MLF1005L 2R2K-T	B	32.4/91.3
L97	6200011650	S.COI LQW18AN68NG00D	B	25.3/95.7
L99	6200014260	S.COI LQM2MPN2R2NG0L	B	27.5/7.7
L100	6200014260	S.COI LQM2MPN2R2NG0L	B	37.0/7.4

[MAIN-1 UNIT] (for #13, #14, #23, and #24)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
R11	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	T	6.8/70.9
R12	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	T	9.0/70.9
R13	7030016090	S.RES RMC1/16S-223JTH (22 k)	T	8.0/72.2
R14	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	T	6.5/81.4
R15	7030015910	S.RES RMC1/16S-101JTH (100)	T	9.0/81.3
R16	7030015980	S.RES RMC1/16S-333JTH (33 k)	T	7.8/82.1
R17	7030016110	S.RES RMC1/16S-473JTH (47 k)	T	5.9/77.2
R18	7030015920	S.RES RMC1/16S-221JTH (220)	T	8.7/74.6
R19	7510001461	S.THE NTCG16 3NH 471JT	T	6.9/75.7
R20	7030015680	S.RES RMC1/10-150JTP (15)	B	16.1/64.0
R21	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	7.7/63.9
R22	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	13.7/63.0
R23	7030016150	S.RES RMC1/16S-100JTH (10)	B	7.0/65.3
R24	7030016210	S.RES RMC1/16S-121JTH (120)	B	9.6/60.5
R25	7030015900	S.RES RMC1/16S-470JTH (47)	B	11.0/59.4
R26	7030016210	S.RES RMC1/16S-121JTH (120)	B	9.6/58.0
R27	7030015920	S.RES RMC1/16S-221JTH (220)	T	16.2/72.8
R28	7030016080	S.RES RMC1/16S-822JTH (8.2 k)	T	11.8/57.9
R29	7030015950	S.RES RMC1/16S-152JTH (1.5 k)	T	10.1/58.8
R30	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	11.9/57.6
R40	7030016330	S.RES RMC1/16S-153JTH (15 k)	T	10.1/57.9
R41	7030015930	S.RES RMC1/16S-471JTH (470)	B	13.9/105.3
R43	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	19.9/100.5
R44	7030016000	S.RES RMC1/16S-823JTH (82 k)	B	32.7/106.7
R45	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	31.8/106.7
R47	7030016500	S.RES RMC1/16S-562JTH (5.6 k)	B	13.9/107.3
R48	7030016540	S.RES RMC1/16SK334FTH (330 k)	B	36.2/106.7
R49	7030015900	S.RES RMC1/16S-470JTH (47)	B	33.9/107.1
R51	7030016370	S.RES RMC1/16S-271JTH (270)	B	30.5/103.9
R52	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	33.8/102.4
R53	7030015910	S.RES RMC1/16S-101JTH (100)	B	10.0/107.4
R54	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	28.7/101.4
R58	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	29.6/98.5
R59	7030016030	S.RES RMC1/16S-154JTH (150 k)	B	33.6/98.5
R60	7030015990	S.RES RMC1/16S-683JTH (68 k)	B	33.6/98.0
R62	7030016390	S.RES RMC1/16S-184JTH (180 k)	B	25.3/93.6
R63	7030015990	S.RES RMC1/16S-683JTH (68 k)	B	23.2/93.8
R64	7030015910	S.RES RMC1/16S-101JTH (100)	B	30.9/92.8
R65	7030016180	S.RES RMC1/16S-680JTH (68)	B	26.4/94.7
R66	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	33.1/95.0
R67	7030016560	S.RES RMC1/16SJPTH	B	33.9/106.2
R68	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	25.4/79.2
R69	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	26.0/75.2
R70	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	25.2/80.1
R71	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	40.4/67.8
R72	7030016220	S.RES RMC1/16S-563JTH (56 k)	B	34.0/65.3
R73	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	29.9/68.1
R74	7030016150	S.RES RMC1/16S-100JTH (10)	B	39.1/178.9
R75	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	40.6/81.2
R76	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	31.2/73.1
R77	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	34.0/68.1
R79	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	30.3/71.5
R80	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	28.2/71.8
R81	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	B	27.3/68.1
R82	7030016070	S.RES RMC1/16S-474JTH (470 k)	B	30.8/70.2
R83	7030016090	S.RES RMC1/16S-223JTH (22 k)	B	40.6/82.1
R87	7030015910	S.RES RMC1/16S-101JTH (100)	T	41.7/68.3
R90	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	29.9/66.9
R94	7030016560	S.RES RMC1/16SJPTH	B	29.9/70.2
R99	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	28.9/66.9
R100	7030016000	S.RES RMC1/16S-823JTH (82 k)	B	27.7/66.4
R101	7030016100	S.RES RMC1/16S-334JTH (330 k)	B	30.2/65.6
R102	7030016320	S.RES RMC1/16S-225JTH (2.2 M)	B	30.2/63.3
R107	7030015780	S.RES RMC1/10-331JTP (330)	T	37.0/106.9
R108	7030015690	S.RES RMC1/10-180JTP (18)	T	33.5/106.5
R109	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	31.8/107.4
R111	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	9.6/57.1
R114	7030016370	S.RES RMC1/16S-271JTH (270)	B	13.6/57.1
R115	7030016090	S.RES RMC1/16S-223JTH (22 k)	B	13.0/53.7
R117	7030015920	S.RES RMC1/16S-221JTH (220)	B	11.6/50.8
R118	7030016130	S.RES RMC1/16S-150JTH (15)	T	10.7/50.7
R119	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	15.9/50.2
R120	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	13.1/50.2
R121	7030015910	S.RES RMC1/16S-101JTH (100)	B	15.0/48.8
R122	7030016170	S.RES RMC1/16S-560JTH (56)	B	26.7/41.0
R123	7030011000	S.RES RR0510P-392-D (3.9 k)	T	20.9/47.3
R124	7030011000	S.RES RR0510P-392-D (3.9 k)	T	8.8/46.3
R130	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	B	4.4/52.9
R134	7030015930	S.RES RMC1/16S-471JTH (470)	B	23.6/44.2
R135	7030016480	S.RES RMC1/16S-821JTH (820)	B	24.5/47.1
R140	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	29.7/23.2
R142	7030015640	S.RES RMC1/10JPTP	T	18.5/31.3
R145	7030005820	S.RES RR0510P-103-D (10 k)	B	21.0/27.9
R147	7030005950	S.RES RR0510P-123-D (12 k)	B	19.8/28.3
R148	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	19.1/26.3
R150	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	21.6/23.4
R192	7030016740	S.RES RMC1/16SK474DTH (470 k)	T	35.5/16.1
R193	7030016750	S.RES RMC1/16SK124DTH (120 k)	T	34.7/19.6
R194	7030016740	S.RES RMC1/16SK474DTH (470 k)	T	19.9/109.9
R195	7030016750	S.RES RMC1/16SK124DTH (120 k)	T	17.3/109.4
R210	7030016560	S.RES RMC1/16SJPTH	B	33.3/23.2
R211	7030016390	S.RES RMC1/16S-184JTH (180 k)	B	28.0/58.0
R212	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	27.8/56.8
R213	7030016340	S.RES RMC1/16S-393JTH (39 k)	B	29.6/56.6
R214	7030016450	S.RES RMC1/16S-824JTH (820 k)	B	23.5/57.0
R219	7030015660	S.RES RMC1/10-2R7JTP (2.7)	T	11.2/79.6
R220	7030015930	S.RES RMC1/16S-471JTH (470)	B	40.8/117.2
R222	7030016040	S.RES RMC1/16S-224JTH (220 k)	B	44.7/115.2
R223	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	42.3/113.8
R224	7030016330	S.RES RMC1/16S-153JTH (15 k)	B	44.5/113.1
R225	7030015970	S.RES RMC1/16S-103JTH (10 k)	B	37.7/26.3
R226	7030016090	S.RES RMC1/16S-223JTH (22 k)	T	35.6/101.7
R227	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	39.4/44.1
R231	7030016560	S.RES RMC1/16SJPTH	T	37.1/32.8
R252	7030016560	S.RES RMC1/16SJPTH	B	25.5/44.4

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN-1 UNIT] (for #13, #14, #23, and #24)

REF NO.	PART NO.		DESCRIPTION	M.	H/V LOCATION
R253	7030016490	S.RES	RMC1/16S-391JTH (390)	B	24.6/44.4
R254	7030015960	S.RES	RMC1/16S-472JTH (4.7 k)	B	10.9/44.2
R256	7030011920	S.RES	RR0510P-561-D (560)	T	20.9/48.6
R258	7030008340	S.RES	RR0510P-182-D (1.8 k)	T	17.8/46.1
R260	7030008340	S.RES	RR0510P-182-D (1.8 k)	T	8.7/47.2
R262	7030011920	S.RES	RR0510P-561-D (560)	T	14.0/44.7
R265	7030015930	S.RES	RMC1/16S-471JTH (470)	T	18.3/50.3
R266	7030015990	S.RES	RMC1/16S-683JTH (68 k)	T	17.1/49.3
R274	7030015930	S.RES	RMC1/16S-471JTH (470)	B	33.0/68.4
R283	7030016390	S.RES	RMC1/16S-184JTH (180 k)	B	29.6/57.5
R290	7030015900	S.RES	RMC1/16S-470JTH (47)	T	43.7/68.3
R293	7030016000	S.RES	RMC1/16S-823JTH (82 k)	B	35.2/106.7
R299	7030015640	S.RES	RMC1/10JPTP	T	17.2/79.6
R302	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	11.8/100.9
R303	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	13.2/101.6
R304	7030015970	S.RES	RMC1/16S-103JTH (10 k)	T	12.0/114.7
R305	7030016290	S.RES	RMC1/16S-222JTH (2.2 k)	T	13.6/113.0
R311	7030016040	S.RES	RMC1/16S-224JTH (220 k)	B	27.8/103.3
R313	7030015900	S.RES	RMC1/16S-470JTH (47)	B	10.3/51.4
R316	7030016090	S.RES	RMC1/16S-223JTH (22 k)	B	33.6/57.5
R317	7030016110	S.RES	RMC1/16S-473JTH (47 k)	B	31.5/56.6
R318	7030015970	S.RES	RMC1/16S-103JTH (10 k)	B	32.7/58.4
R319	7030016110	S.RES	RMC1/16S-473JTH (47 k)	B	33.6/56.6
R320	7030016300	S.RES	RMC1/16S-332JTH (3.3 k)	T	7.6/83.8
R321	7510001661	S.THR	NTCG16 4LH 473JT	T	7.4/85.2
R322	7030016190	S.RES	RMC1/16S-273JTH (27 k)	T	6.7/83.8
R323	7030016440	S.RES	RMC1/16S-272JTH (2.7 k)	T	6.4/82.5
R331	7030016050	S.RES	RMC1/16S-102JTH (1 k)	T	7.1/76.7
R333	7030016090	S.RES	RMC1/16S-223JTH (22 k)	T	8.5/77.5
R334	7030015970	S.RES	RMC1/16S-103JTH (10 k)	B	32.0/41.4
R338	7030016000	S.RES	RMC1/16S-823JTH (82 k)	T	9.2/119.6
R349	7030015640	S.RES	RMC1/10JPTP	B	39.6/88.5
R352	7030016270	S.RES	RMC1/16S-151JTH (150)	B	32.2/80.6
R353	7030016560	S.RES	RMC1/16SJPTH	B	31.2/90.8
R355	7030016240	S.RES	RMC1/16S-684JTH (680 k)	B	45.1/72.3
R357	7030016050	S.RES	RMC1/16S-102JTH (1 k)	B	45.1/78.7
R359	7030016050	S.RES	RMC1/16S-102JTH (1 k)	B	21.5/39.7
R361	7030016090	S.RES	RMC1/16S-223JTH (22 k)	B	27.0/82.6
R363	7030016090	S.RES	RMC1/16S-223JTH (22 k)	B	28.8/93.4
R366	7030015910	S.RES	RMC1/16S-101JTH (100)	B	23.5/81.7
R367	7030015910	S.RES	RMC1/16S-101JTH (100)	B	22.8/91.8
R368	7030015970	S.RES	RMC1/16S-103JTH (10 k)	B	14.7/54.7
R369	7030016050	S.RES	RMC1/16S-102JTH (1 k)	B	25.6/76.4
R370	7030016050	S.RES	RMC1/16S-102JTH (1 k)	B	12.2/102.0
R374	7030016330	S.RES	RMC1/16S-153JTH (15 k)	B	39.5/77.2
R375	7030016360	S.RES	RMC1/16S-123JTH (12 k)	T	27.1/87.2
R376	7030016330	S.RES	RMC1/16S-153JTH (15 k)	B	37.0/66.6
R377	7030016360	S.RES	RMC1/16S-123JTH (12 k)	T	39.4/71.7
R378	7030016270	S.RES	RMC1/16S-151JTH (150)	B	15.4/57.9
R379	7030016470	S.RES	RMC1/16S-390JTH (39)	B	14.5/57.9
R380	7030016270	S.RES	RMC1/16S-151JTH (150)	B	15.9/59.1
R381	7030016050	S.RES	RMC1/16S-102JTH (1 k)	B	29.0/73.1
R388	7030016360	S.RES	RMC1/16S-123JTH (12 k)	T	43.3/71.3
R389	7030016360	S.RES	RMC1/16S-123JTH (12 k)	T	28.5/69.3
R390	7030016050	S.RES	RMC1/16S-102JTH (1 k)	T	31.1/68.1
R391	7030016060	S.RES	RMC1/16S-105JTH (1 M)	B	33.3/36.5
R393	7030016450	S.RES	RMC1/16S-824JTH (820 k)	B	29.4/37.6
R394	7030016400	S.RES	RMC1/16S-564JTH (560 k)	B	30.8/37.0
R397	7030016560	S.RES	RMC1/16SJPTH	B	24.3/95.7
R398	7030016020	S.RES	RMC1/16S-104JTH (100 k)	B	26.5/66.3
R399	7030008270	S.RES	RR0510P-104-D (100 k)	B	21.1/65.4
R400	7030005840	S.RES	RR0510P-473-D (47 k)	B	23.7/62.4
R401	7030016560	S.RES	RMC1/16SJPTH	B	25.0/61.9
R405	7030015970	S.RES	RMC1/16S-103JTH (10 k)	B	42.8/79.0
R407	7030016110	S.RES	RMC1/16S-473JTH (47 k)	B	22.9/38.4
R417	7030016020	S.RES	RMC1/16S-104JTH (100 k)	B	40.6/39.5
R419	7030016290	S.RES	RMC1/16S-222JTH (2.2 k)	B	10.1/111.6
R426	7030015910	S.RES	RMC1/16S-101JTH (100)	B	24.1/73.7
R427	7030016060	S.RES	RMC1/16S-105JTH (1 M)	B	20.7/76.2
R428	7030016300	S.RES	RMC1/16S-332JTH (3.3 k)	B	23.2/70.8
R431	7030016560	S.RES	RMC1/16SJPTH	B	23.2/69.1
R432	7030016110	S.RES	RMC1/16S-473JTH (47 k)	T	41.2/71.7
R433	7030016110	S.RES	RMC1/16S-473JTH (47 k)	T	28.9/71.4
R434	7030015640	S.RES	RMC1/10JPTP	T	37.2/18.6
R443	7030016380	S.RES	RMC1/16S-183JTH (18 k)	T	35.3/102.9
R444	7030005830	S.RES	RR0510P-223-D (22 k)	B	26.9/42.3
R456	7030015910	S.RES	RMC1/16S-101JTH (100)	B	20.6/50.1
R457	7410001130	S.ARR	EXB28V102JX	B	30.7/48.5
R458	7030015970	S.RES	RMC1/16S-103JTH (10 k)	B	22.6/43.9
R459	7030015990	S.RES	RMC1/16S-683JTH (68 k)	B	32.9/46.4
R460	7030016250	S.RES	RMC1/16S-220JTH (22)	B	34.2/46.0
R461	7030016560	S.RES	RMC1/16SJPTH	B	35.3/37.5
R462	7410001140	S.ARR	EXB28V104JX	T	27.9/49.3
R463	7030015970	S.RES	RMC1/16S-103JTH (10 k)	B	21.1/49.1
R464	7030016000	S.RES	RMC1/16S-823JTH (82 k)	B	22.9/36.8
R465	7030015970	S.RES	RMC1/16S-103JTH (10 k)	B	42.4/68.8
R466	7030016560	S.RES	RMC1/16SJPTH	B	43.5/62.9
R467	7030015990	S.RES	RMC1/16S-683JTH (68 k)	B	40.5/63.0
R468	7030015930	S.RES	RMC1/16S-471JTH (470)	T	21.0/62.9
R469	7030016020	S.RES	RMC1/16S-104JTH (100 k)	T	21.8/57.4
R470	7030016560	S.RES	RMC1/16SJPTH	T	28.0/58.4
R472	7030015930	S.RES	RMC1/16S-471JTH (470)	T	31.4/34.7
R473	7030016020	S.RES	RMC1/16S-104JTH (100 k)	T	26.4/41.2
R478	7030016780	S.RES	RMC1/16SK224DTH (220 k)	B	9.2/35.1
R479	7030017390	S.RES	RMC1/16SK184FTH (180 k)	B	8.0/34.5
R480	7030005850	S.RES	RR0510P-563-D (56 k)	B	6.8/33.2
R481	7030008270	S.RES	RR0510P-104-D (100 k)	B	7.4/29.0
R482	7030008270	S.RES	RR0510P-104-D (100 k)	B	7.4/27.9
R483	7030008270	S.RES	RR0510P-104-D (100 k)	B	5.8/24.3
R484	7030008270	S.RES	RR0510P-104-D (100 k)	B	6.2/23.0
R485	7030008270	S.RES	RR0510P-104-D (100 k)	B	5.8/17.7
R486	7030008270	S.RES	RR0510P-104-D (100 k)	B	4.9/16.1
R487	7030016930	S.RES	RMC1/16SK274DTH (270 k)	B	10.1/35.1
R488	7030018520	S.RES	RMC1/16SK564FTH (560 k)	B	11.3/34.4
R489	7030016930	S.RES	RMC1/16SK274DTH (270 k)	B	12.1/33.2

[MAIN-1 UNIT] (for #13, #14, #23, and #24)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
R490	7030005850	S.RES RR0510P-563-D (56 k)	B	13.9/29.9
R491	7030007610	S.RES RR0510P-683-D (68 k)	B	12.4/27.6
R492	7030008270	S.RES RR0510P-104-D (100 k)	B	13.9/25.4
R493	7030016750	S.RES RMC1/16SK124DTH (120 k)	B	13.0/22.6
R494	7030016750	S.RES RMC1/16SK124DTH (120 k)	B	13.0/21.0
R495	7030016750	S.RES RMC1/16SK124DTH (120 k)	B	13.0/19.1
R497	7030015980	S.RES RMC1/16S-333JTH (33 k)	B	12.1/8.8
R498	7030016400	S.RES RMC1/16S-564JTH (560 k)	T	43.2/35.3
R499	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	T	43.3/36.2
R500	7030015980	S.RES RMC1/16S-333JTH (33 k)	T	42.3/25.6
R501	7030016250	S.RES RMC1/16S-220JTH (22)	T	34.6/34.6
R502	7030016560	S.RES RMC1/16SJPTH	T	35.1/39.1
R503	7030016200	S.RES RMC1/16S-274JTH (270 k)	T	21.2/125.0
R504	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	23.0/125.0
R505	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	33.0/121.1
R515	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	7.9/21.7
R519	7030012340	S.RES RR0510P-821-D	B	26.6/14.8
R520	7030016750	S.RES RMC1/16SK124DTH (120 k)	B	27.5/9.3
R521	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	32.2/13.7
R524	7030016560	S.RES RMC1/16SJPTH	T	26.8/33.7
R526	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	13.5/8.4
R527	7030015980	S.RES RMC1/16S-333JTH (33 k)	B	40.4/24.6
R528	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	B	37.7/23.0
R529	7030015910	S.RES RMC1/16S-101JTH (100)	B	36.6/23.9
R530	7030016420	S.RES RMC1/16S-182JTH (1.8 k)	B	19.9/24.3
R532	7030016560	S.RES RMC1/16SJPTH	B	21.5/24.3
R537	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	23.2/99.3
R540	7030016330	S.RES RMC1/16S-153JTH (15 k)	T	48.0/42.0
R541	7030016100	S.RES RMC1/16S-334JTH (330 k)	T	48.0/40.1
R542	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	42.1/39.0
R543	7030016320	S.RES RMC1/16S-225JTH (2.2 M)	T	44.7/38.6
R544	7030016330	S.RES RMC1/16S-153JTH (15 k)	T	43.0/38.1
R545	7030016100	S.RES RMC1/16S-334JTH (330 k)	T	46.6/37.5
R546	7030016060	S.RES RMC1/16S-105JTH (1 M)	T	48.5/38.3
R548	7030016070	S.RES RMC1/16S-474JTH (470 k)	T	34.9/28.5
R549	7030016220	S.RES RMC1/16S-563JTH (56 k)	T	34.3/24.4
R550	7030016560	S.RES RMC1/16SJPTH	T	32.5/36.7
R551	7030016560	S.RES RMC1/16SJPTH	T	32.5/37.6
R552	7030016560	S.RES RMC1/16SJPTH	T	32.0/38.7
R554	7030016560	S.RES RMC1/16SJPTH	T	29.1/41.6
R555	7030016560	S.RES RMC1/16SJPTH	T	26.7/64.0
R556	7030016560	S.RES RMC1/16SJPTH	T	25.7/64.0
R558	7030016560	S.RES RMC1/16SJPTH	T	23.5/63.6
R559	7030016560	S.RES RMC1/16SJPTH	T	21.0/61.1
R561	7030016560	S.RES RMC1/16SJPTH	T	27.7/62.1
R562	7030016560	S.RES RMC1/16SJPTH	T	28.4/60.0
R563	7030016380	S.RES RMC1/16S-183JTH (18 k)	B	10.0/8.0
R564	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	11.1/4.0
R565	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	9.6/5.0
R566	7030015980	S.RES RMC1/16S-333JTH (33 k)	B	11.7/7.6
R568	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	13.3/7.5
R569	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	35.7/48.1
R571	7030006020	S.RES RR0510P-682-D (6.8 k)	B	27.8/14.4
R572	7030016500	S.RES RMC1/16S-562JTH (5.6 k)	T	15.4/12.2
R573	7030019630	S.RES RL1220S-1R8-F (1.8)	T	20.3/10.6
R574	7030019630	S.RES RL1220S-1R8-F (1.8)	T	22.0/10.6
R575	7030019630	S.RES RL1220S-1R8-F (1.8)	T	27.5/7.6
R577	7030015940	S.RES RMC1/16S-681JTH (680)	T	23.8/12.7
R578	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	24.6/14.7
R580	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	16.8/19.4
R581	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	21.1/18.5
R582	7030019580	S.RES RG1005P-104-B-T5 (100 k)	T	29.8/12.2
R583	7030006020	S.RES RR0510P-682-D (6.8 k)	T	30.0/13.8
R584	7030019580	S.RES RG1005P-104-B-T5 (100 k)	T	30.4/15.0
R585	7030019600	S.RES RG1005P-103-B-T5 (10 k)	T	14.3/16.6
R588	7030019630	S.RES RL1220S-1R8-F (1.8)	T	28.3/5.1
R589	7030019600	S.RES RG1005P-103-B-T5 (10 k)	T	15.6/18.3
R590	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	14.7/15.3
R591	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	16.3/11.7
R593	7030016560	S.RES RMC1/16SJPTH	B	38.6/27.2
R594	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	47.2/45.3
R595	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	43.1/44.7
R596	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	21.7/57.4
R597	7030016060	S.RES RMC1/16S-105JTH (1 M)	B	25.7/55.8
R600	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	35.5/51.8
R601	7030016560	S.RES RMC1/16SJPTH	B	20.2/65.4
R602	7030016560	S.RES RMC1/16SJPTH	T	22.1/98.4
R604	7030016560	S.RES RMC1/16SJPTH	T	26.9/90.2
R605	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	38.9/7.7
R606	7520000241	S.POS PRF18BC471QB5RB	T	14.8/79.1
R607	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	T	18.9/78.3
R608	7030016050	S.RES RMC1/16S-102JTH (1 k)	T	20.3/6.8
R609	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	18.4/9.4
R610	7030015970	S.RES RMC1/16S-103JTH (10 k)	T	18.1/10.7
R612	7030015910	S.RES RMC1/16S-101JTH (100)	T	15.9/20.4
R613	7030016560	S.RES RMC1/16SJPTH	T	21.7/118.8
R617	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	B	29.4/79.2
R619	7030016560	S.RES RMC1/16SJPTH	B	9.3/61.7
R620	7030015910	S.RES RMC1/16S-101JTH (100)	T	44.8/36.2
R621	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	15.4/18.4
R622	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	15.4/21.3
R623	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	10.2/28.3
R624	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	14.3/31.2
R626	7030015960	S.RES RMC1/16S-472JTH (4.7 k)	B	6.0/16.1
R627	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	6.9/21.5
R629	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	6.9/25.6
R632	7030016110	S.RES RMC1/16S-473JTH (47 k)	B	6.9/31.3
R635	7030015900	S.RES RMC1/16S-470JTH (47)	B	7.5/67.2
R637	7030016020	S.RES RMC1/16S-104JTH (100 k)	B	40.0/64.2
R638	7030016290	S.RES RMC1/16S-222JTH (2.2 k)	B	31.9/77.7
R639	7030016050	S.RES RMC1/16S-102JTH (1 k)	B	24.8/78.0
R641	7030016110	S.RES RMC1/16S-473JTH (47 k)	T	46.3/44.7
R642	7030015940	S.RES RMC1/16S-681JTH (680)	T	23.3/13.9
R644	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	39.7/45.4
R645	7030016020	S.RES RMC1/16S-104JTH (100 k)	T	39.7/47.0

[MAIN-1 UNIT] (for #13, #14, #23, and #24)

REF NO.	PART NO.	DESCRIPTION		M.	H/V LOCATION
R646	7030016020	S.RES	RMC1/16S-104JTH (100 k)	T	38.8/47.6
R647	7030016020	S.RES	RMC1/16S-104JTH (100 k)	T	37.9/47.6
R648	7030016020	S.RES	RMC1/16S-104JTH (100 k)	T	41.8/46.6
R649	7030016360	S.RES	RMC1/16S-123JTH (12 k)	T	32.3/85.4
	7030016360	S.RES	RMC1/16S-123JTH (12 k)	#13] #14]	
R650	7030016050	S.RES	RMC1/16S-102JTH (1 k)	T	31.1/69.0
R651	7030016560	S.RES	RMC1/16SJPTH	B	36.5/79.5
R652	7030016090	S.RES	RMC1/16S-223JTH (22 k)	B	21.2/72.2
R653	7030016050	S.RES	RMC1/16S-102JTH (1 k)	T	20.3/75.7
R654	7030015960	S.RES	RMC1/16S-472JTH (4.7 k)	B	23.9/79.2
R655	7030016030	S.RES	RMC1/16S-154JTH (150 k)	B	32.6/64.9
R656	7030016190	S.RES	RMC1/16S-273JTH (27 k)	B	27.3/61.1
R657	7030016040	S.RES	RMC1/16S-224JTH (220 k)	B	28.0/59.6
R658	7030015930	S.RES	RMC1/16S-471JTH (470)	B	15.4/105.8
R660	7030016020	S.RES	RMC1/16S-104JTH (100 k)	B	31.4/23.2
R662	7030016050	S.RES	RMC1/16S-102JTH (1 k)	T	39.1/23.0
R670	7030016360	S.RES	RMC1/16S-123JTH (12 k)	T	34.5/70.8
	7030016360	S.RES	RMC1/16S-123JTH (12 k)	#13] #14]	
R671	7030017740	S.RES	RMC1/10-271JTP (270)	T	35.2/106.7
R672	7030015900	S.RES	RMC1/16S-470JTH (47)	B	17.5/105.9
R673	7030015930	S.RES	RMC1/16S-471JTH (470)	B	22.4/80.0
R674	7030016460	S.RES	RMC1/16S-181JTH (180)	T	28.2/110.8
R677	7030015960	S.RES	RMC1/16S-472JTH (4.7 k)	T	32.5/46.6
R678	7030016020	S.RES	RMC1/16S-104JTH (100 k)	T	33.1/45.7
R679	7030010990	S.RES	RR0510P-272-D (2.7 k)	B	25.4/14.4
R680	7030016090	S.RES	RMC1/16S-223JTH (22 k)	B	33.6/29.6
R682	7030016140	S.RES	RMC1/16S-124JTH (120 k)	T	45.1/44.7
C3	4030023580	S.CER	0603N220J500CT	T	8.3/118.0
C4	4030023410	S.CER	0603N9R0D500CT	T	9.6/113.8
C5	4030023620	S.CER	0603N270J500CT	T	6.7/113.8
C6	4030023350	S.CER	0603N5R0B500CT	T	8.3/112.0
C7	4030023580	S.CER	0603N220J500CT	T	3.2/107.8
C8	4030023850	S.CER	0603B102K500CT	T	5.1/107.0
C9	4030023850	S.CER	0603B102K500CT	T	12.7/108.5
C10	4030023850	S.CER	0603B102K500CT	T	9.0/103.8
C11	4030022610	S.CER	0402N0R3B500CT	T	11.5/103.8
C13	4030023580	S.CER	0603N220J500CT	T	7.1/102.6
C14	4030023580	S.CER	0603N220J500CT	T	9.0/98.7
C15	4030022610	S.CER	0402N0R3B500CT	T	11.2/98.5
C17	4030023200	S.CER	0402B471K500CT	T	7.2/74.0
C19	4030023590	S.CER	0603N221J500CT	T	9.0/97.5
C20	4030023090	S.CER	0402B102K500CT	T	14.5/109.4
C23	4030023130	S.CER	0402B222K500CT	T	9.2/71.8
C24	4030023010	S.CER	0402B104K160CT	T	14.5/91.0
C25	4030023090	S.CER	0402B102K500CT	T	8.5/83.8
C28	4030023030	S.CER	0402B103K250CT	T	9.7/68.4
C29	4030023090	S.CER	0402B102K500CT	B	14.7/63.0
C30	4030022900	S.CER	0402N680J500CT	T	13.4/78.0
C31	4030023030	S.CER	0402B103K250CT	T	17.6/75.9
C32	4030023090	S.CER	0402B102K500CT	T	8.7/76.2
C33	4030023090	S.CER	0402B102K500CT	B	14.4/61.7
C34	4030022630	S.CER	0402N100C500CT	T	14.6/69.4
C35	4030022880	S.CER	0402N560J500CT	T	15.5/69.4
C37	4550007360	S.TAN	F931A226MABAMA	T	19.6/69.7
C38	4030023090	S.CER	0402B102K500CT	T	18.8/73.7
C39	4030022700	S.CER	0402N180J500CT	B	6.0/64.3
C40	4030023090	S.CER	0402B102K500CT	B	11.0/57.6
C48	4030023090	S.CER	0402B102K500CT	T	19.9/57.6
C49	4550007390	S.TAN	F931C225MABAMA	T	10.4/55.6
C50	4030023820	S.CER	0603B104K250CT	T	19.1/56.3
C51	4030023090	S.CER	0402B102K500CT	T	10.1/59.7
C52	4030023010	S.CER	0402B104K160CT	T	10.1/60.7
C53	4030023580	S.CER	0603N220J500CT	T	3.2/106.3
C54	4030022740	S.CER	0402N220J500CT	T	11.7/111.2
C56	4030023090	S.CER	0402B102K500CT	T	12.9/101.7
C57	4030023090	S.CER	0402B102K500CT	B	16.4/107.1
C58	4030023090	S.CER	0402B102K500CT	B	12.7/107.1
C60	4030023090	S.CER	0402B102K500CT	B	21.2/100.6
C61	4030023010	S.CER	0402B104K160CT	B	24.0/92.5
C62	4030022700	S.CER	0402N180J500CT	B	27.9/107.0
C63	4030023090	S.CER	0402B102K500CT	B	11.0/109.9
C64	4030023090	S.CER	0402B102K500CT	B	12.1/100.3
C65	4030023090	S.CER	0402B102K500CT	B	37.1/106.7
C66	4030023010	S.CER	0402B104K160CT	B	36.5/105.0
C67	4030023090	S.CER	0402B102K500CT	B	34.7/102.6
C68	4030023090	S.CER	0402B102K500CT	B	29.6/103.9
C69	4030020000	S.CER	C1005 JB 1A 105K-T	B	36.5/103.1
C71	4030022660	S.CER	0402N120J500CT	B	17.0/104.1
C72	4030022520	S.CER	0402N1R0B500CT	B	31.8/105.1
C73	4030022790	S.CER	0402N2R5B500CT	B	32.9/102.4
C74	4030022720	S.CER	0402N1R5B500CT	B	35.3/101.0
C75	4030023090	S.CER	0402B102K500CT	B	29.6/102.3
C76	4030023090	S.CER	0402B102K500CT	B	39.1/108.4
C77	4030022530	S.CER	0402N2R0B500CT	B	33.6/98.9
C78	4030022700	S.CER	0402N180J500CT	B	31.7/98.1
C79	4030023090	S.CER	0402B102K500CT	B	30.3/100.9
C80	4030023090	S.CER	0402B102K500CT	B	24.4/93.7
C81	4030023090	S.CER	0402B102K500CT	B	28.2/94.7
C82	4030023030	S.CER	0402B103K250CT	B	32.9/92.6
C83	4030023090	S.CER	0402B102K500CT	B	33.8/92.6
C84	4030023090	S.CER	0402B102K500CT	B	33.8/93.8
C85	4030022700	S.CER	0402N180J500CT	B	34.1/95.1
C86	4030022580	S.CER	0402N7R0C500CT	B	20.1/85.3
C87	4030022560	S.CER	0402N5R0B500CT	B	13.7/99.9
C88	4030023030	S.CER	0402B103K250CT	B	25.7/77.8
C90	4030023090	S.CER	0402B102K500CT	B	29.0/76.2
C91	4030022590	S.CER	0402N8R0C500CT	B	38.5/67.7
C92	4030023020	S.CER	0402B473K160CT	B	35.6/64.9
C93	4030023090	S.CER	0402B102K500CT	B	31.7/67.9
C95	4030023030	S.CER	0402B103K250CT	B	31.6/68.8
C97	4550007520	S.TAN	F931A106MAABMA	B	36.6/81.0
C98	4030022640	S.CER	0402N101J500CT	B	29.1/71.8
C99	4030023030	S.CER	0402B103K250CT	B	28.6/70.0

[MAIN-1 UNIT] (for #13, #14, #23, and #24)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
C100	4030023200	S.CER 0402B471K500CT	B	29.9/69.0
C101	4030019560	S.CER GRM21BB31C106KE15L	B	36.5/78.1
C102	4030023200	S.CER 0402B471K500CT	B	28.6/69.3
C103	4030022540	S.CER 0402N3R0B500CT	B	43.0/74.1
C104	4030023030	S.CER 0402B103K250CT	B	37.0/68.2
C106	4030023010	S.CER 0402B104K160CT	B	40.1/70.6
C107	4030020000	S.CER C1005 JB 1A 105K-T	T	42.6/67.4
C110	4030023090	S.CER 0402B102K500CT	B	36.5/104.1
C113	4030023010	S.CER 0402B104K160CT	B	42.8/80.9
C115	4030023010	S.CER 0402B104K160CT	B	29.3/63.3
C116	4030023090	S.CER 0402B102K500CT	T	18.5/75.9
C117	4030023090	S.CER 0402B102K500CT	T	19.5/80.9
C118	4030023030	S.CER 0402B103K250CT	T	18.6/80.9
C121	4030019560	S.CER GRM21BB31C106KE15L	T	35.3/110.2
C125	4030023030	S.CER 0402B103K250CT	T	21.9/109.5
C126	4030023010	S.CER 0402B104K160CT	T	26.6/122.4
C127	4030023090	S.CER 0402B102K500CT	T	33.9/109.6
C130	4510009700	S.ELE EEEFK1C101P	T	37.9/115.5
C150	4030022680	S.CER 0402N150J500CT	B	11.0/55.0
C151	4030022600	S.CER 0402N9R0C500CT	B	11.9/51.8
C152	4030023090	S.CER 0402B102K500CT	B	14.6/53.8
C153	4030023090	S.CER 0402B102K500CT	B	14.1/49.0
C155	4030022810	S.CER 0402N330J500CT	T	12.5/50.7
C156	4030023090	S.CER 0402B102K500CT	B	15.9/48.9
C168	4550007550	S.TAN F931V334MAABMA	T	17.6/38.3
C169	4550007390	S.TAN F931C225MAABMA	B	25.0/48.6
C170	4030022720	S.CER 0402N1R5B500CT	T	19.2/42.6
C171	4030023090	S.CER 0402B102K500CT	B	12.8/59.1
C172	4030023010	S.CER 0402B104K160CT	B	8.3/52.0
C173	4550008160	S.TAN F931A226MAA	B	7.7/55.0
C174	4030023010	S.CER 0402B104K160CT	B	22.2/50.1
C176	4030023010	S.CER 0402B104K160CT	T	16.4/109.4
C180	4030023010	S.CER 0402B104K160CT	T	34.7/18.7
C186	4030023010	S.CER 0402B104K160CT	B	18.9/28.4
C187	4030023010	S.CER 0402B104K160CT	B	17.0/25.9
C188	4030017480	S.CER C1608 JB 1A 474K-T	B	18.0/26.4
C190	4030022750	S.CER 0402N221J500CT	B	14.4/104.1
C191	4030023030	S.CER 0402B103K250CT	B	31.5/103.5
C192	4030023090	S.CER 0402B102K500CT	B	26.9/99.6
C193	4030023090	S.CER 0402B102K500CT	B	26.8/98.7
C196	4030023010	S.CER 0402B104K160CT	B	22.6/28.8
C197	4030023020	S.CER 0402B473K160CT	B	27.3/62.2
C201	4030022840	S.CER 0402N390J500CT	B	38.5/68.6
C202	4030023010	S.CER 0402B104K160CT	B	15.0/6.8
C211	4030023330	S.CER 0603N4R0B500CT	T	13.2/119.4
C212	4030023720	S.CER 0603N470J500CT	T	6.7/96.3
C223	4030024520	S.CER C1005 JB 1C 474K-T	B	33.3/21.5
C225	4030024050	S.CER 0603B473K500CT	B	6.8/12.9
C229	4030023030	S.CER 0402B103K250CT	T	44.6/68.8
C232	4030022530	S.CER 0402N2R0B500CT	B	24.1/91.6
C235	4030020000	S.CER C1005 JB 1A 105K-T	B	8.2/108.9
C237	4030023090	S.CER 0402B102K500CT	B	40.8/118.2
C238	4550007270	S.TAN F931A475MAABMA	T	38.5/120.9
C239	4030022980	S.CER 0402B473K100CT	B	44.7/116.2
C240	4030023090	S.CER 0402B102K500CT	B	40.3/116.3
C241	4030023090	S.CER 0402B102K500CT	B	45.3/114.2
C242	4030023010	S.CER 0402B104K160CT	B	37.7/24.7
C243	4030023090	S.CER 0402B102K500CT	B	40.4/114.5
C245	4030023010	S.CER 0402B104K160CT	T	35.3/103.8
C249	4030023090	S.CER 0402B102K500CT	T	27.2/52.8
C274	4030023090	S.CER 0402B102K500CT	B	36.2/84.6
C293	4030023090	S.CER 0402B102K500CT	B	12.7/4.0
C294	4030020000	S.CER C1005 JB 1A 105K-T	B	29.6/55.7
C296	4030023760	S.CER 0603N680J500CT	T	9.2/87.2
C297	4030023570	S.CER 0603N201J500CT	T	6.7/95.1
C301	4030023090	S.CER 0402B102K500CT	B	13.1/43.6
C302	4030022810	S.CER 0402N330J500CT	T	20.9/42.6
C306	4030023670	S.CER 0603N330J500CT	T	16.7/45.0
C307	4030022570	S.CER 0402N6R0C500CT	T	11.7/42.3
C308	4030023090	S.CER 0402B102K500CT	B	11.8/44.2
C309	4030023090	S.CER 0402B102K500CT	B	11.4/46.0
C310	4030023670	S.CER 0603N330J500CT	T	19.5/48.5
C311	4030023790	S.CER 0603N820J500CT	T	9.5/45.2
C312	4030023090	S.CER 0402B102K500CT	T	16.4/46.3
C313	4030023090	S.CER 0402B102K500CT	T	12.5/48.6
C315	4030023670	S.CER 0603N330J500CT	T	12.2/45.2
C316	4030024490	S.CER 0402NR75B500CT	T	16.3/48.4
C317	4030024490	S.CER 0402NR75B500CT	T	12.4/49.7
C319	4030023090	S.CER 0402B102K500CT	T	19.6/49.8
C321	4030023030	S.CER 0402B103K250CT	B	36.1/68.2
C323	4030023030	S.CER 0402B103K250CT	B	27.3/94.7
C327	4030023090	S.CER 0402B102K500CT	B	28.7/103.3
C328	4030023090	S.CER 0402B102K500CT	B	26.9/101.1
C329	4030022530	S.CER 0402N2R0B500CT	B	21.2/104.9
C330	4030023030	S.CER 0402B103K250CT	B	31.1/58.4
C331	4030023010	S.CER 0402B104K160CT	B	12.5/10.2
C333	4030023090	S.CER 0402B102K500CT	B	6.8/97.0
C335	4030023670	S.CER 0603N330J500CT	T	12.9/46.4
C336	4030022860	S.CER 0402N470J500CT	T	10.5/42.2
C338	4030023670	S.CER 0603N330J500CT	T	18.6/44.4
C347	4030023010	S.CER 0402B104K160CT	B	36.5/76.7
C349	4550007550	S.TAN F931V334MAABMA	B	24.9/41.1
C350	4030022860	S.CER 0402N470J500CT	T	16.7/75.9
C351	4030022750	S.CER 0402N221J500CT	T	7.2/67.1
C352	4030023090	S.CER 0402B102K500CT	T	9.2/72.7
C354	4030023090	S.CER 0402B102K500CT	B	36.2/61.6
C355	4030021240	S.CER C1005 JB 1C 105K-T	B	30.8/38.8
C356	4030023010	S.CER 0402B104K160CT	B	40.1/72.5
C357	4030022980	S.CER 0402B473K100CT	B	35.1/66.9
C361	4030022550	S.CER 0402N4R0B500CT	B	30.3/81.1
C364	4030022540	S.CER 0402N3R0B500CT	B	32.5/90.4
C365	4030022680	S.CER 0402N150J500CT	B	33.5/84.2
C372	4030023090	S.CER 0402B102K500CT	T	15.4/91.0
C373	4030023090	S.CER 0402B102K500CT	T	11.1/66.7
C375	4030022610	S.CER 0402N0R3B500CT	T	9.7/112.8

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN-1 UNIT] (for #13, #14, #23, and #24)

REF NO.	PART NO.	DESCRIPTION		M.	H/V LOCATION
C376	4030023090	S.CER	0402B102K500CT	B	32.9/50.0
C377	4030022620	S.CER	0402N0R5B500CT	T	10.2/49.3
C379	4030023330	S.CER	0603N4R0B500CT	T	16.8/43.8
C381	4030023090	S.CER	0402B102K500CT	B	36.2/62.8
C383	4030023330	S.CER	0603N4R0B500CT	T	11.4/43.6
C384	4030021520	S.CER	GRM31CB31H106KA12L	T	25.0/109.6
C385	4030021240	S.CER	C1005 JB 1C 105K-T	T	21.6/106.1
C386	4030022560	S.CER	0402N5R0B500CT	T	11.7/41.2
C387	4030023090	S.CER	0402B102K500CT	B	28.4/41.5
C388	4030023090	S.CER	0402B102K500CT	T	20.3/90.4
C389	4030022560	S.CER	0402N5R0B500CT	T	12.1/39.0
C390	4030023090	S.CER	0402B102K500CT	B	32.8/76.8
C391	4030022900	S.CER	0402N680J500CT	B	26.5/76.4
C392	4030023090	S.CER	0402B102K500CT	B	23.6/75.2
C393	4030020000	S.CER	C1005 JB 1A 105K-T	B	24.7/76.4
C394	4030023030	S.CER	0402B103K250CT	B	23.8/76.4
C395	4030023090	S.CER	0402B102K500CT	B	15.9/54.2
C396	4030022660	S.CER	0402N120J500CT	B	15.1/56.7
C397	4030022680	S.CER	0402N150J500CT	B	16.2/60.5
C398	4030022860	S.CER	0402N470J500CT	B	42.1/74.1
C399	4030022650	S.CER	0402N110J500CT	B	42.8/75.6
C400	4030022640	S.CER	0402N101J500CT	B	41.2/74.1
C401	4030022550	S.CER	0402N4R0B500CT	B	41.2/75.5
C402	4030022880	S.CER	0402N560J500CT	B	40.3/74.1
C403	4030023090	S.CER	0402B102K500CT	B	33.0/43.9
C405	4030023090	S.CER	0402B102K500CT	B	19.4/99.2
C407	4030020450	S.CER	C1005 JB 0J 475M-T	B	16.3/105.4
C418	4030023090	S.CER	0402B102K500CT	T	40.3/12.6
C420	4030023090	S.CER	0402B102K500CT	T	37.3/104.8
C429	4030022860	S.CER	0402N470J500CT	T	16.4/91.0
C430	4030021240	S.CER	C1005 JB 1C 105K-T	B	22.7/78.8
C431	4030023090	S.CER	0402B102K500CT	T	37.2/16.9
C432	4030023090	S.CER	0402B102K500CT	B	38.1/106.7
C438	4030022630	S.CER	0402N100C500CT	B	32.9/41.4
C439	4030022640	S.CER	0402N101J500CT	B	43.7/69.2
C440	4030023090	S.CER	0402B102K500CT	B	33.8/41.4
C441	4030020000	S.CER	C1005 JB 1A 105K-T	B	34.8/38.9
C443	4030023090	S.CER	0402B102K500CT	B	23.1/39.7
C444	4030023010	S.CER	0402B104K160CT	B	35.4/46.5
C445	4030021240	S.CER	C1005 JB 1C 105K-T	B	34.8/44.3
C446	4030023030	S.CER	0402B103K250CT	B	45.1/79.6
C451	4030023010	S.CER	0402B104K160CT	B	24.4/81.3
C458	4030023010	S.CER	0402B104K160CT	B	29.9/91.1
C459	4030023010	S.CER	0402B104K160CT	B	31.0/80.1
C460	4030023010	S.CER	0402B104K160CT	B	40.0/75.8
C461	4030023010	S.CER	0402B104K160CT	T	25.3/85.9
C462	4030023010	S.CER	0402B104K160CT	T	38.2/72.1
C463	4030023010	S.CER	0402B104K160CT	T	26.2/72.1
C464	4030023010	S.CER	0402B104K160CT	T	44.5/71.7
C466	4030023010	S.CER	0402B104K160CT	T	28.9/72.3
C467	4030023010	S.CER	0402B104K160CT	T	42.1/71.7
C468	4030023010	S.CER	0402B104K160CT	T	26.2/86.8
C469	4030023010	S.CER	0402B104K160CT	B	26.7/84.2
C470	4030023010	S.CER	0402B104K160CT	B	26.6/89.5
C471	4030023010	S.CER	0402B104K160CT	B	33.7/90.8
C472	4030023010	S.CER	0402B104K160CT	B	33.1/80.6
C473	4030022560	S.CER	0402N5R0B500CT	B	41.6/70.4
C474	4030022570	S.CER	0402N6R0C500CT	B	43.9/72.8
C475	4030022880	S.CER	0402N560J500CT	B	41.3/71.7
C476	4030023090	S.CER	0402B102K500CT	B	26.8/80.2
C477	4030023090	S.CER	0402B102K500CT	B	29.7/94.7
C478	4030023030	S.CER	0402B103K250CT	B	22.0/64.9
C479	4030023030	S.CER	0402B103K250CT	B	24.9/62.8
C481	4030019560	S.CER	GRM21BB31C106KE15L	B	9.6/109.5
C484	4030023030	S.CER	0402B103K250CT	B	8.7/52.9
C485	4030023090	S.CER	0402B102K500CT	T	25.7/66.2
C486	4030023090	S.CER	0402B102K500CT	T	26.7/66.2
C487	4030023090	S.CER	0402B102K500CT	T	27.7/66.2
C488	4030019560	S.CER	GRM21BB31C106KE15L	B	9.5/106.0
C489	4030020000	S.CER	C1005 JB 1A 105K-T	B	24.2/72.3
C490	4030023010	S.CER	0402B104K160CT	B	35.7/38.9
C491	4030023090	S.CER	0402B102K500CT	B	31.5/57.5
C492	4030020450	S.CER	C1005 JB 0J 475M-T	T	28.9/70.5
C493	4030020450	S.CER	C1005 JB 0J 475M-T	T	40.3/71.7
C495	4030021520	S.CER	GRM31CB31H106KA12L	T	19.6/82.7
C496	4030021520	S.CER	GRM31CB31H106KA12L	T	21.3/107.7
C508	4030023090	S.CER	0402B102K500CT	T	14.4/41.4
C509	4030023090	S.CER	0402B102K500CT	T	13.9/38.5
C510	4030023090	S.CER	0402B102K500CT	B	26.6/45.7
C511	4030022640	S.CER	0402N101J500CT	B	29.4/40.4
C512	4030024500	S.CER	C1005 JB 1C 224K-T	B	30.3/40.4
C513	4030019560	S.CER	GRM21BB31C106KE15L	B	27.6/38.7
C514	4030023010	S.CER	0402B104K160CT	B	33.9/44.3
C515	4030023010	S.CER	0402B104K160CT	B	32.4/48.1
C516	4030019560	S.CER	GRM21BB31C106KE15L	B	28.4/49.8
C517	4030023010	S.CER	0402B104K160CT	B	29.9/38.8
C518	4030023090	S.CER	0402B102K500CT	B	26.3/50.7
C519	4030023090	S.CER	0402B102K500CT	B	28.7/47.7
C520	4030023090	S.CER	0402B102K500CT	B	15.5/42.4
C521	4030023090	S.CER	0402B102K500CT	B	16.4/47.7
C522	4030023090	S.CER	0402B102K500CT	T	19.5/50.7
C523	4030023090	S.CER	0402B102K500CT	B	21.9/38.5
C524	4030023090	S.CER	0402B102K500CT	B	21.5/37.3
C525	4030023090	S.CER	0402B102K500CT	B	44.1/67.8
C526	4030022630	S.CER	0402N100C500CT	B	42.4/67.8
C527	4030021240	S.CER	C1005 JB 1C 105K-T	B	40.5/65.4
C528	4030023010	S.CER	0402B104K160CT	B	39.6/65.4
C529	4030023010	S.CER	0402B104K160CT	B	44.5/64.6
C530	4030021240	S.CER	C1005 JB 1C 105K-T	B	41.9/63.1
C531	4030023010	S.CER	0402B104K160CT	T	21.0/62.0
C532	4030019560	S.CER	GRM21BB31C106KE15L	T	26.5/54.9
C533	4030023010	S.CER	0402B104K160CT	T	24.8/54.9
C534	4030023090	S.CER	0402B102K500CT	T	32.5/33.3
C535	4030023010	S.CER	0402B104K160CT	T	24.8/36.0
C536	4030019560	S.CER	GRM21BB31C106KE15L	T	24.7/34.0

[MAIN-1 UNIT] (for #13, #14, #23, and #24)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
C537	4030023010	S.CER 0402B104K160CT	T	30.5/33.8
C538	4520000020	S.NIO NOJC227M006RWJV	T	30.3/24.2
C539	4030023090	S.CER 0402B102K500CT	B	41.3/96.4
C541	4030021240	S.CER C1005 JB 1C 105K-T	B	34.8/27.6
C542	4030023010	S.CER 0402B104K160CT	B	34.5/23.2
C543	4030023090	S.CER 0402B102K500CT	T	15.9/9.5
C544	4030023090	S.CER 0402B102K500CT	T	13.0/6.6
C548	4030022930	S.CER 0402N821J500CT	B	8.0/35.4
C549	4030020170	S.CER C1608 CH 1H 472J-T	B	5.6/31.1
C550	4030022710	S.CER 0402N181J500CT	B	8.7/33.2
C551	4030018620	S.CER C1608 CH 1H 222J-T	B	6.0/28.1
C552	4030022690	S.CER 0402N151J500CT	B	9.0/28.0
C553	4030019570	S.CER C1608 CH 1H 332J-T	B	5.6/19.4
C554	4030022880	S.CER 0402N560J500CT	B	8.0/23.4
C555	4030020160	S.CER C1608 CH 1H 103J-T	B	5.5/14.7
C556	4030022630	S.CER 0402N100C500CT	B	7.6/18.5
C557	4030022930	S.CER 0402N821J500CT	B	11.4/35.3
C558	4030022930	S.CER 0402N821J500CT	B	13.0/31.7
C559	4030022690	S.CER 0402N151J500CT	B	10.5/33.2
C560	4030020170	S.CER C1608 CH 1H 472J-T	B	13.7/27.4
C561	4030022870	S.CER 0402N471J500CT	B	11.2/28.3
C562	4030020940	S.CER C1608 CH 1H 392JT	B	14.1/22.1
C563	4030022640	S.CER 0402N101J500CT	B	12.1/23.2
C564	4030020160	S.CER C1608 CH 1H 103J-T	B	14.1/19.1
C565	4030022680	S.CER 0402N150J500CT	B	9.3/18.3
C566	4030021240	S.CER C1005 JB 1C 105K-T	T	41.5/35.4
C567	4030021240	S.CER C1005 JB 1C 105K-T	T	41.9/36.8
C568	4030021240	S.CER C1005 JB 1C 105K-T	T	40.9/25.9
C569	4030023010	S.CER 0402B104K160CT	T	42.6/26.5
C570	4030023010	S.CER 0402B104K160CT	T	39.6/26.3
C571	4030019560	S.CER GRM21BB31C106KE15L	T	35.0/37.1
C572	4030019560	S.CER GRM21BB31C106KE15L	T	37.6/34.9
C573	4030023090	S.CER 0402B102K500CT	T	9.1/21.3
C574	4030022900	S.CER 0402N680J500CT	B	27.5/10.2
C577	4030021520	S.CER GRM31CB31H106KA12L	B	21.7/9.3
C579	4030021520	S.CER GRM31CB31H106KA12L	B	23.8/9.3
C580	4030021520	S.CER GRM31CB31H106KA12L	B	34.9/6.7
C585	4030023010	S.CER 0402B104K160CT	B	25.4/9.5
C586	4030023030	S.CER 0402B103K250CT	B	26.3/9.5
C587	4030022870	S.CER 0402N471J500CT	B	40.4/23.7
C588	4030022860	S.CER 0402N470J500CT	B	41.6/21.9
C589	4030021240	S.CER C1005 JB 1C 105K-T	B	39.1/22.5
C590	4030023090	S.CER 0402B102K500CT	B	35.2/87.5
C591	4030022640	S.CER 0402N101J500CT	B	36.9/88.1
C592	4030022640	S.CER 0402N101J500CT	B	40.1/96.7
C593	4030023090	S.CER 0402B102K500CT	B	41.5/94.8
C596	4030023090	S.CER 0402B102K500CT	T	11.7/10.7
C597	4030023010	S.CER 0402B104K160CT	B	26.6/26.3
C598	4030021240	S.CER C1005 JB 1C 105K-T	B	25.7/26.3
C599	4030023090	S.CER 0402B102K500CT	T	23.4/118.8
C602	4030023090	S.CER 0402B102K500CT	T	21.2/120.6
C605	4030022640	S.CER 0402N101J500CT	T	28.2/123.0
C608	4030019560	S.CER GRM21BB31C106KE15L	B	21.2/29.9
C610	4030023090	S.CER 0402B102K500CT	T	23.0/97.1
C612	4030019560	S.CER GRM21BB31C106KE15L	T	27.8/91.6
C613	4030023090	S.CER 0402B102K500CT	T	22.1/100.3
C614	4030023010	S.CER 0402B104K160CT	T	25.7/92.4
C615	4030023010	S.CER 0402B104K160CT	T	23.9/97.1
C616	4030023090	S.CER 0402B102K500CT	T	24.8/92.4
C622	4030023060	S.CER 0402B183K250CT	T	46.7/42.3
C623	4030023060	S.CER 0402B183K250CT	T	46.7/40.7
C624	4030023010	S.CER 0402B104K160CT	T	46.6/38.4
C627	4030023010	S.CER 0402B104K160CT	B	10.8/9.2
C628	4030023010	S.CER 0402B104K160CT	B	13.9/5.3
C629	4050000340	S.FEE NFM21PC224R1C3D	B	32.9/6.7
C631	4030022590	S.CER 0402N8R0C500CT	B	10.2/18.3
C632	4030022720	S.CER 0402N1R5B500CT	B	7.6/17.6
C633	4030023010	S.CER 0402B104K160CT	B	11.1/18.7
C634	4030023010	S.CER 0402B104K160CT	B	13.0/24.2
C635	4030023010	S.CER 0402B104K160CT	B	12.1/28.8
C636	4030023010	S.CER 0402B104K160CT	B	13.1/15.0
C637	4030023010	S.CER 0402B104K160CT	B	12.2/13.7
C638	4030023010	S.CER 0402B104K160CT	B	25.5/57.0
C639	4030023090	S.CER 0402B102K500CT	B	40.6/108.4
C640	4030023090	S.CER 0402B102K500CT	B	45.6/104.3
C641	4030023010	S.CER 0402B104K160CT	T	43.6/46.2
C642	4030023010	S.CER 0402B104K160CT	T	47.9/39.2
C643	4030023010	S.CER 0402B104K160CT	T	41.7/43.5
C644	4030023200	S.CER 0402B471K500CT	T	48.0/41.1
C645	4030023010	S.CER 0402B104K160CT	T	42.1/50.2
C646	4030019560	S.CER GRM21BB31C106KE15L	T	32.8/91.3
C647	4030023010	S.CER 0402B104K160CT	T	28.1/89.8
C648	4030023090	S.CER 0402B102K500CT	B	12.2/60.3
C649	4030023090	S.CER 0402B102K500CT	B	10.2/61.7
C650	4030023010	S.CER 0402B104K160CT	T	19.8/15.8
C651	4030023010	S.CER 0402B104K160CT	T	13.8/21.2
C652	4030023010	S.CER 0402B104K160CT	T	11.7/15.2
C653	4030021240	S.CER C1005 JB 1C 105K-T	T	22.0/97.1
C656	4030023090	S.CER 0402B102K500CT	T	15.6/7.8
C660	4030023090	S.CER 0402B102K500CT	B	6.6/67.2
C661	4030023010	S.CER 0402B104K160CT	T	40.6/46.4
C662	4030023010	S.CER 0402B104K160CT	T	41.2/44.9
C663	4030023010	S.CER 0402B104K160CT	T	33.2/85.4
C664	4030023010	S.CER 0402B104K160CT	B	36.5/41.7
C665	4030023070	S.CER 0402B223K250CT	B	20.7/75.2
C666	4030023010	S.CER 0402B104K160CT	T	34.3/22.5
C667	4030023090	S.CER 0402B102K500CT	B	14.0/15.0
C668	4030023090	S.CER 0402B102K500CT	B	12.0/18.7
C669	4030023090	S.CER 0402B102K500CT	B	13.9/24.2
C670	4030023090	S.CER 0402B102K500CT	B	13.0/29.4
C671	4030022640	S.CER 0402N101J500CT	B	6.0/21.5
C672	4030022640	S.CER 0402N101J500CT	B	6.9/16.1
C673	4030023090	S.CER 0402B102K500CT	T	42.4/45.6
C674	4030023090	S.CER 0402B102K500CT	T	16.1/22.4
C675	4030023090	S.CER 0402B102K500CT	T	6.5/15.7

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN-1 UNIT] (for #13, #14, #23, and #24)

REF NO.	PART NO.	DESCRIPTION	M.	H/V LOCATION
C676	4030023090	S.CER 0402B102K500CT	T	19.3/79.5
C677	4030019560	S.CER GRM21BB31C106KE15L	B	24.5/68.6
C680	4030023010	S.CER 0402B104K160CT	T	32.7/86.6
	4030023010	S.CER 0402B104K160CT		
C681	4030023010	S.CER 0402B104K160CT	T	35.2/81.9
	4030023010	S.CER 0402B104K160CT		
C682	4030023010	S.CER 0402B104K160CT	T	30.1/71.4
C683	4030023090	S.CER 0402B102K500CT	B	43.1/94.4
C684	4030023090	S.CER 0402B102K500CT	B	38.9/95.7
C694	4030023090	S.CER 0402B102K500CT	T	36.7/58.4
C704	4030023090	S.CER 0402B102K500CT	T	40.1/58.6
C706	4030023090	S.CER 0402B102K500CT	T	38.3/58.6
C712	4030023820	S.CER 0603B104K250CT	T	7.1/19.1
C713	4550008850	S.TAN F931C227MNC	T	25.8/29.5
C715	4030023010	S.CER 0402B104K160CT	T	47.2/43.6
J1	6450000870	CON HEC2711-01-020	T	13.0/4.0
J2	6450000131	CON HSJ1102-018540		
J4	6510021901	S.CON BM02B-ASRS-TF (LF) (SN)		
J5	6450001060	CON HSJ1493-01-010		
J6	6510031230	S.CON 50P4.5-JMCS-G-TF (N) (1)	T	35.7/54.3
MC1	7700003060	MIC F6027AP-SBC-462		
S1	2260003640	SWI SKHLLCA010		
EP3	6910014640	S.BEA MPZ2012S221A-T	T	39.3/14.4
EP4	6910014640	S.BEA MPZ2012S221A-T	T	19.5/121.0
EP5	6910014730	S.BEA MPZ2012S331A-T	T	37.0/102.8
EP6	6910014730	S.BEA MPZ2012S331A-T	B	40.2/110.9
EP7	6910014730	S.BEA MPZ2012S331A-T	B	41.8/106.3
EP10	6910014730	S.BEA MPZ2012S331A-T	T	13.9/8.6
EP11	6910014730	S.BEA MPZ2012S331A-T	B	39.7/103.7
EP13	6910020610	S.BEA BLM15BD102SN1D	T	15.7/47.5
EP14	6910020610	S.BEA BLM15BD102SN1D	T	12.5/47.7
EP15	6910014640	S.BEA MPZ2012S221A-T	T	39.7/18.6
EP16	6910014640	S.BEA MPZ2012S221A-T	T	18.5/89.0
EP18	6910020610	S.BEA BLM15BD102SN1D	T	27.7/56.8
EP19	6910020610	S.BEA BLM15BD102SN1D	T	23.5/54.5
EP20	6910020610	S.BEA BLM15BD102SN1D	T	26.6/42.9
EP21	6910020610	S.BEA BLM15BD102SN1D	T	32.6/34.2
EP23	6910014730	S.BEA MPZ2012S331A-T	T	12.2/8.6
EP24	6910014730	S.BEA MPZ2012S331A-T	B	42.4/92.3
EP25	6910020610	S.BEA BLM15BD102SN1D	B	36.5/87.2
EP26	6910020610	S.BEA BLM15BD102SN1D	B	40.1/95.7
EP28	6910020610	S.BEA BLM15BD102SN1D	T	26.9/110.8
EP29	6910014640	S.BEA MPZ2012S221A-T	T	30.3/110.0
EP30	6910014640	S.BEA MPZ2012S221A-T	B	34.9/10.9
EP31	6910020610	S.BEA BLM15BD102SN1D	T	19.5/111.2

M.= Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)
H/V LOCATION= See the BOARD LAYOUTS for details

SECTION 6

MECHANICAL PARTS

[CHASSIS PARTS]

REF NO.	PART NO.	DESCRIPTION	QTY.
J1	6510027690	BNC-R170 (A)	1
SP1	2510002150	C36N07M-7	1
W1	8900009640	OPC-963	1
EP1	3310005090	GNBA-A13A	[#11] 1
	3310005090	GNBA-A13A	[#12] 1
	3310005090	GNBA-A13A	[#13] 1
	3310005090	GNBA-A13A	[#14] 1
EP2	8940000080	3699 KEY P.C.B.	1
MP1	8010024120	3699 CHASSIS	1
MP2	8210032970	3699 FRONT PANEL ASSEMBLY	[#11] 1
	8210032970	3699 FRONT PANEL ASSEMBLY	[#12] 1
	8210032970	3699 FRONT PANEL ASSEMBLY	[#13] 1
	8210032970	3699 FRONT PANEL ASSEMBLY	[#14] 1
	8210032960	3699 FRONT PANEL (A) ASSEMBLY	[#21] 1
	8210032960	3699 FRONT PANEL (A) ASSEMBLY	[#22] 1
	8210032960	3699 FRONT PANEL (A) ASSEMBLY	[#23] 1
	8210032960	3699 FRONT PANEL (A) ASSEMBLY	[#24] 1
MP5	8310091150	3699 WINDOW PLATE	1
MP6	8610016330	KNOB N-449	1
MP7	8610016340	KNOB N-450	1
MP10	8930096800	3699 JACK CAP (KOB)	1
MP11	8930096810	3699 DC CAP	1
MP12	8930096820	3699 MAIN SEAL (SHJ)	1
MP13	8930096830	3699 MIC RUBBER (TOP)	1
MP14	8930096840	3699 CONTACT RUBBER (TOP)	1
MP15	8930098760	INSULATION SHEET (OP)	[#11] 1
	8930098760	INSULATION SHEET (OP)	[#12] 1
	8930098760	INSULATION SHEET (OP)	[#13] 1
	8930098760	INSULATION SHEET (OP)	[#14] 1
MP16	8930096850	3699 WINDOW SHEET	1
MP18	8930083690	3322 GPS SPONGE	[#11] 1
	8930083690	3322 GPS SPONGE	[#12] 1
	8930083690	3322 GPS SPONGE	[#13] 1
	8930083690	3322 GPS SPONGE	[#14] 1
MP20	8830004260	3776 ANT NUT	1
MP21	8830003900	VR NUT (AF)	1
MP23	8930074350	O-RING (BW) (TOP)	1
MP24	8930088050	O-RING (CS) (TOT)	1
MP25	8930090100	O-RING (CX) (TOT)	1
MP26	8850003421	SEALING WASHER (AA)-1 (TOT)	1
MP27	8930098360	3699 VOL RUBBER (TOP)	1
MP28	8930084870	3384 REAR SHEET	1
MP29	8930088670	3521 VENT SHEET	1
MP30	8930068980	2905 VENT SHEET	1
MP32	8930083700	DOUBLE SIDE TAPE (BM)	[#11] 1
	8930083700	DOUBLE SIDE TAPE (BM)	[#12] 1
	8930083700	DOUBLE SIDE TAPE (BM)	[#13] 1
	8930083700	DOUBLE SIDE TAPE (BM)	[#14] 1
MP34	8810011050	BT O M2x3 NI-ZC3	11
MP35	8810009181	BT M2x5 NI-ZC3	2
MP36	8810009511	PH BT M2x4 NI-ZC3 (3.6-4.0)	1
MP37	8810011050	BT O M2x3 NI-ZC3	6
MP38	8810010850	PH BT B0 M2x8 SUS SSBC	2
MP39	8810011830	TAPPING SCREW B0 2x4 SUS SSBC	1
MP40	8850003250	PLAIN WASHER (AU)	1
MP41	8950009290	3766 T-KEY (B) (YTP)	[#11] 1
	8950009290	3766 T-KEY (B) (YTP)	[#12] 1
	8950009300	3766 T-KEY (C) (YTP)	[#13] 1
	8950009300	3766 T-KEY (C) (YTP)	[#14] 1
	8950009310	3766 T-KEY (D) (YTP)	[#21] 1
	8950009310	3766 T-KEY (D) (YTP)	[#22] 1
	8950009320	3766 T-KEY (E) (YTP)	[#23] 1
	8950009320	3766 T-KEY (E) (YTP)	[#24] 1
MP42	8930097220	3699 SP HOLDER	1
MP43	8930097830	3699 SPONGE	2
MP44	8930098420	SPONGE (PK)	2
MP45	8930098420	SPONGE (PK)	1
MP46	8930098430	SPONGE (PL)	3
MP47	8930098410	SPONGE (PJ)	1
MP48	8930098440	DOUBLE SIDE TAPE (CH)	1
MP49	8930098420	SPONGE (PK)	2

[LOGIC UNIT] (for #11, #12, #21, and #22)

REF NO.	PART NO.	DESCRIPTION	QTY.
J1*	6510030220	50RF-JMCS-G-1B-TF (N) (LF) (SN)	1
J2*	6510031390	15FXVL-RSM1-GAN-TF-1 (HF)	1
J3*	6510023480	AYU1-1P-02676-120-TF	[#11] 1
	6510023480	AYU1-1P-02676-120-TF	[#12] 1
J4*	6510031380	31FXVL-RSM1-GAN-TF-1 (HF)	1
DS5	5030004360	TM128160D1CIWUGND	1
S23*	2260003320	SKRTLAE010	1
S24*	2260003320	SKRTLAE010	1
S25*	2260003320	SKRTLAE010	1
MP1*	8510022120	3699 VCO CASE	[#11] 1
	8510022120	3699 VCO CASE	[#12] 1
MP2	8930096860	3699 WHITE SHEET	1
MP3	8930096870	3699 LCD FILTER	1
MP4	8930094680	DOUBLE SIDE TAPE (CC)	2
MP5	8210032890	3699 REFLECTOR	1
MP6*	8510022280	3699 CPU SHIELD	1
MP7	8930097820	3699 LCD HOLDER	1
MP8	8930083700	DOUBLE SIDE TAPE (BM)	1

[MAIN UNIT] (for #11, #12, #21, and #22)

REF NO.	PART NO.	DESCRIPTION	QTY.
J1*	6450000870	HEC2711-01-020	1
J2*	6450000131	HSJ1102-018540	1
J4*	6510021901	BM02B-ASRS-TF (LF) (SN)	1
J5	6450001060	HSJ1493-01-010	1
J6*	6510031230	50P4.5-JMCS-G-TF (N) (1)	1
MC1*	7700003060	F6027AP-SBC-462	1
S1*	2260003640	SKHLLCA010	1
MP1*	8410003040	3699 PA HEATSINK	1
MP3*	8510022120	3699 VCO CASE	1
MP5	8950009230	3699 CONTACT SPRING	1
MP10	8930097700	3699 JACK SHEET	1
MP11	8510022270	3699 ANT SHIELD	1
MP12	8510022260	3699 PA CASE	1
MP20	8930070581	SHIELD SPONGE (BA)-1	1
MP21	8930085101	SHIELD SPONGE (CW)-1	1
MP22	8930085111	SHIELD SPONGE (CX)-1	1
MP23	8930058510	INSULATION SHEET HC	1
MP24	8930084910	THERMAL SHEET (CB)	2

*: Refer to "BOARD LAYOUTS" for the location.

**: Refer to "GENERAL WIRING" for the connection

Screw abbreviations A, B0, BT: Self-tapping PH: Pan head BS: Brass NI: Nickel ZU: Zinc SUS: Stainless

[LOGIC-1 UNIT] (for #13, #14, #23, and #24)

REF NO.	PART NO.	DESCRIPTION	QTY.
J1*	6510030220	50RF-JMCS-G-1B-TF (N) (LF) (SN)	1
J2*	6510031390	15FXVL-RSM1-GAN-TF-1 (HF)	1
J3*	6510023480	AYU1-1P-02676-120-TF	1
J4*	6510023480	AYU1-1P-02676-120-TF	1
	6510031380	31FXVL-RSM1-GAN-TF-1 (HF)	1
DS5	5030004360	TM128160D1CIWUGND	1
S23*	2260003320	SKRTLAE010	1
S24*	2260003320	SKRTLAE010	1
S25*	2260003320	SKRTLAE010	1
MP1*	8510022120	3699 VCO CASE	1
	8510022120	3699 VCO CASE	1
MP2	8930096860	3699 WHITE SHEET	1
MP3	8930096870	3699 LCD FILTER	1
MP4	8930094680	DOUBLE SIDE TAPE (CC)	2
MP5	8210032890	3699 REFLECTOR	1
MP6*	8510022280	3699 CPU SHIELD	1
MP7	8930097820	3699 LCD HOLDER	1
MP8	8930083700	DOUBLE SIDE TAPE (BM)	1


[MAIN-1 UNIT] (for #13, #14, #23, and #24)

REF NO.	PART NO.	DESCRIPTION	QTY.
J1*	6450000870	HEC2711-01-020	1
J2*	6450000131	HSJ1102-018540	1
J4*	6510021901	BM02B-ASRS-TF (LF) (SN)	1
J5	6450001060	HSJ1493-01-010	1
J6*	6510031230	50P4.5-JMCS-G-TF (N) (1)	1
MC1*	7700003060	F6027AP-SBC-462 <TDS>	1
S1*	2260003640	SKHLLCA010	1
MP1*	8410003040	3699 PA HEATSINK	1
MP3*	8510022120	3699 VCO CASE	1
MP5	8950009230	3699 CONTACT SPRING	1
MP10	8930097700	3699 JACK SHEET	1
MP11	8510022270	3699 ANT SHIELD	1
MP12	8510022260	3699 PA CASE	1
MP20	8930070581	SHIELD SPONGE (BA)-1	1
MP21	8930072061	SHIELD SPONGE (BU)-1	1
MP22	8930085111	SHIELD SPONGE (CX)-1	1
MP23	8930058510	INSULATION SHEET HC	1

[ACCESSORIES]

REF NO.	PART NO.	DESCRIPTION	QTY.
W1	—	OPC-2379†	1
	—	OPC-2379†	1
	—	OPC-2379†	1
	—	OPC-2379†	1
	—	OPC-2379†	1
	—	OPC-2379†	1
EP1	3310002130	FA-B02AR (125)	1
EP2	6910018620	BLACK HANDY STRAP	1
EP3	—	BP-288†	1
EP5	—	BC-123SA†	1
	—	BC-123SE†	1
	—	BC-123SE†	1
	—	BC-123SV†	1
	—	BC-123SA†	1
	—	BC-123SE†	1
	—	BC-123SE†	1
	—	BC-123SV†	1
EP7	—	BC-224†	1
EP8	—	BP-289†	1
	—	BP-289†	1
	—	BP-289†	1
	—	BP-289†	1
	—	BP-289†	1
	—	BP-289†	1
	—	BP-289†	1
	—	BP-289†	1
MP1	—	MB-133†	1

†Sold as an option.


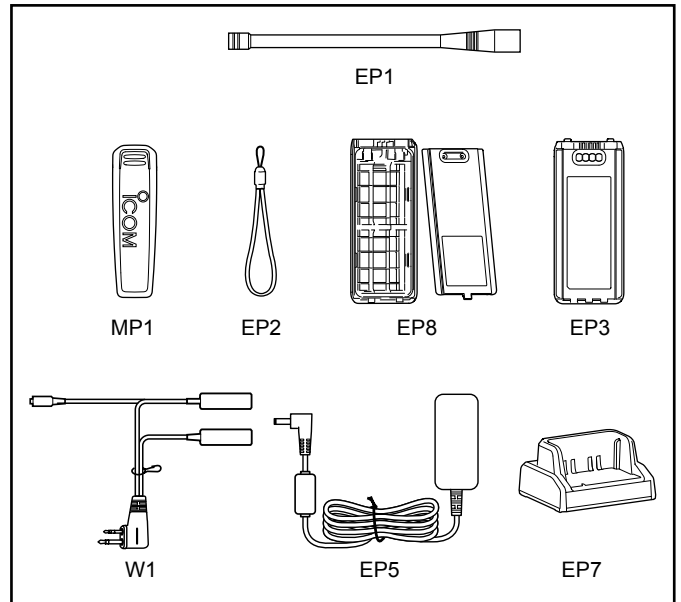


*: Refer to “BOARD LAYOUTS” for the location.

***: Refer to “GENERAL WIRING” for the connection

Screw abbreviations A, B0, BT: Self-tapping PH: Pan head BS: Brass NI: Nickel ZU: Zinc SUS: Stainless


Apply the grease to the following area of the front panel
Used grease: G501 (80G) SHINETSU (8950002750)

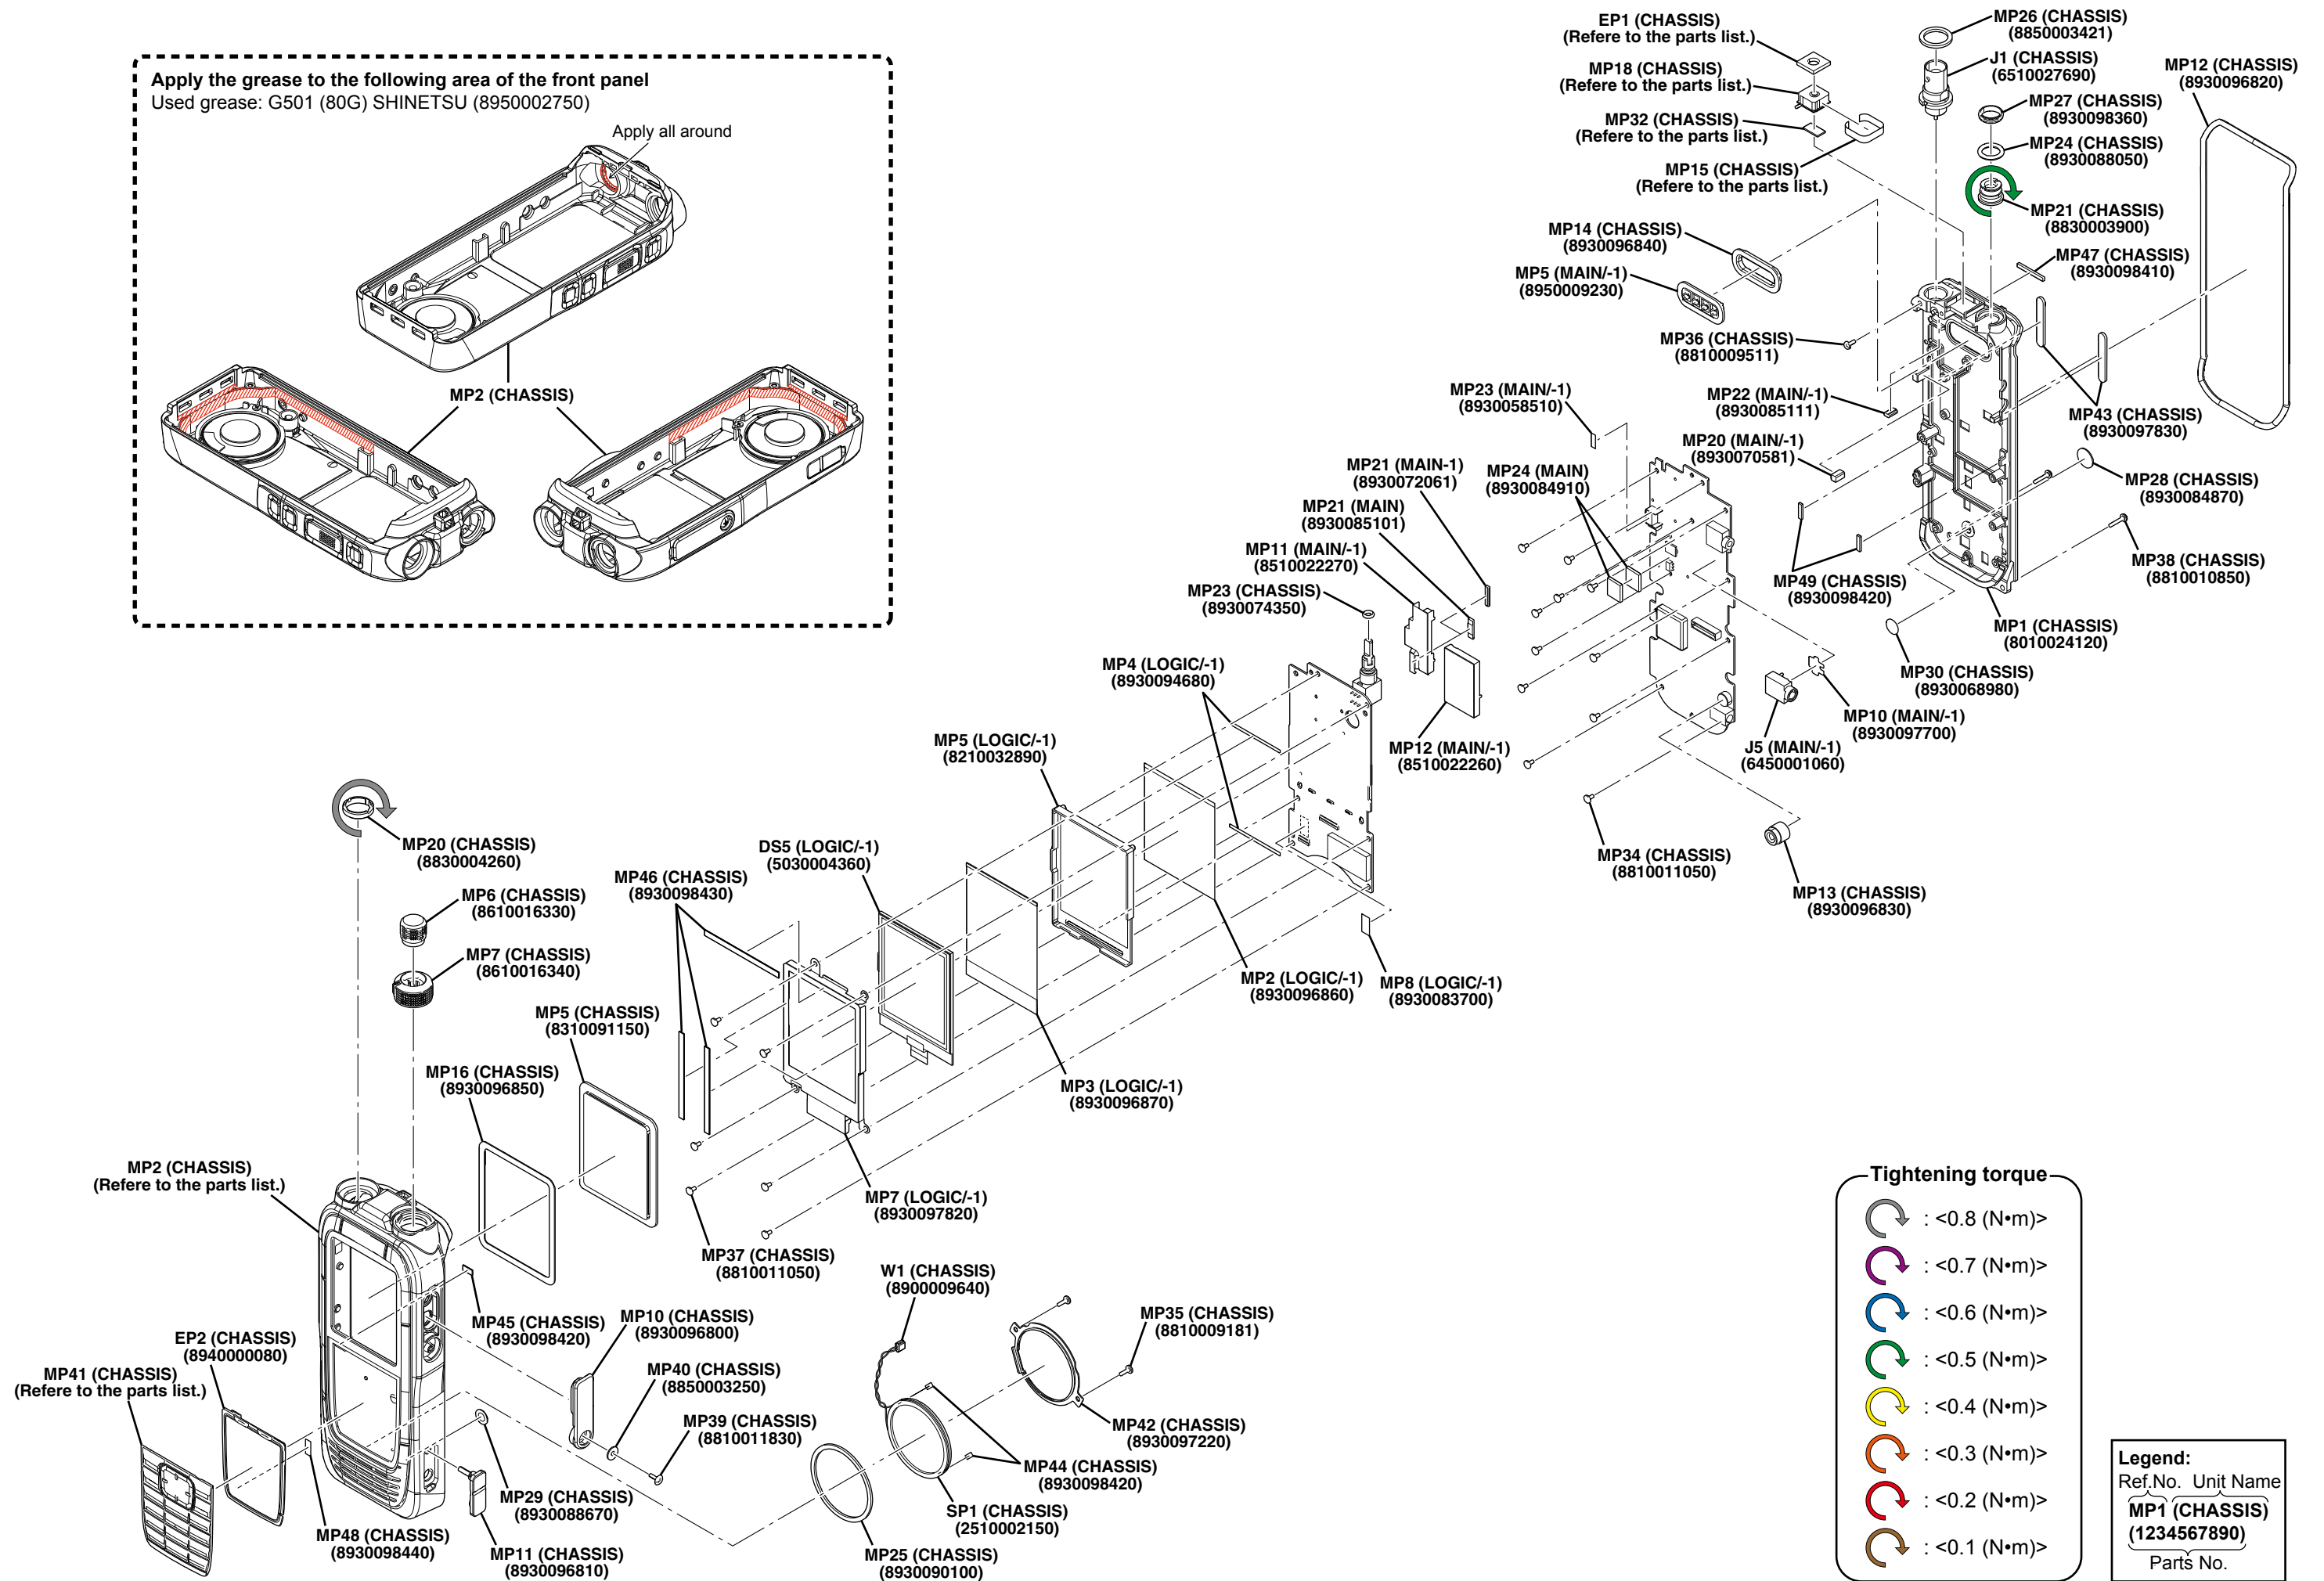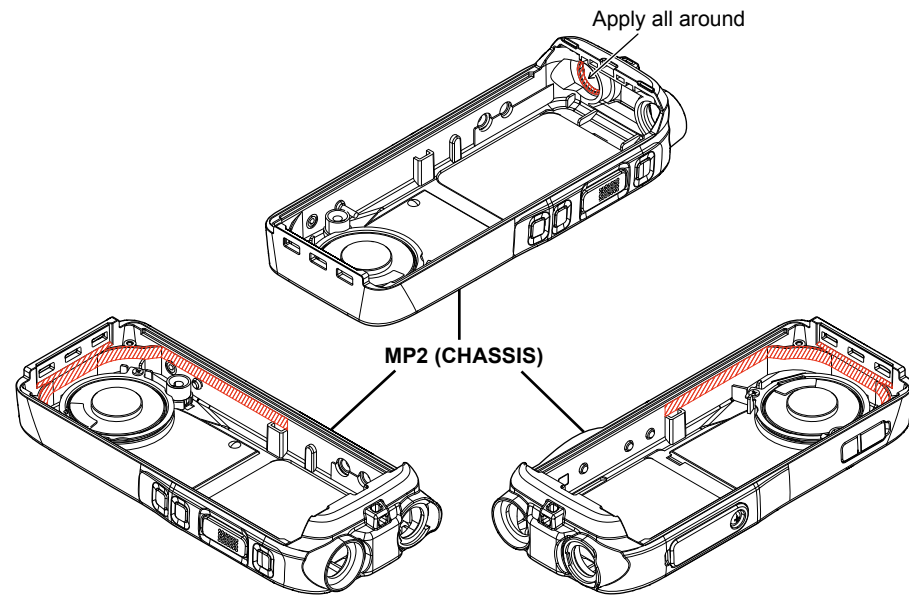


BOARD LAYOUT

The actual configuration of the PC board can be seen by viewing the top and bottom BOARD LAYOUT pages together.

- LOGIC UNIT (B-8813: Top view)

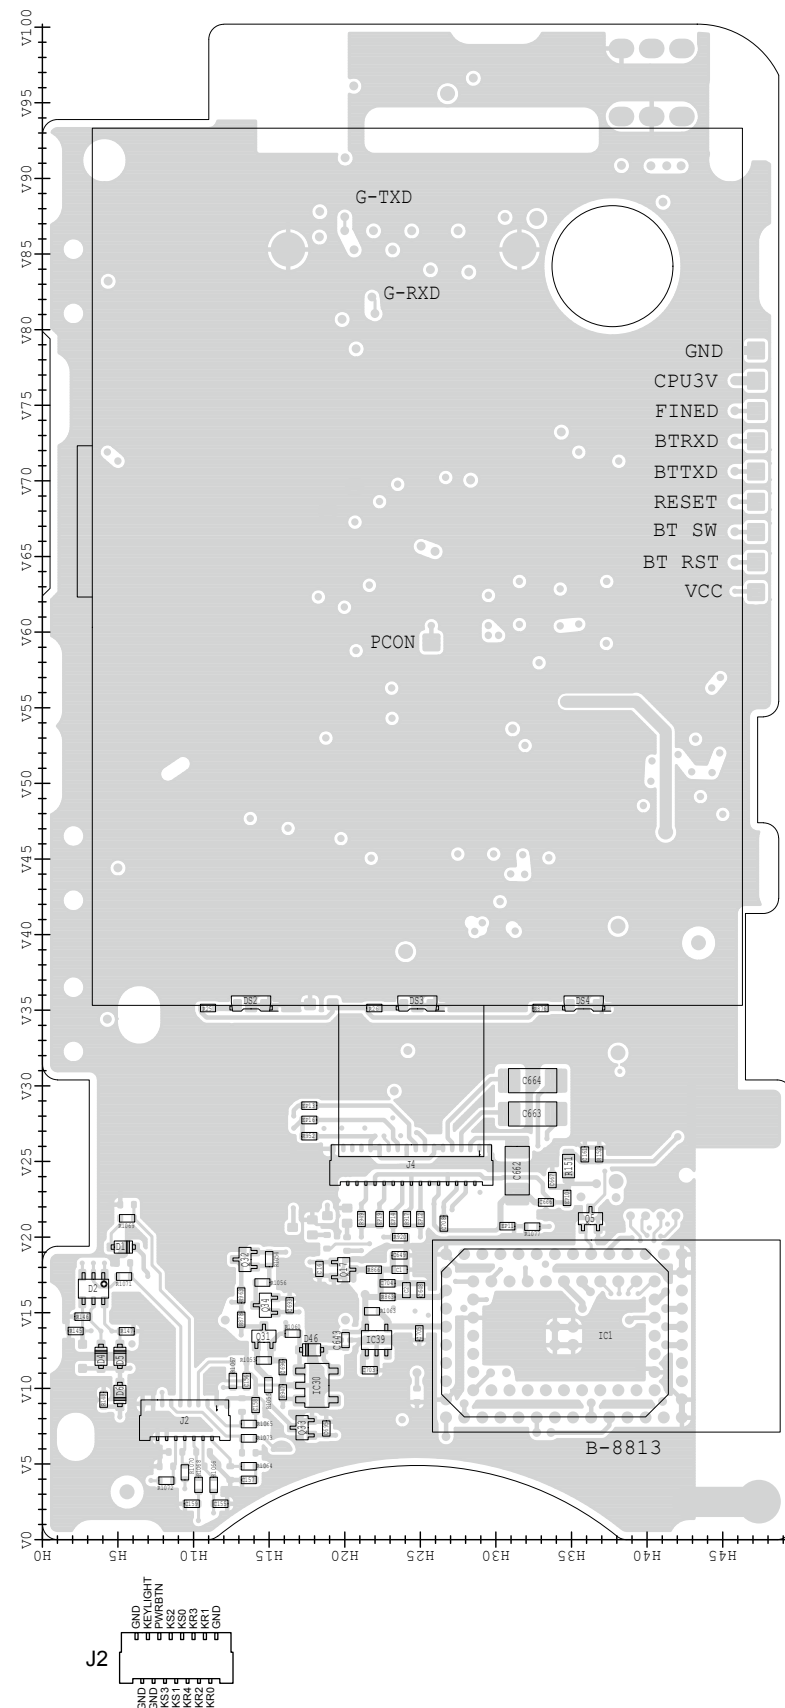


- **MAIN UNIT (B-8812: Top view)**

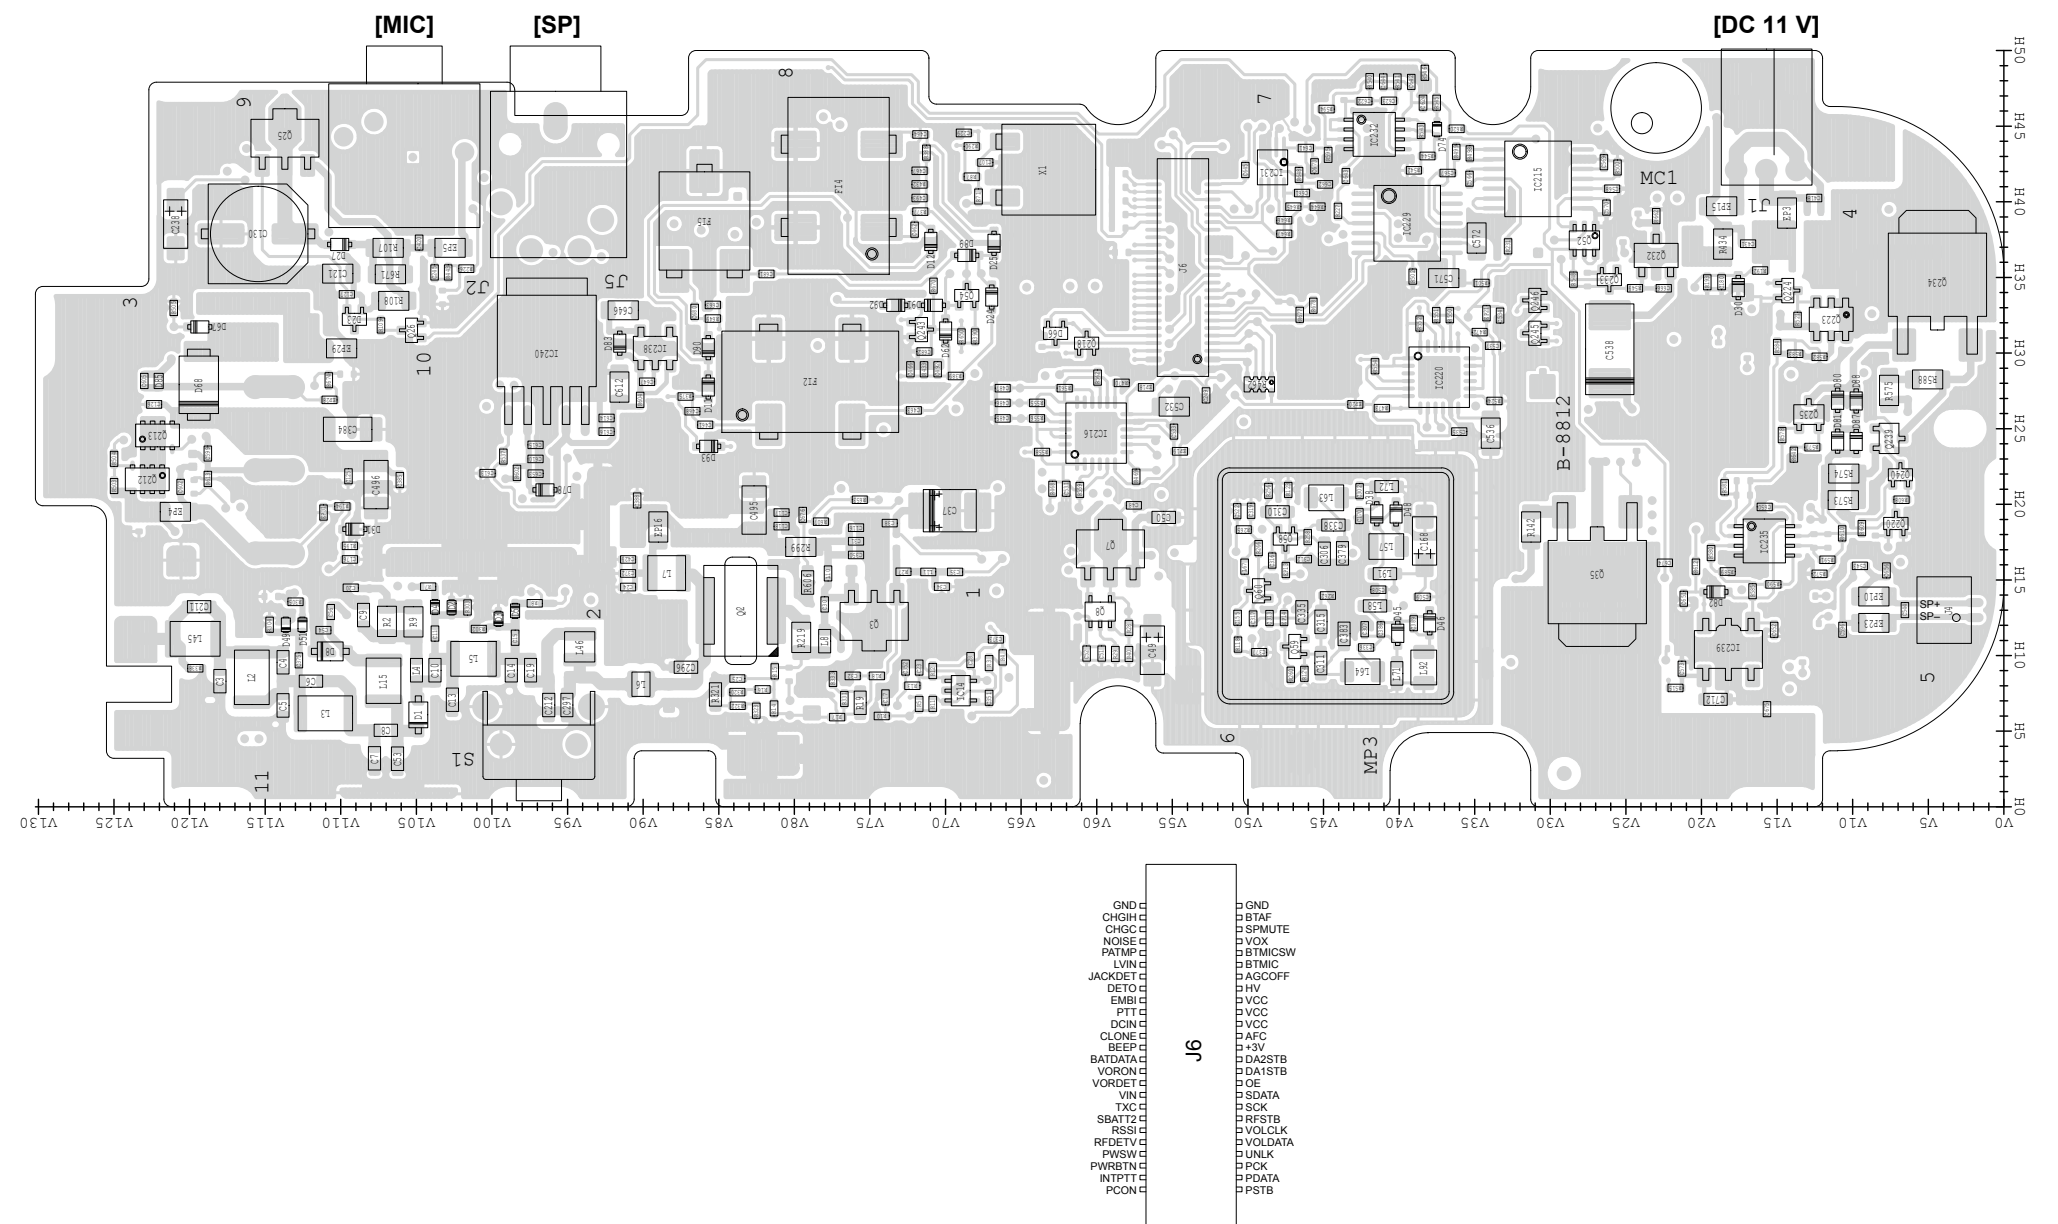


The actual configuration of the PC board can be seen by viewing the top and bottom BOARD LAYOUT pages together.

• MAIN UNIT (B-8812: Bottom view)

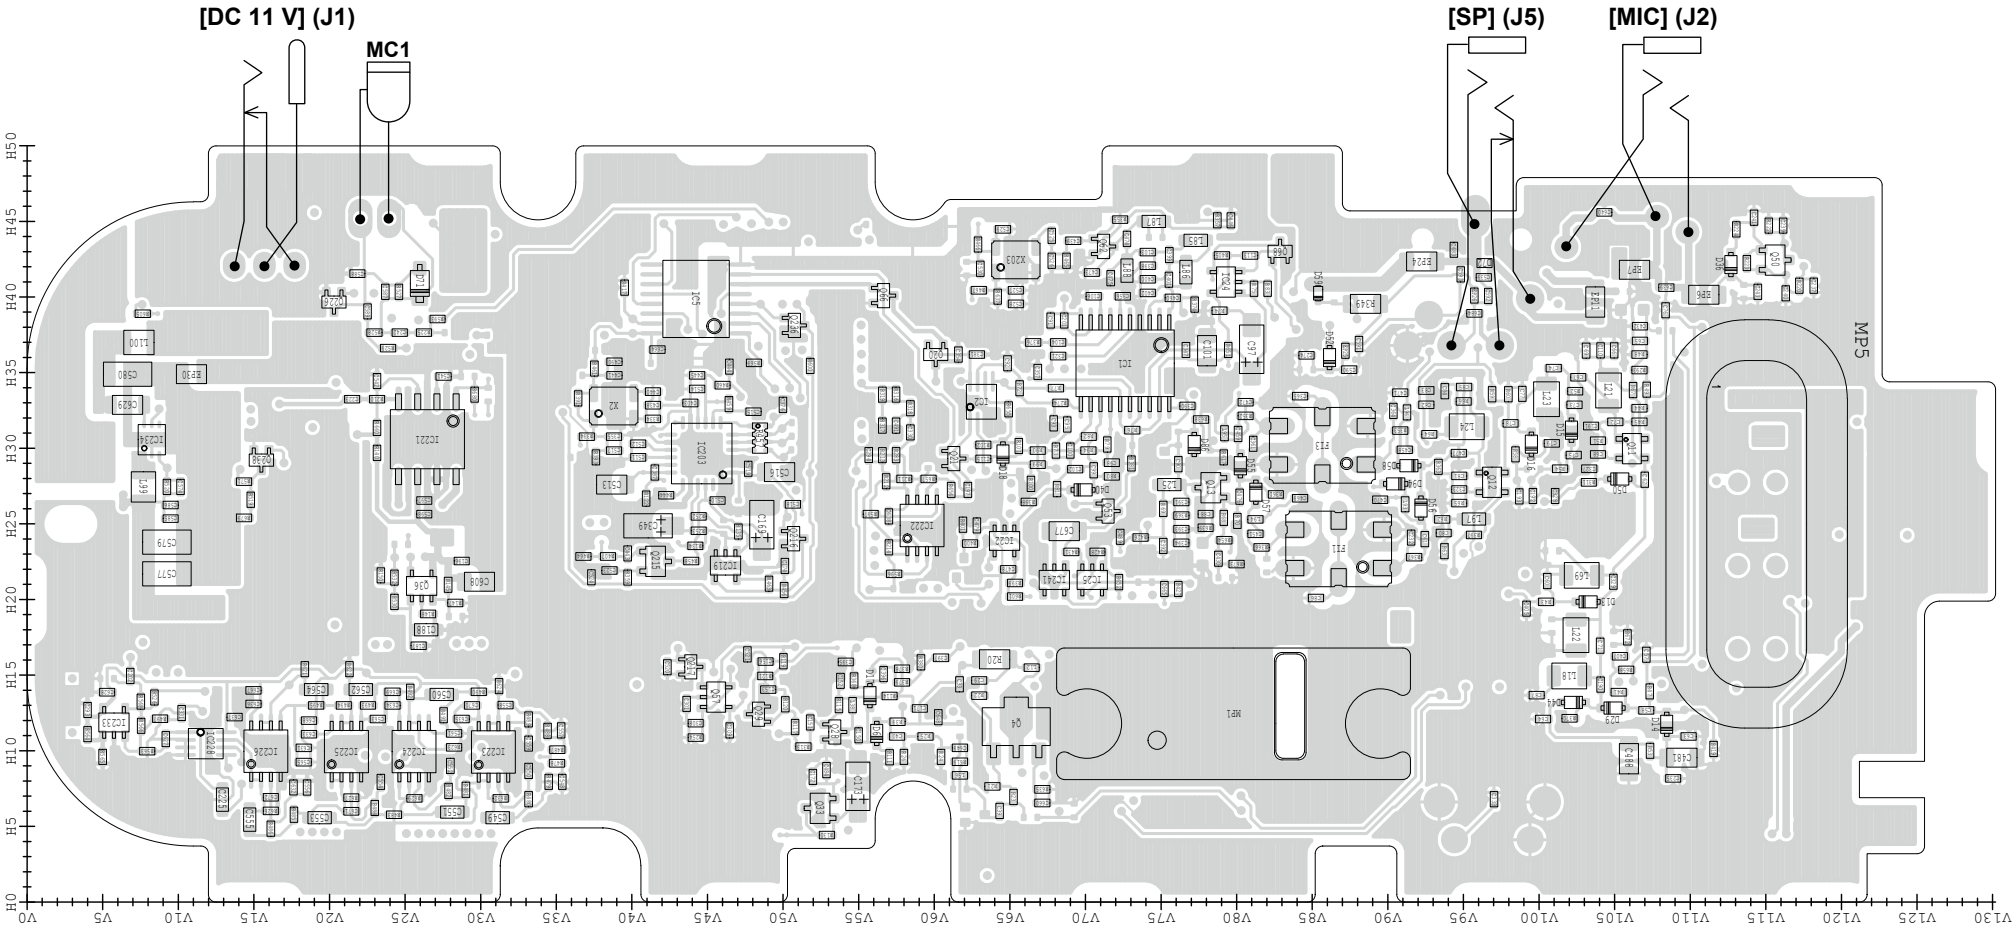


• LOGIC UNIT (B-8813: Bottom view)

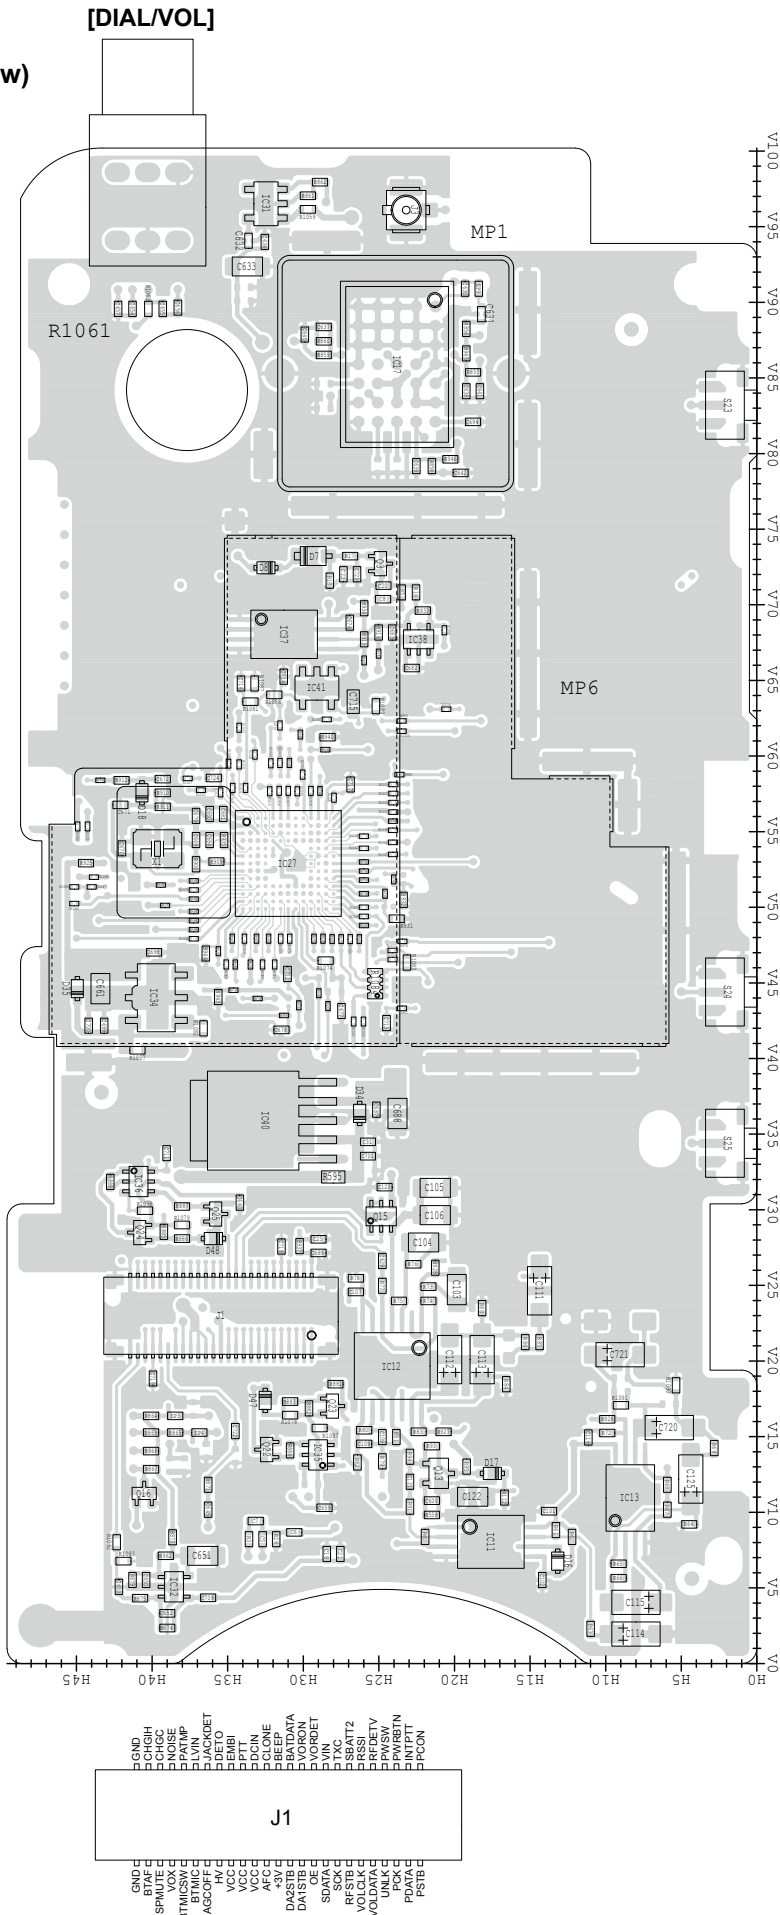

See the PARTS LIST H/V location on the PARTS LIST for location details.

• LOGIC-1 UNIT (B-8816: Top view)

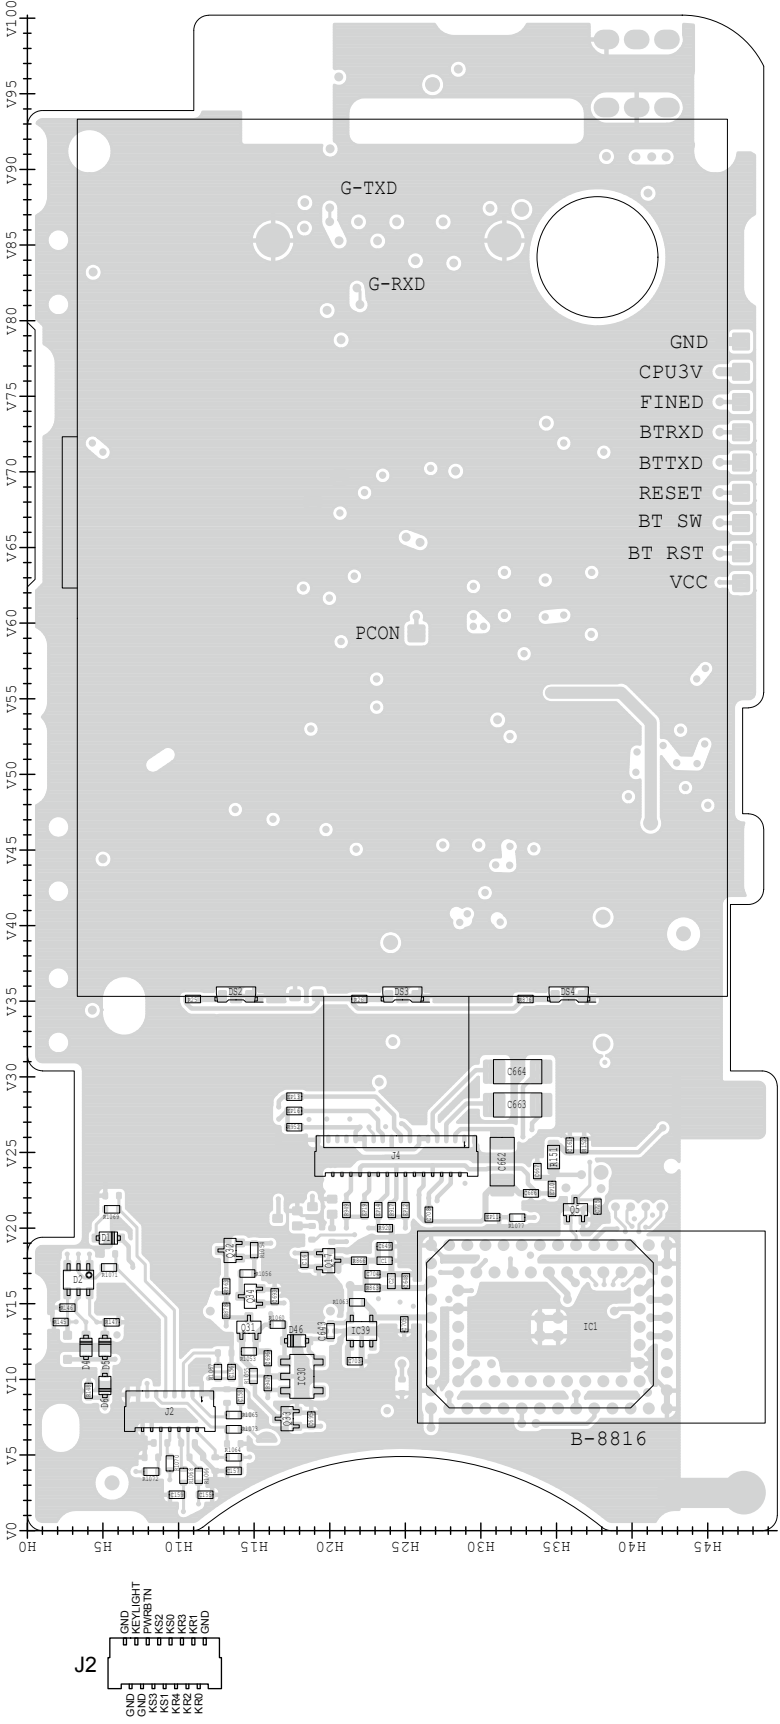

• MAIN UNIT (B-8801a: Top view)




The actual configuration of the PC board can be seen by viewing the top and bottom BOARD LAYOUT pages together.

- **MAIN UNIT (B-8812: Bottom view)**




- **LOGIC UNIT**
(B-8813: Bottom view)

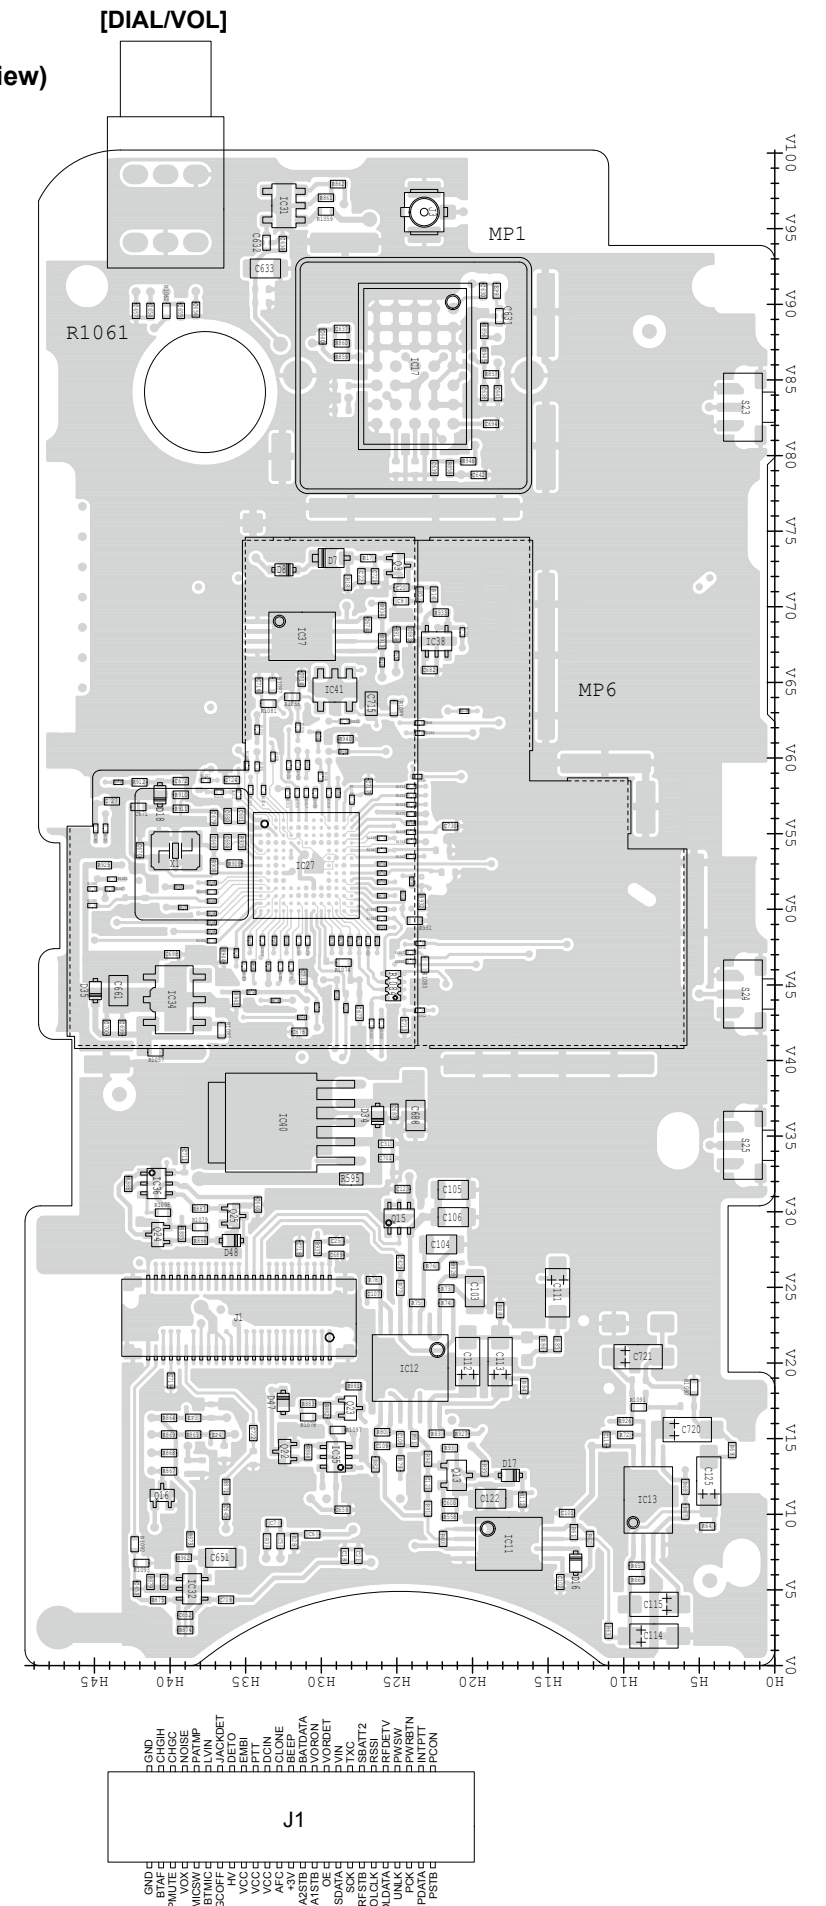

See the PARTS LIST H/V location on the PARTS LIST for location details.


SECTION 8 BLOCK DIAGRAM

SECTION 8 BLOCK DIAGRAM

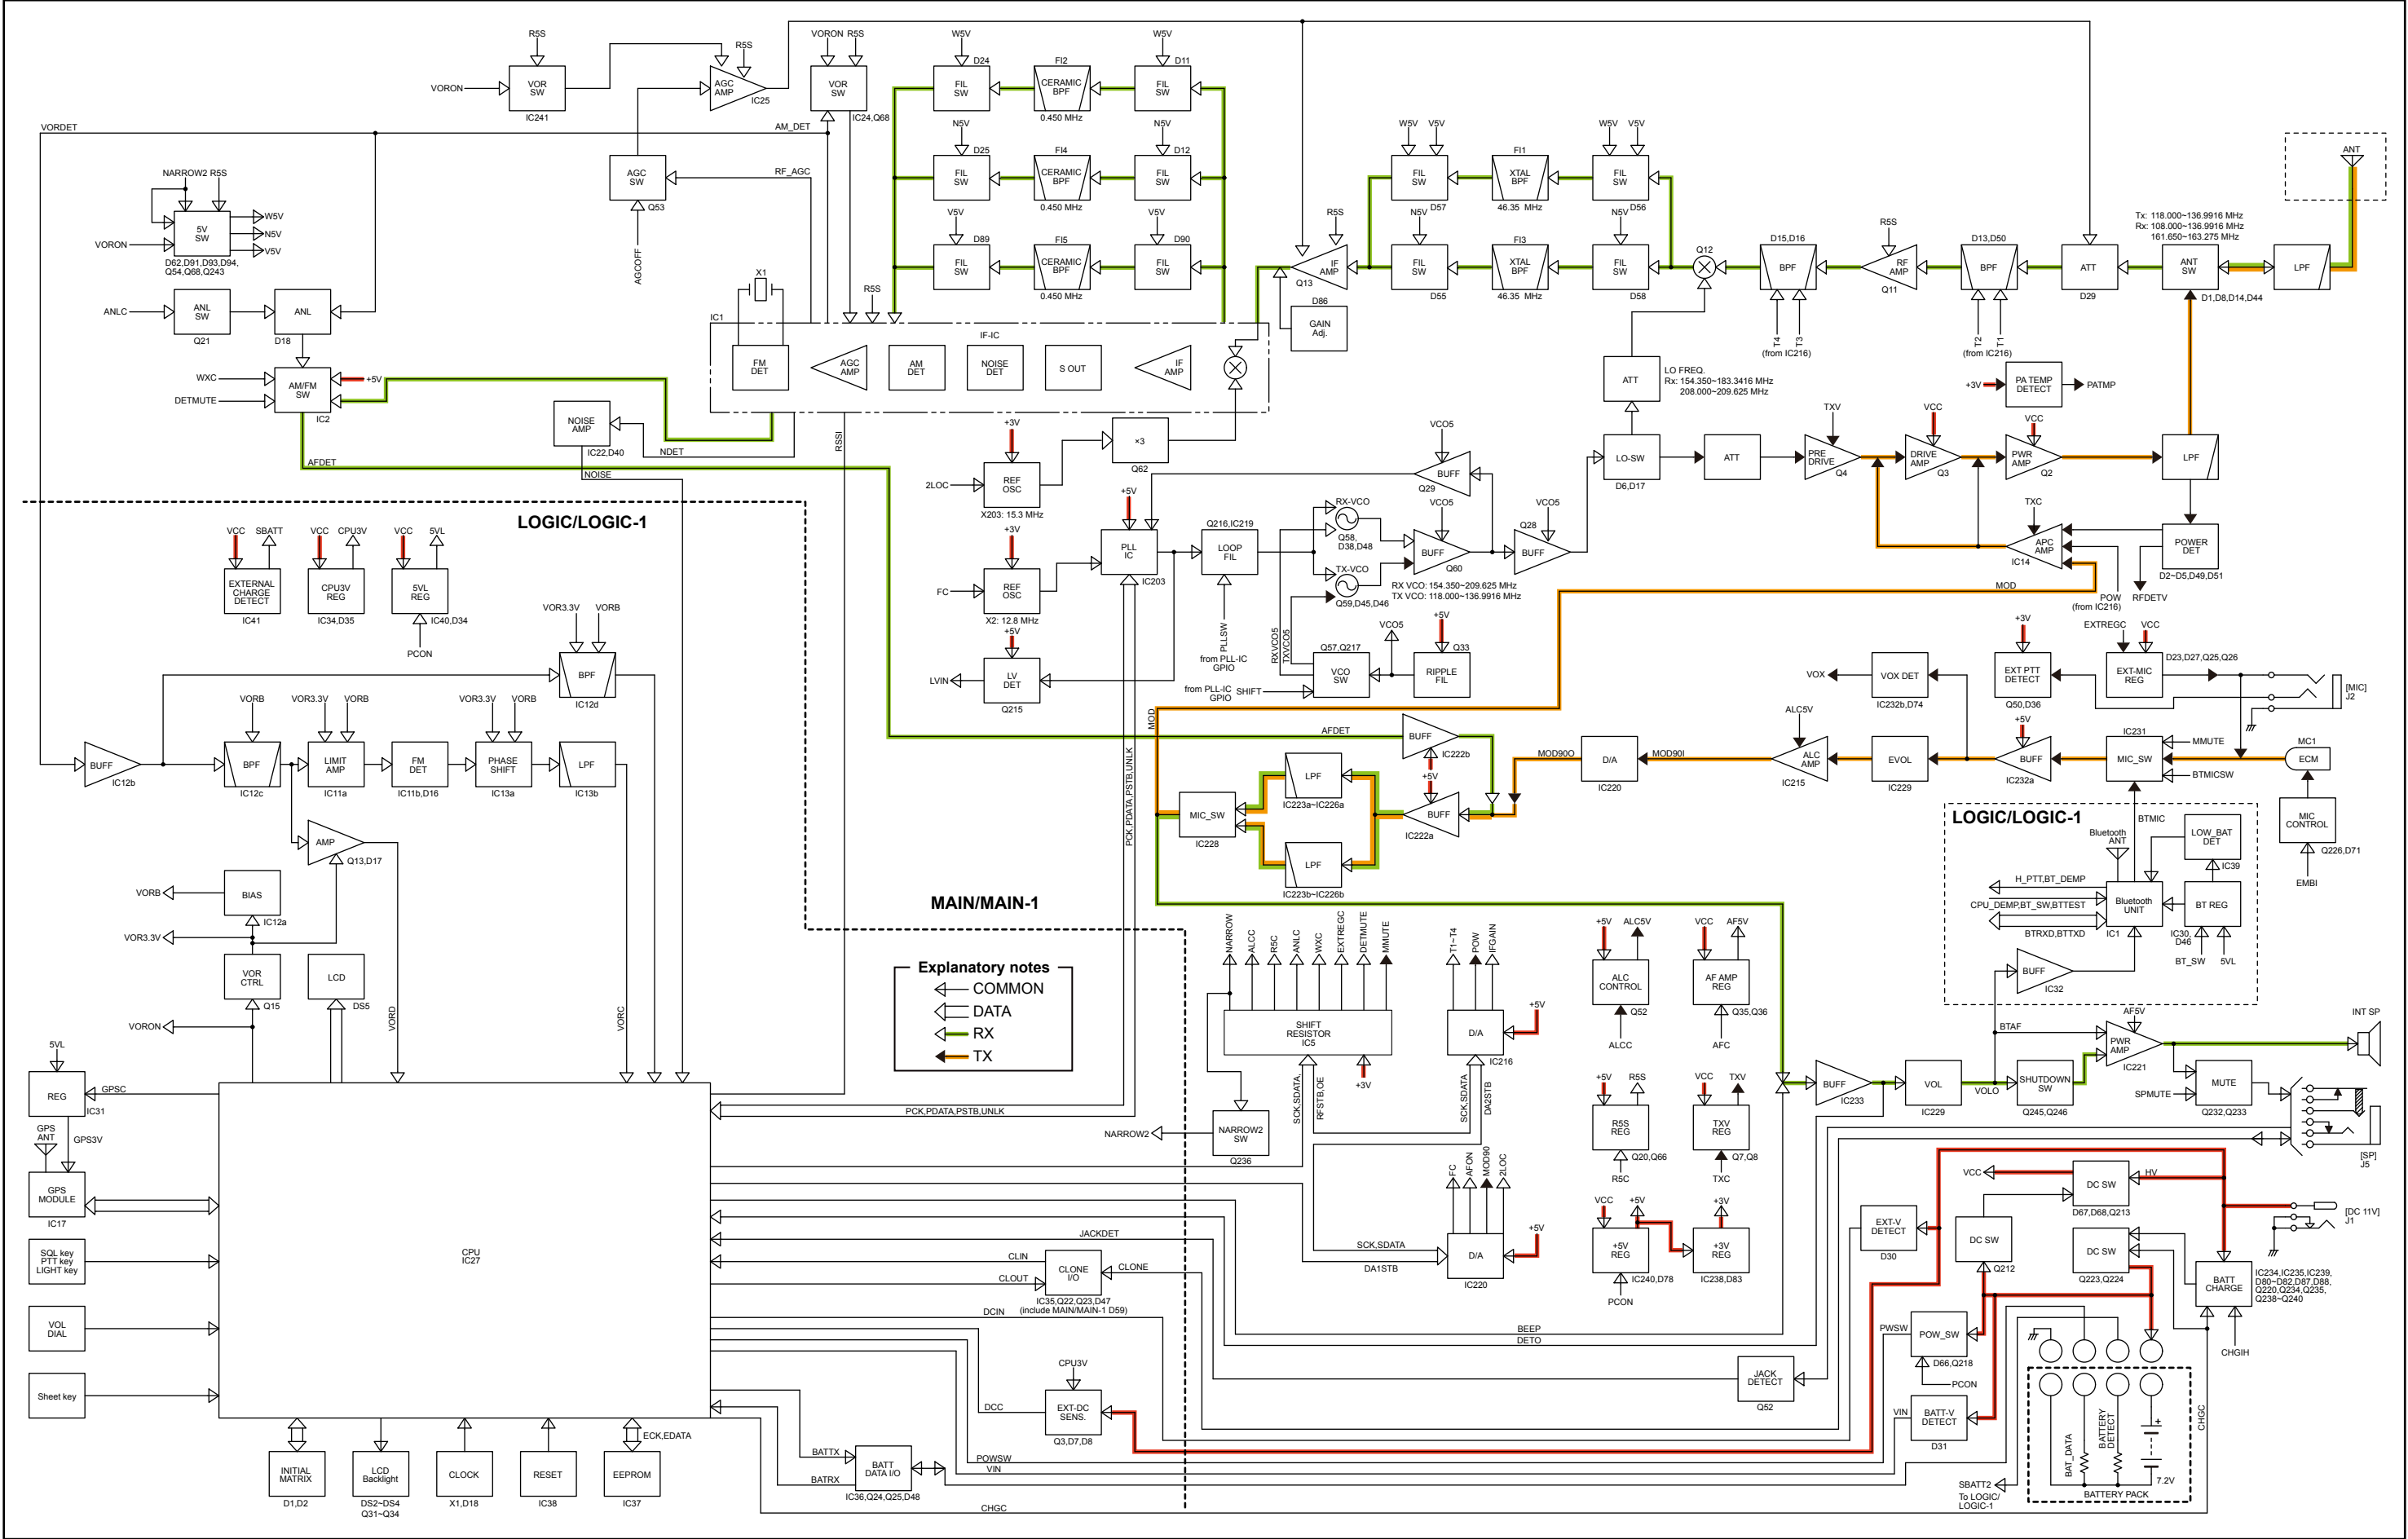


VOLTAGE DIAGRAM

• LOGIC UNIT (2/2)

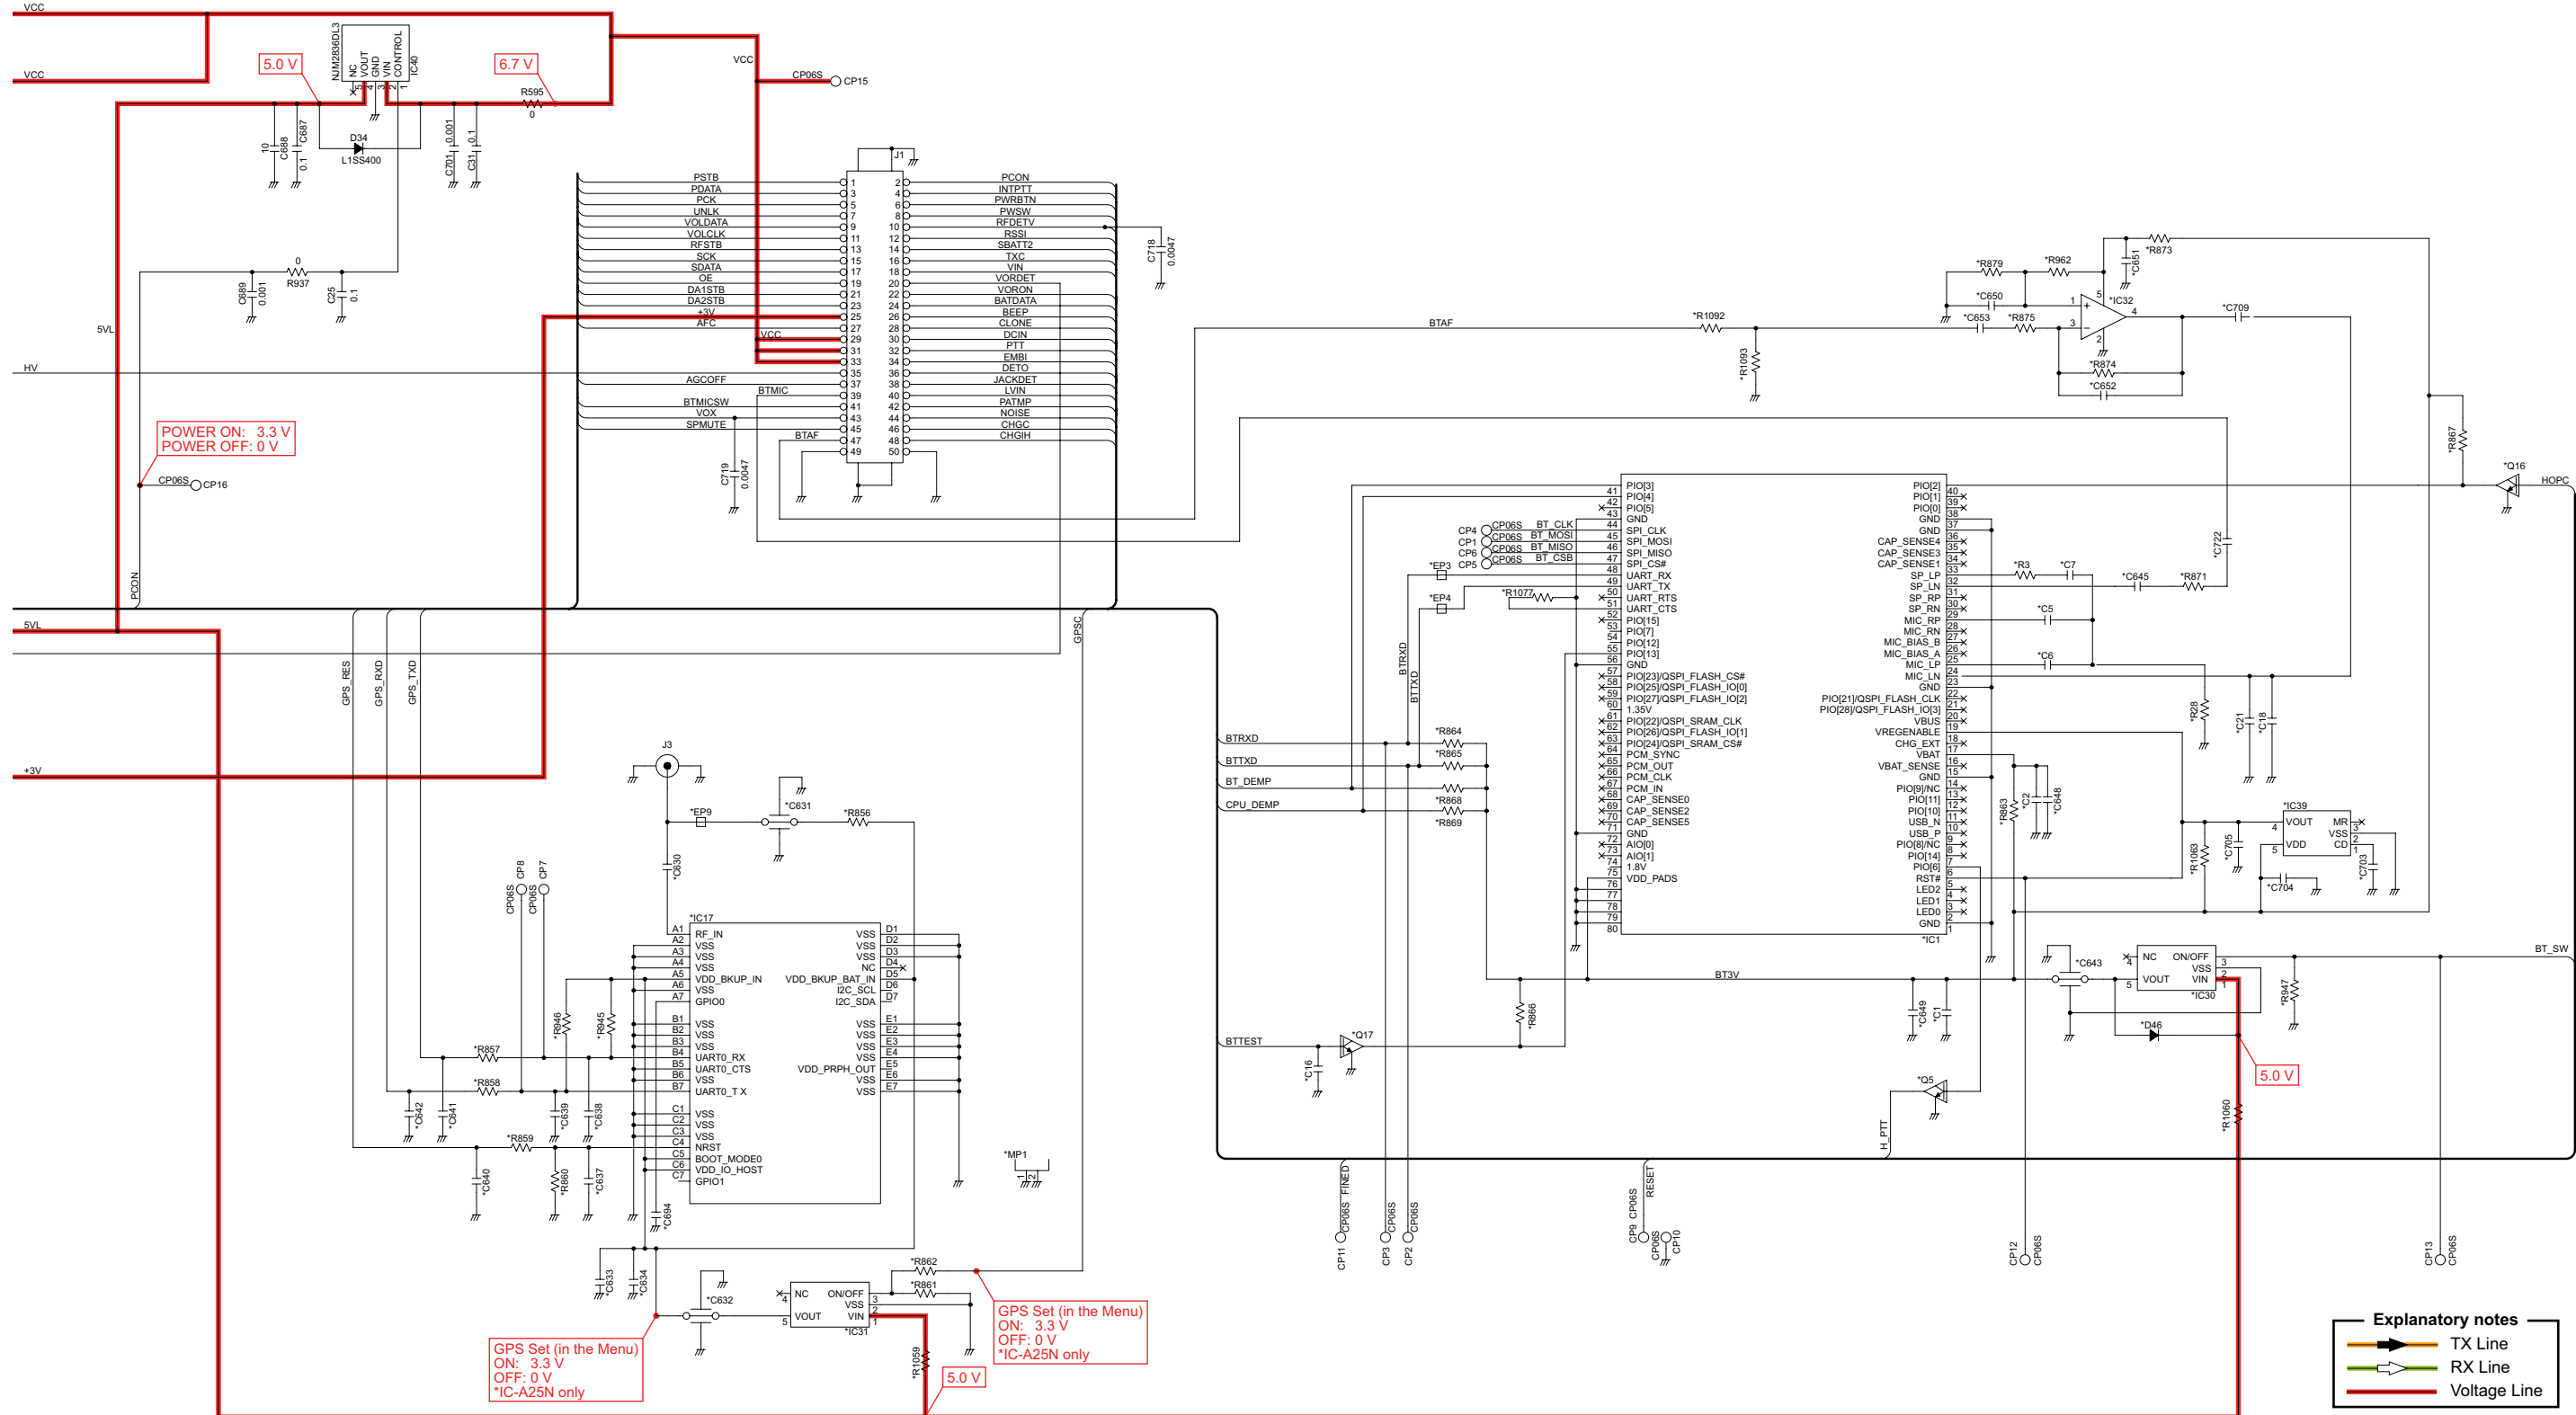


*Refer to the PARTS LIST for the value and name of component.

• MAIN UNIT (1/4)

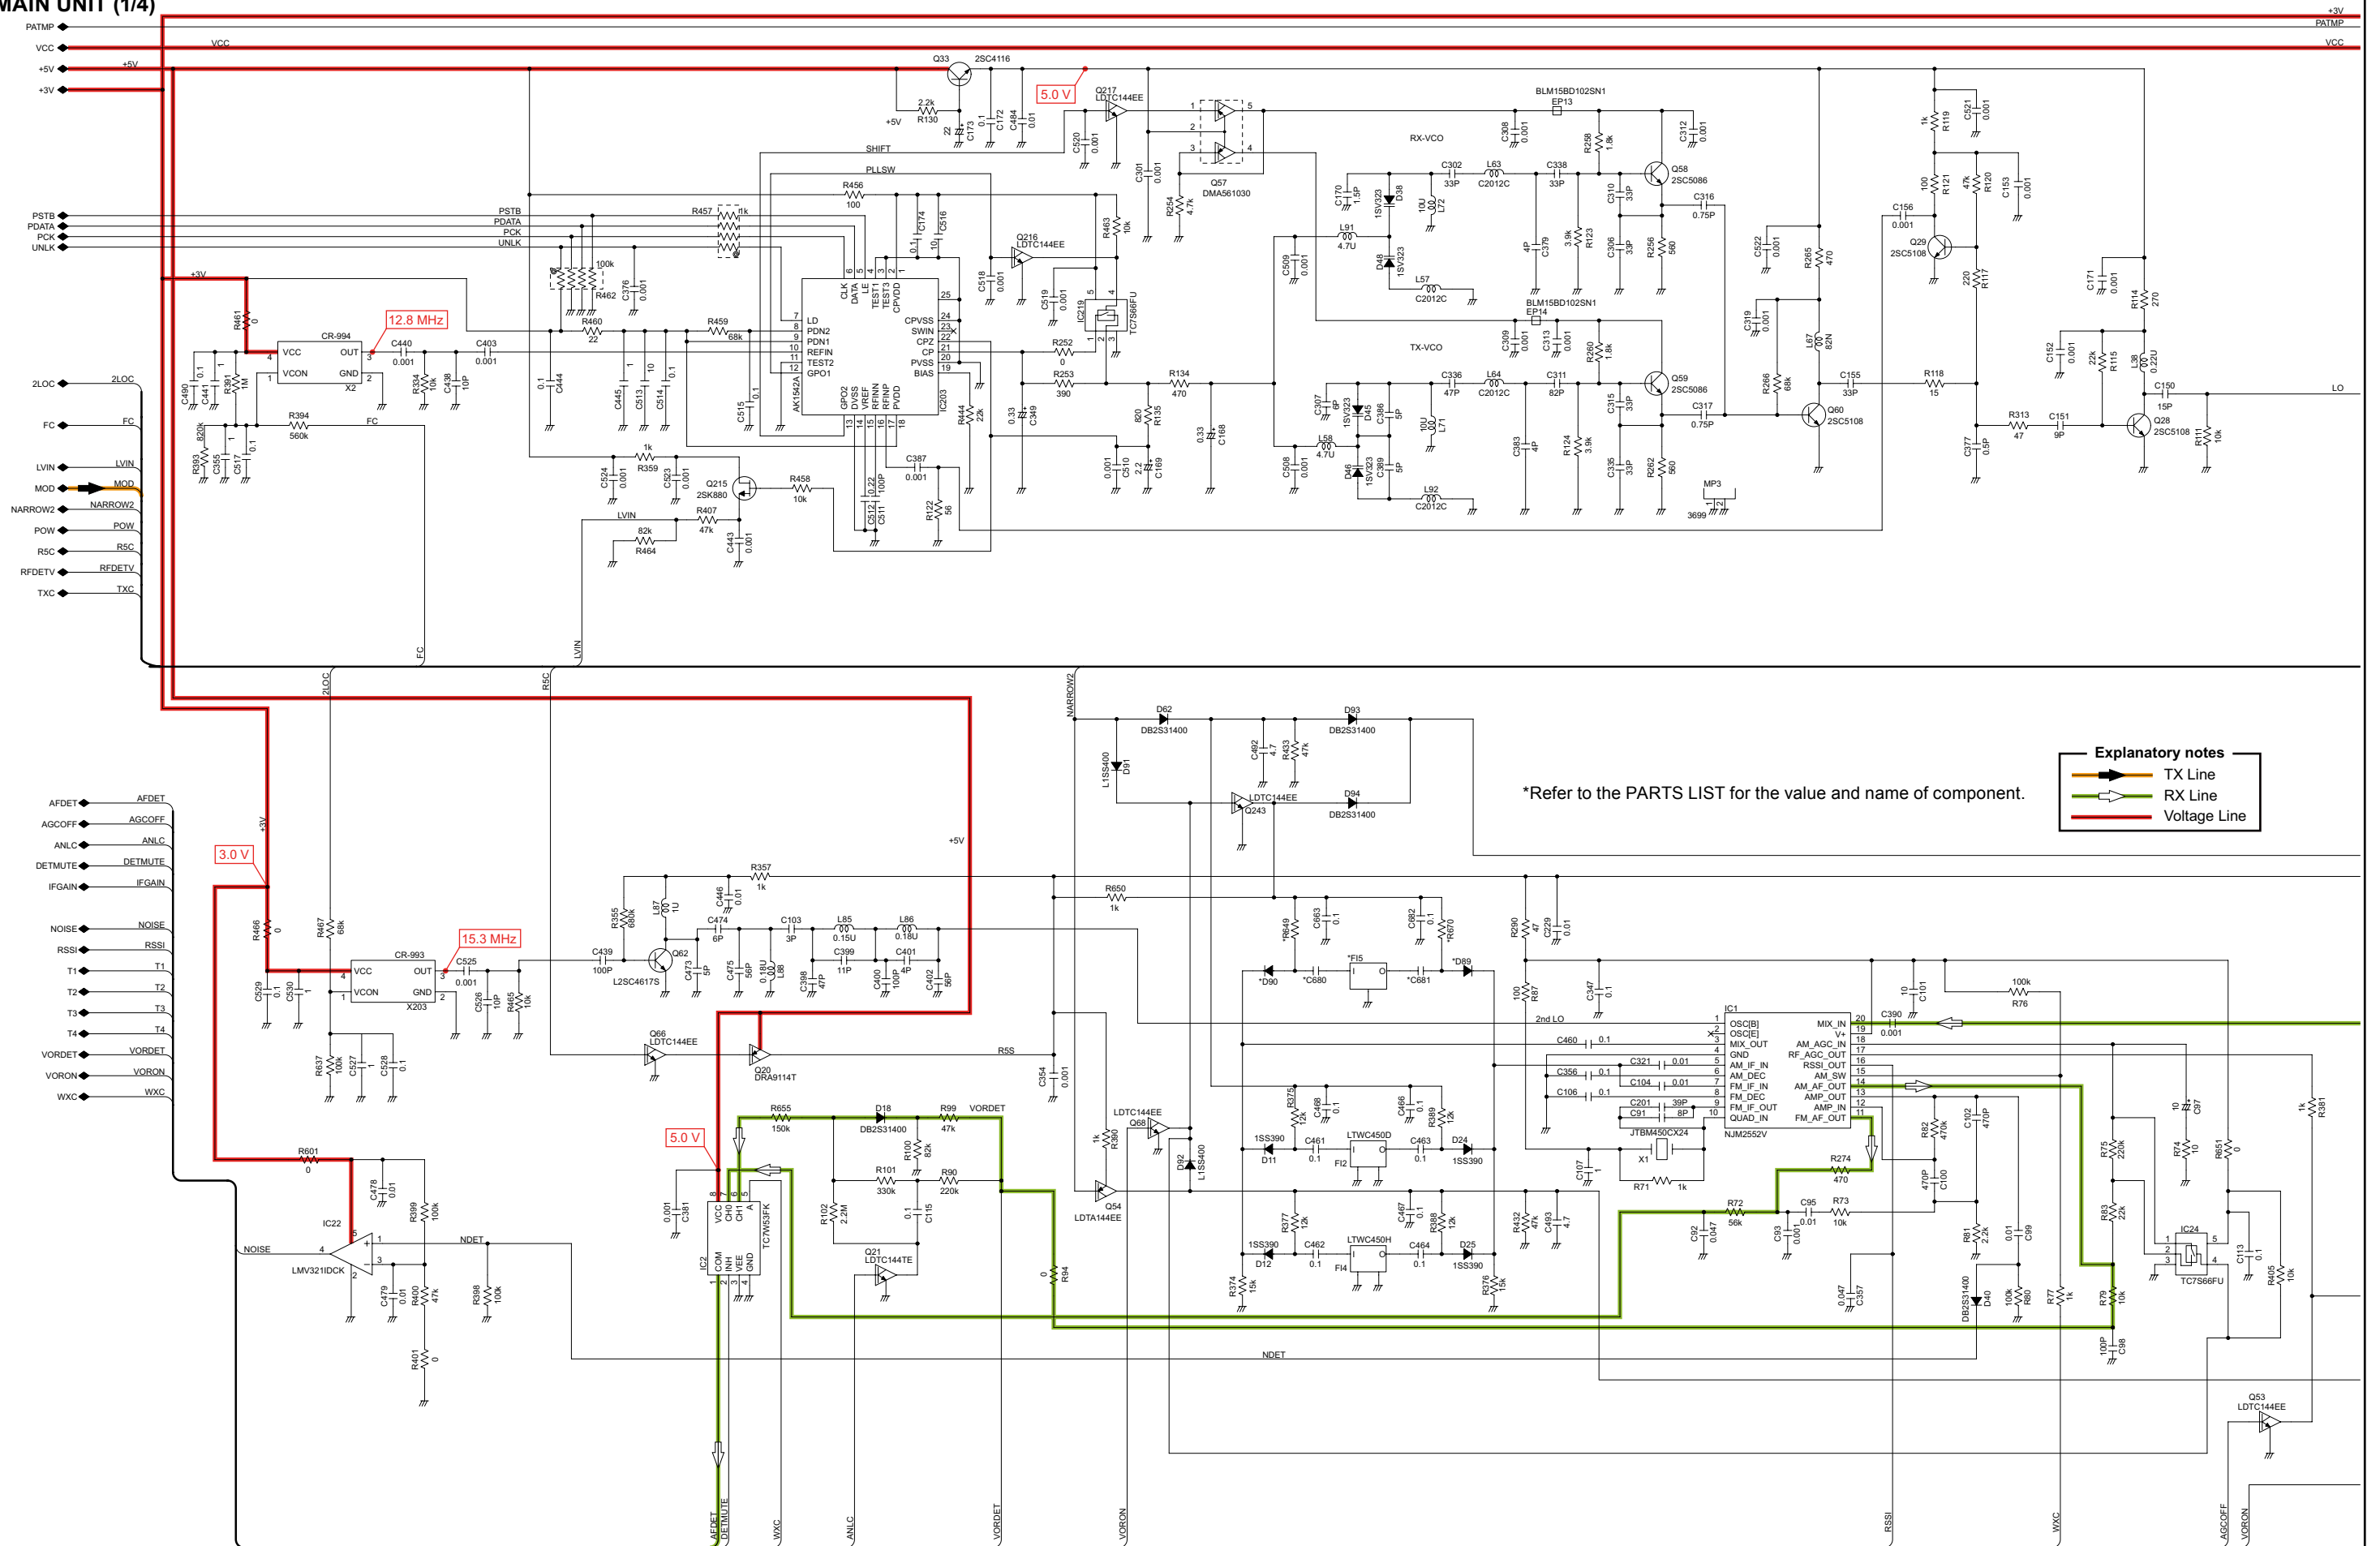


• MAIN UNIT (2/4)

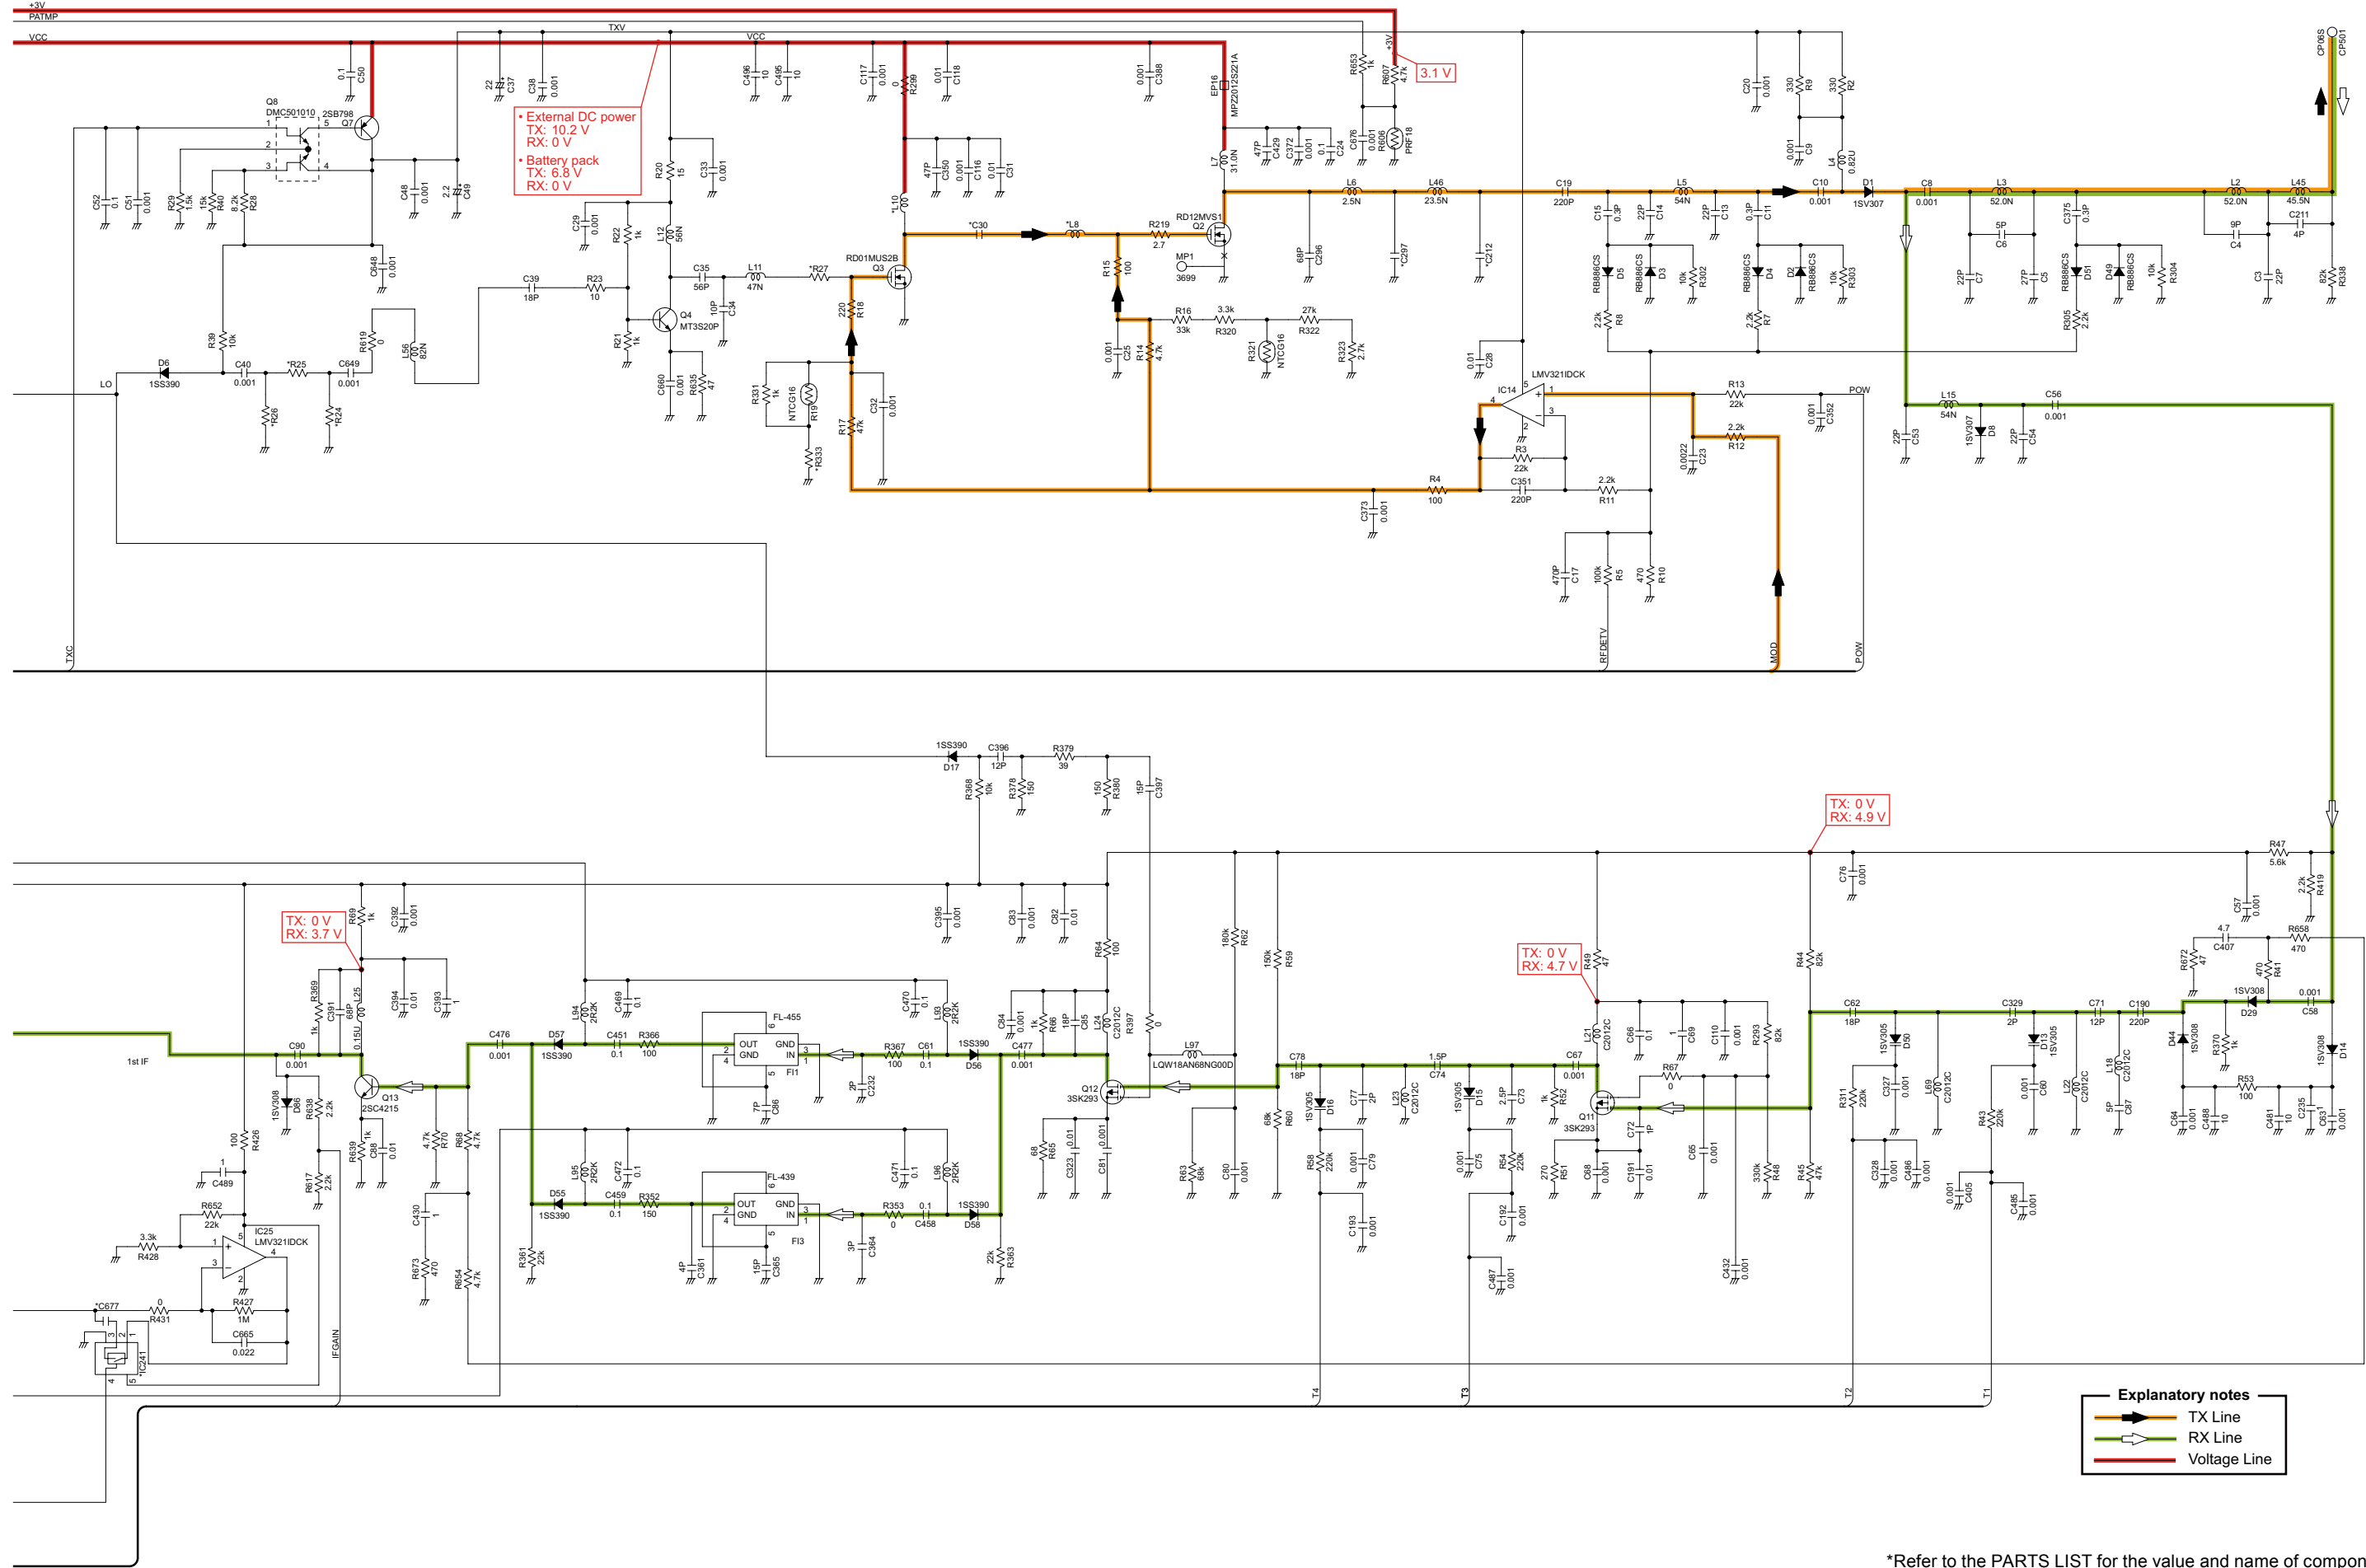


*Refer to the PARTS LIST for the value and name of component.

• MAIN UNIT (3/4)

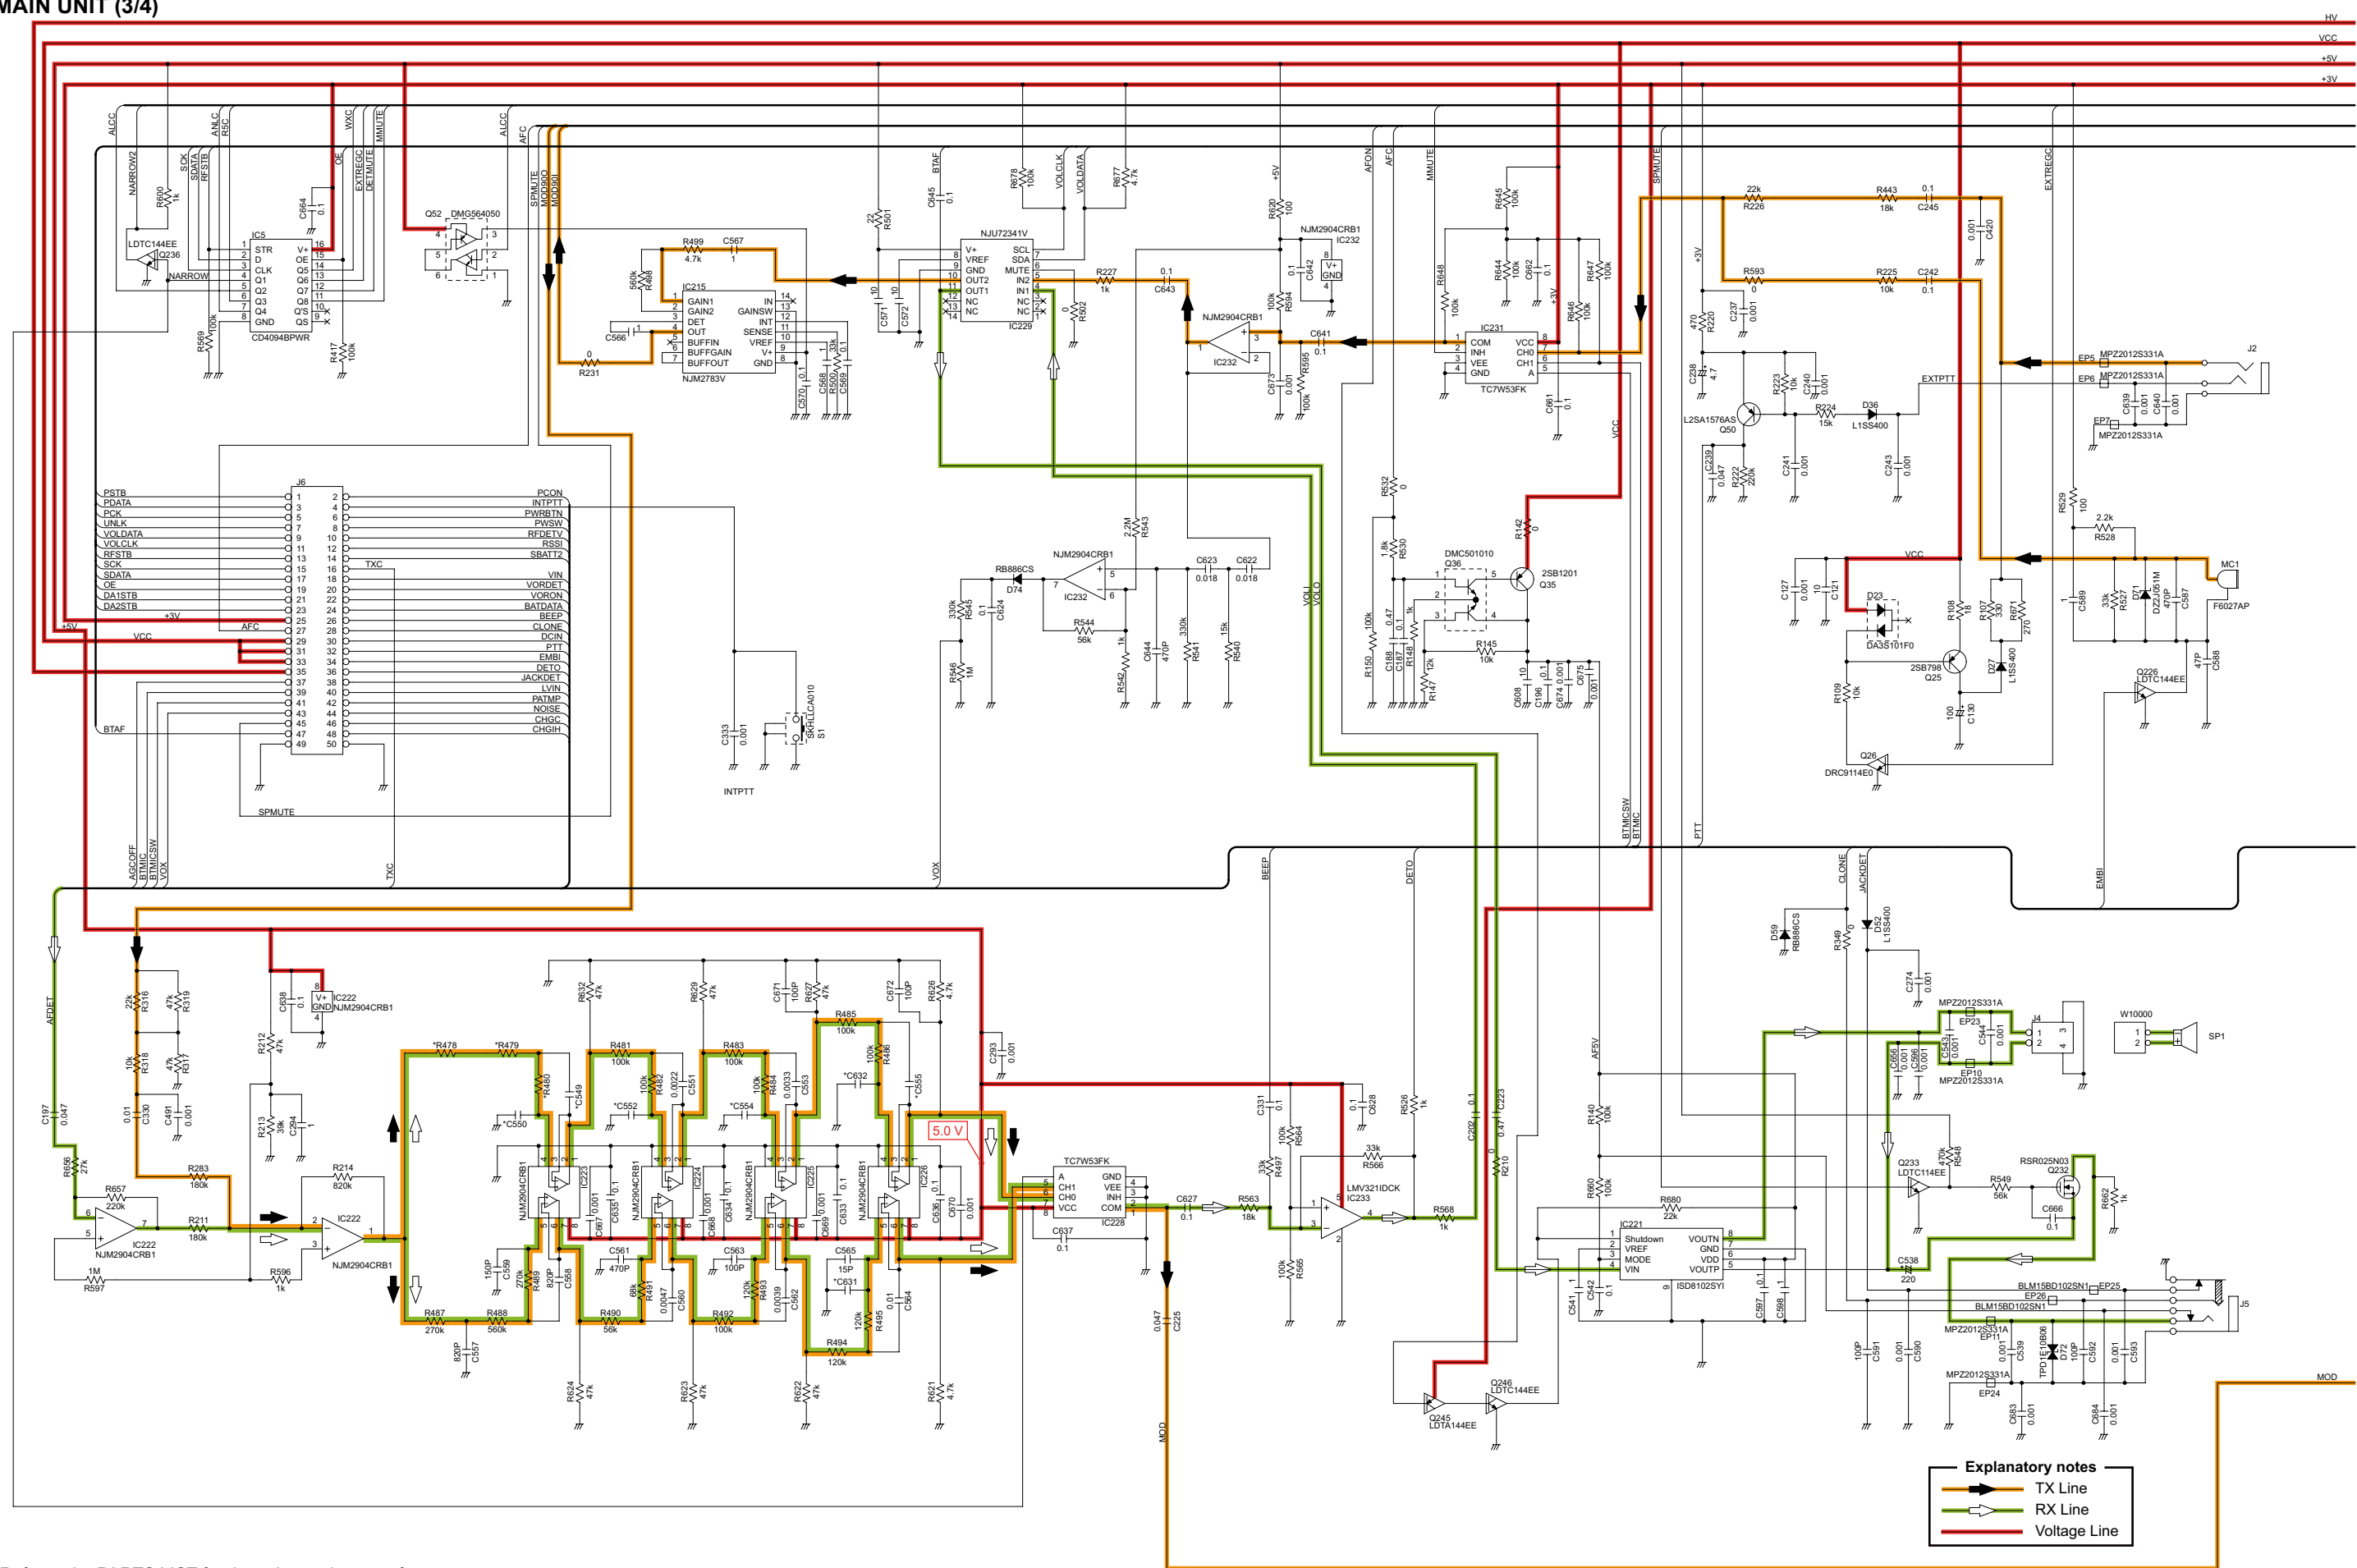


*Refer to the PARTS LIST for the value and name of component.

- MAIN UNIT (4/4)

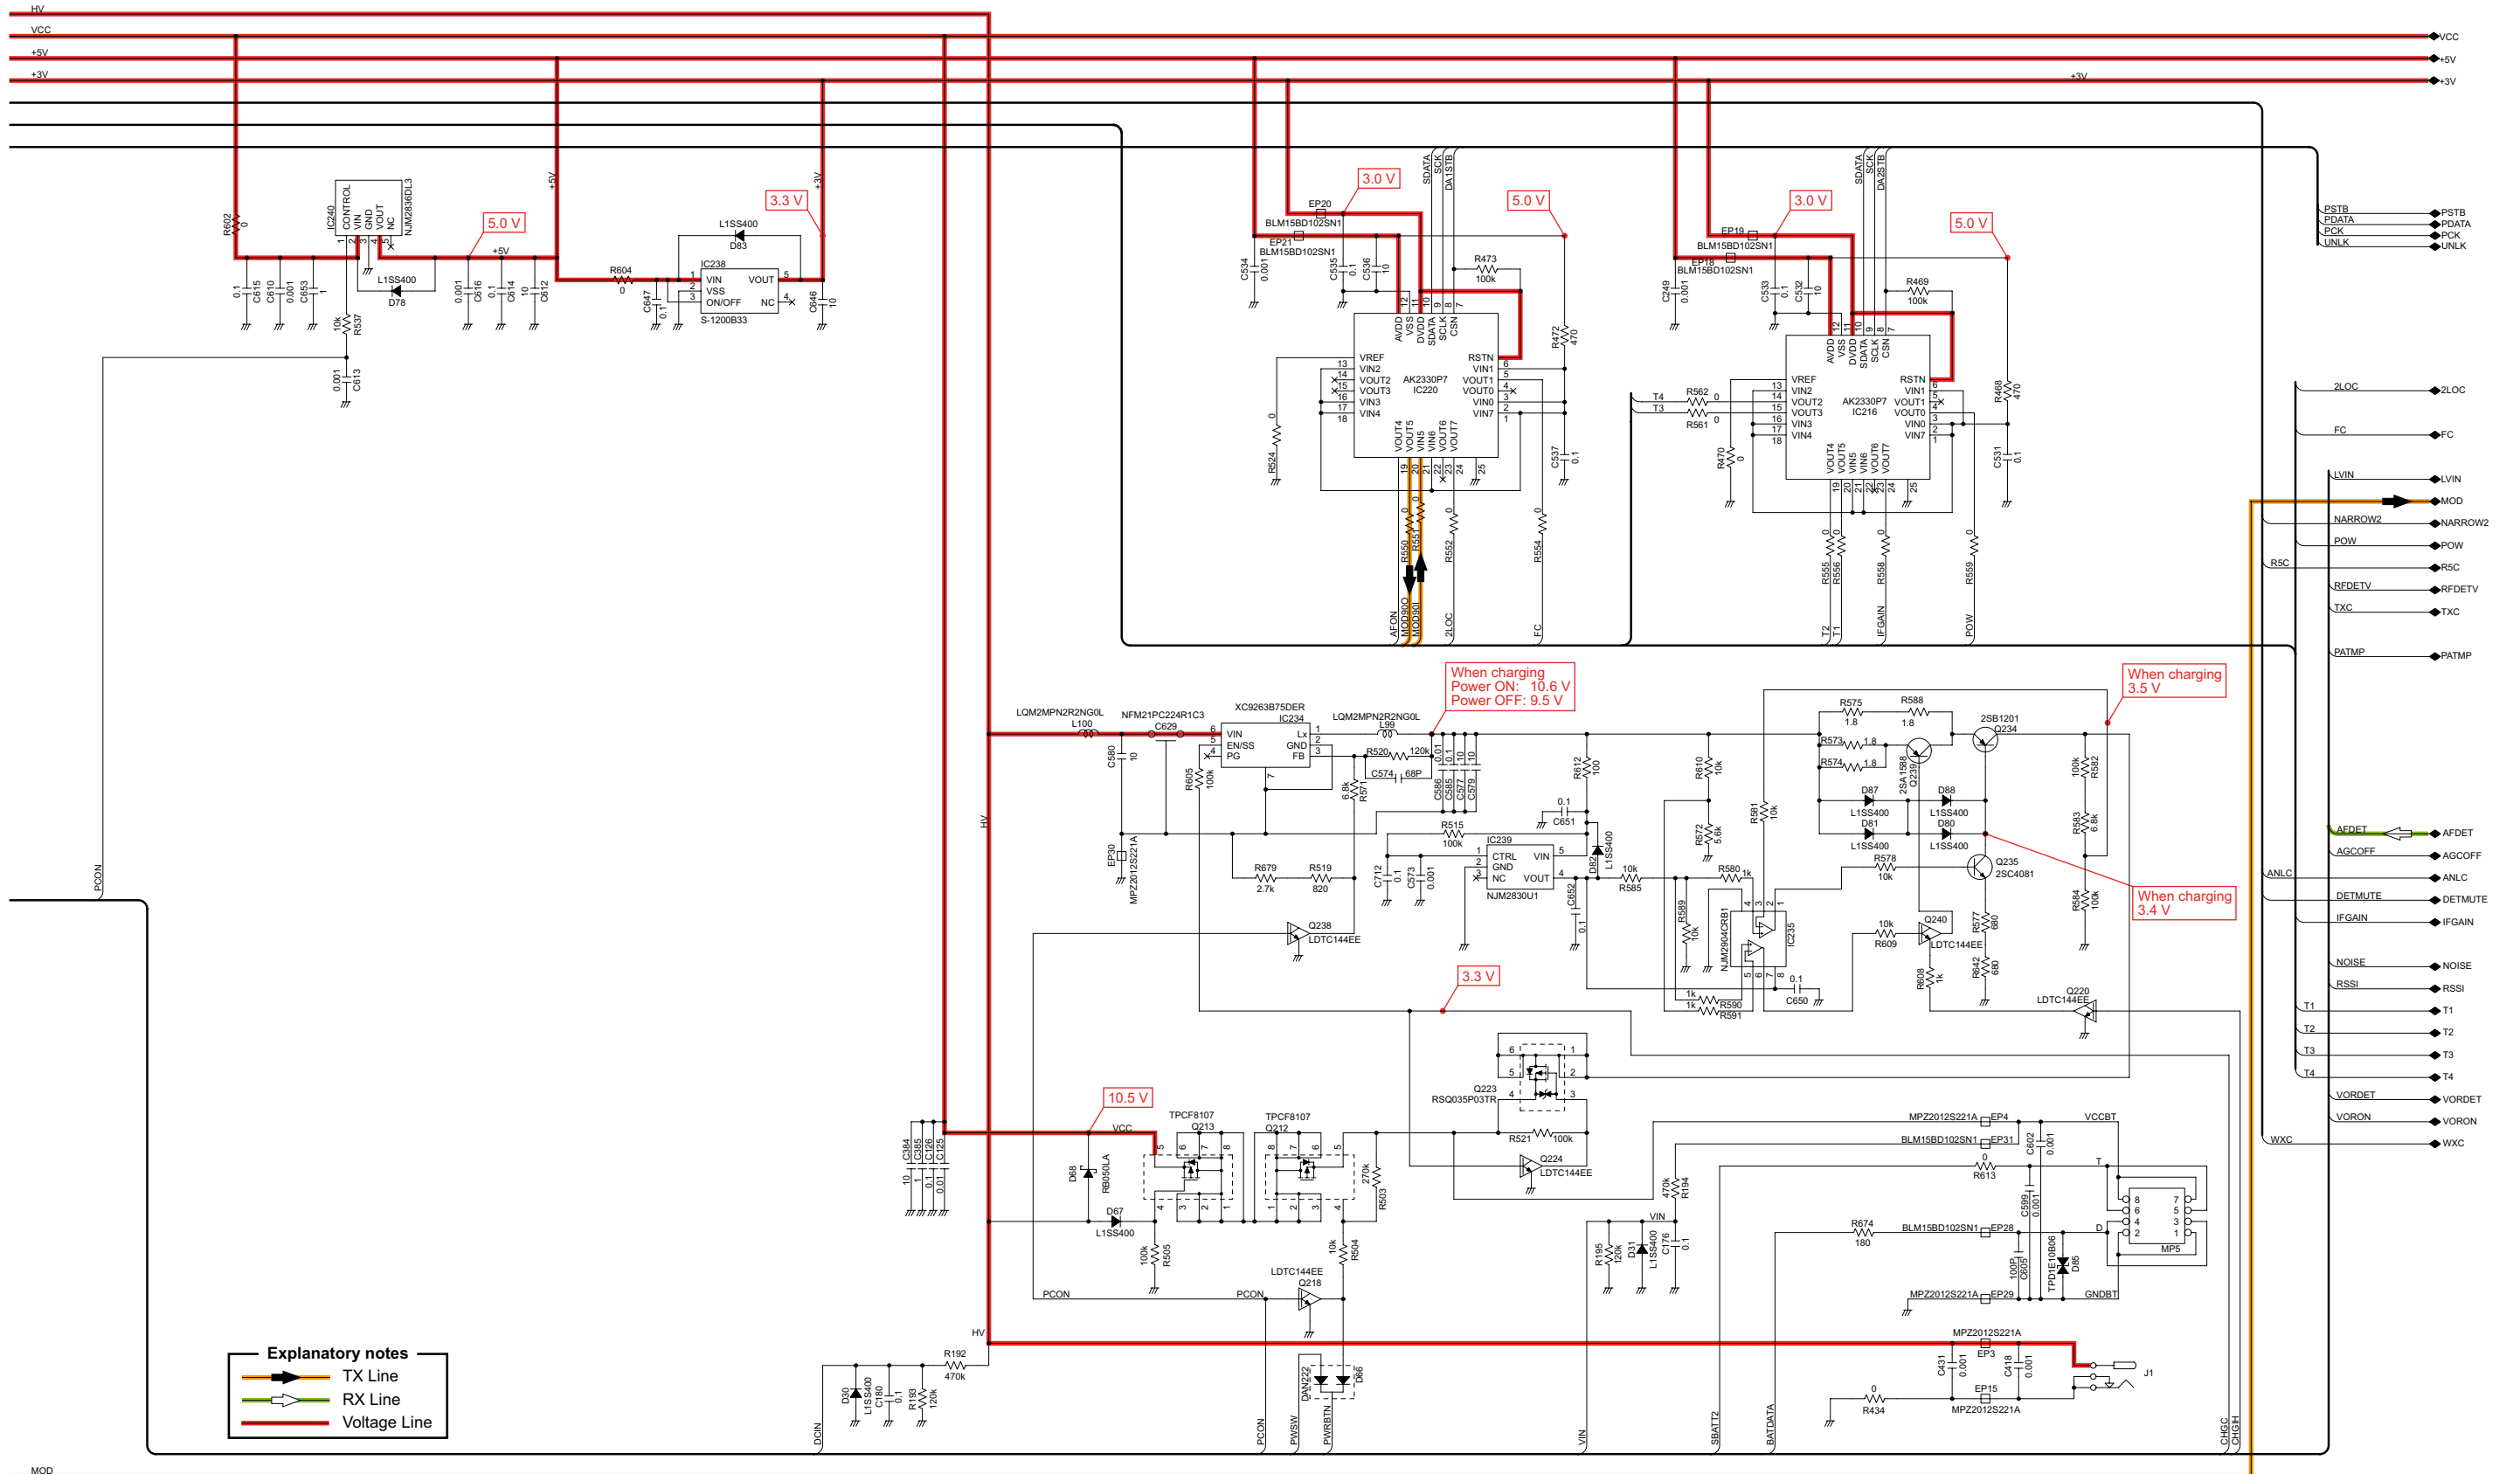


*Refer to the PARTS LIST for the value and name of component.

- LOGIC-1 UNIT (1/2)

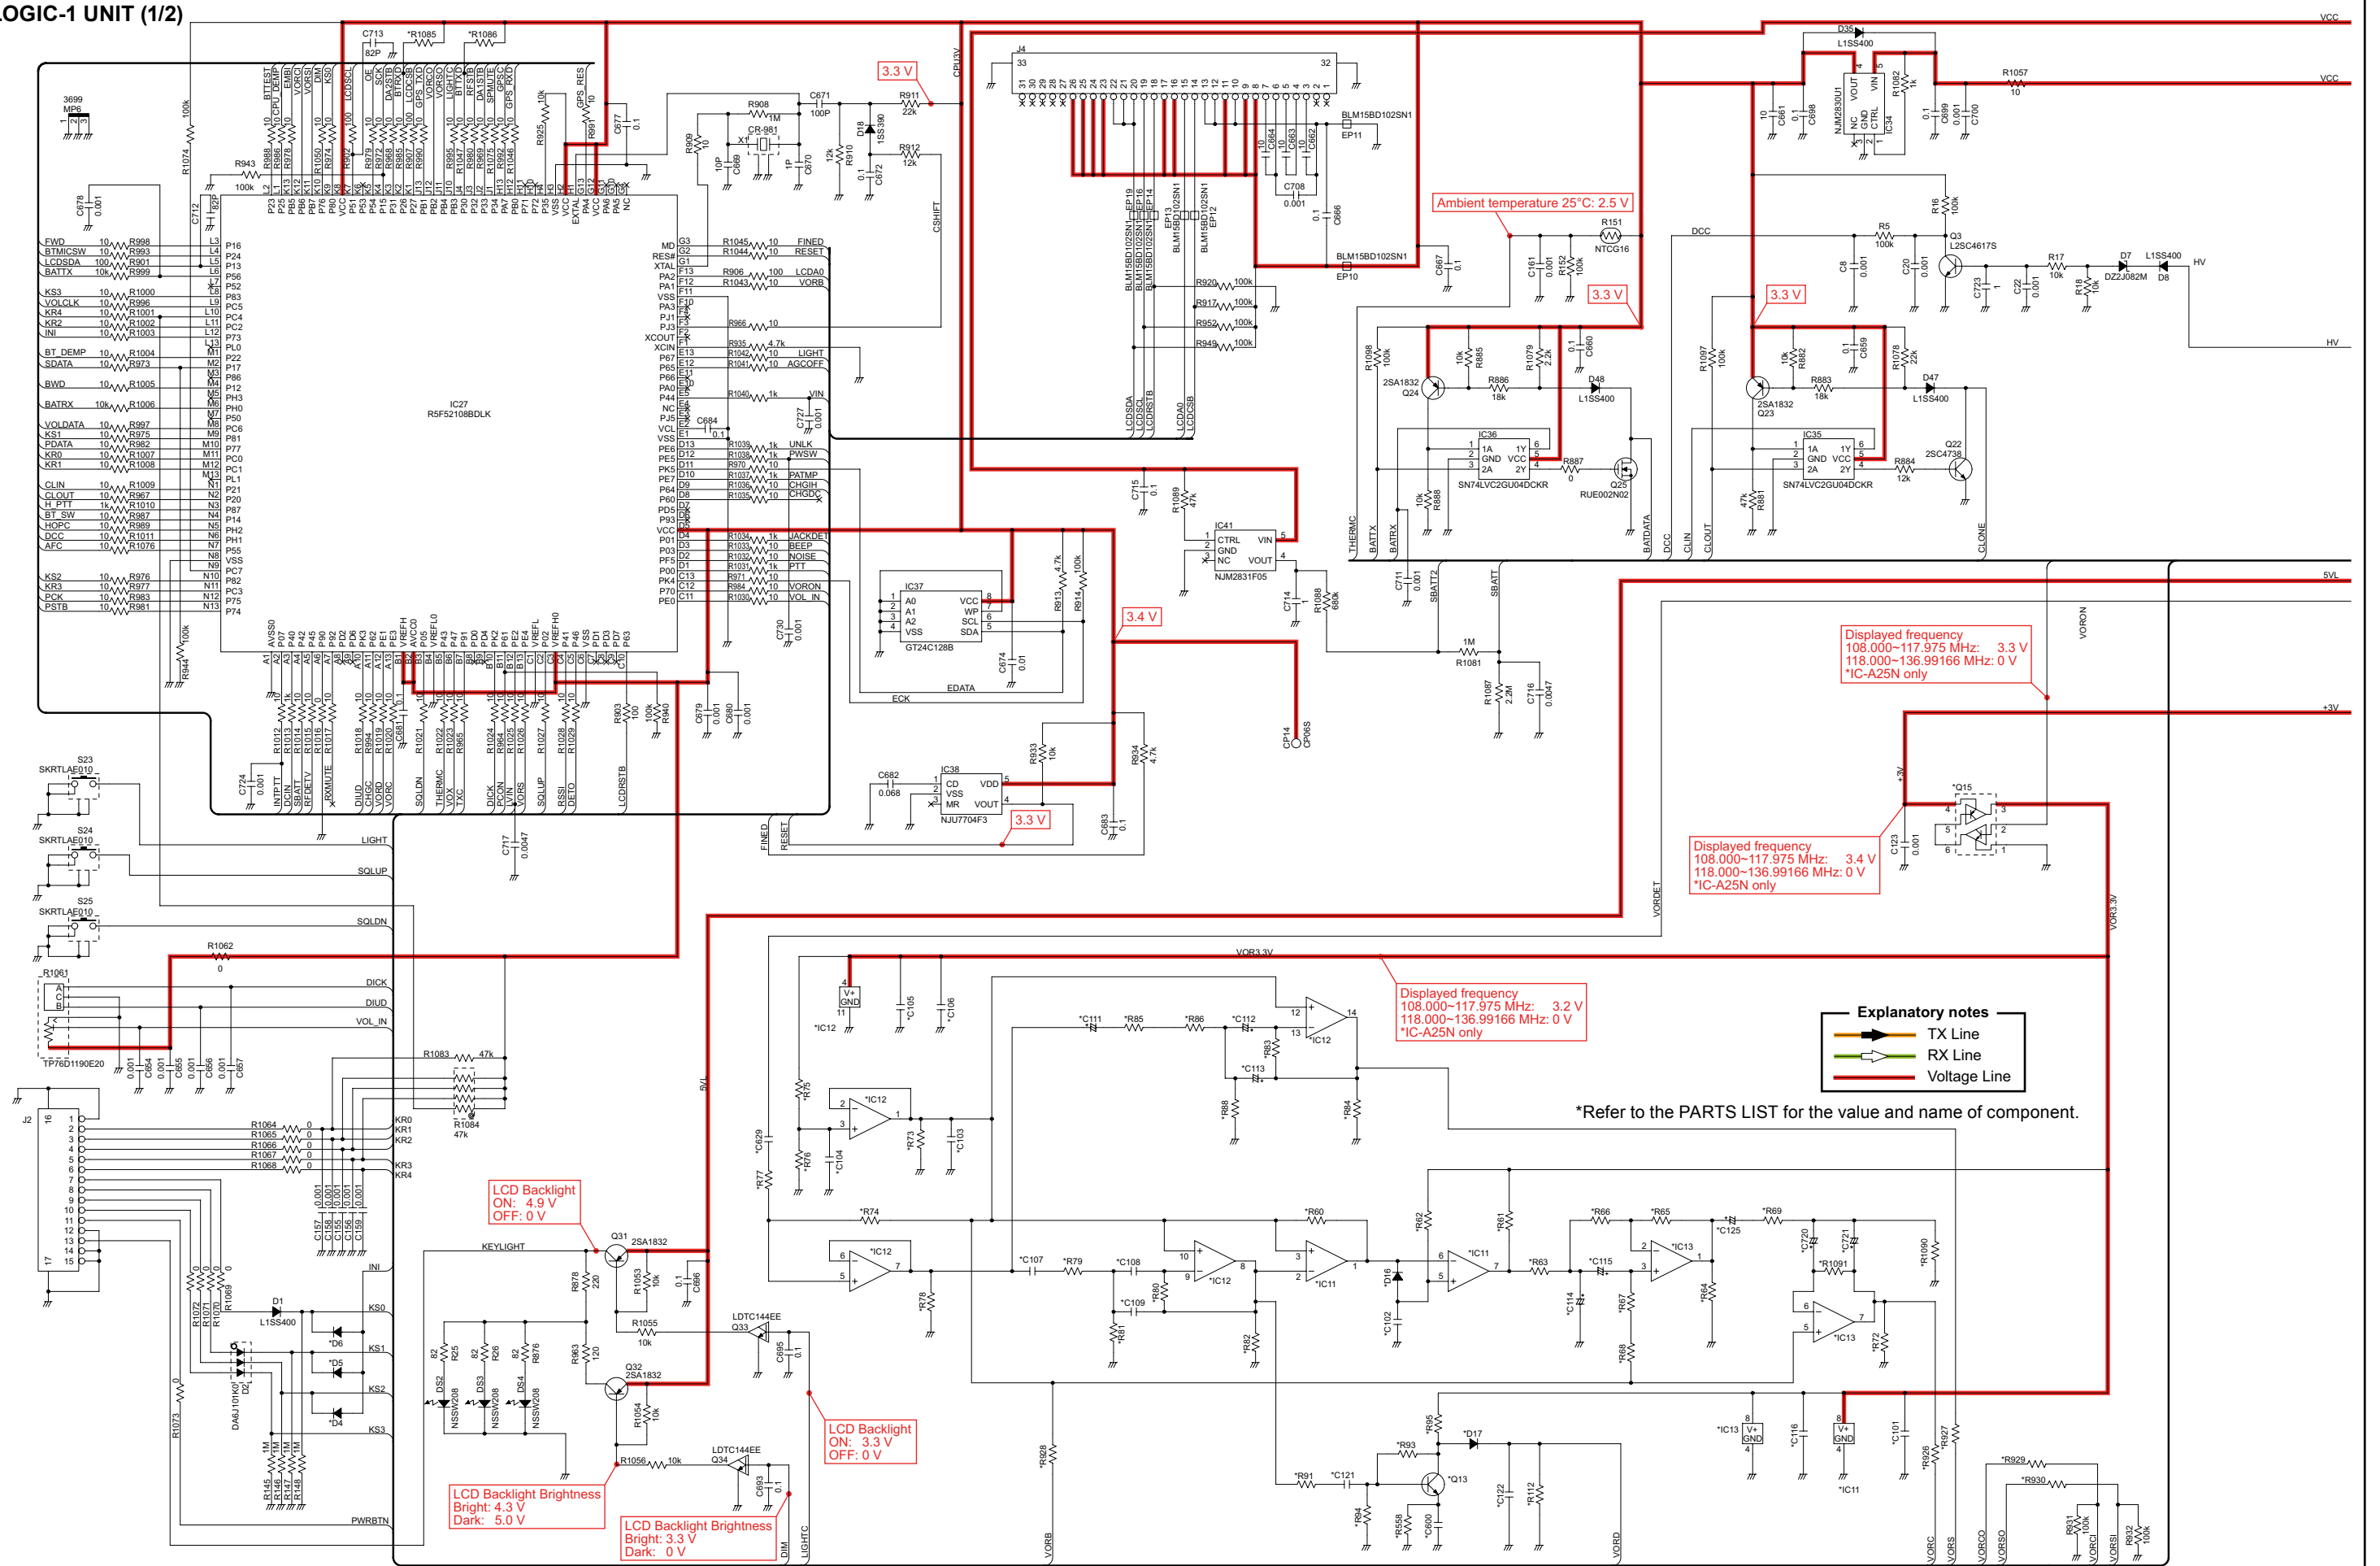


• LOGIC-1 UNIT (2/2)

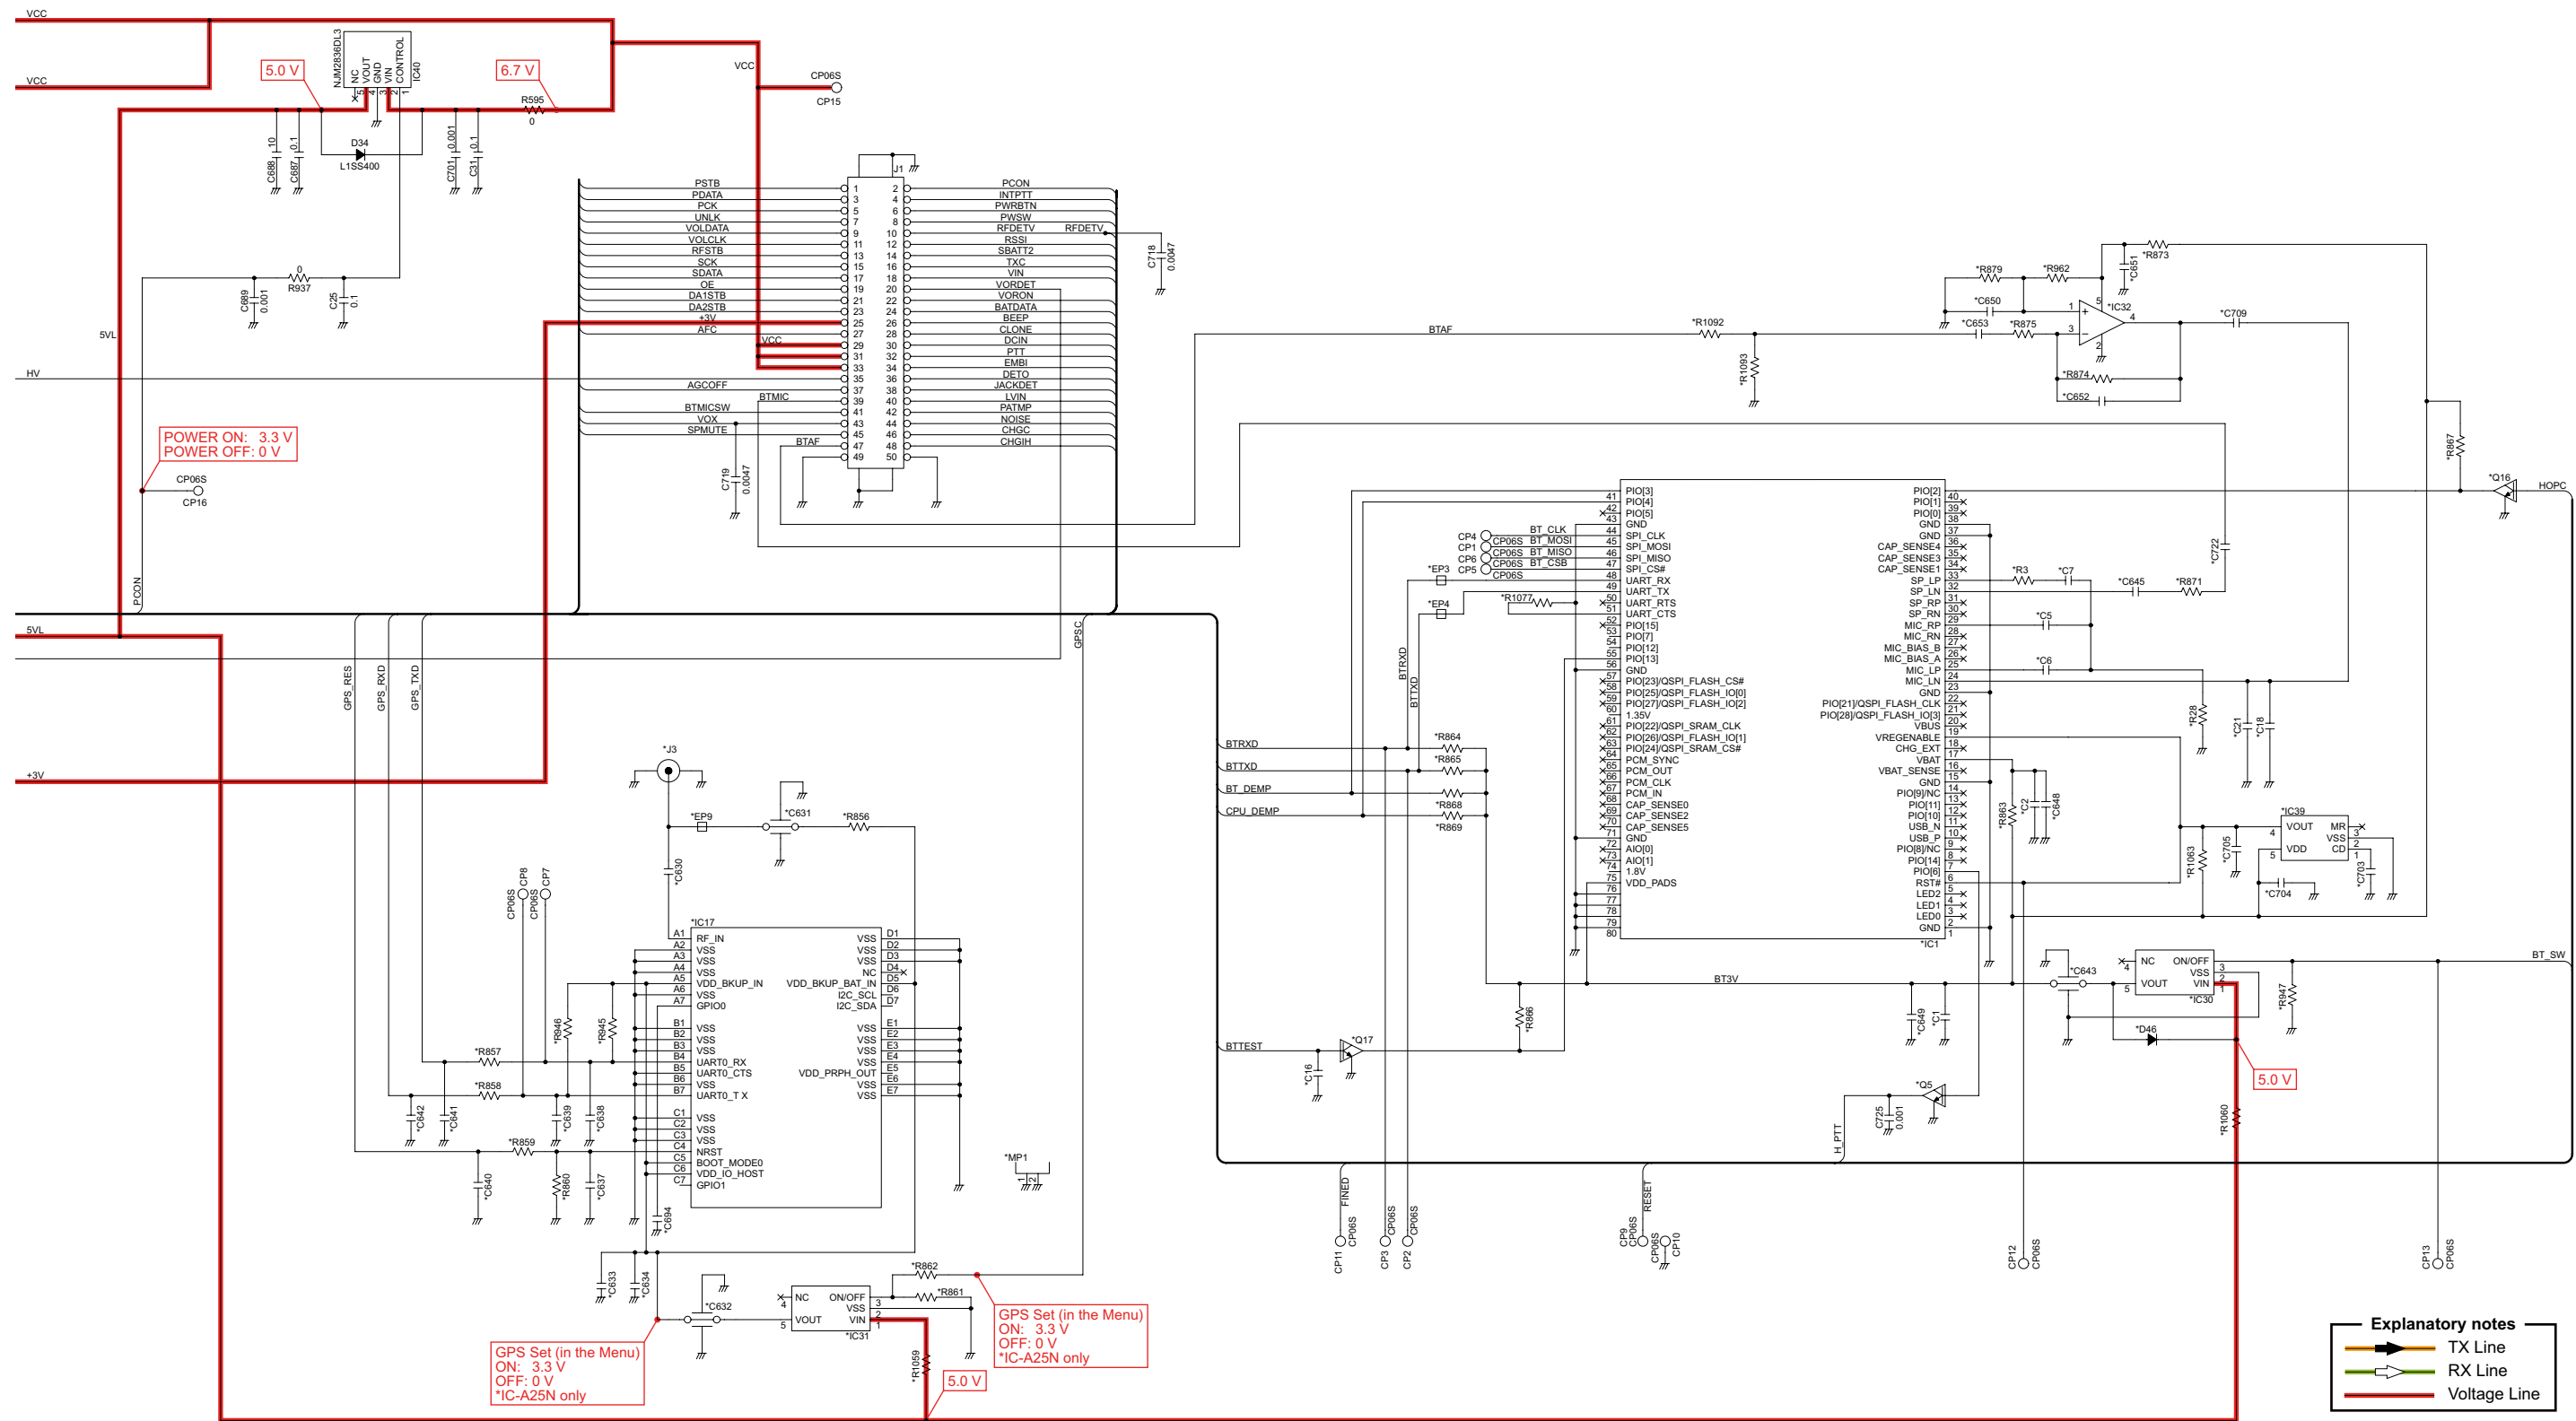


*Refer to the PARTS LIST for the value and name of component.

• MAIN-1 UNIT (1/4)

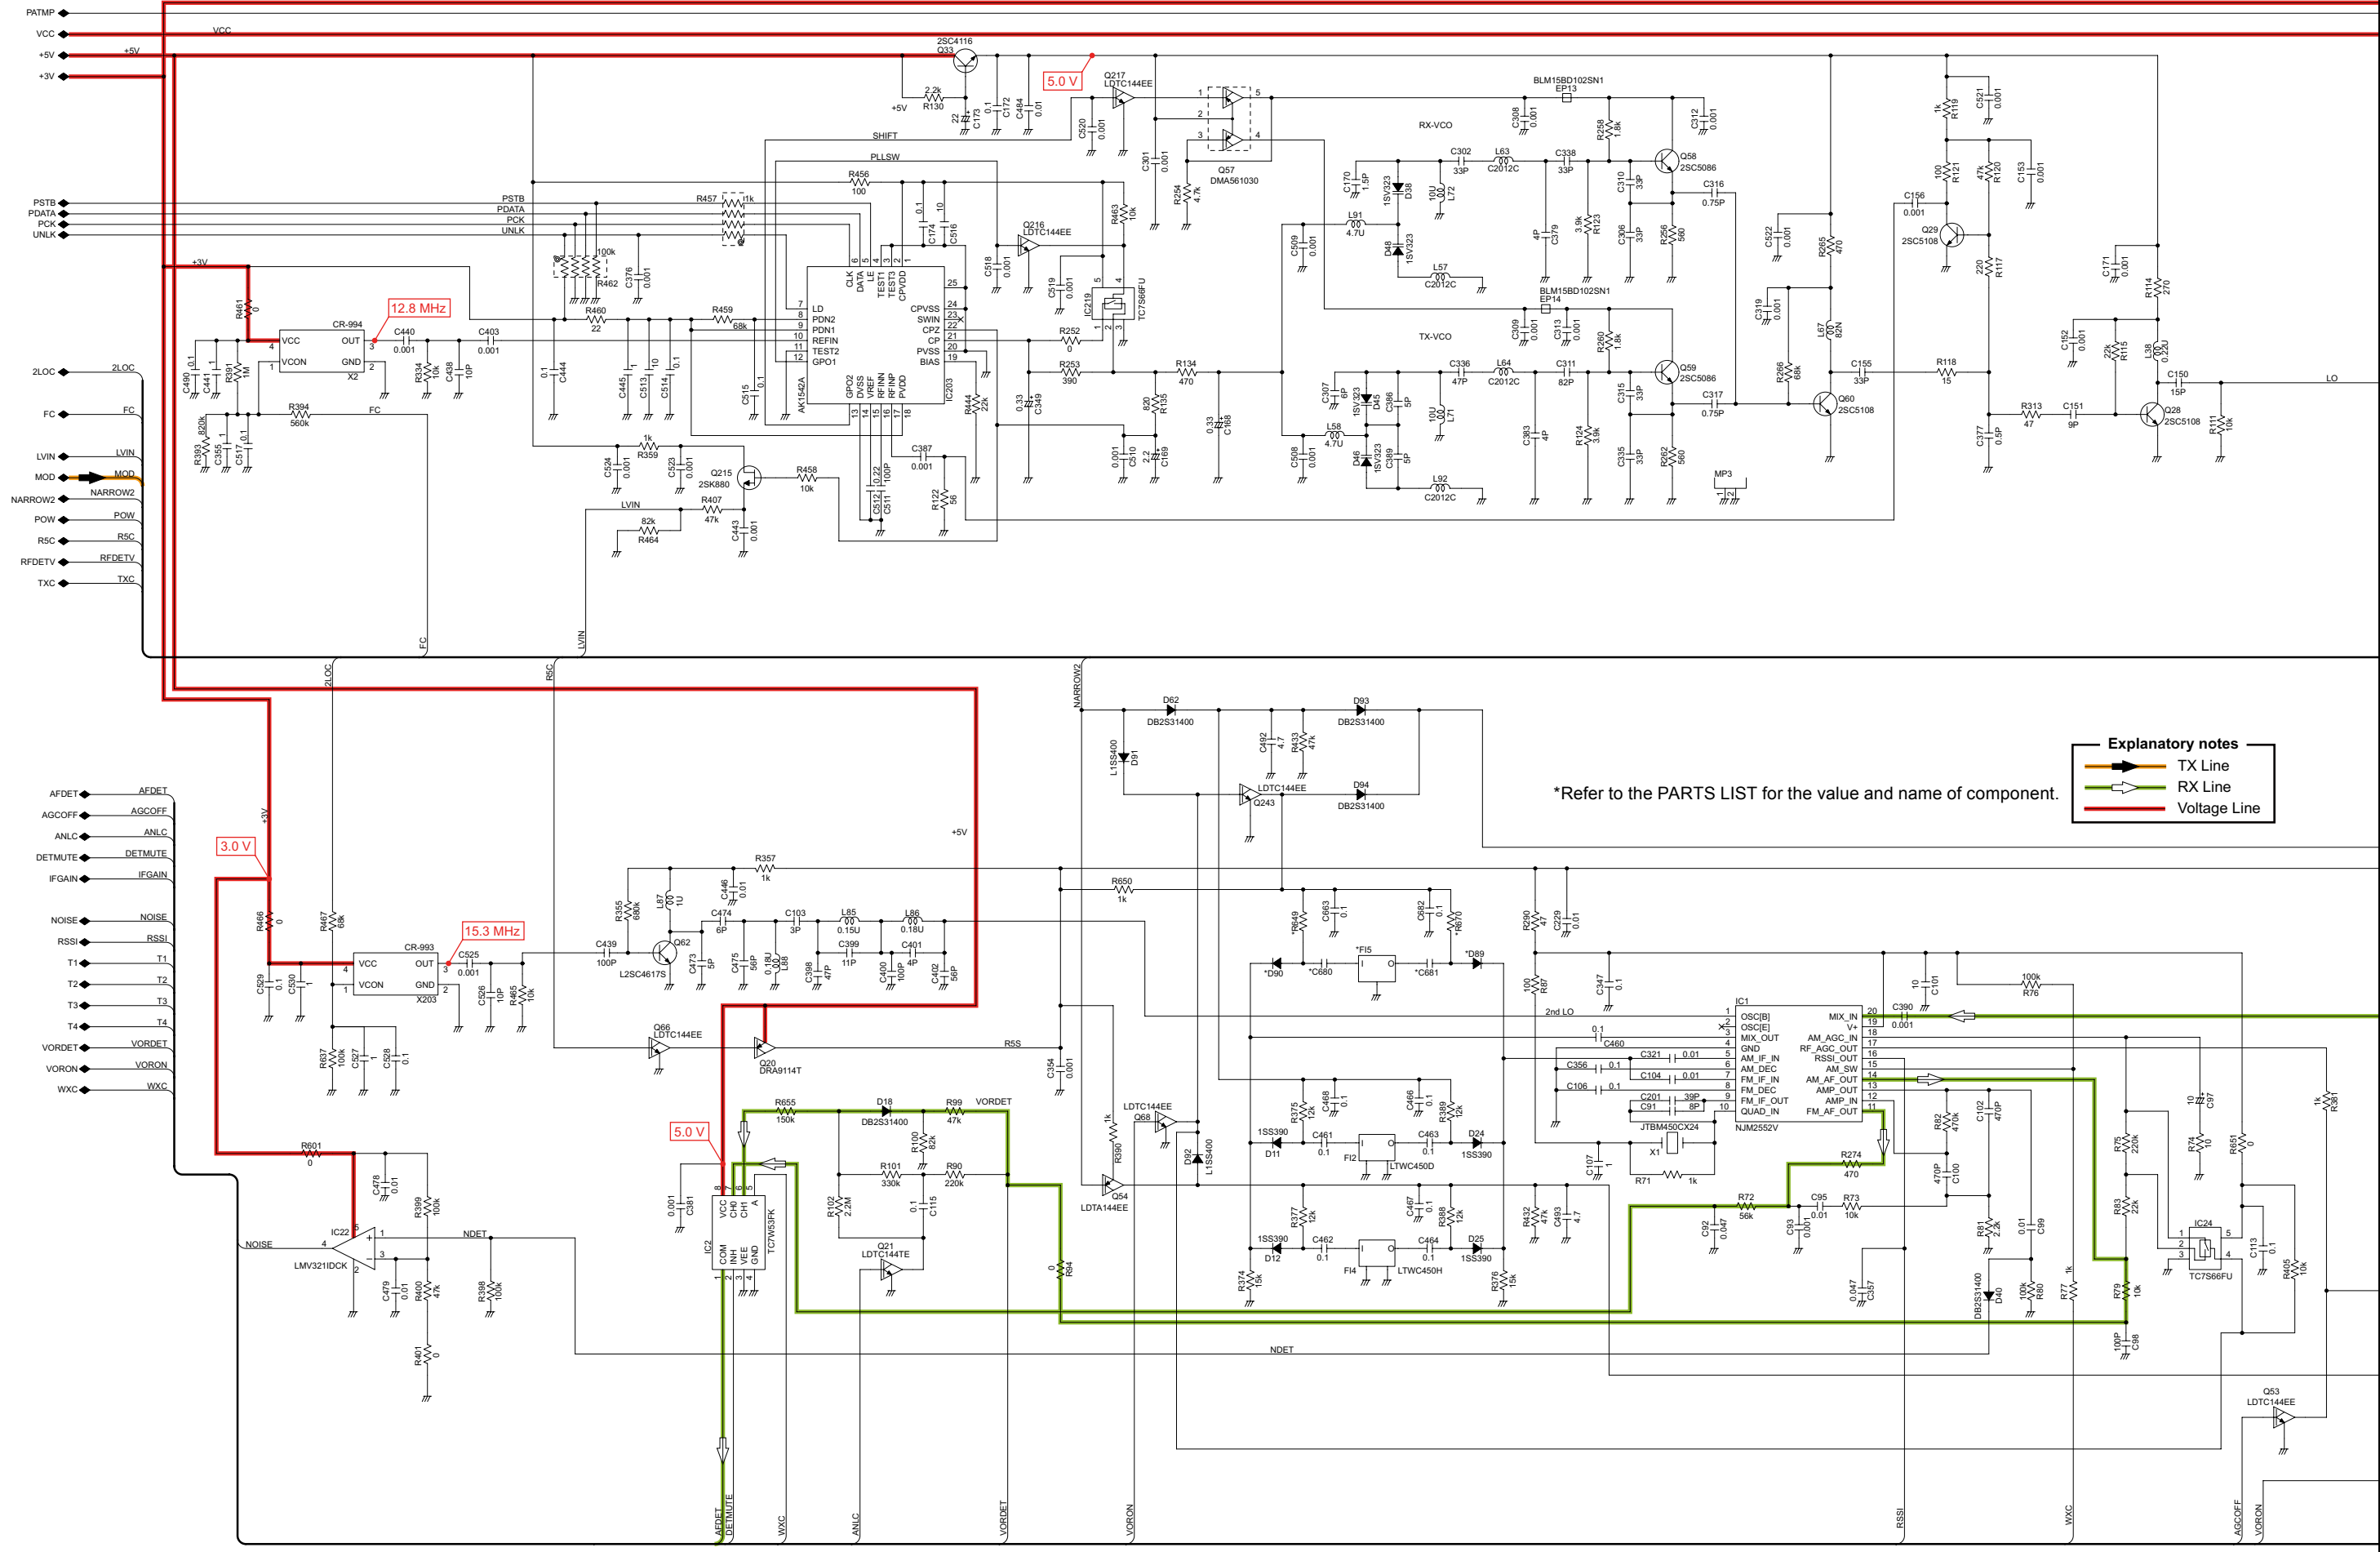


• MAIN-1 UNIT (2/4)

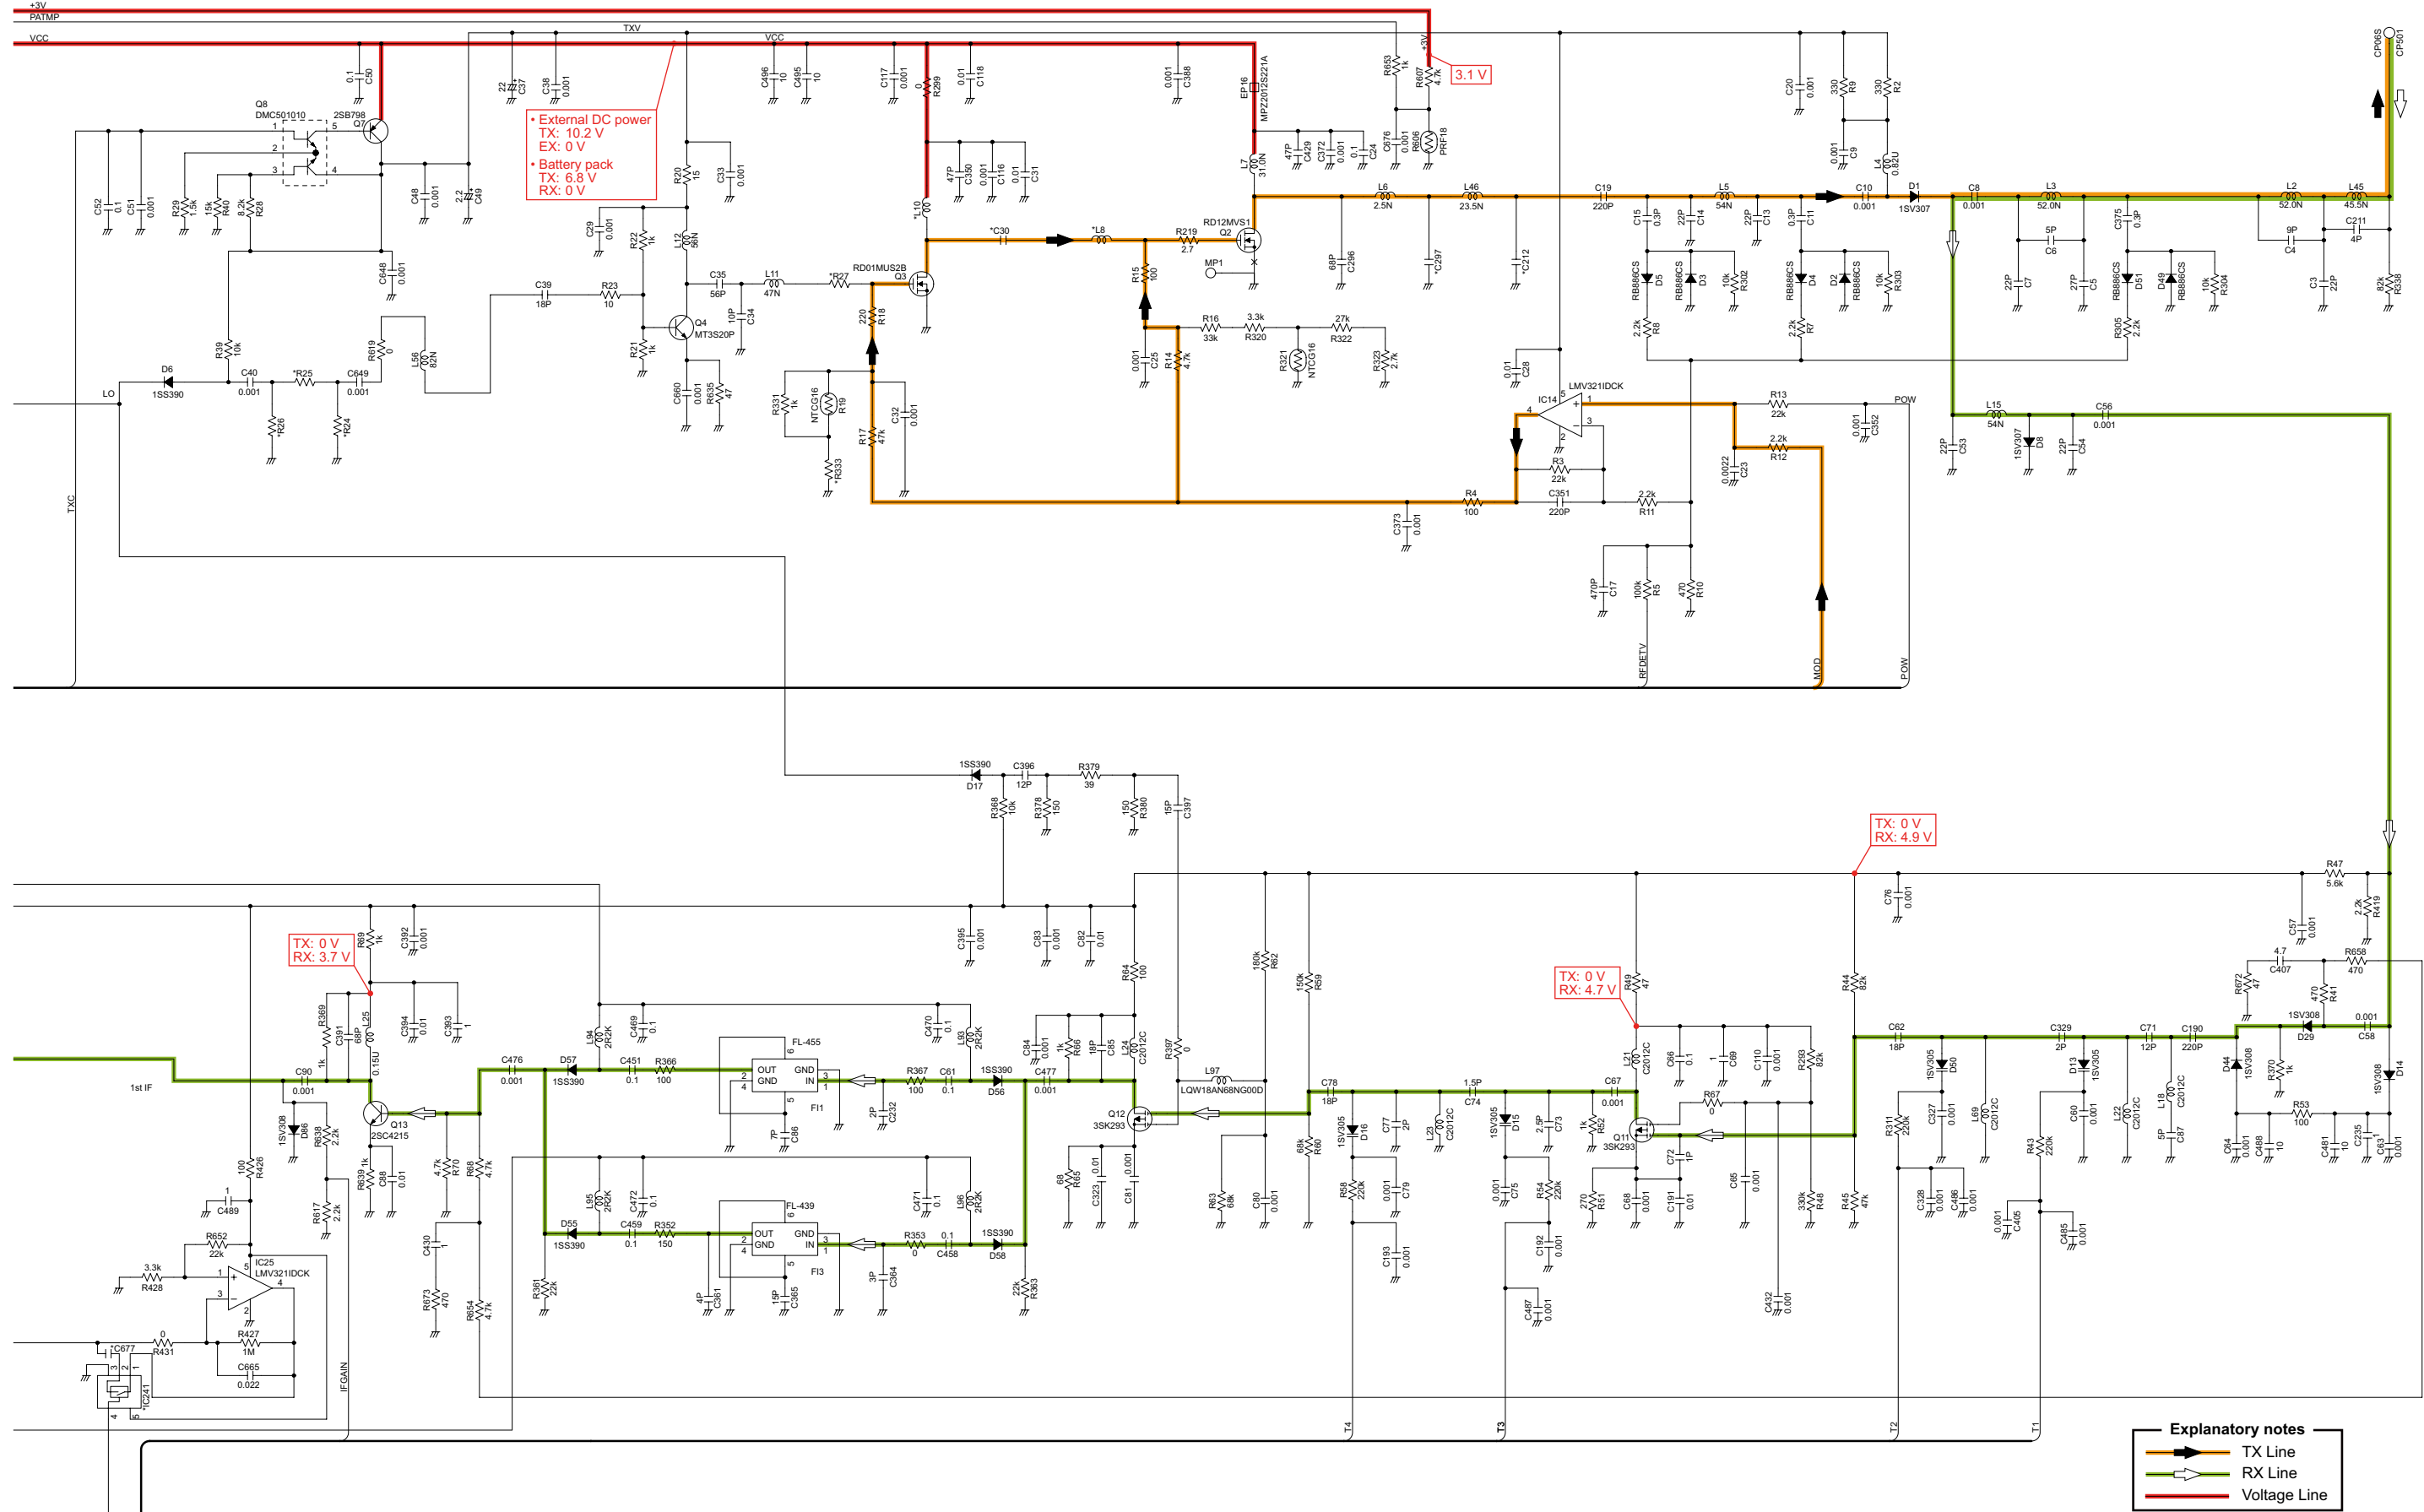


*Refer to the PARTS LIST for the value and name of component.

• MAIN-1 UNIT (3/4)

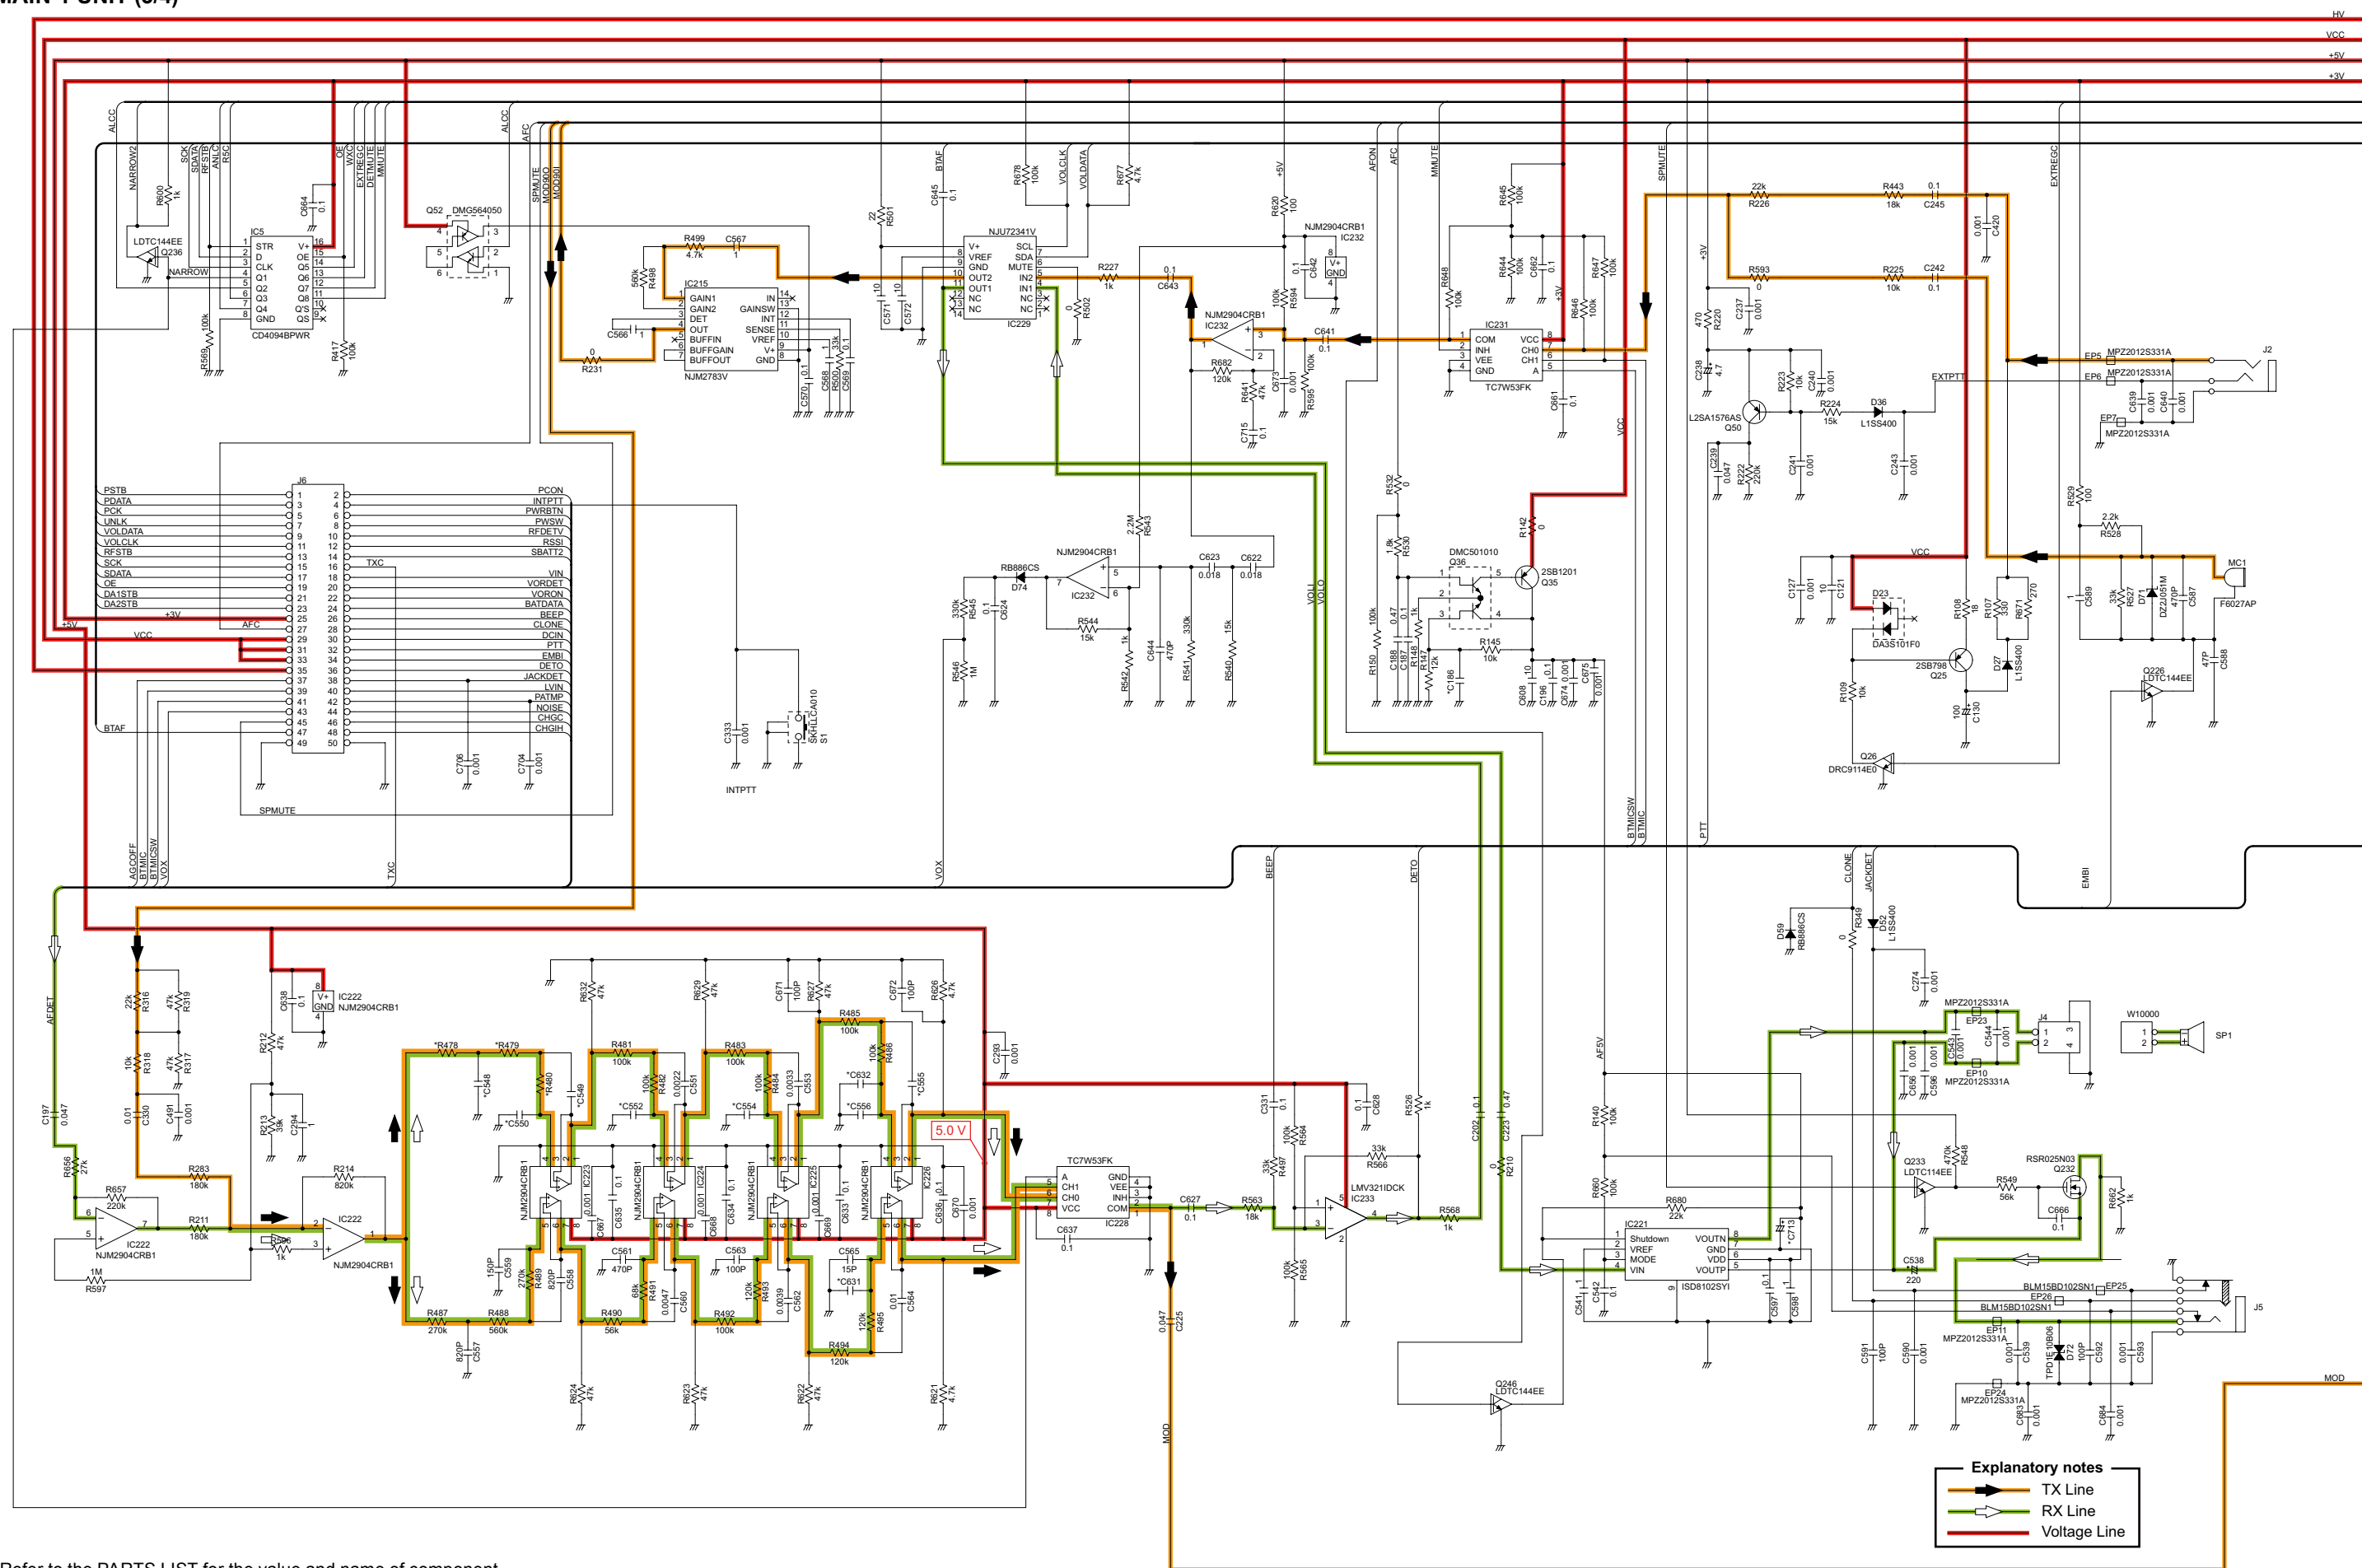

*Refer to the PARTS LIST for the value and name of component.

• MAIN-1 UNIT (4/4)

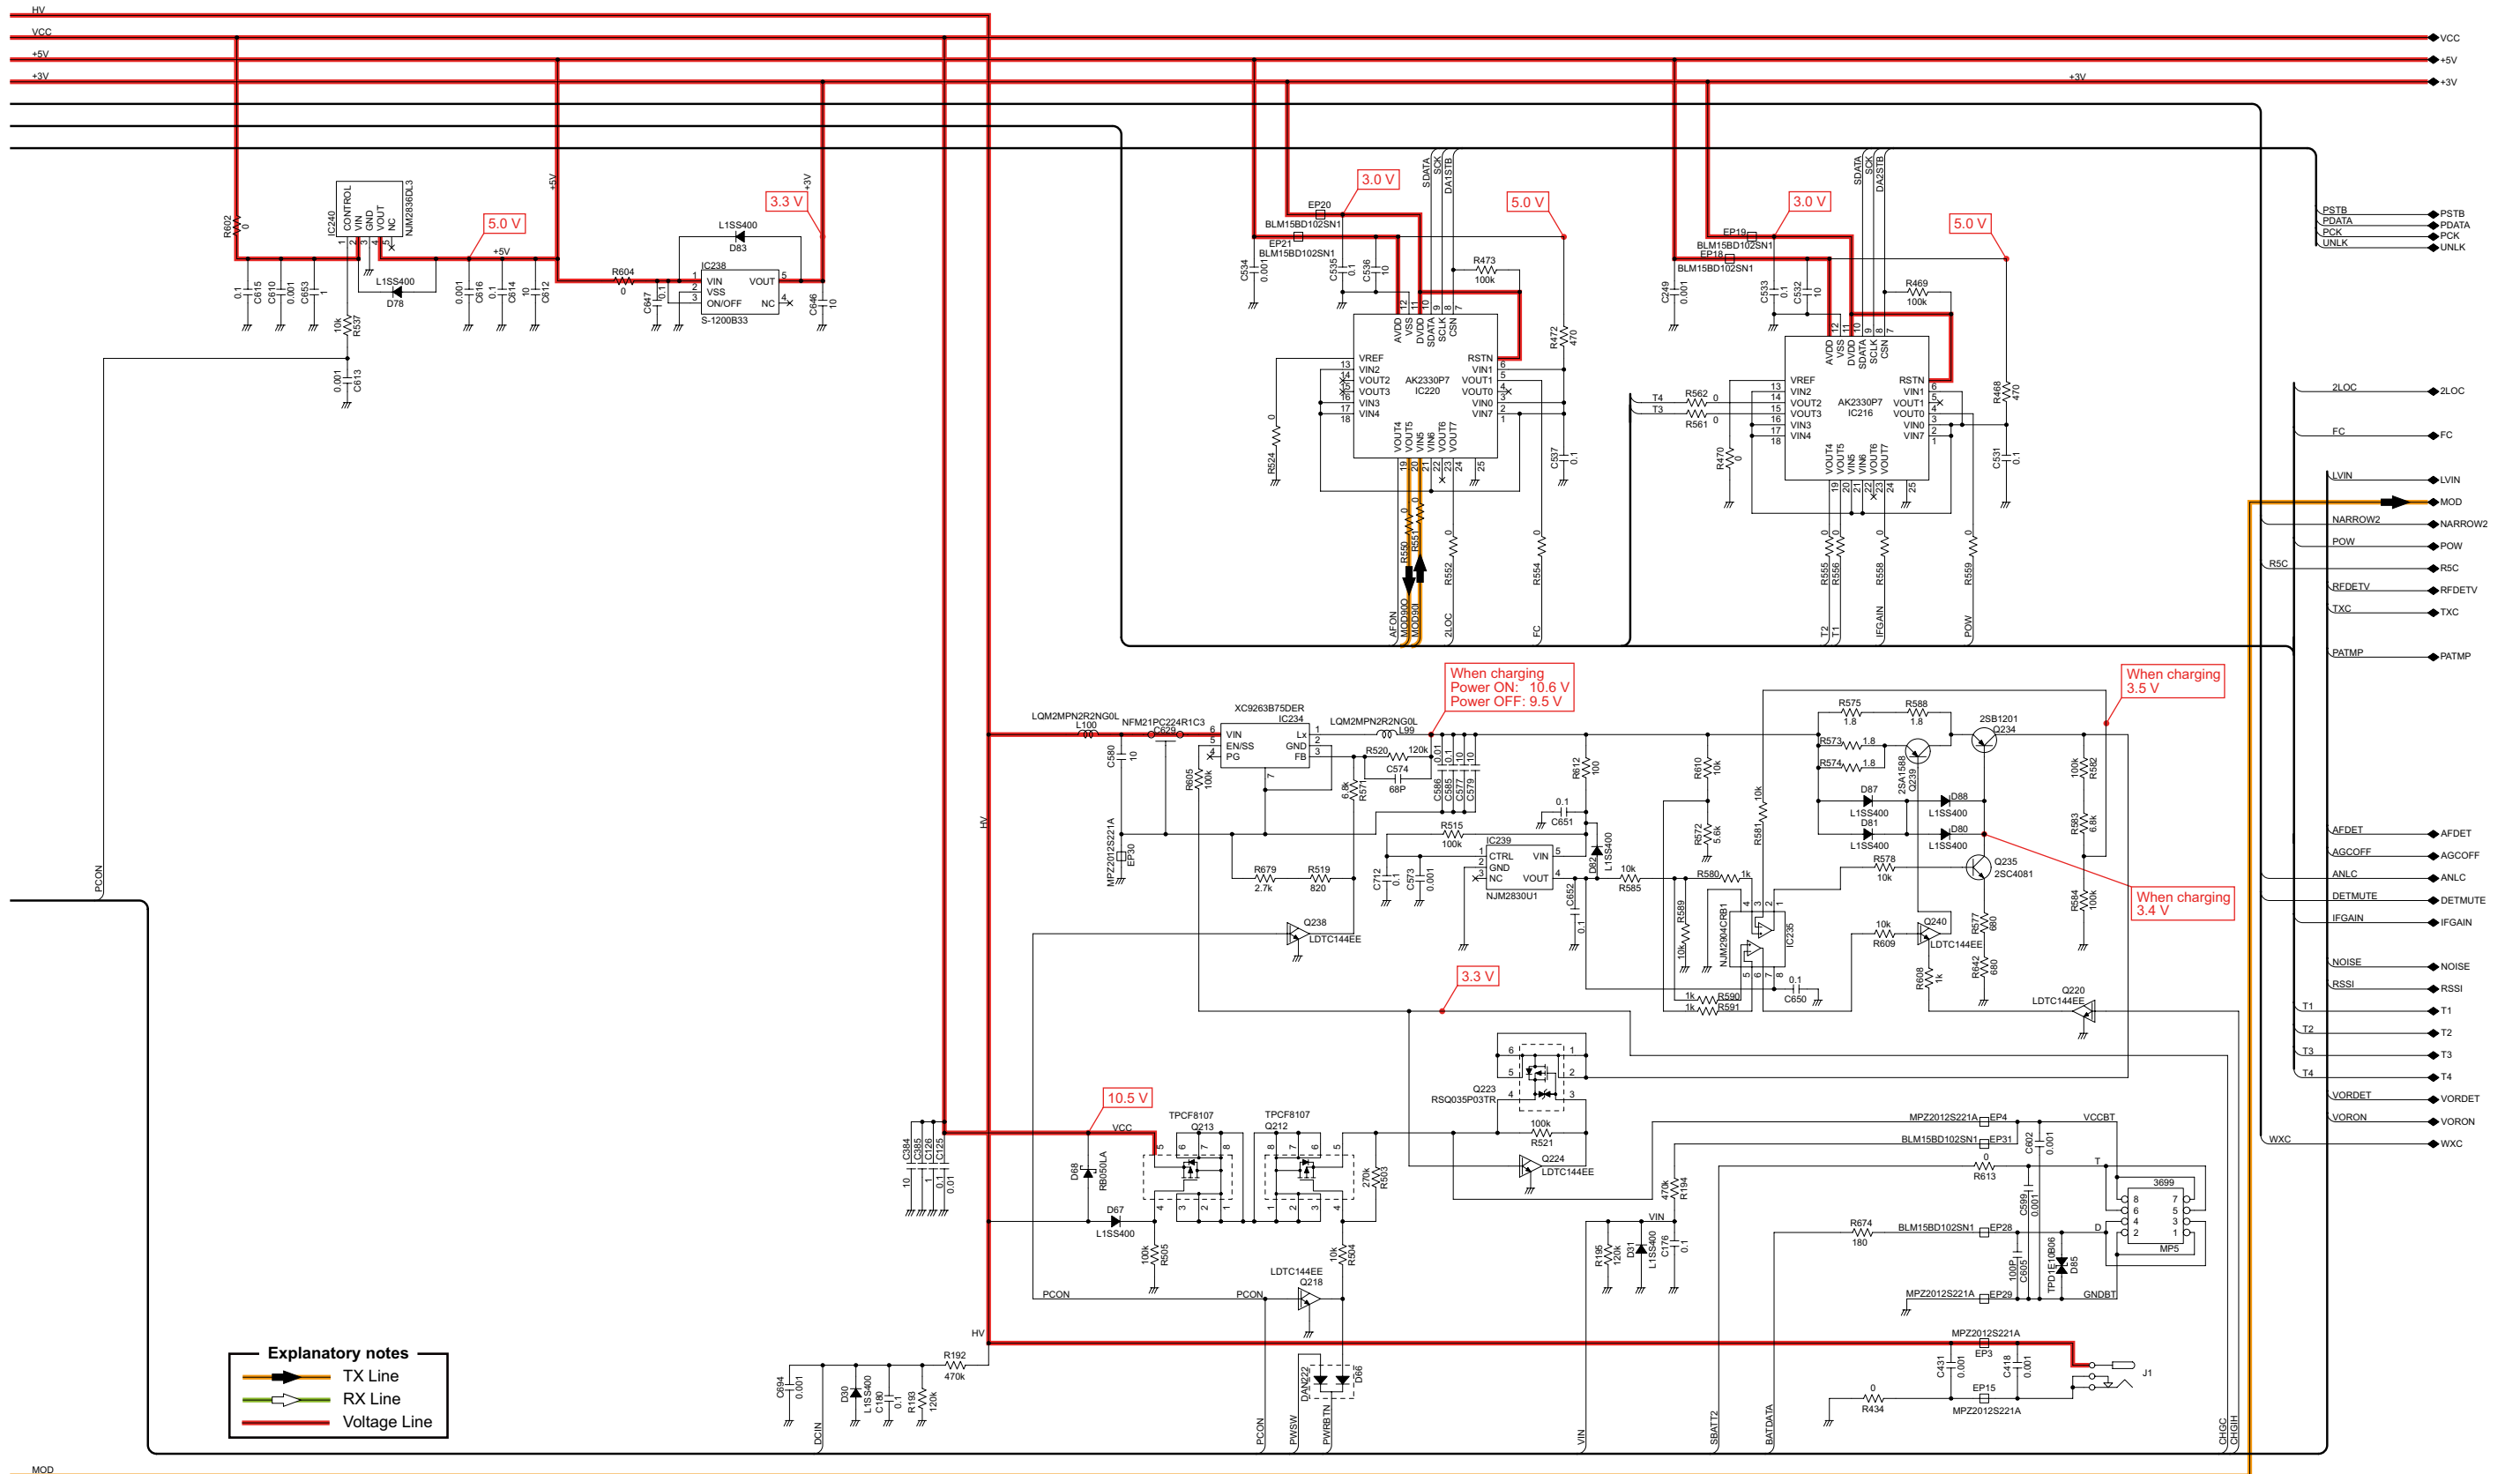

*Refer to the PARTS LIST for the value and name of component.

If you have any inquiries regarding service, contact your distributor. The contact number or E-mail address of your distributor can be found on our website.

<http://www.icom.co.jp/world/>

Count on us!

Other ManualsLib Projects

 www.manualslib.com

 www.manualslib.de

 www.manualslib.es

 www.manualslib.fr

 www.manualslib.nl

 www.manualslib.mx

 www.manualslib.tech 30+ Languages