MicroScan | Hardware Fit Gauge V2

PRINT 100% / ACTUAL SIZE. Turn OFF scaling. No physical board fit verified.

Nominal board from retailer: 40 x 27 x 12 mm. Actual PCB revision unknown.

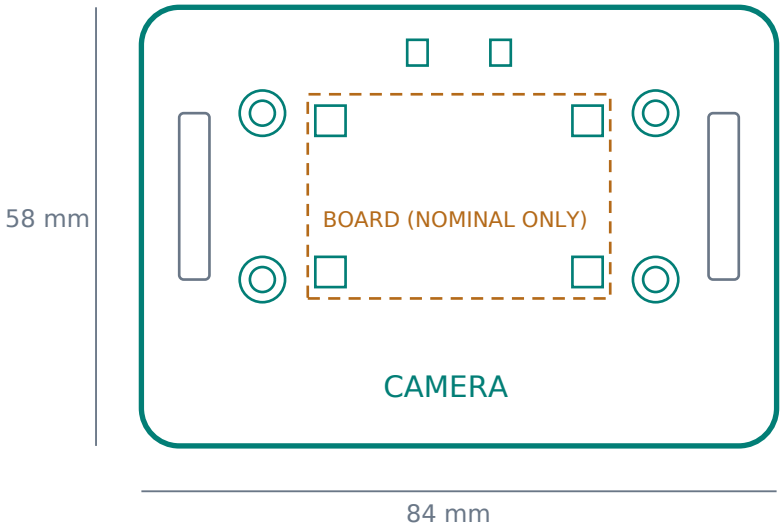

- Board outline is NOT a verified hole / component map.
- All four retainers contact only a narrow edge region; check actual PCB first.
- Do not route cables beneath skin. Camera must remain openly visible.
- No purchase, printing, electrical connection or physical fitting has occurred.

100 mm printer calibration ruler (measure after printing)

MicroScan | Height and hardware stack (NOT to scale)

The V1 8.7mm number described printed geometry only, not total device thickness.

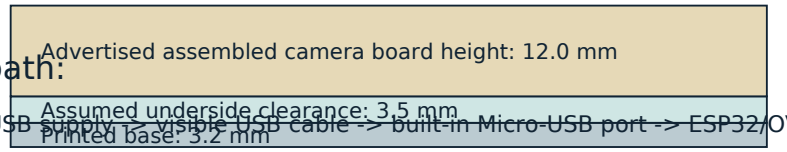

Estimated assembled thickness: 3.2 + 3.5 + 12 = 18.7 mm (NOT measured).

Clamp height above base reaches 11.1 mm; camera board may be taller.

M3 x 16 nylon screws/nuts are a provisional hardware size; verify before ordering.

Power path:

Rated 5V USB supply -> visible USB cable -> built-in Micro-USB port -> ESP32/OV2640.

Local Wi-Fi transfer is firmware-dependent and NOT demonstrated on a board.

Do not connect unknown camera wires, raw lithium cells, or new proprietary bus adapters.