
PRODUCTION MEETING · ANCIENT SPANISH MONASTERY GARDEN

# Visiting Stage Tuning Map

Option B · with the tent

| TUNEIT SCORE | FLOOR EVEN | BASS SWING | HEADROOM | BOXES |
|---|---|---|---|---|
| 99 — Excellent, out of 100 | 99% — within ±3 dB | 3.6 dB — bass, 50-80 Hz | +18.9 dB — 98 dB show | 8 — Main, Sub, Stage |

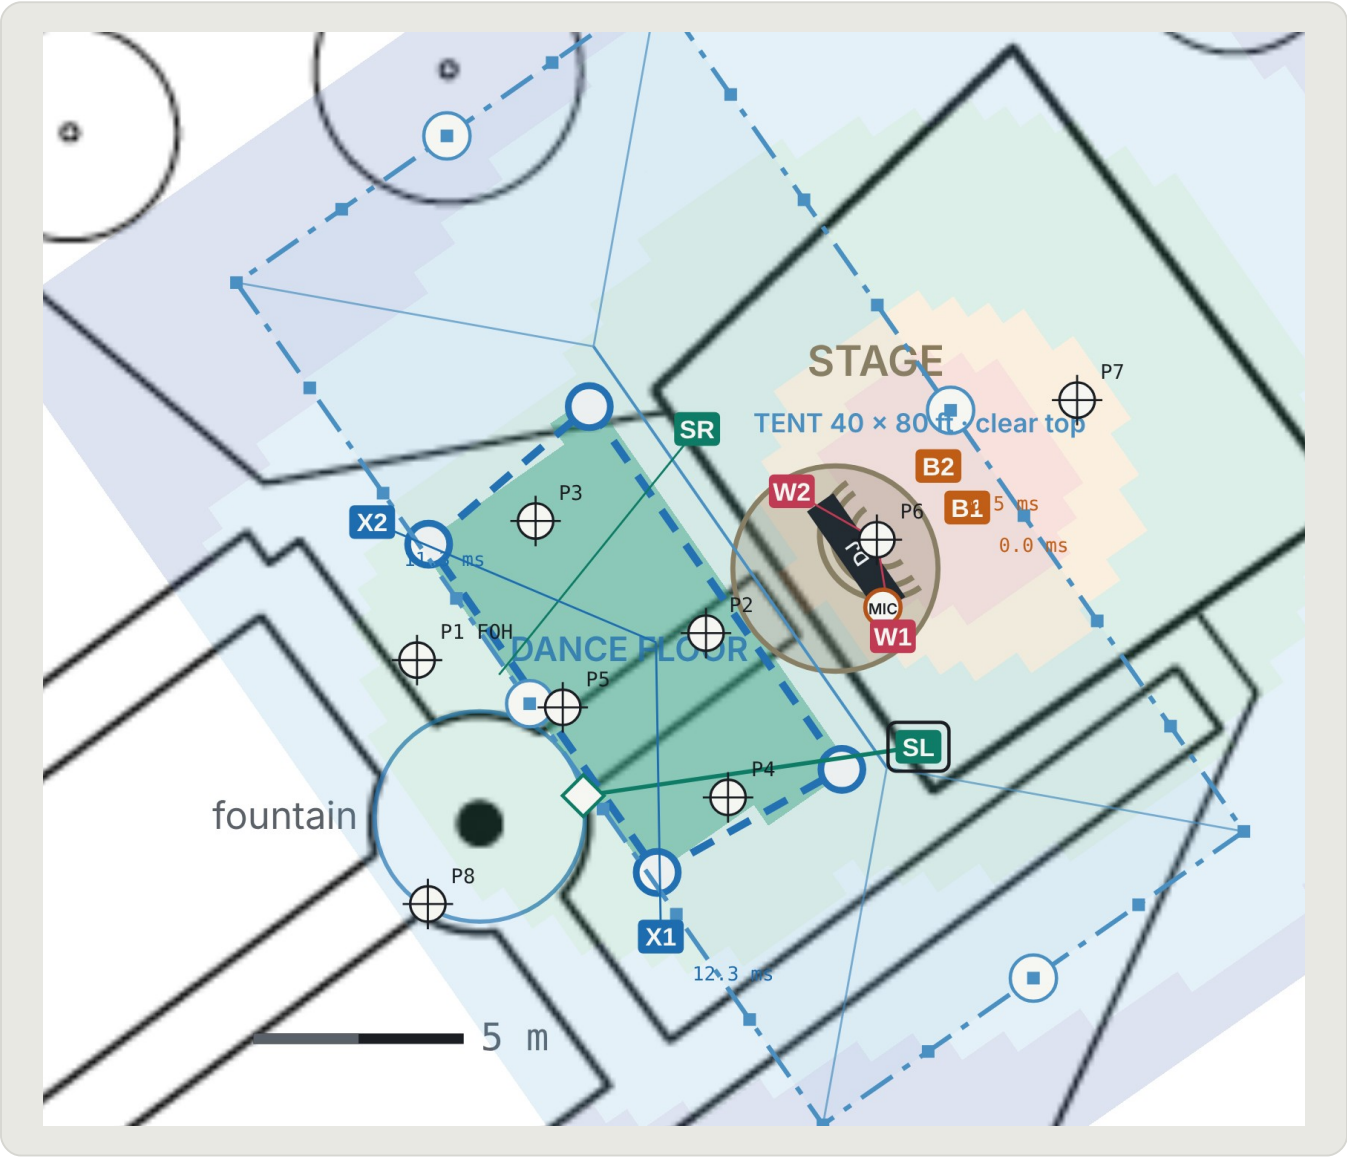


The plan as shown on the map, with the layers that were switched on. Coverage colours compare each spot with the middle of the dance floor.

01 · SUMMARY

## What this layout delivers

Option B under the Rumbas 40 × 80 ft clear-top frame tent (3.05 m legs) running across the stage: stage, subs and the whole dance floor under the roof. The tent is centred on the dance floor, front legs just past the floor edge and about 0.5 m clear of the fountain ring. SR drops to 2.5 m; nothing else moves. Keep the stage arches under about 4.3 m.

- 99% of the dance floor sits within ±3 dB of the middle of the dance floor, 99% within ±6 dB.
- Bass varies 3.6 dB across the floor, which is even.
- Tops on the stage: -11.9 dB against the floor, which keeps the stage clean.
- Level available at the middle of the dance floor: about 117 dB, +18.9 dB over a 98 dB show.
- Every rule kept: nothing on the dance floor, the front of the stage clear.
- Tent: Rumbas Frame Tent, clear top, 40 × 80 ft, 3.1 m legs, about 5.6 m at the peak (confirm with Rumbas). Roof bounce on the floor -21.0 dB against the direct sound; sides open. Nothing hangs from the tent frame unless Rumbas signs off the loads.
- Air 24 °C, 70% humidity, sound at 345.8 m/s.

02 · SPEAKERS

## Speaker schedule

Position from the reference shown on the map. Delays and trims as set in the map; confirm by measurement.

| ID | UNIT | MOUNTED | POSITION | HEIGHT | AIM OFF | TILT | DELAY MS | TRIM DB | TUNE AT |
|---|---|---|---|---|---|---|---|---|---|
| **SL** | JBL VRX: 2 line-array tops on a stand | Stand | 0.8 out, 4.6 right | 2.8 m | 27° left | 8.5° down | 9.4 | 0 | P1 |
| **SR** | JBL VRX: 2 line-array tops on a stand | Stand | 0.8 out, 4.6 left | 2.5 m | 16° right | 6.8° down | 9.4 | 0 | P1 |
| **B1** | JBL VRX sub | Floor | -3.4 out, 0.6 right | 0.4 m | stage axis | - | 0.0 | 0 | P1 |
| **B2** | JBL VRX sub | Floor | -3.4 out, 0.6 left | 0.4 m | stage axis | - | 0.5 | 0 | P1 |
| **W1** | JBL SRX stage monitor | Stage deck | -0.2 out, 2.1 right | 0.6 m | at P6 | 23.3° up | - | 0 | P6 |
| **W2** | JBL SRX stage monitor | Stage deck | -0.2 out, 2.1 left | 0.6 m | at P6 | 23.3° up | - | 0 | P6 |
| **X1** | JBL SRX on a stand | Stand | 8.4 out, 4.8 right | 2.2 m | 124° left | 4.9° down | 12.3 | -6 | P5 |
| **X2** | JBL SRX on a stand | Stand | 8.4 out, 7.2 left | 2.2 m | 122° right | 4.7° down | 11.3 | -6 | P5 |

03 · TUNING POINTS

## Where to measure

Type each reading into the map; the Off by column shows how far the model is from the room.

| POINT | WHERE | TARGET | USE IT TO | PREDICTED | MEASURED | OFF BY |
|---|---|---|---|---|---|---|
| **P1** | FOH reference, behind the floor beside the fountain | 98-100 dB(A) LAeq at peak | System EQ for the tops; sub-to-top alignment | 95.8 dB | - | - |

| POINT | WHERE | TARGET | USE IT TO | PREDICTED | MEASURED | OFF BY |
|---|---|---|---|---|---|---|
| **P2** | Front of the floor | No more than the floor average + 4 dB | Front row not overpowered | 98.6 dB | - | - |
| **P3** | Floor, house left | Floor average ± 3 dB | Set F2 (Option A) | 97.6 dB | - | - |
| **P4** | Floor, house right | Floor average ± 3 dB | Set F1 (Option A) | 98.2 dB | - | - |
| **P5** | Back of the floor, at the fountain | Floor average ± 3 dB | Set the SRX fillers X1, X2 | 96.4 dB | - | - |
| **P6** | DJ position | 95-100 dB(A) from the monitors | Mains at least 10 dB under the monitors here | 105.5 dB | - | - |
| **P7** | Behind the stage, the old square | As low as the show allows | Spill back into the square and toward the trees | 102.0 dB | - | - |
| **P8** | Path beyond the fountain | Floor average - 6 dB | Spill toward the walkway and neighbours | 93.9 dB | - | - |

04 · ON SITE

## Tuning sequence

- 1. Walk and mark. Tape the stage centre at P5, the four floor corners, every speaker, tower and tuning point using the out / left / right numbers from the stage.
- 2. Stage, subs and stands. Subs side by side behind the stage at the edge of the old square, tops on stands at the listed height and tilt, SRX fillers at the far corners. Cable ramps over the walkway.
- 3. Polarity and signal check. Pink noise through every box one at a time.
- 4. Mains at the middle of the floor, then FOH. System EQ for the garden: little low-mid build-up outdoors, watch the wind. Set the reference level.
- 5. Subs to tops. Align phase at the crossover in the middle of the floor; the map lists the delay that waits for the subs behind the stage. Check P2.
- 6. Fills and ambience fillers at their points. Mains on, speaker on: set delay so the stage leads, then level to land within ±3 dB of the floor average. Type each reading into its tuning point.
- 7. Stage. Monitors with a DJ on the decks; ring out the MC mic with everything running; mains at P6 at least 10 dB under the monitors.
- 8. Neighbours. Walk P7 in the old square behind the stage, P8 on the path beyond the fountain and toward the cloister at show level; trim the subs if the Shared Ball can hear them.
- 9. Full walk with music. Floor, walkway, stage. Log the final values, save a full-house version with the fillers 2 to 3 dB brighter, and lock the processors.

05 · SIGN-OFF

## Agreed for the show

TECHNICAL DIRECTION

**DJ UZO**

signature _____ date _____

AUDIO VENDOR

signature _____ date _____

VENUE / PRODUCTION

signature _____ date _____