



Experiment 4 A

Student Name: Roshan Kumar

UID: 22BCS16490

Branch: CSE

Section/Group: NTPP_602-A

Semester: 6th

Date of Performance: 13/02/25

Subject Name: AP Lab-2

Subject Code: 22CSH-352

1. TITLE:

Sort Colors

2. AIM:

Given an array `nums` with `n` objects colored red, white, or blue, sort them in-place so that objects of the same color are adjacent, with the colors in the order red, white, and blue.

We will use the integers 0, 1, and 2 to represent the color red, white, and blue, respectively.

You must solve this problem without using the library's sort function.

3. Algorithm

- Initialize counters for zeros and ones.
- Traverse the list and count the number of zeros and ones.
- Overwrite the original list: first with zeros, then ones, and finally twos (the remainder).

Implementation/Code

```
class Solution:
def sortColors(self, nums: List[int]) -> None:
    zeros, ones, n = 0, 0, len(nums)
    for num in nums:
        if num == 0:
            zeros += 1
```




DEPARTMENT OF COMPUTER SCIENCE & ENGINEERING

Discover. Learn. Empower.

```
elif num == 1:  
    ones += 1  
for i in range(0, zeros):  
    nums[i] = 0  
for i in range(zeros, zeros + ones):  
    nums[i] = 1  
for i in range(zeros + ones, n):  
    nums[i] = 2
```

Output

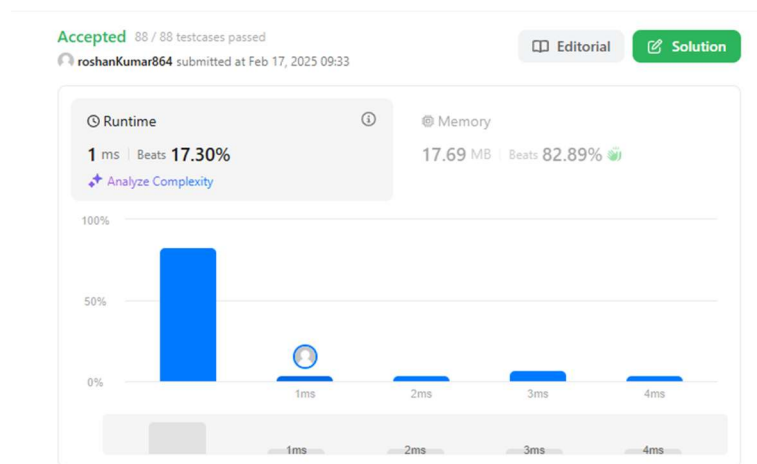

Time Complexity : $O(n)$

Space Complexity : $O(1)$

Learning Outcomes:-

- Learn the principles behind counting sort.
- Manipulate array indices and values to sort in-place



Experiment 4 B

Student Name: Roshan Kumar

UID: 22BCS16490

Branch: CSE

Section/Group: NTPP_602-A

Semester: 6th

Date of Performance: 13/02/25

Subject Name: AP Lab-2

Subject Code: 22CSH-352

1. TITLE:

Search in Rotated Sorted Array

AIM:

There is an integer array `nums` sorted in ascending order (with distinct values).

Prior to being passed to your function, `nums` is possibly rotated at an unknown pivot index `k` ($1 \leq k < \text{nums.length}$) such that the resulting array is `[nums[k], nums[k+1], ..., nums[n-1], nums[0], nums[1], ..., nums[k-1]]` (0-indexed). For example, `[0,1,2,4,5,6,7]` might be rotated at pivot index 3 and become `[4,5,6,7,0,1,2]`.

2. Algorithm

- Initialize two pointers, `left` at the start and `right` at the end of the list.
- Use a loop to repeatedly divide the list into halves.
- If the middle element matches the target, return its index.
- Adjust the `left` or `right` pointer based on the comparison between the target and the middle element.
- If the target is not found by the end of the loop, return -1.

Implementation/Code:

```
class Solution:
    def search(self, nums: List[int], target: int) -> int:
        left, right = 0, len(nums) - 1
        while left <= right:
            mid = (left + right) // 2
            if nums[mid] == target:
                return mid
            if nums[left] <= nums[mid]:
```




DEPARTMENT OF COMPUTER SCIENCE & ENGINEERING

Discover. Learn. Empower.

```
if nums[left] <= target < nums[mid]:  
    right = mid - 1  
else:  
    left = mid + 1  
else:  
    if nums[mid] < target <= nums[right]:  
        left = mid + 1  
    else:  
        right = mid - 1  
return -1
```

Output

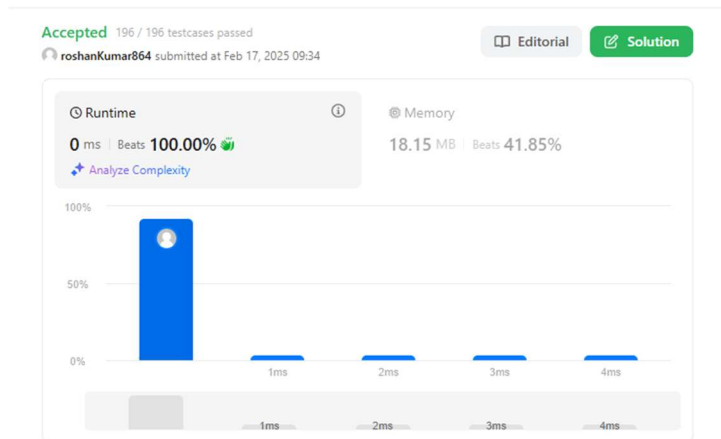

Time Complexity : $O(\log n)$

Space Complexity : $O(1)$

Learning Outcomes:-

1. Implement the Dutch National Flag algorithm.
2. Learn in-place sorting techniques with low time complexity.
3. Apply binary search on a rotated sorted array.
4. Develop problem-solving skills for searching in partially ordered data.