Cody / Atlante di progettazione

Domande esplicite, notifiche e confini A03; aggiorno anche le pagine originali.

Conservo il PC, poi ricevo il lavoro

Tengo distinti pairing, presenza LAN e attivita' dell'ultimo prompt reale. L'estensione EVENT porta avvisi e domande esplicite; non inventa una chat quando manca un hook. Il contesto dichiarato e' un'etichetta.

Decido soltanto dopo aver letto

Da Codex needs you apro due o tre scelte. La selezione apre un riepilogo con Send e Back. Mostro Reply sent solo dopo l'ACK del destinatario. Una domanda dura 180 secondi; la scadenza non sceglie al mio posto.

Le PR restano in sola lettura

Conservo la decisione A03: gli screen 21-24 riportano stati e nomi dei check falliti. Il 25 e' ritirato; diagnosi e azioni PR restano sul PC. Un'approvazione nativa rimanda a On your PC, senza Allow o Deny su Cody.

Come leggo questa revisione

Ho aggiornato pagine principali e limiti del flow. Conservo gli addenda precedenti e aggiungo errata datate. Distinguo il contratto nei sorgenti dalle prove host e fisiche; registro gli esiti correnti in done.md.

Inventario e perimetro degli screen

Uso gli screen ID del documento; le identita' enum del firmware sono separate.

01-16 e 40-42 / Avvio e collegamento

Conservo provisioning LAN, Options, Skin e pairing con consenso alla sostituzione. Let's go cerca subito il PC salvato. Niente scelta manuale della chat.

17-20 e 18U / Attivita'

Seguo il prompt reale attraverso hook autorizzati. Stop significa risposta pronta, senza certificare test o PR. Una domanda aperta ha precedenza su questi aggiornamenti ordinari.

21-27 e 31 / Stato e decisioni

21-24 sono PR in sola lettura; 25 ritirato. 26 annuncia avvisi/domande, 27 contiene scelte e riepilogo con Send. 31 richiede l'ACK del destinatario; 32 conserva il percorso offline.

28-30 e 33-39 / Confini

28-30 restano voce futura. Conservo 33/34 come indicatori, 35A/35B per sleep/wake e 36-39 per preferenze e sviluppo. Non dichiaro questa nuova estensione verificata fisicamente.

The circle is usable space

Plan both the central square and the rounded regions.

CANVAS

466 x 466; center (233, 233); radius 233.

SAFE SQUARE

320 x 320 at (73, 73); bounds [73, 393).

BACK ICON

60 x 60 at (10, 203); center (40, 233).

ROUNDED REGIONS

73 px beside the square at its midline; about 9.38 px at its top and bottom.

ROTATION

Shared display/touch coordinates at 0/90/180/270 degrees. Back stays on the visual left.

NOTES

Umberto Giacobbi | hello@umbertogiacobbi.biz
Copyright umbertogiacobbi.biz 2026 - confidential

Cody's current cold boot

Branding precedes screens 01-03; route selection uses saved state.

BOOT

Identity and timing

Cody AI Companion and A distraction-free sidekick appear together, above the complete floppy artwork. The original 42-frame animation retains its 3.5-second cycle; startup work can extend wall time.

Layout and next route

Title y=60; subtitle y=110; artwork (137,164), 192 x 219. After local startup, absent Wi-Fi opens Welcome 04; missing association/IP opens 42; a valid LAN without pairing opens 40; retained pairing searches its PC on 14.

STATIC SCHEMATICS / illustrative fonts and values / no device capture

Wi-Fi setup has its own journey

Screens 04-09 and 42 / provisioning is separate from Codex pairing.

NETWORK

NETWORK-WAIT

Show QR, then Pair Cody

05 opens the installation QR on 06 without starting radios. Pair Cody starts Bluetooth on 07. A session QR appears only at ReadyToScan, then retires when credentials or connection are in progress. Cancel waits for confirmed cleanup.

A real local connection

09 offers Continue only with valid current Wi-Fi/IP. No connection on 42 offers Network setup or Later. CCP needs the local LAN; public Internet availability is a separate fact. Debug handoff 39 needs a fresh tap; Release continues to 09.

STATIC SCHEMATICS / illustrative fonts and values / no device capture

Finish Wi-Fi without inventing success

Screens 04-09 and 42 / provisioning is separate from Codex pairing.

Show QR, then Pair Cody

05 opens the installation QR on 06 without starting radios. Pair Cody starts Bluetooth on 07. A session QR appears only at ReadyToScan, then retires when credentials or connection are in progress. Cancel waits for confirmed cleanup.

A real local connection

09 offers Continue only with valid current Wi-Fi/IP. No connection on 42 offers Network setup or Later. CCP needs the local LAN; public Internet availability is a separate fact. Debug handoff 39 needs a fresh tap; Release continues to 09.

Make it yours: four working preferences

Screen 10 -> Settings 36 -> Skin 11 / Options returns to its caller.

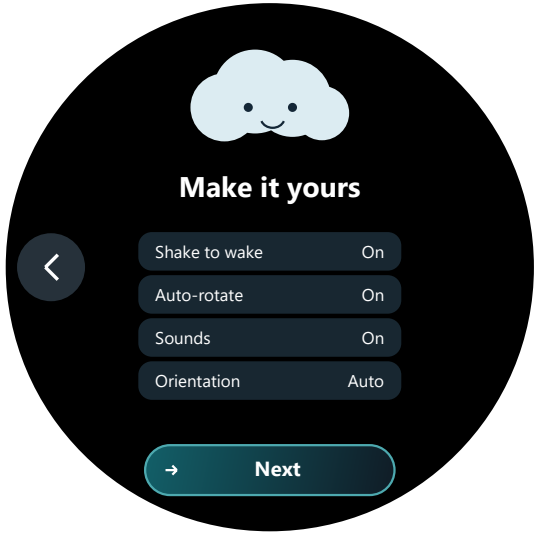

PREFERENCES

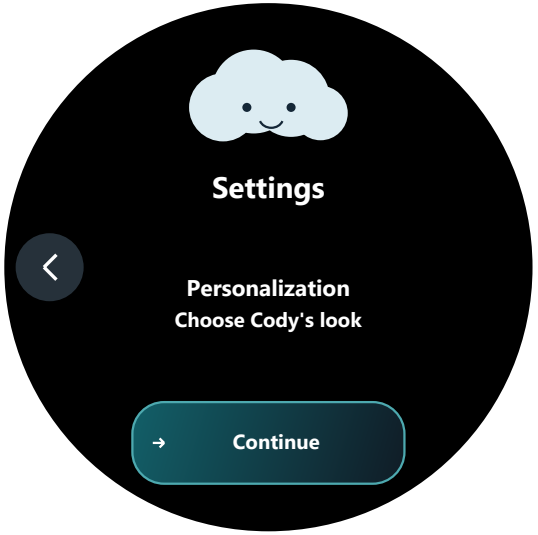

SETTINGS

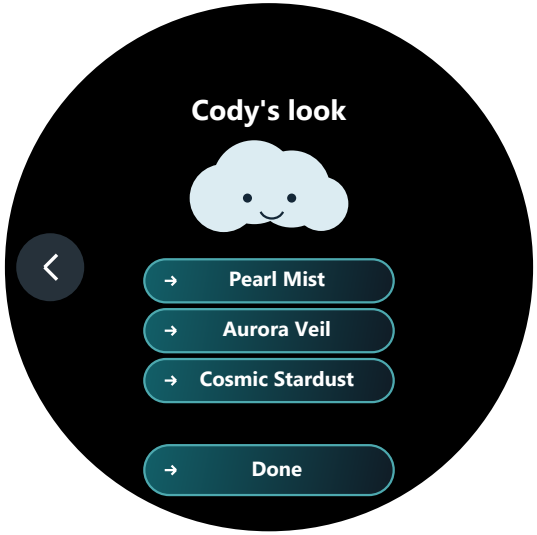

SKIN

Four compact rows

Shake to wake, Auto-rotate and Sounds each have persistent On/Off values. Orientation shows Auto while auto-rotation is enabled; manual choices are 0 or 180 when it is Off. Sounds Off stops playback while keeping microphone and wake word active.

Save before confirming

Next opens Settings: Personalization / Choose Cody's look. Continue opens Skin: Pearl Mist, Aurora Veil, Cosmic Stardust, Enchanted Mosaic and Dreamwave, saved by stable ID. Saving retains the prior value; successful write/readback confirms the change. Save failed and Retry preserve the cause and requested value; no silent repair.

STATIC SCHEMATICS / illustrative fonts and values / no device capture

From the code to the retained PC

Screens 12 -> 13 -> 14 -> 15 / association and presence are different facts.

CODE

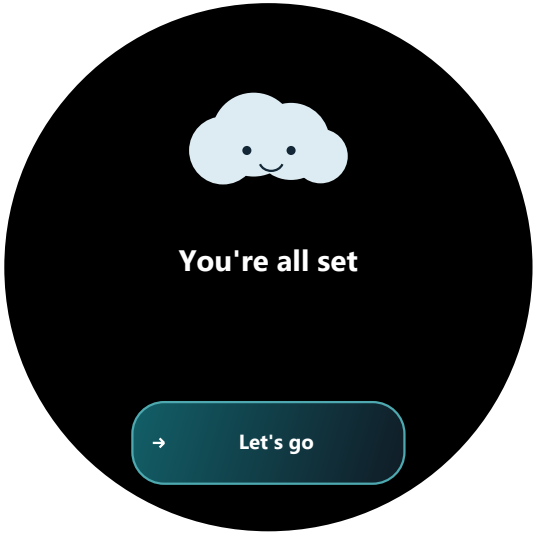

ALL-SET

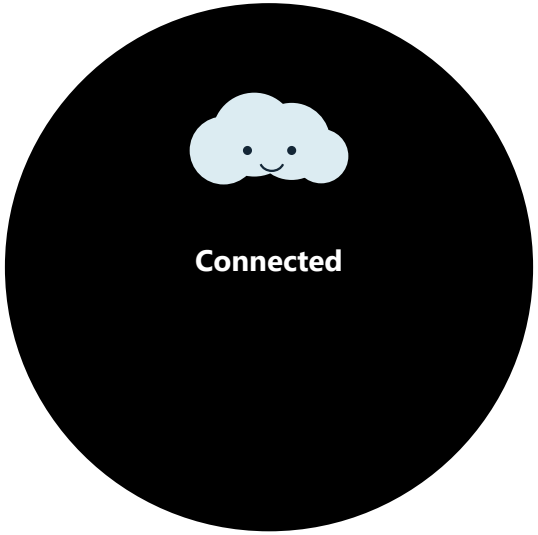

CONNECTED

Prepare, then read

12 shows Preparing secure code / Please wait / About 30 seconds until a code exists. The estimate is not measured progress. Use only all six characters visible on the intended Cody after discovery. The backend window is five minutes; screen inactivity is three minutes from code readiness.

Confirm and connect

You're all set on 13 follows the two-sided persisted handshake. Let's go searches the retained PC immediately on 14, or reuses valid authenticated presence on 15. The earlier ten-second Idle detour is removed. READY establishes presence; genuine prompt hooks establish chat activity.

STATIC SCHEMATICS / illustrative fonts and values / no device capture

Cody segue il lavoro che invio

Screen 17, 18 e 18U / nessuna scelta di chat dal dispositivo.

17 / Project active

Mostro il contesto dell'ultima chat con un prompt. Il nome progetto e' un'etichetta ASCII; l'identita' della chat resta distinta. Non acquisisco ancora il branch.

18 / Working

Entro in Working dopo un prompt reale. Gli hook dei tool forniscono Editing o Running. Con un nuovo prompt posso seguire automaticamente un'altra chat.

18U / Unavailable

Dopo 120 secondi senza un nuovo hook considero scaduta l'attivita' in corso. Il solo heartbeat del PC non mi dice se la chat sta ancora lavorando.

I Cody associati al PC seguono la chat dell'ultimo prompt reale. Il cambio di scheda non e' un hook documentato. CCP conserva metadati, non prompt o risposte.

Risposta, pausa e riposo

Screen 19, 20A, 20B e 16 / il volto non certifica il risultato del lavoro.

19 / Response ready

Interpreto Stop come risposta pronta da leggere. Il risultato del lavoro, dei test o del deploy resta quello dichiarato e verificato nella chat.

20A / Paused

Con PermissionRequest mostro l'attesa di approvazione; con Interrupt il turno interrotto. Un completamento sullo sfondo non lo riavvia.

20B -> 16 / Ended

Mostro SessionEnd per cinque secondi attivi, poi lascio riposare Cody. Il prossimo prompt reale fornisce di nuovo il contesto senza altro pairing.

Distinguo l'accettazione locale di un hook dai pixel aggiornati sul display. Registro separatamente la prova di trasporto, quella visiva e quella di risveglio.

Osservo una PR senza gestirla

Screen 21-23 / nessuna azione di merge, approve, close, rerun o comment.

21 / PR pending

Mostro lo stato del PR indicato senza azioni. La fonte e' uno snapshot esplicito riferito all'esatto head.

22 / Checks running

Mostro conteggi solo da una lista completa e corrente. Checks passed resta tre secondi dopo la narrativa, poi torno al lavoro senza un pulsante Done.

23 / Checks failed

L'unica azione apre 24, la lista di nomi reali. Ogni diagnosi o correzione continua sul PC.

A03 rimane vincolante. Un dato assente o incompleto non diventa un conteggio inventato; un evento Stop non equivale a check passati.

Errori sul PC; domande sul Cody

Screen 24, 25 ritirato e 26 / correggo le illustrazioni precedenti in conflitto.

23 -> 24 / View failures

L'unica azione apre i nomi reali dei check falliti: al massimo sei, fino a 48 caratteri ASCII ciascuno. Un input non rappresentabile viene rifiutato esplicitamente; non taglio nomi e non invento totali.

24 sola lettura / 25 ritirato

Mostro tre nomi per pagina, fino a due righe ciascuno; scorro verticalmente e tengo Back laterale. Non offro View log o righe selezionabili. Log, diagnosi e correzioni restano sul PC.

26 / Codex needs you

Ricevo una domanda dal chiamante MCP esplicito; per gli avvisi mostro From Codex. Leggo testo inglese ASCII. Il contesto e' dichiarato dal chiamante, senza attribuirgli l'identita' verificata della chat o degli hook.

Approvazioni / On your PC

Un PermissionRequest puo' richiamare la mia attenzione, ma la decisione nativa resta nel computer. Non aggiungo Allow, Deny o un'autorizzazione generica ricavata da un testo incompleto.

Due o tre scelte, poi Send

Screen 26 e due varianti del 27 / gradienti, icone e conferma reversibile.

26 / Codex needs you

Leggo l'avviso e apro la richiesta. Una domanda resta protetta dagli aggiornamenti ordinari e dura 180 secondi.

27 / Choose a reply

Due card sono affiancate; la terza va sotto al centro. Ogni ID resta stabile anche se cambia l'ordine.

27 / Review choice

Leggo la descrizione e confermo con Send. Back torna alle scelte; selezionare una card da solo non invia.

Il vecchio elenco verticale e' superato. Mostro i pulsanti completi dopo il testo principale; niente teletype nelle label. 31 arriva solo dopo delivered.

Quando posso dire Reply sent?

Screen 31 / registro ricevuto, consegna confermata, scadenza e annullamento separati.

Ticket e capability privati

Il chiamante MCP crea un ticket di 128 bit con capability privata. Poll e cancel richiedono entrambi i valori. La capability resta sul PC e non viaggia sulla LAN.

received non e' delivered

Il poll restituisce scelta e answer_id. Un poll successivo con acknowledge_answer_id uguale prova la ricezione del chiamante: solo allora passo a delivered e allo screen 31.

Invio e risposta ripetuta

Dopo pending entro in Sending locale, senza cambiare scelta. Received non e' ancora delivered. Ripetere la stessa risposta e' idempotente; una diversa non sovrascrive la prima.

Scadenza e consegna incerta

I 180 secondi valgono anche in received. Se ho gia' ammesso Send mostro Reply unconfirmed: puo' mancare solo l'ACK. Prima di Send uso Request expired. Nessun Retry o ACK tardivo riapre la domanda.

Battery and sleep

Device state changes the presentation without discarding useful content.

33 / Low battery

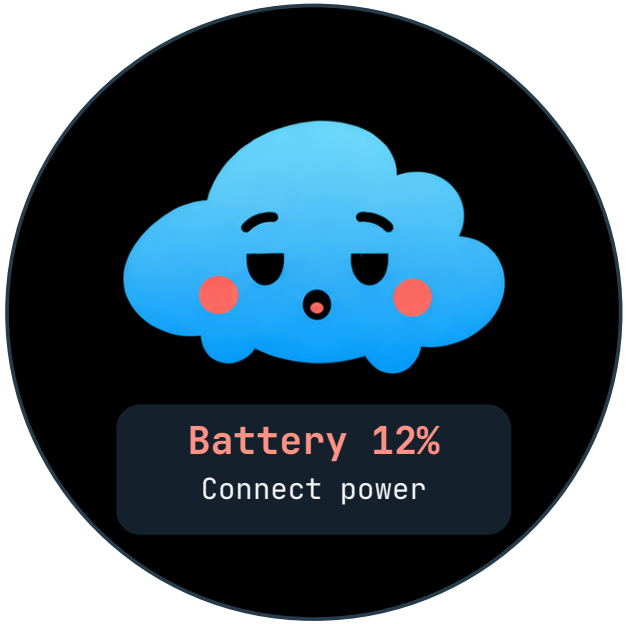

A real low-charge event adds a compact notice. On question screens it must preserve the question.

NOTES

34 / Charging

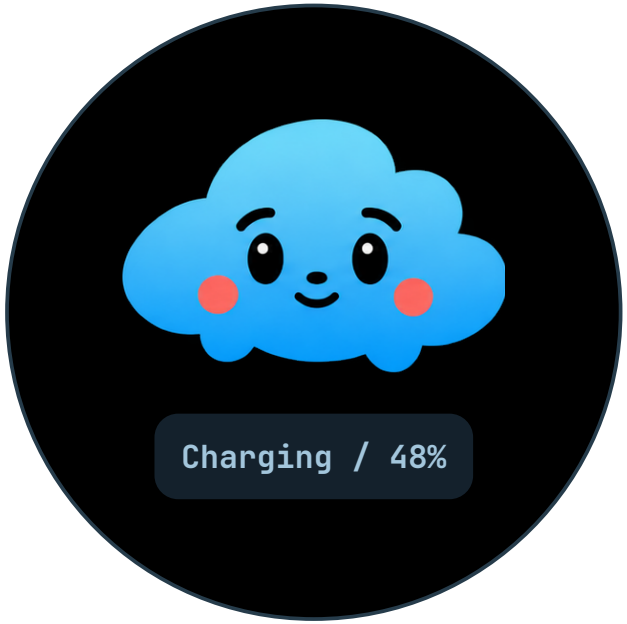

Show charging as an independent device indicator. Energy and facial channels can still vary.

NOTES

35A / Sleep

Eyes close while the mouth and cloud continue a slow animated breath, before any display-off policy.

NOTES

Umberto Giacobbi | hello@umbertogiacobbi.biz
Copyright umbertogiacobbi.biz 2026 - confidential

Ritrovo il percorso al risveglio

Screen 26/27, 32 e 35A/35B / standby e scadenza restano fatti diversi.

Domanda protetta

Una domanda aperta resta davanti agli aggiornamenti ordinari. Conservo selezione e percorso. Batteria, charging o un avviso successivo non fanno sparire una decisione che devo ancora leggere.

32 / Offline

Conservo il contenuto e cerco il PC salvato. La scadenza continua: tornare sulla LAN non rinnova i 180 secondi. Timeout, Cancel e disconnessione non scelgono un'opzione e non confermano consegna.

Scadenza e annullamento

Prima di Send mostro Request expired; dopo Send, Reply unconfirmed e Check on your PC. Uso Request cancelled o Reply rejected per gli altri esiti, con Done. Non riapro stati terminali.

35A / 35B e nuovi avvisi

Mantengo Wi-Fi durante lo standby di Cody associato. Accodo il wake per un avviso autenticato al worker power, preservando AFE e wake word. Registro a parte gli esiti del risveglio fisico.

Inspect the composed expression

Debug shows the same evaluated pose that the character renderer uses.

38 / Expression channels

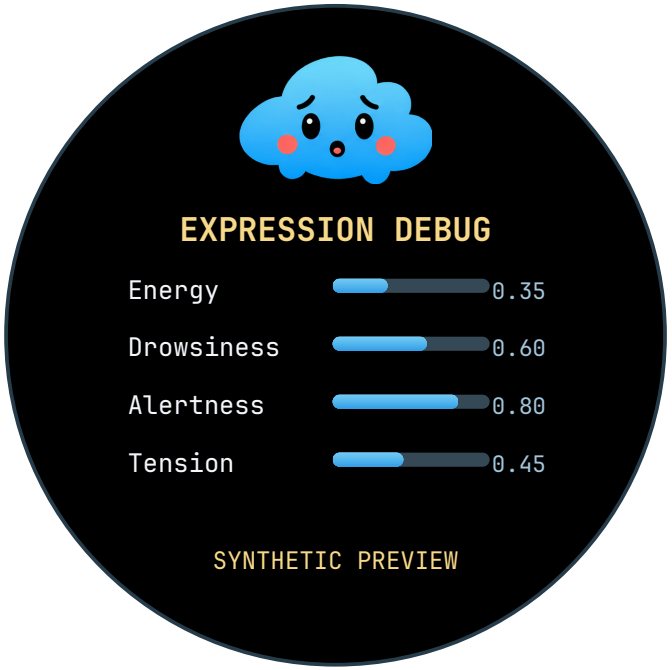

ONE CHARACTER, MANY CHANNELS

Inputs

Valid local events: motion, touch, orientation, charge and time since interaction.

Expressive state

Energy, drowsiness, alertness, tension and mood can coexist.

Independent motion

Breathing, gaze and blinking compose with the selected expression.

Shared geometry

Rig anchors and curve handles come from the same evaluated pose.

Preview controls

Synthetic examples are confined to a clearly labelled desktop preview.

NOTES

NOTES

Umberto Giacobbi | hello@umbertogiacobbi.biz
Copyright umbertogiacobbi.biz 2026 - confidential

Expression combinations / 01

Illustrative moments made from independent channels; these are not exclusive face states.

Calm

Relaxed brows + open eyes + gentle smile.

Slow breath; occasional blink.

NOTES

Curious

Raised brow + shifted gaze + small open mouth.

Keep the body breathing independently.

NOTES

Happy

Smiling eyes + lifted brows + open smile.

A brief response can settle back into idle.

NOTES

Focused

Attentive eyes + gathered brows + quiet mouth.

Subtle breath keeps the pose alive.

NOTES

Umberto Giacobbi | hello@umbertogiacobbi.biz
Copyright umbertogiacobbi.biz 2026 - confidential

Expression combinations / 02

Illustrative moments made from independent channels; these are not exclusive face states.

Afraid

Wide eyes + worried brows + breathing mouth.

Alertness rises quickly, then eases down.

NOTES

Stressed

Tense brows + tired eyes + a tight mouth.

Tension can coexist with low energy.

NOTES

Sleeping

Closed eyelids + relaxed brows + open mouth.

Slow breath continues with closed eyes.

NOTES

Drowsy

Half-closed eyes + relaxed brows + open mouth.

A surprise may briefly reopen the eyelids.

NOTES

Umberto Giacobbi | hello@umbertogiacobbi.biz
Copyright umbertogiacobbi.biz 2026 - confidential

The shared palette / all 256 slots

Exact RGB888 design swatches and indices from palette256.json.

000 #000000	001 #FFFFFF	002 #F4F6FA	003 #04101A	004 #0B1118	005 #111A24	006 #182330	007 #203040	008 #2A3C4D	009 #35495B	010 #40576A	011 #4D6477	012 #5B7184	013 #6B8092	014 #7D91A2	015 #92A3B2
016 #A5B4C1	017 #B9C6D1	018 #CBD6DF	019 #DCE4EA	020 #75CBF3	021 #74CAF3	022 #73CAF3	023 #72C9F3	024 #71C9F2	025 #70C8F2	026 #6FC7F2	027 #6EC7F2	028 #6DC6F2	029 #6CC6F2	030 #6BC5F1	031 #6AC4F1
032 #69C4F1	033 #68C3F1	034 #67C3F1	035 #66C2F1	036 #66C2F1	037 #65C1F0	038 #64C0F0	039 #63C0F0	040 #62BFF0	041 #61BFF0	042 #60BEF0	043 #5FBDEF	044 #5EBDEF	045 #5DBCEF	046 #5CBCEF	047 #5BBBEF
048 #5ABAEF	049 #59BAEE	050 #58B9EE	051 #57B9EE	052 #56B8EE	053 #55B7EE	054 #54B6EE	055 #53B6ED	056 #52B5ED	057 #51B4ED	058 #50B3ED	059 #4FB2EC	060 #4DB2EC	061 #4CB1EC	062 #4BB0EC	063 #4AAFEC
064 #49AEEB	065 #48AEEB	066 #47ADEB	067 #46ACEB	068 #45ABEA	069 #44AAEA	070 #43A9EA	071 #42A9EA	072 #41A8E9	073 #40A7E9	074 #3FA6E9	075 #3EA5E9	076 #3CA5E9	077 #3BA4E8	078 #3AA3E8	079 #39A2E8
080 #38A1E8	081 #37A1E7	082 #36A0E7	083 #359FE7	084 #9EF0D8	085 #9CEFD7	086 #9AEFD6	087 #97EED6	088 #95EED5	089 #93EDD4	090 #91ECD3	091 #8EECD2	092 #8CEBD2	093 #8AEBD1	094 #88EAD0	095 #85E9CF
096 #83E9CE	097 #81E8CD	098 #7FE8CD	099 #7CE7CC	100 #7AE6CB	101 #78E6CA	102 #76E5C9	103 #74E5C9	104 #71E4C8	105 #6FE3C7	106 #6DE3C6	107 #6BE2C5	108 #68E2C5	109 #66E1C4	110 #64E1C3	111 #62E0C2
112 #5FDFC1	113 #5DDFC1	114 #5BDEC0	115 #59DEBF	116 #57DDBE	117 #54DCBD	118 #52DCBD	119 #50DBBC	120 #4EDBBB	121 #4BDABA	122 #49D9B9	123 #47D9B8	124 #45D8B8	125 #42D8B7	126 #40D7B6	127 #3ED6B5
128 #3CD6B4	129 #39D5B4	130 #37D5B3	131 #35D4B2	132 #FF9385	133 #FE9183	134 #FE8E81	135 #FD8C7F	136 #FC8A7D	137 #FC877B	138 #FB8579	139 #FA8377	140 #FA8075	141 #F97E73	142 #F87C71	143 #F8796F
144 #F7776D	145 #F7746B	146 #F67269	147 #F57067	148 #F56D65	149 #F46B63	150 #F36961	151 #F3665F	152 #F2645D	153 #F1625B	154 #F15F59	155 #F05D57	156 #F8D989	157 #F6D685	158 #F5D281	159 #F3CF7D
160 #F1CC79	161 #F0C875	162 #EEC571	163 #ECC26D	164 #EBBE68	165 #E9BB64	166 #E7B860	167 #E6B45C	168 #E4B158	169 #E2AE54	170 #E1AA50	171 #DFA74C	172 R #000000	173 R #000000	174 R #000000	175 R #000000
176 R #000000	177 R #000000	178 R #000000	179 R #000000	180 R #000000	181 R #000000	182 R #000000	183 R #000000	184 R #000000	185 R #000000	186 R #000000	187 R #000000	188 R #000000	189 R #000000	190 R #000000	191 R #000000
192 R #000000	193 R #000000	194 R #000000	195 R #000000	196 R #000000	197 R #000000	198 R #000000	199 R #000000	200 R #000000	201 R #000000	202 R #000000	203 R #000000	204 R #000000	205 R #000000	206 R #000000	207 R #000000
208 R #000000	209 R #000000	210 R #000000	211 R #000000	212 R #000000	213 R #000000	214 R #000000	215 R #000000	216 R #000000	217 R #000000	218 R #000000	219 R #000000	220 R #000000	221 R #000000	222 R #000000	223 R #000000
224 R #000000	225 R #000000	226 R #000000	227 R #000000	228 R #000000	229 R #000000	230 R #000000	231 R #000000	232 R #000000	233 R #000000	234 R #000000	235 R #000000	236 R #000000	237 R #000000	238 R #000000	239 R #000000
240 R #000000	241 R #000000	242 R #000000	243 R #000000	244 R #000000	245 R #000000	246 R #000000	247 R #000000	248 R #000000	249 R #000000	250 R #000000	251 R #000000	252 R #000000	253 R #000000	254 R #000000	255 R #000000

172 allocated slots / 84 reserved black slots / R = reserved, not an extra black role

Design colors are sRGB. Several entries may map to the same RGB565 word; 256 slots do not imply 256 unique colors.

NOTES

Copyright umbertogiacobbi.biz 2026 - confidential

Un linguaggio UI, anche per decidere

Riferimenti approvati / card 2 o 2+1; riepilogo separato con capsula Send.

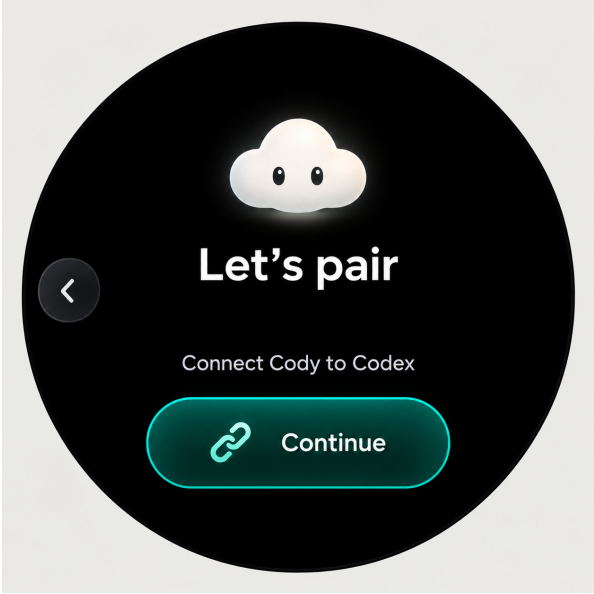

Due / tre / uno

Con due azioni uso card affiancate. La terza va sotto, al centro. Per una sola azione scelgo una capsula larga con icona a sinistra.

Il colore ha un significato

Uso teal per conferma/Codex, blu per rete, grafite per scelte neutre, No e Later, ambra per Retry, Cancel o sostituzione. Aggiungo icone e gradienti discreti.

DECISIONE UI IMPORTANTE / approvata il 9 ottobre 2026

Faccio comparire i pulsanti completi dopo titolo e riga principale; abilito il touch solo quando sono visibili. Il teletype resta sul testo narrativo. Conservo Back laterale e corde del cerchio. Sul 27 la scelta apre un riepilogo: uso Send in capsula e Back per rivedere le opzioni. Queste immagini sono i riferimenti approvati; l'aspetto fisico del firmware richiede una prova separata.

Dove finisce il compito di Cody

A03 resta in vigore / approvazioni native e diagnosi non passano al dispositivo.

MCP esplicito e hook reali

Tengo separati il ticket della richiesta e la chat seguita dagli hook. context e' un'etichetta del chiamante; non fabbrico UserPromptSubmit, identita' o testo per far sembrare attiva una chat.

Approvazioni sul computer

PermissionRequest produce al massimo un avviso On your PC. Non autorizzo strumenti nativi da Cody e non converto un avviso parziale in un generico consenso.

PR e diagnosi sul PC

Applico A03 del 4 ottobre: 21-24 sola lettura, 25 ritirato. Errori, log e stack trace restano sul PC; le domande 26/27 non sono un percorso alternativo per gestire una PR.

Voce e prove distinte

28 Recording, 29 Transcribing e 30 Review transcript restano un percorso futuro. Tengo separati sorgenti, suite host e prova touch sul dispositivo; gli esiti correnti sono in done.md.

Separate app installation from pairing

A01 supplements the printed atlas. Existing pages and screen IDs stay in place.

REQUESTED BY	AFFECTED BASE PAGES	PRINT ONLY THIS PAGE
Umberto Giacobbi (project owner)	**05 / 06 / 21**	**23 / keep the existing printout**

06 / REVISED

Installation QR. Remove the visible 'Scan to install' title. Pair Cody opens the device QR.

06-bis / NEW

Device QR. Scan it inside the provisioning app. Back stops the active BLE session and returns to 06.

WHY THIS CHANGE

The installation link downloads the app. A second QR identifies Cody for Wi-Fi provisioning over BLE. One QR cannot express both steps clearly.

UPDATED JOURNEY

05 Show QR -> 06
06 Pair Cody -> 06-bis
Credentials received -> 07
Failure -> 08 / Retry -> 06-bis
Wi-Fi connected + IP -> 09

SHARED ACTION BUTTON

Reuse one capsule control: Blue / Primary, Mint / Success, Gold / Warning, Coral / Danger, Neutrals / Secondary. Use the palette roles on base page 21; Retry stays Primary.

QR drawings are illustrative. Firmware must supply the real app URL and device-session payload.

06-bis is a screen ID, not a PDF page number. This addendum records the owner's requested design change.

Umberto Giacobbi | hello@umbertogiacobbi.biz
Copyright umbertogiacobbi.biz 2026 - confidential

A02 / Screen 11 becomes Cody's look

One scrollable single-choice list changes the live preview above it.

SCREEN 11 / REVISED

Affected historical pages: 02 inventory and 07 OOBE layouts. The old Blue/Mint color chips are superseded; their printed pages remain historical.

Five authored looks

Pearl Mist DEFAULT

cody.skin.pearl_mist.v1

Aurora Veil

cody.skin.aurora_veil.v1

Cosmic Stardust

cody.skin.cosmic_stardust.v1

Enchanted Mosaic

cody.skin.enchanted_mosaic.v1

Dreamwave

cody.skin.dreamwave.v1

Interaction contract

Drag vertically to scroll. Tap one row to select exactly one look. The preview changes immediately. The user sees the cool name; firmware stores only the stable internal ID. Back or Done returns to the caller. No color editor, mixing or texture controls are added.

Umberto Giacobbi | hello@umbertogiacobbi.biz
Copyright umbertogiacobbi.biz 2026 - confidential

A03 / Pull requests become status-only

Screens 21-24 stay concise and read-only; screen 25 is retired.

PRINT PAGE 25 ONLY

21 / PR pending

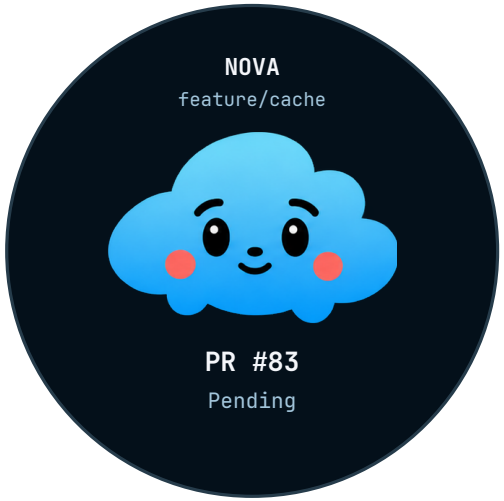

Observe only. No PR action is offered.

22 / Checks running

Show a count only when the exact total is known.

23 / Checks failed

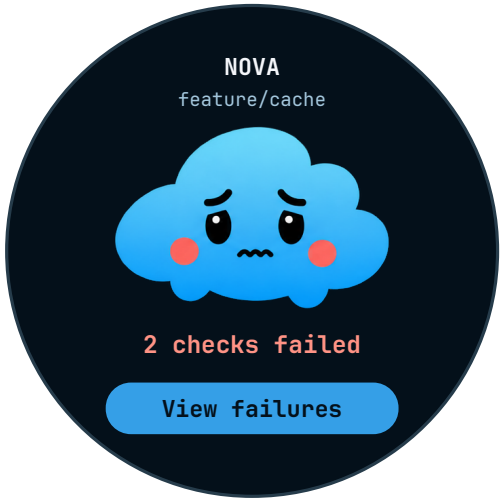

One explicit action opens the failure list.

24 / Failed checks

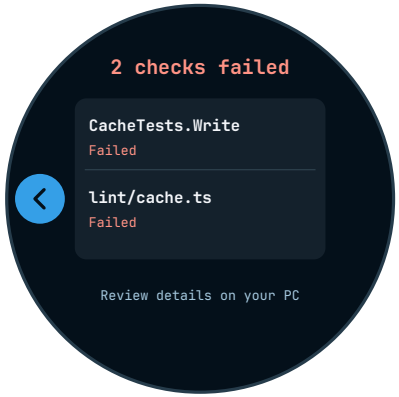

READ-ONLY CONTRACT

Screen 22 briefly changes to 'All checks passed' before returning to screen 17. Screen 24 lists real failed check names and uses the fixed lateral Back control. It has no View log button and no selectable log rows.

25 / RETIRED

Raw logs and stack traces stay on the PC. Cody does not merge, approve, close, rerun or comment on a PR.

Umberto Giacobbi | hello@umbertogiacobbi.biz
Copyright umbertogiacobbi.biz 2026 - confidential

A04 / Pairing handoff and continued setup

One temporary Debug screen; all other steps keep their existing atlas IDs.

PRINT PAGE 26 ONLY

39 / Pairing debug

DEBUG ONLY

PAIRING SUCCESS CONTRACT

A healthy current Wi-Fi/IP handoff writes cody_firstboot=false and reads it back before any success UI. Debug builds then show screen 39. One awake tap dismisses it. Release builds contain no screen-39 route and go directly to 09.

SCREENS 04-09 / CONFIG_LUNASHELL_CODY_FORCE_FIRST_BOOT=n

Accepts y/n; Cody profile default: n. y replays first setup at each boot, even when cody_firstboot=false; n follows the saved value. The override does not change flash.

SCREEN 11 / REVISED INTERACTION

Use the five-look selector shown on planning page 24. Remove Back. Pearl Mist remains visibly selected by default, but Done starts disabled. The user must tap one row explicitly; tapping Pearl Mist itself is a valid confirmation. The selector remains reusable from screen 36 later.

FIRST-RUN ORDER

09 **You're online** → 10 **Make it yours** → 36 **Settings** → 11 **Cody's look**

12 **Connect Codex** → 13 **All set** → 14 **Looking for PC** → 15 **Connected**

SCREEN 12 / CONFIG_LUNA_SHELL_CODY_ENABLE_CODEX=y

Controls Codex connection setup. Explicitly configured y and currently always enabled; n skips 12, from 11 to 13.

Umberto Giacobbi | hello@umbertogiacobbi.biz
Copyright umbertogiacobbi.biz 2026 - confidential

Startup: two saved decisions

Local Wi-Fi/IP first. Then the retained Codex pairing. Public Internet is not required.

1 / No saved Wi-Fi profile

A valid absent-profile observation opens 04 > 05 > 06 > 07 > 09. Debug may show 39 before 09. Continue: 10 > 36 > 11 (skin), then the Codex decision.

2 / Saved Wi-Fi; waiting for the network

42 / No connection keeps the profile while the Wi-Fi owner reconnects. Network setup reopens 04-09; Later returns to Idle. Invalid/stale data shows UNAVAILABLE.

3 / LAN ready; no saved Codex pairing

40 / Connect Codex? Yes starts the code on 12. No returns to 16 / Idle without a settings write or CCP request. The next boot may ask again.

4 / LAN ready; saved Codex pairing

Adopt the saved attempt and search on 14. Only authenticated READY enters 15. A retained identity alone never means the PC is connected.

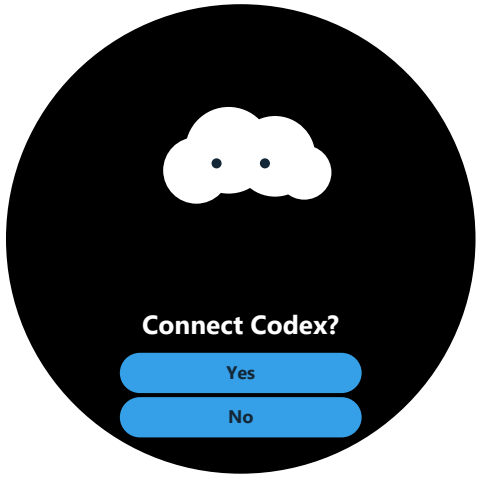

40 / Explicit Yes or No

Illustrative UI. Choice controls do not start pairing until the user acts.

Reopen setup from Cody

Hold the visible character still for 1.5 seconds. No button-based factory reset is added.

41 / Setup

Connect Codex opens a fresh display-code attempt. Network setup reopens 04-09. Left Back returns to Idle. Opening or leaving the menu erases no Wi-Fi, skin or pairing.

Keep the gesture deliberate

Available from stable Idle, PC search/connected and terminal CCP errors. Moving more than 12 px, a sample gap over 250 ms, rotation or a lifecycle interruption cancels the hold. Busy work and active provisioning are excluded; release before choosing.

PWR / existing policy

Single: standby/wake; active Debug defaults to screenshot countdown. Long release: standby. Debug double within 500 ms, or a continuous 3-second hold: restart preserving data.

BOOT / existing policy

Short: restore a dim/sleeping panel first, otherwise toggle fullscreen/status arcs. Hold 3 seconds: Debug restart; Release has no firmware reset action. Saved Wi-Fi and CCP survive restart.

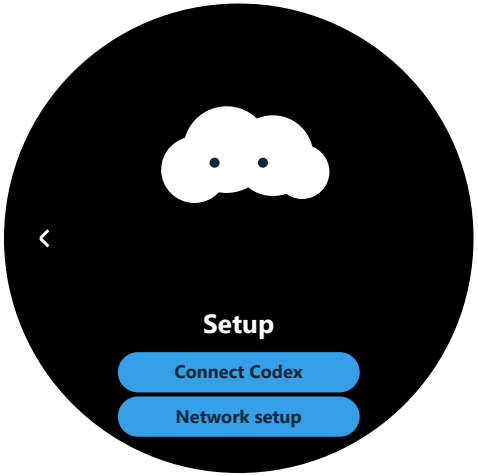

41 / Reversible setup access

Illustrative UI. A true factory erase is a separate explicitly requested operation.

Errata and corrections

Revision date: 09 October 2026 / CODY-SETUP-20261009

Original analysis gap

The initial analysis omitted startup with Wi-Fi already configured but no saved Codex pairing, and did not define a reversible user entry to setup. This was an original analysis gap (buco di analisi iniziale), now addressed in source.

Affected original pages and screen IDs

Original pages 02 (inventory), 07 (preferences/PC setup) and 26 (A04 handoff); screens 04-16, 35B, 36. The inventory gains 40, 41 and 42.

Corrections

Add 40 / optional Yes-No Codex choice, 41 / character-hold Setup, and 42 / reconnect wait. 09 means local Wi-Fi/IP; 11 selects a skin. No/Later performs no persistence or new CCP request. Saved pairing returns to 14 and requires authenticated READY for 15. PWR/BOOT do not clear pairing.

Preservation

All 26 previous pages, earlier corrections, bookmarks and unrelated content are retained. This dated addendum supersedes only the cited startup/setup/install statements; the original numbering stays stable.

Evidence and limits

Firmware source implementation and static integration review completed. PDF pages rendered and visually reviewed. No firmware tests, validation scans, configure/build/size, simulator execution, device pairing/input, flash or erase accompanied this revision. Runtime validation is pending.

Setup after standby

Hold Cody for 1.5 seconds to choose Network setup or Connect Codex.

04-06 / Escape the network loop

After inactivity, Welcome previously sent its first touch straight back to Let's pair. Welcome now opens 41 on a stationary tap release. A character hold also opens 41 from timeout Welcome, Let's pair or the installation QR page when no operation is busy.

35B / Wake, then hold

A finger already down during wake starts its 1.5-second hold only on a fresh acquired sample with the restored visible character. Hidden standby/wake time never counts. Movement over 12 px, report gaps over 250 ms or rotation cancel the hold. Release before choosing.

41 / Two explicit destinations

Upper Connect Codex opens 12 and its six-character CCP code using the local Wi-Fi/IP connection. Lower Network setup explicitly opens 04-09. No Internet probe is required. Active provisioning, worker admission and pending cancellation block menu access.

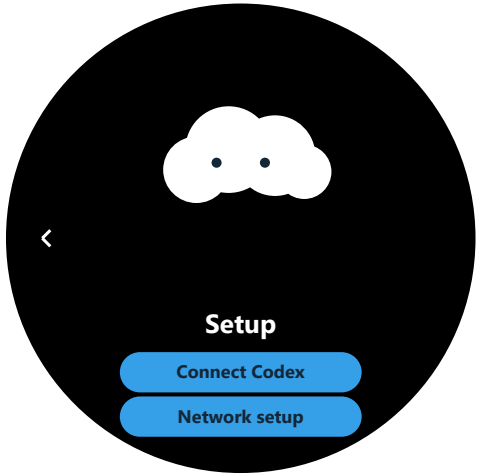

41 / Same choices after wake

Illustrative UI. Existing credentials and retained CCP pairing are preserved.

Errata and corrections

Revision date: 09 October 2026 / recovery correction

Original analysis gap

The first analysis did not reconcile the legacy Welcome timeout/touch path with reopening setup after standby. This was an original analysis gap (buco di analisi iniziale).

Affected pages and screens

Previous setup addendum: page 28. Affected screen IDs: 04, 05, 06, 12, 35B and 41. Earlier dated errata remain intact.

Corrections

Timeout Welcome tap release and stationary character holds on resting 04-06 reopen 41. A hold spanning wake starts only after visible restoration. Connect Codex goes to 12; Network setup goes to 04-09. Busy work and pending cleanup cannot be bypassed.

Evidence and limits

A user-authorized 90-second passive serial capture confirmed LAN/DHCP, Welcome inactivity return and standby. No Connect Codex press occurred in that capture; the initial wrong-selection report remains unresolved. The correction has static source review; corrected physical behavior still needs observation.

Preservation

All 29 preceding pages, prior errata and unrelated content are retained. This addendum supersedes only the cited escape/gesture behavior. Saved credentials are not erased.

Cody action language

IMPORTANT UI DECISION / approved 09 October 2026 / binding for future screens

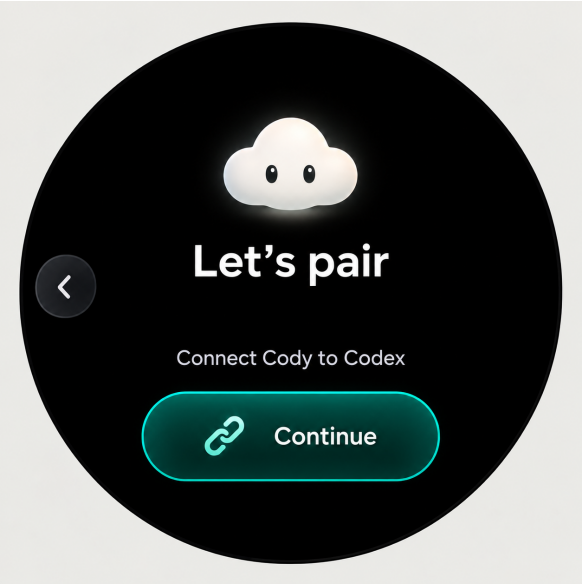

Layout rule

Two actions: rounded cards side by side. Three: the same pair plus one centered action below. One: a wide centered capsule with its icon left of the label.

Shared visual language

Dark restrained gradients, thin semantic borders, white labels and action icons. Teal: affirmative/Codex; blue: network; graphite: No/Later/Options; amber: Retry/Cancel.

Circular geometry

Keep Back separate at the left. Share rendering and touch bounds in every orientation. QR pages keep the quiet zone and use the compact single-action variant.

Options and touch continuity

Setup keeps Network setup and Connect Codex distinct. Options opens screen 10.

41 / Setup

Left card: Connect Codex. Right card: Network setup. Centered third action: Options. Options opens 10 / Make it yours, then 36 and 11 / skin. Done returns to Setup; Back retraces this local preferences path. No network or Codex association is erased or implicitly started.

40 / Connect Codex? and 42 / No connection

Yes/No and Network setup/Later are side by side, with purpose-specific icons and colors. Their existing explicit backend admission stays intact. Screen IDs 05-15 and 36 share the action styling where an action is present.

Observed freeze / original cause

An authorized 90-second reset/capture recorded Yes at 16497 ms, entry to Connect Codex at 16498 ms, then a CST9217 report with fifteen FF bytes and ACK=FF at 17112 ms (expected AB). ESP_ERR_INVALID_RESPONSE stopped the renderer. LAN/IP was ready.

Scoped runtime correction

The touch owner still rejects malformed reports and publishes the real error. After startup only, that acquisition error is optional for rendering. Discard queued gesture reports, cancel the gesture and require a real acquired release before another press. No release is invented. The same acquisition error can mean an I2C NACK; its origin is not inferred. Startup, other acquisition errors, locks and route failures remain terminal.

Evidence boundary

Native source integration and approved mockups are documented here. The underlying cause of the FF report and corrected physical touch/standby behavior remain unverified. A successful build/flash alone does not establish those outcomes.

Errata and corrections

Revision date: 09 October 2026 / important UI decision and touch correction

Important design decision

The user approved the two-column pair plus centered third action, and the wide single action with icon to the left. These are binding layouts from this revision onward. Gradients, icons and semantic colors are required across Cody screens.

Affected original material

Original pages 02 (inventory), 07 (preferences/PC setup) and 26 (A04 handoff); screens 04-16, 35B, 36. The inventory gains 40, 41 and 42. Also affected: screens 05-15, 35B, 36 and 40-42. Earlier stacked-blue control illustrations are superseded only in their action layout/styling.

Original analysis gaps

The initial analysis omitted Options re-entry and did not distinguish an optional malformed runtime touch report from renderer failure. This was a buco di analisi iniziale. Options now opens 10 and returns to Setup after preferences/skin.

Corrections and limits

Yes/No become horizontal and semantic. The measured invalid touch report retains its original error while rendering continues with interrupted gestures. Hardware FF root cause and physical corrected behavior remain open.

Preservation

All 31 preceding pages, earlier errata and unrelated content remain unchanged. Approved images are design references, not physical device screenshots.

Addendum / automatic context

CCP 0.4 / screens 15-20 and 32 / corrected 10 October 2026.

15 / Connected, waiting for Codex

An authenticated PC reply proves presence. Until a genuine prompt arrives, show Waiting for Codex. There is no device picker and no manual selection command in Codex.

The user prompt chooses context

Trusted UserPromptSubmit sends the exact chat and turn identities to CCP. The latest prompt-hook emission becomes the followed context for this PC's paired Cody devices. SessionStart alone does not select a chat.

Background chats stay in the background

Tool activity, completion and interrupts from another chat cannot steal the followed context. A new prompt in that other chat switches it. A tab click alone has no documented hook signal and is not claimed as focus tracking.

32 / Recover the same context

LAN reconnect restores the broker's current context. A broker restart waits for the next genuine prompt. The workspace label is display text, not identity. No transcripts, prompts or responses are retained by CCP.

Errata and corrections

Revision date: 10 October 2026 / authenticated chat activity

Affected original material

Original pages 9-10 and 25; screens 17-20, 21-24 and 32.

Analysis gap corrected

Screen 15 originally proved PC presence only. The initial analysis omitted explicit chat selection, shared runtime lifetime and event freshness. This was a buco di analisi iniziale; it is now addressed in source.

Contract and UI

CCP 0.3 adds metadata-only hooks, exact session selection and nonce-bound ACTIVITY messages. The canonical snapshot owns validity and errors. 18U adds the unavailable state. Setup re-entry preserves the selected context.

Evidence and limits

The user confirmed Connected on 10 October after real pairing. That evidence belongs to the previous firmware and CCP 0.2. New code is implemented; host checks, hook trust/autoload and physical 0.3 behavior are not established here. A response-ready event is never reported as task success.

Preservation

All 34 previous pages and earlier errata remain unchanged. The approved gradient/icon action layouts remain binding. These diagrams describe architecture, not captured device pixels.

Addendum / current integration contract

Screen IDs 15-20, 18U and 32 / genuine hooks are required.

PC ownership

One local broker owns the paired PC identity and authenticated activity. Multiple MCP clients share it. Trusted hook metadata supplies session/turn/tool identities; prompts, replies, transcripts and tool arguments are discarded at ingestion.

Device ownership

Cody receives nonce-bound ACTIVITY alongside authenticated READY. The canonical snapshot owns validity, timestamps and real errors. UI and audio consume it; neither chooses a chat nor reads host data independently.

Limits and observation

Eight seconds without packets expires device activity; 120 seconds without an active hook marks activity unavailable. Missing input never becomes success. Hook acceptance is not evidence of displayed pixels or audible playback.

Deployment and references

CCP 0.4 removes manual select/clear tools. Install the updated plugin, review/trust its hooks and submit a real prompt. Source: learn.chatgpt.com/docs/hooks and developers.openai.com/plugins/build/plugins. Actual hook/display delivery remains to verify.

Errata and corrections

Revision date: 10 October 2026 / CODY-AUTO-CONTEXT-20261010

Main pages updated

Current flow is integrated from the cover onward, using screen IDs as the reference. Screens 10-15, 36, 40 and 41 now show Skin, real pairing and the agreed setup access. Screens 15-20, 18U and 32 describe automatic context and real activity.

Manual selection removed

The old Choose/Pick a chat prerequisite was an initial analysis gap (buco di analisi iniziale). CCP associates the latest genuine prompt automatically. Cody only presents the supplied context. Background chat events do not change it.

History retained

Earlier addenda, unrelated pages and errata remain at the end. The activity addendum itself is corrected. Historical errata mentioning explicit selection describe the previous decision and are superseded by this dated revision, not current instructions.

Evidence and limits

CCP 0.4 and the Waiting for Codex caption are source changes. New host checks, plugin hook execution and physical behavior require their own evidence. The prior successful Connected/standby capture does not verify this revision. Screen artwork is illustrative.

Addendum / pairing conservato

Registro della decisione / 10 ottobre 2026 / screen 04-16, 35B, 36 e 40-42.

Primo avvio / Dispositivo gia' configurato

Senza Wi-Fi salvato apro 04-09. Con credenziali ma senza IP uso 42. Con LAN e senza pairing offro 40. Con un record valido riprendo 14-15, senza verificare Internet.

Setup / Consenso alla sostituzione

Apro 41 tenendo premuto il personaggio per 1,5 secondi. Con un pairing salvato mostro Already paired: Keep pairing, Pair again oppure Forget. Retry riprende la ricerca senza codice nuovo.

Pairing / Presenza / Attivita'

Con 13 confermo il pairing. Let's go cerca subito il PC. Su 15 confermo CCP e attendo il prompt reale. Gli hook seguono la sua chat automaticamente: ho eliminato la scelta manuale.

Options / Scelte locali

Apro Make it yours da Options e riutilizzo Settings e Skin. Torno al chiamante corretto. Tengo separati preferenze, sostituzione del PC e qualsiasi cancellazione esplicita.

Addendum / casi di recupero

Screen 14-16, 18U, 32, 35A/35B e 42 / conservo l'identita' salvata.

Internet giu', LAN funzionante

Continuo a usare il collegamento Wi-Fi/IP locale tra Cody e CCP. Tengo separata la disponibilita' dei servizi online di Codex: il PC presente sulla LAN non mi garantisce una risposta del modello.

Wi-Fi o IP locale assenti

Conservo credenziali e PC associato. All'avvio mostro 42 con Network setup o Later. Durante il recupero attendo la LAN e riprovo con l'identita' salvata. Gli errori reali del trasporto restano visibili nello stato.

PC o CCP assenti

Continuo la ricerca su 14; uso 32 per la perdita dopo un'attivita' gia' seguita. Retry riprende la ricerca senza nuovo codice. Posso comunque tenere premuto Cody per 1,5 secondi e aprire Setup.

35A / 35B e aggiornamento firmware

Con lo standby ordinario conservo percorso e pairing. Al risveglio recupero la presenza autenticata. Un flash applicativo normale preserva NVS; cancellazione, dati danneggiati o altra identita' PC sono casi distinti.

Addendum / conferma e reset

Screen 12, 13, 40 e 41 / conservo rete, skin, preferenze e log.

Due candidati, attivi conservati

Sul PC salvo il candidato DPAPI prima di PAIR; sul Cody uso ccp_pending. Tengo separati i vecchi attivi. CONFIRM oppure READY fresco provano il PC e consentono commit e rilettura sul Cody.

Chiudo con una prova del commit

Il PC promuove dopo ACTIVE o COMMITTED autenticati, mai per il solo FIND. Dopo ogni READY valido Cody ripete COMMITTED con il nonce corrente: recupero riavvii e ACK persi senza un altro codice.

Cancel / Chiudo il tentativo

Dal codice pronto scarto il candidato Cody. Conservo il vecchio link operativo; sul PC il candidato resta pending. Per sostituirlo richiedo nuovo codice e replace_pending:true esplicito. Una prova con la vecchia chiave non autorizza la cancellazione.

Forget / Solo il pairing Codex

Confermo Forget pairing con Go back / Forget e Only Codex is reset. Cancello solo i record CCP di Cody; il PC conserva il suo. Dopo l'esito reale mostro Unpaired / Pairing removed, poi Done -> Setup.

Errata and corrections

Data revisione: 10 ottobre 2026 / CODY-RETAINED-FLOW-20261010

Pagine originali 1, 2, 4, 5, 6, 7, 8, 9, 10, 14, 16, 21, 22

Ho integrato il flow corrente nelle pagine principali, conservando quelle non coinvolte e tutti gli addenda/errata precedenti. Riferisco il percorso agli screen ID anche quando cambia la paginazione.

Screen 10-16, 32, 35B e 40-42

Options salva quattro preferenze; Already paired offre Keep pairing, Pair again e Forget. Separo Retry, Cancel e reset. Uso journal separati e COMMITTED per il commit reale. Let's go cerca subito.

Buco di analisi iniziale e responsabilita'

Avevo mescolato commissioning, recupero e attivita', senza chiedere conferma della sostituzione. Ho esplicitato queste decisioni. CCP segue il prompt autentico; ho ritirato la vecchia scelta manuale della chat.

Decisione UI ed evidenza

Conservo il linguaggio approvato: gradienti, icone, coppia orizzontale o capsula singola e pulsanti senza teletype. Con questa revisione aggiorno sorgenti e documenti; elenco separatamente le prove di dispositivo, hook e simulatore ancora da completare.

Addendum / notifiche e decisioni

Revisione 10 ottobre 2026 / screen 26, 27 e 31.

26 / Codex needs you e Open

Mostro il contesto dichiarato, il titolo e l'avviso. La richiesta ha un ticket distinto e dura 180 secondi. Aprire o chiudere una vista non allunga la scadenza e non seleziona una risposta.

27 / Choose a reply

Uso due card affiancate; con tre aggiungo quella centrata sotto. Ogni scelta ha un ID stabile e un significato proprio. Back torna a 26 e conserva la domanda, senza inviare.

27 / Review choice

La scelta apre un riepilogo con descrizione e capsula Send. Back mi riporta alle opzioni. Dopo Send tengo la scelta ferma e mostro Sending reply. Non aggiungo un quarto pulsante sotto tre card.

31 / Reply sent dopo consegna

L'ACK UDP received lascia Waiting for Codex: CCP ha registrato la scelta. Solo con delivered mostro Reply sent e Delivered to Codex; Done riprende il contesto precedente 17, 18 o 16.

Addendum / PR solo in lettura

A03 resta in vigore / screen 21-24; 25 ritirato.

21 / PR pending

Osservo soltanto il PR indicato. Conservo l'esatto head dello snapshot esplicito fornito da Codex. Non uso Stop come prova dei check e non offro merge, approve, close, rerun o comment.

22 / Checks running e Checks passed

Mostro numeri solo da un elenco completo e attuale sullo stesso head. Checks passed non ha pulsanti: attendo la fine della narrativa e tre secondi, poi torno al lavoro.

23 -> 24 / View failures

L'unica azione apre i nomi reali dei check falliti: al massimo sei, fino a 48 caratteri ASCII ciascuno. Un input non rappresentabile viene rifiutato esplicitamente; non taglio nomi e non invento totali.

24 sola lettura / 25 ritirato

Mostro tre nomi per pagina, fino a due righe ciascuno; scorro verticalmente e tengo Back laterale. Non offro View log o righe selezionabili. Log, diagnosi e correzioni restano sul PC.

Addendum / consegna e comandi

Screen 31, 32 e nuovo setup / distinguo accettazione e risultato.

received non e' delivered

Il poll restituisce scelta e answer_id. Un poll successivo con acknowledge_answer_id uguale prova la ricezione del chiamante: solo allora passo a delivered e allo screen 31.

Scadenza e consegna incerta

I 180 secondi valgono anche in received. Se ho gia' ammesso Send mostro Reply unconfirmed: puo' mancare solo l'ACK. Prima di Send uso Request expired. Nessun Retry o ACK tardivo riapre la domanda.

Riavvio esplicito / dati conservati

Scrivo 'resetta il device codice 043533477' nel messaggio corrente: nove cifre, zero compreso. E' un controllo anti-equivoco, non una password; non lo completo dai documenti. Uso il peer paired LAN, dati conservati. ACK = accepted; boot = nuova presenza.

Factory reset / primo setup

Con 'formatta cody 043533477' elimino preferenze, Wi-Fi e pairing; conservo firmware, asset e SD. ACK indica ammissione. Riavvio solo dopo cancellazione verificata; poi riparto dal setup Wi-Fi. Un errore resta visibile e non avvia il reboot.

Errata and corrections

Data revisione: 10 ottobre 2026 / CODY-NOTIFICATIONS-20261010

Pagine originali 1, 2, 11, 12, 13, 14, 16, 21, 22

Ho aggiornato le pagine principali coinvolte, mantenendo quelle estranee al flow e gli addenda precedenti. Uso gli screen ID.

Screen 21-27 e 31-32

Ho applicato A03: PR in sola lettura e 25 ritirato. Ho rimosso View log e il vecchio elenco verticale. Ora 27 ha card e riepilogo Send; 31 richiede delivered dopo l'ACK del destinatario.

Buco di analisi iniziale

Avevo lasciato ambigui ricevuta, consegna e scadenza, oltre a illustrazioni PR superate. Li separo con ticket, received/delivered e 180 secondi. Timeout e offline non scelgono risposte.

Storico, comandi e prove

Ho separato riavvio e factory reset: il primo conserva i dati, il secondo cancella la configurazione per tornare al setup. ACK indica ammissione. Conservo storico ed errori reali; gli esiti host e fisici sono in done.md.

Addendum / boot and Wi-Fi

Revision date: 10 October 2026 / branding, 01-09 and 42.

Identity and timing

Cody AI Companion and A distraction-free sidekick appear together, above the complete floppy artwork. The original 42-frame animation retains its 3.5-second cycle; startup work can extend wall time.

Layout and next route

Title y=60; subtitle y=110; artwork (137,164), 192 x 219. After local startup, absent Wi-Fi opens Welcome 04; missing association/IP opens 42; a valid LAN without pairing opens 40; retained pairing searches its PC on 14.

Show QR, then Pair Cody

05 opens the installation QR on 06 without starting radios. Pair Cody starts Bluetooth on 07. A session QR appears only at ReadyToScan, then retires when credentials or connection are in progress. Cancel waits for confirmed cleanup.

A real local connection

09 offers Continue only with valid current Wi-Fi/IP. No connection on 42 offers Network setup or Later. CCP needs the local LAN; public Internet availability is a separate fact. Debug handoff 39 needs a fresh tap; Release continues to 09.

Addendum / pairing and connection

Revision date: 10 October 2026 / screens 12-15, 40 and 41.

Reopen choices

Hold the visible character still for 1.5 seconds to open Setup. Connect Codex and Network setup share one row; Options is centered below. Release the opening contact before selecting. Back retraces the valid previous route.

Keep, replace or forget

Already paired offers Keep pairing, Pair again and Forget. Only Pair again authorizes replacement; Forget opens a second confirmation. Pairing paused identifies an incomplete candidate. Pairing error preserves the storage cause and admits explicit removal only.

Prepare, then read

12 shows Preparing secure code / Please wait / About 30 seconds until a code exists. The estimate is not measured progress. Use only all six characters visible on the intended Cody after discovery. The backend window is five minutes; screen inactivity is three minutes from code readiness.

Confirm and connect

You're all set on 13 follows the two-sided persisted handshake. Let's go searches the retained PC immediately on 14, or reuses valid authenticated presence on 15. The earlier ten-second Idle detour is removed. READY establishes presence; genuine prompt hooks establish chat activity.

Addendum / settings and controls

Revision date: 10 October 2026 / screens 10, 11, 36 and 41.

Four compact rows

Shake to wake, Auto-rotate and Sounds each have persistent On/Off values. Orientation shows Auto while auto-rotation is enabled; manual choices are 0 or 180 when it is Off. Sounds Off stops playback while keeping microphone and wake word active.

Save before confirming

Next opens Settings: Personalization / Choose Cody's look. Continue opens Skin: Pearl Mist, Aurora Veil, Cosmic Stardust, Enchanted Mosaic and Dreamwave, saved by stable ID. Saving retains the prior value; successful write/readback confirms the change. Save failed and Retry preserve the cause and requested value; no silent repair.

Controls appear together

Two actions use rounded gradient cards side by side; three add one centered action below. Single actions use an icon-left capsule. Captions have no teletype: controls and touch become available together after the title and main body line. QR quiet zones and local circular chords remain protected.

How to read the drawings

These are static documentation schematics derived from current source geometry and approved action references, not simulator frames or physical captures. Numeric values are layout coordinates, not sensor measurements. Firmware, simulator and device validation are outside this document revision.

Errata and corrections

Revision date: 10 October 2026 / CODY-SCREENS-20261010

Affected original pages

cody-planning-atlas-v1.pdf: current pages 4, 5, 6, 7, 8. Original screen references: branding before 01-03; Wi-Fi 04-09/42; preferences 10/36/11; Codex 12-15/40/41. Page numbers and screen IDs are distinct.

Corrections recorded

Replace the old title-free/twofold boot illustration with the current title, subtitle and 192 x 219 artwork. Replace outdated setup, code preparation, connection detour and settings descriptions with the source-based contracts above.

Historical record

All earlier addenda and errata are preserved in their existing order, along with unrelated pages. Historical boot sizes and old next-route diagrams remain dated evidence; the revised current pages and this addendum supersede them only for these topics.

How to read the drawings

These are static documentation schematics derived from current source geometry and approved action references, not simulator frames or physical captures. Numeric values are layout coordinates, not sensor measurements. Firmware, simulator and device validation are outside this document revision.