



Appliance

How to enable license modules

Version 5.18.0.2





UNITED SECURITY PROVIDERS

Copyright © 2026 United Security Providers AG

This document is protected by copyright under the applicable laws and international treaties. No part of this document may be reproduced in any form and distributed to third parties by any means without prior written authorization of United Security Providers AG.

DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESSED OR IMPLIED REPRESENTATIONS AND WARRANTIES, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED TO THE EXTENT PERMISSIBLE UNDER THE APPLICABLE LAWS.



Contents

1	How to enable license options for the USP Secure Entry Server® Appliance	1
1.1	Download Configuration Backup	1
1.2	Add the module key	1
1.3	Upload modified configuration backup	1




1 How to enable license options for the USP Secure Entry Server® Appliance

Follow the step-by-step instruction to enable the license modules. The license module property keys will be provided by your account manager.

1.1 Download Configuration Backup

1. Login to the USP Secure Entry Server® Appliance administration GUI with administrator role.
2. Go to *Configuration* → *Manage and Deploy* → *Import/Export*
3. In the *Download configuration* section, select *Backup* and uncheck *Create compressed archive* checkbox. Then press the button *Download* to save the configuration archive.
Store the provided archive on your local disk when the *Save as* dialog is shown.

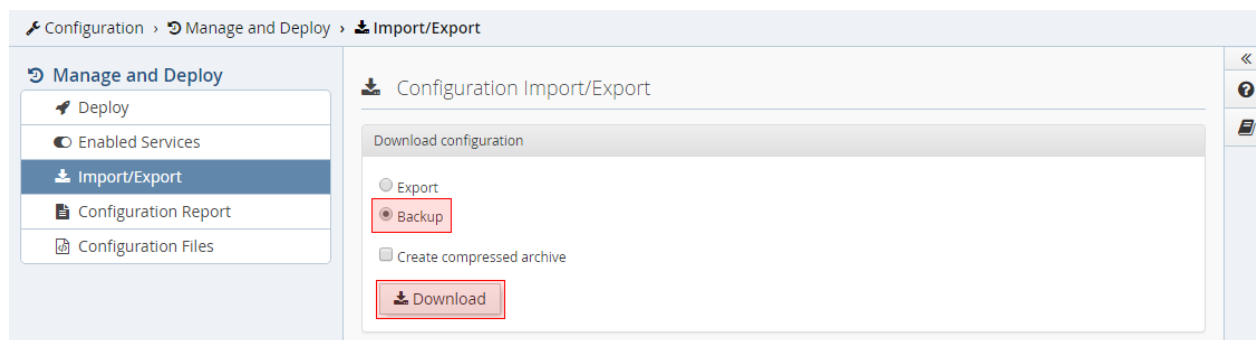

1.2 Add the module key

1. Extract the content of the downloaded configuration backup .tar archive on your local disk.
2. Open the file <extracted folder>/settings/featuretoggles.properties in your favorite text editor.
3. Add the provided properties at the end of the file in the form `propertyname=true` and save the file.
The properties must be separated by newlines.
4. Create a new .tar archive containing the modified file and the rest of the previously extracted archive.

Note

The structure of the new created archive must exactly match the structure of the downloaded one, e.g. no additional folders.

1.3 Upload modified configuration backup



Warning

You must ensure, that no changes has been performed between the download of the configuration backup and the upload of the modified one. Otherwise the changes done before the upload will be lost!
Additionally you should ensure that activated version is the latest revision shown in the deploy history!

1. Login to the USP Secure Entry Server® Appliance administration GUI with administrator role.



2. Go to *Configuration* → *Manage and Deploy* → *Import/Export*
3. In the *Upload configuration* section, press *Choose file* and choose the new *.tar* archive created in the previous section.



4. Press *Import/Recover* and await the upload process to finish. You will see a green "Recovery successful." message at the top of the page.



5. Go to *Configuration* → *Manage and Deploy* → *Deploy view*.
No pending changes should be shown, but no configuration is marked as activated.
6. Press *Activate* to activate the latest configuration.
Wait until the process is finished.
7. Go to *Administration* → *Appliance Control*
8. Press *Restart GUI* in the *Power Switch* section and press *Ok* in the confirmation dialog. This will restart the GUI which will take a moment. Afterwards you can login again and the new modules will be ready to use.

