
Maag enclosure · frosted panels, Rev A


TUFFAK GP Matte polycarbonate, 1/8 in (3.175 mm), frosted. Three 48 × 96 in sheets, six panels. Cut to size and drill.
All dimensions mm. Hole positions from each panel's lower left corner, seen from the side that faces OUT (the DXFs are drawn the same way).
Tolerances: outline ± 1, hole positions ± 0.5, holes + 0.3 / − 0. Corners R3. Keep the protective film on until install; please deburr the holes.

Sheet A · 48 × 96 in

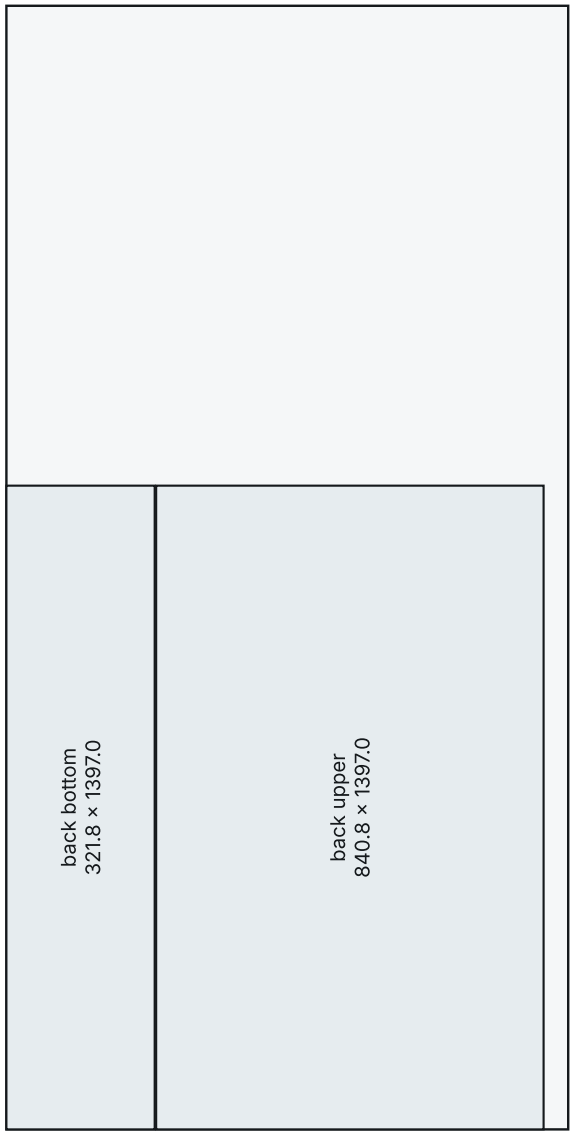


spare 53 across, 1041 along

Sheet B · 48 × 96 in

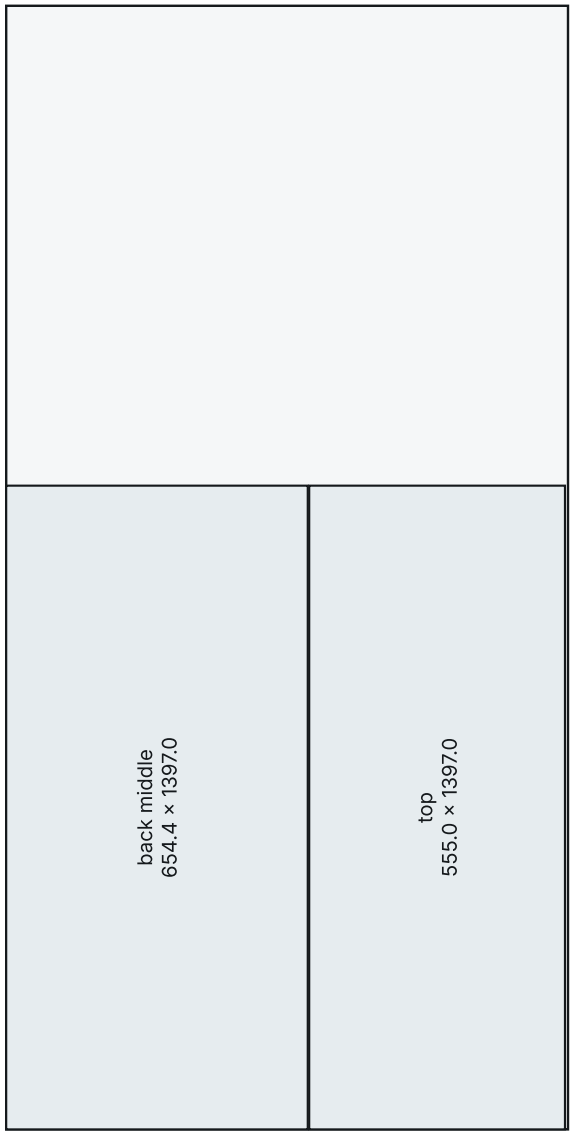

spare 7 across, 1041 along


Sheet C · 48 × 96 in

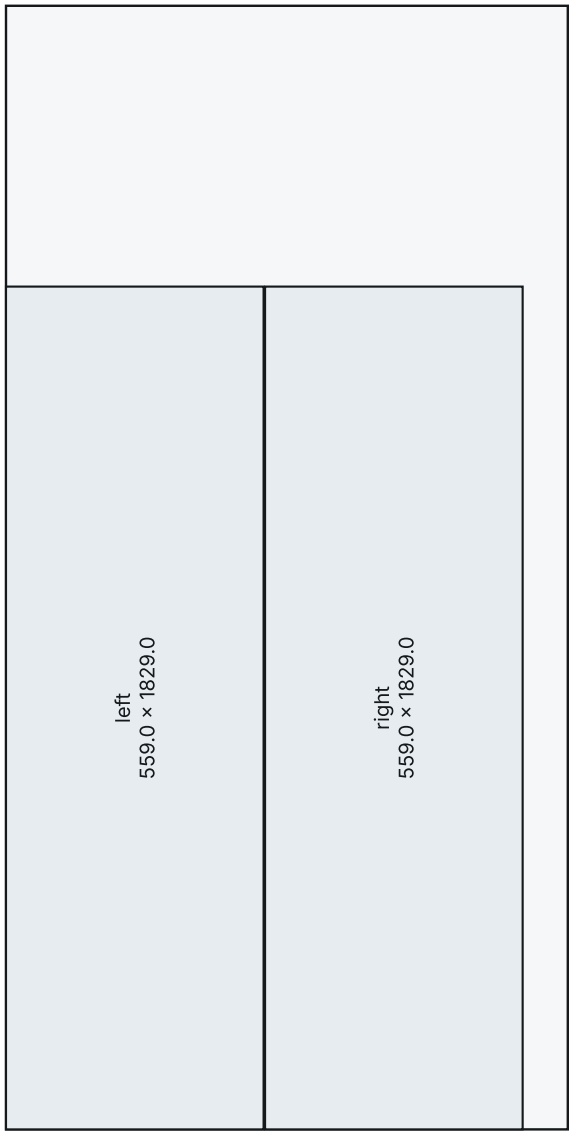

spare 98 across, 609 along

Panel · left · 559.0 × 1829.0 · qty 1

File: acplastics/panel_left.dxf. Seen from outside. 28 holes.

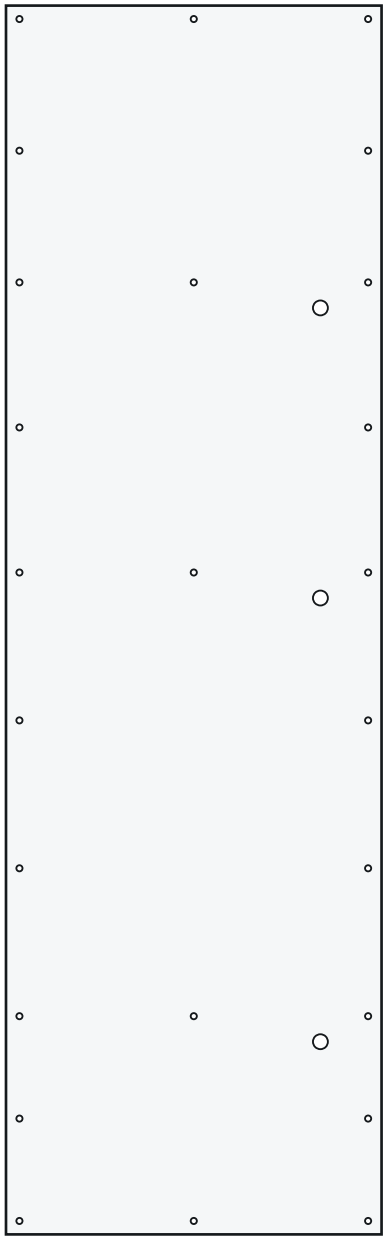

lower left corner = (0, 0)

bottom: floor · right edge: FRONT of the cabinet

Ø 22.2 ×3 · grommet


(468.0, 286.8) (468.0, 947.2) (468.0, 1379.0)

Ø 8 ×25 · screw holes

(20.0, 20.0) (279.5, 20.0) (539.0, 20.0)
(20.0, 172.4) (539.0, 172.4) (20.0, 324.8)
(279.5, 324.8) (539.0, 324.8) (20.0, 544.9)
(539.0, 544.9) (20.0, 765.1) (539.0, 765.1)
(20.0, 985.2) (279.5, 985.2) (539.0, 985.2)
(20.0, 1201.1) (539.0, 1201.1) (20.0, 1417.0)
(279.5, 1417.0) (539.0, 1417.0) (20.0, 1613.0)
(539.0, 1613.0) (20.0, 1809.0) (279.5, 1809.0)
(539.0, 1809.0)

Panel · right · 559.0 × 1829.0 · qty 1

File: acplastics/panel_right.dxf. Seen from outside. 47 holes.

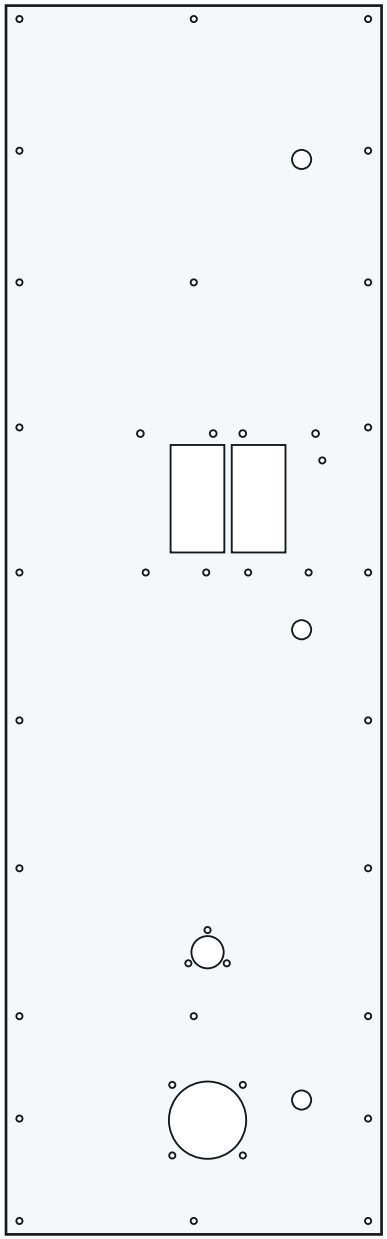

lower left corner = (0, 0)

bottom: floor · left edge: FRONT of the cabinet

80 × 160, corners R25 · feeder opening
centre (285.0, 1095.0)

80 × 160, corners R25 · feeder opening
centre (376.0, 1095.0)

Ø 115 ×1 · intake opening
(300.0, 170.0)

Ø 48 ×1 · duct
(300.0, 420.0)

Ø 28.5 ×3 · cable gland PG21
(440.0, 200.0) (440.0, 900.0) (440.0, 1600.0)

Ø 10 ×4 · well nuts, harvest feeder
(200.0, 1192.0) (308.4, 1192.0) (352.4, 1192.0) (460.8, 1192.0)

Ø 8 ×24 · screw holes
(20.0, 20.0) (279.5, 20.0) (539.0, 20.0)
(20.0, 172.4) (539.0, 172.4) (20.0, 324.8)
(279.5, 324.8) (539.0, 324.8) (20.0, 544.9)
(539.0, 544.9) (20.0, 765.1) (539.0, 765.1)
(20.0, 985.2) (539.0, 985.2) (20.0, 1201.1)
(539.0, 1201.1) (20.0, 1417.0) (279.5, 1417.0)
(539.0, 1417.0) (20.0, 1613.0) (539.0, 1613.0)
(20.0, 1809.0) (279.5, 1809.0) (539.0, 1809.0)

Ø 8 ×4 · screw holes, harvest feeder
(208.0, 985.2) (298.0, 985.2) (360.4, 985.2) (450.4, 985.2)

Ø 8 ×1 · feeder switch cable
(470.8, 1152.0)

Ø 4.5 ×4 · grill screw
(247.5, 117.5) (352.5, 117.5) (247.5, 222.5) (352.5, 222.5)

Ø 4.5 ×3 · collar screw
(271.4, 403.5) (328.6, 403.5) (300.0, 453.0)

Panel · back bottom · 1397.0 × 321.8 · qty 1

File: acplastics/panel_back_bottom.dxf. Seen from outside. 8 holes.

Ø 8 ×8 · screw holes

(20.0, 20.0) (291.4, 20.0) (562.8, 20.0)
(834.2, 20.0) (1105.6, 20.0) (1377.0, 20.0)
(20.0, 172.4) (1377.0, 172.4)



lower left corner = (0, 0)


bottom: floor side · seen from behind the cabinet

Panel · back middle · 1397.0 × 654.4 · qty 1

File: acplastics/panel_back_middle.dxf. Seen from outside. 4 holes.

Ø 8 ×4 · screw holes

(20.0, 217.1) (1377.0, 217.1) (20.0, 437.3)
(1377.0, 437.3)



lower left corner = (0, 0)


bottom: floor side · seen from behind the cabinet

Panel · back upper · 1397.0 × 840.8 · qty 1

File: acplastics/panel_back_upper.dxf. Seen from outside. 16 holes.

Ø 8 ×16 · screw holes

(20.0, 212.9) (1377.0, 212.9) (20.0, 428.8)
(291.4, 428.8) (562.8, 428.8) (834.2, 428.8)
(1105.6, 428.8) (1377.0, 428.8) (20.0, 624.8)
(1377.0, 624.8) (20.0, 820.8) (291.4, 820.8)
(562.8, 820.8) (834.2, 820.8) (1105.6, 820.8)
(1377.0, 820.8)



lower left corner = (0, 0)

bottom: floor side · seen from behind the cabinet

Panel · top · 1397.0 × 555.0 · qty 1

File: acplastics/panel_top.dxf. Seen from outside. 28 holes.

Ø 115 ×2 · fan opening


(420.0, 338.0) (977.0, 338.0)

Ø 8 ×18 · screw holes

(60.0, 18.0) (315.4, 18.0) (570.8, 18.0)
(826.2, 18.0) (1081.6, 18.0) (1337.0, 18.0)
(20.0, 58.0) (1377.0, 58.0) (20.0, 277.5)
(1377.0, 277.5) (20.0, 497.0) (1377.0, 497.0)
(60.0, 537.0) (315.4, 537.0) (570.8, 537.0)
(826.2, 537.0) (1081.6, 537.0) (1337.0, 537.0)

Ø 4.5 ×8 · fan screw

(367.5, 285.5) (472.5, 285.5) (924.5, 285.5)
(1029.5, 285.5) (367.5, 390.5) (472.5, 390.5)
(924.5, 390.5) (1029.5, 390.5)

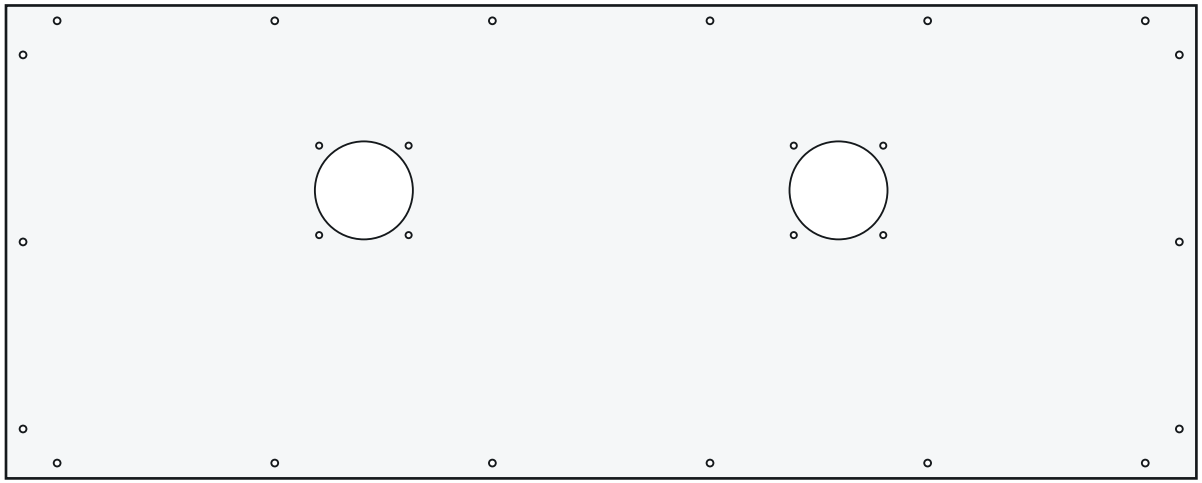

lower left corner = (0, 0)

bottom edge: FRONT of the cabinet · seen from above