Risposte di Funzioni Di Trasferimento (FDT)

Setup

```
close all;
clear all;
clc;
FS = 18; % FontSize
LW = 2; % LineWidth
```

Variabili simboliche

```
syms Yel(s)
syms yel(t)
```

Esempio

Asse del tempo

```
tt = linspace(0, 10, 1000);
```

Esercizio 2.11.1

FDT

Modello del sistema

```
[A,B,C,D] = tf2ss(G.Numerator{1}, G.Denominator{1})

A = 2×2
-1.5000 -1.0000
```

```
-1.5000 -1.0000

1.0000 0

B = 2×1

1

0

C = 1×2

4.5000 0.5000

D = 0
```

Autovalori

```
eig(A)
```

```
ans = 2 \times 1 complex
```

```
-0.7500 + 0.6614i
-0.7500 - 0.6614i
```

Evoluzione libera

Trasformata

```
Yel(s) = simplify(free_evolution(A, C, ones(size(C))'));
pretty(Yel)
```

Evoluzione libera nel dominio del tempo


```
yel(t) = simplify(ilaplace(Yel));
pretty(vpa(yel, 4))
```

```
\exp(-0.75 t) (\cos(0.6614 t) - \sin(0.6614 t) 2.117) 5.0
```


Grafico

Evoluzione libera

```
figure('Name','Evoluzione libera')
plot(tt, yel(tt))
xlim([tt(1) tt(end)])
xlabel('$$t$$', 'interpreter','latex', 'FontSize',20)
ylabel('$$y_{el}(t)$$', 'Interpreter','latex', 'FontSize',20)
yline(double(yel(tt(end))), '--', 'LineWidth',0.5, 'Color',[0.6 0.6 0.6])
title("Evoluzione libera", 'Interpreter','latex', 'FontSize',20)
```

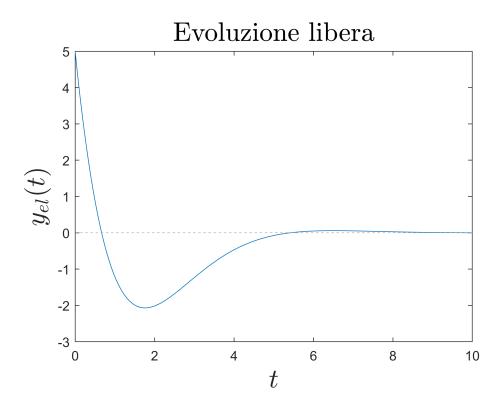

```
figure('Name','Risposta al gradino')
step(G)
```

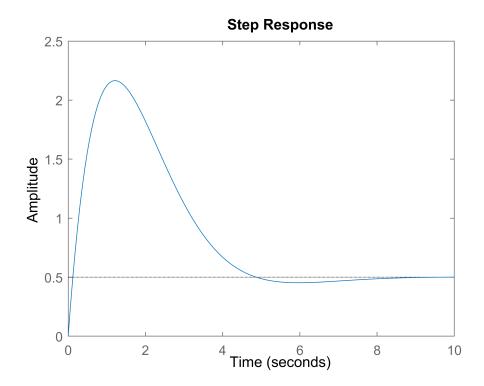


```
G1 = tf(G1)

G1 =

10
----
s + 2
```

Continuous-time transfer function.

```
figure('Name', 'G1')
step(G1)
[~, lgd, ~, ~] = legend('Location', 'best');
set(findall(gcf,'-property', 'FontSize'), 'FontSize', FS)
set(findall(gcf,'Type','Line'),'LineWidth',LW)
set(findobj(lgd, 'Type','Line'),'LineWidth',LW)
```

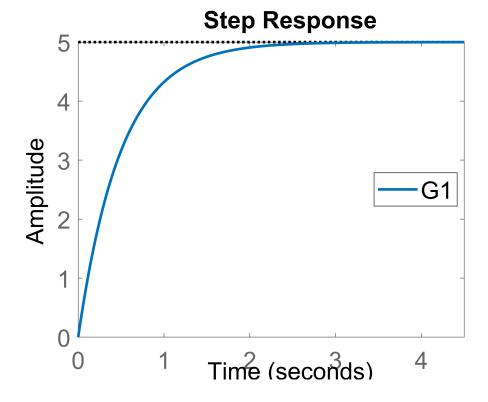

```
G2 = zpk([], [-2, -10-10j, -10+10j], 2000)

G2 = 

2000


(s+2) (s^2 + 20s + 200)

Continuous-time zero/pole/gain model.

G2 = tf(G2)
```

Continuous-time transfer function.

```
figure('Name', 'G2')
step(G2)
[~, lgd, ~, ~] = legend('Location','best');
set(findall(gcf,'-property','FontSize'),'FontSize',FS)
set(findall(gcf,'Type','Line'),'LineWidth',LW)
set(findobj(lgd, 'Type','Line'),'LineWidth',LW)
```

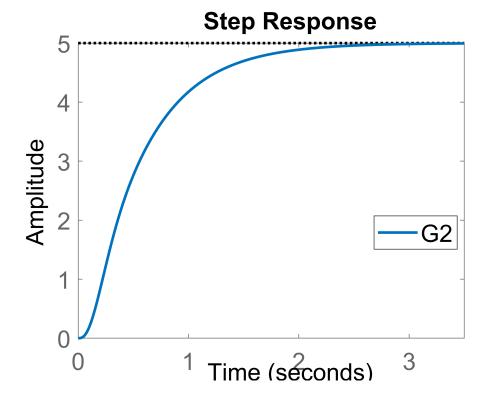

```
G3 = zpk([], [-2, -2-2j, -2+2j], 80)

G3 = 

80

(s+2) (s^2 + 4s + 8)


Continuous-time zero/pole/gain model.
```

```
G3 = tf(G3)
G3 =
```

80 -----s^3 + 6 s^2 + 16 s + 16

Continuous-time transfer function.

```
figure('Name', 'G3')
step(G3)
[~, lgd, ~, ~] = legend('Location','best');
set(findall(gcf,'-property','FontSize'),'FontSize',FS)
set(findall(gcf,'Type','Line'),'LineWidth',LW)
set(findobj(lgd, 'Type','Line'),'LineWidth',LW)
```

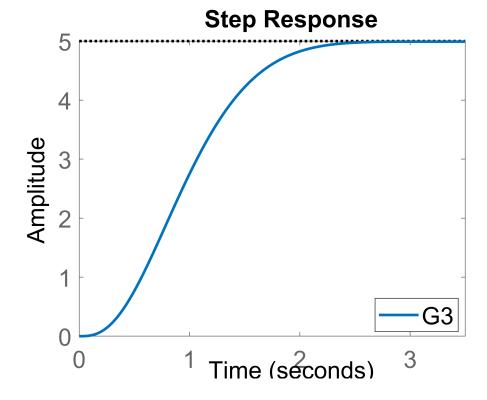

```
G4 = zpk([], [-2, -2-20j, -2+20j], 4040)

G4 = 

4040

(s+2) (s^2 + 4s + 404)

Continuous-time zero/pole/gain model.

G4 = tf(G4)
```

```
G4 =


4040

----

$^3 + 6 $^2 + 412 $ + 808
```

Continuous-time transfer function.

```
figure('Name', 'G4')
step(G4)
[~, lgd, ~, ~] = legend('Location', 'best');
set(findall(gcf,'-property', 'FontSize'), 'FontSize', FS)
set(findall(gcf,'Type','Line'),'LineWidth',LW)
set(findobj(lgd, 'Type','Line'),'LineWidth',LW)
```

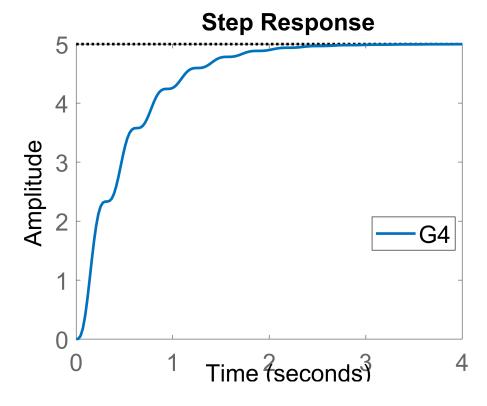

```
G5 = zpk([], [-10, -2-20j, -2+20j], 20200)

G5 =

20200

(s+10) (s^2 + 4s + 404)

Continuous-time zero/pole/gain model.

G5 = tf(G5)
```


```
G5 = 20200
-----s^3 + 14 s^2 + 444 s + 4040
```

Continuous-time transfer function.

Risposta al gradino

```
figure('Name', 'G5')
step(G5)
[~, lgd, ~, ~] = legend('Location','best');
set(findall(gcf,'-property','FontSize'),'FontSize',FS)
set(findall(gcf,'Type','Line'),'LineWidth',LW)
set(findobj(lgd, 'Type','Line'),'LineWidth',LW)
```

Step Response

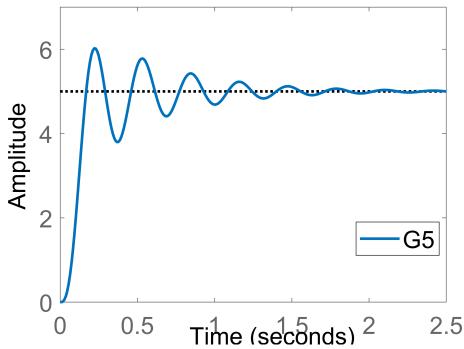

H1


Funzione di trasferimento

Risposta al gradino

 $s^3 + 22 s^2 + 10140 s + 20200$

Continuous-time transfer function.

```
figure('Name', 'H1')
step(H1)
[~, lgd, ~, ~] = legend('Location', 'best');
set(findall(gcf,'-property','FontSize'),'FontSize',FS)
set(findall(gcf,'Type','Line'),'LineWidth',LW)
set(findobj(lgd, 'Type','Line'),'LineWidth',LW)
```

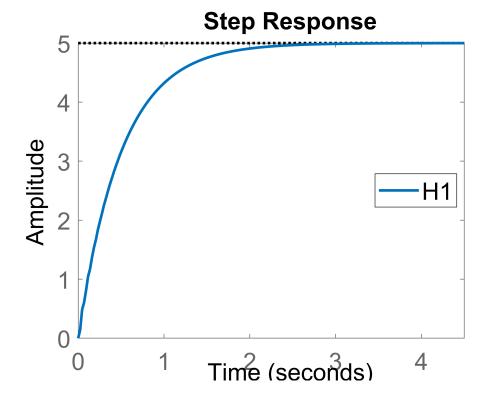

```
H2 = zpk([-1.9], [-2, -10-100j, -10+100j], 53157.89474)

H2 =

53158 (s+1.9)

(s+2) (s^2 + 20s + 1.01e04)

Continuous-time zero/pole/gain model.

H2 = tf(H2)


H2 =

5.316e04 s + 1.01e05
```

Continuous-time transfer function.

 $s^3 + 22 s^2 + 10140 s + 20200$

```
figure('Name', 'H2')
step(H2)
[~, lgd, ~, ~] = legend('Location','best');
set(findall(gcf,'-property','FontSize'),'FontSize',FS)
set(findall(gcf,'Type','Line'),'LineWidth',LW)
set(findobj(lgd, 'Type','Line'),'LineWidth',LW)
```

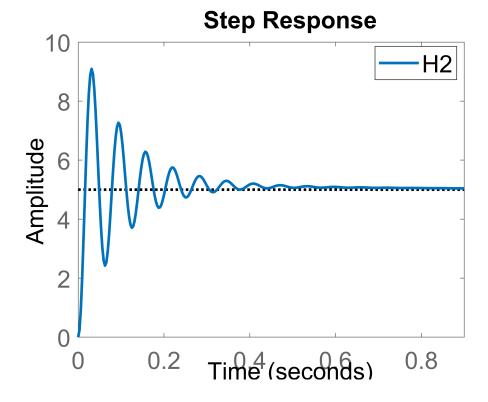

```
H3 = zpk([-5], [-2, -10-100j, -10+100j], 20200)

H3 =

20200 (s+5)

(s+2) (s^2 + 20s + 1.01e04)

Continuous-time zero/pole/gain model.

H3 = tf(H3)

H3 =


20200 s + 101000
```

Risposta al gradino

 $s^3 + 22 s^2 + 10140 s + 20200$

Continuous-time transfer function.

```
figure('Name', 'H3')
step(H3)
[~, lgd, ~, ~] = legend('Location','best');
set(findall(gcf,'-property','FontSize'),'FontSize',FS)
set(findall(gcf,'Type','Line'),'LineWidth',LW)
set(findobj(lgd, 'Type','Line'),'LineWidth',LW)
```

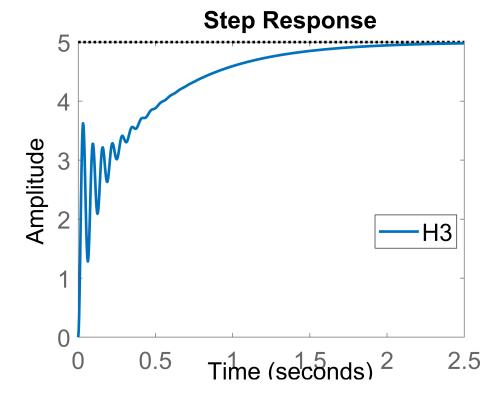

H4

Funzione di trasferimento

```
H4 = zpk([2], [-2, -10-100j, -10+100j], -50500)

H4 =

-50500 (s-2)

(s+2) (s^2 + 20s + 1.01e04)


Continuous-time zero/pole/gain model.

H4 = tf(H4)

H4 =
```


Continuous-time transfer function.

```
figure('Name', 'H4')
step(H4)
[~, lgd, ~, ~] = legend('Location','best');
set(findall(gcf,'-property','FontSize'),'FontSize',FS)
set(findall(gcf,'Type','Line'),'LineWidth',LW)
set(findobj(lgd, 'Type','Line'),'LineWidth',LW)
```

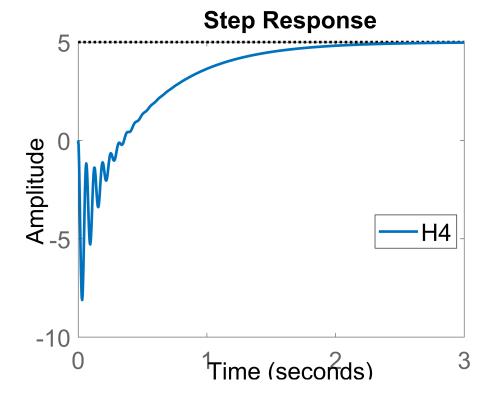


Compare different plots

```
step(G1, G2, G3)
[~, lgd, ~, ~] = legend('Location','best');
set(findall(gcf,'-property','FontSize'),'FontSize',FS)
set(findall(gcf,'Type','Line'),'LineWidth',LW)
set(findobj(lgd, 'Type','Line'),'LineWidth',LW)
```

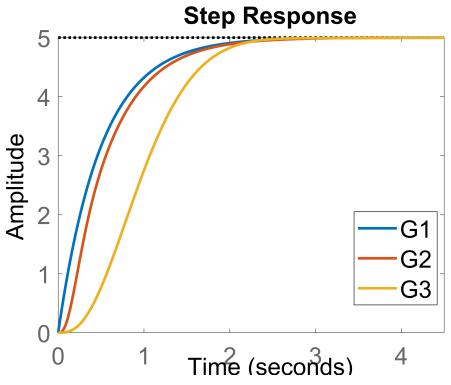

```
step(G1, H1)
[~, lgd, ~, ~] = legend('Location','best');
set(findall(gcf,'-property','FontSize'),'FontSize',FS)
set(findall(gcf,'Type','Line'),'LineWidth',LW)
set(findobj(lgd, 'Type','Line'),'LineWidth',LW)
```

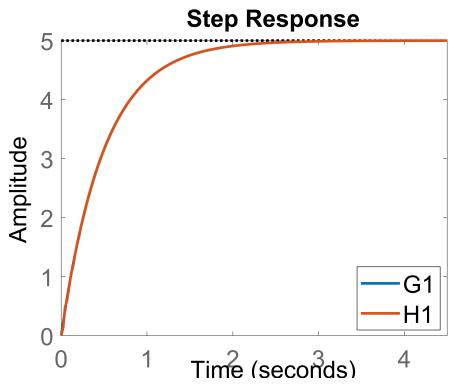

```
step(H1, H2, H3)
[~, lgd, ~, ~] = legend('Location','best');
set(findall(gcf,'-property','FontSize'),'FontSize',FS)
set(findall(gcf,'Type','Line'),'LineWidth',LW)
set(findobj(lgd, 'Type','Line'),'LineWidth',LW)
```

