


Fault Code: 465

Wastegate Actuator Number 1 Circuit

 Printable Version

Overview

Codes	Reason	Effect
Fault Code: 465 PID(P): S032 SPN: 1188 FMI: 3/3 Lamp: Yellow SRT:	High voltage detected at the wastegate actuator number 1 circuit when no voltage was being supplied by the engine control module (ECM).	Engine will run derated.

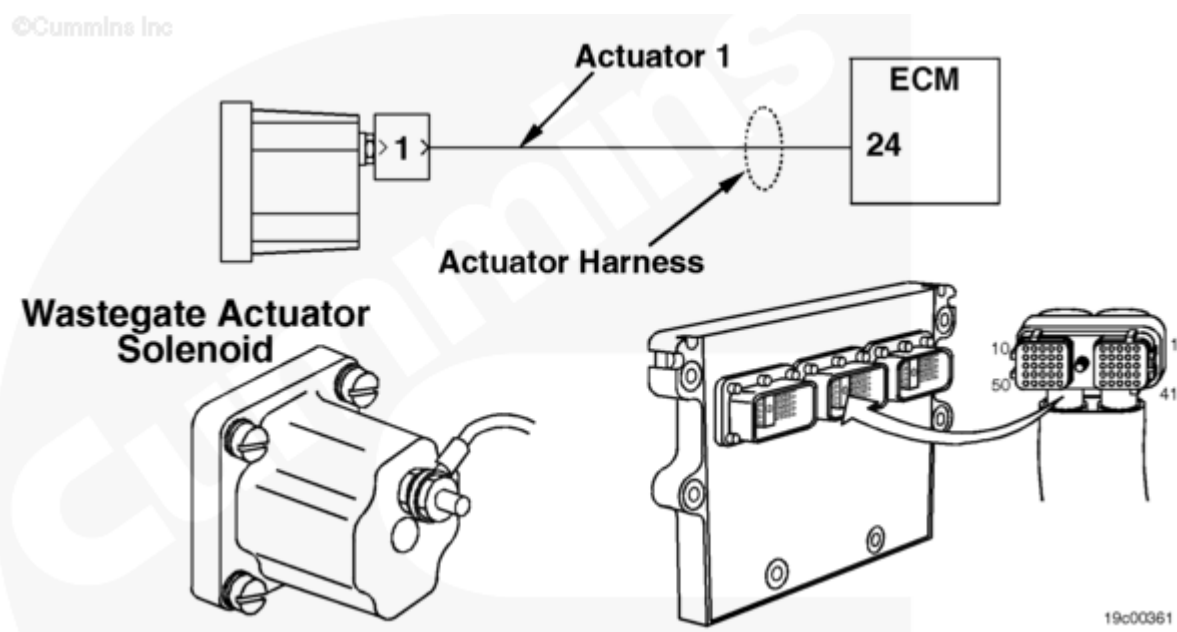

Wastegate Actuator number 1 Circuit

Circuit Description

The wastegate actuators are devices used by the ECM to control boost pressure.

Component Location

The wastegate controller is located on the air inlet horn. Actuator number 1 is the rear-most solenoid on the controller.

Shoptalk

Possible causes of this fault code include:

- A short circuit to voltage source in the harness
- An open circuit in the harness, connector, or wastegate control valve
- Improperly mounted wastegate actuator solenoid.

Refer to Troubleshooting Fault Code t05-465 (</qs3/pubsys2/xml/en/procedures/82/82-t05-465.html>)

Last Modified: 05-Jul-2012
