SCHEMATICS

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVE
REV.A	RELEASED FOR PRODUCTION	20/10/2026	
REV.0	INITIAL RELEASE	10/10/2026	

COMMON CONTROL PANEL

TITLE PAGE

DRAWN VIJAYAKUMAR V S	DRAWN DATE 10/10/2026	SIZE D	DRAWING NUMBER		REV A
	APPROVED DATE 20/10/2026	SCALE NTC		SHEET 001 OF 013	

INDEX

SL. NO.	DRAWING NO.	DRAWING DESCRIPTION
1	SH001	TITLE PAGE
2	SH002	INDEX SHEET
3	SH003	HOW TO READ SCHEMATIC DIAGRAM
4	SH004	HOW TO READ SCHEMATIC DIAGRAM
5	SH005	LEGENDS
6	SH006	GENERAL ARRANGEMENT (GA)
7	SH007	PANEL LAYOUT
8	SH008	POWER DISTRIBUTION CIRCUIT
9	SH009	CONTROL POWER
10	SH010	IPC AND HMI
11	SH011	IPC TERMINAL CONTROL
12	SH012	IPC TERMINAL CONTROL
13	SH013	BILL OF MATERIALS (BOM)

REVISION HISTORY

REV	DESCRIPTION	DATE	APPROVED
REV.A	RELEASED FOR PRODUCTION	20/10/2026	
REV.0	INITIAL RELEASE	10/10/2026	

COMMON CONTROL PANEL

INDEX SHEET

DRAWN VIJAYAKUMAR V S

DRAWN DATE 10/10/2026

APPROVED DATE 20/10/2026

SIZE D

DRAWING NUMBER

REV A


SCALE NTC

SHEET 002 OF 013

Schematic Border / Template


I) Each Border/Template has 32 rungs or rows.
II) Rung numbers are used in wire numbering, Component Tag/Device ID, Cross referencing.
III) First 3 digits: Sheet number padded to three digits
IV) Last 2 digits: Rung number counting sequentially from 01 to 32.

000 Sheet numbers , Rung numbers - 01 to 32

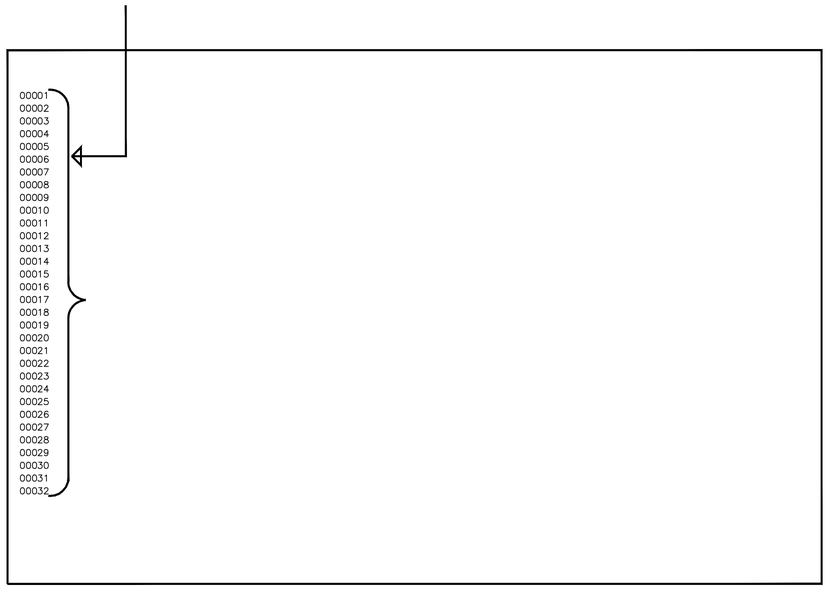


Determination of Wire Number & Device ID/Component Tag

I) Wire Number Format (7 Digit number)

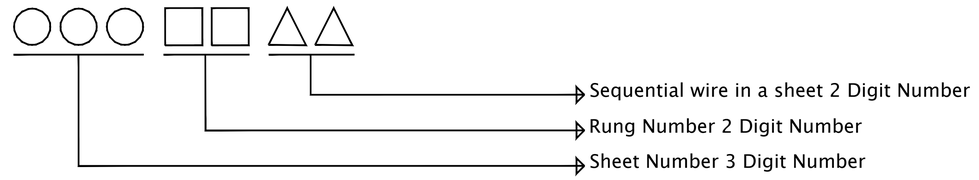

Example :- 0021101, 0081009, 1050112, etc.

II) Device ID / Component Tag format

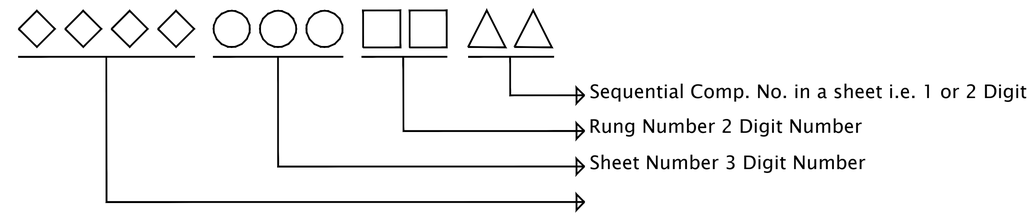

Example :- FL007081, GBLK0071225, BSBR0080101, etc.

III) Cross reference format

Page number
Page and rung number



Rung number

WIRE - Wire number
DESC - Description

REVISION HISTORY

REV	DESCRIPTION	DATE	APPROVED
REV.A	RELEASED FOR PRODUCTION	20/10/2026	
REV.0	INITIAL RELEASE	10/10/2026	

COMMON CONTROL PANEL

HOW TO READ SCHEMATIC DIAGRAM

DRAWN VIJAYAKUMAR V S	DRAWN DATE 10/10/2026	SIZE D	DRAWING NUMBER	REV A
	APPROVED DATE 20/10/2026	SCALE NTC	SHEET 003 OF 013	

Wire Color Abbreviation

COLOR NAME	ABBREVIATION
Black	BK
Blue	BL
Brown	BN
Green	GN
Gray	GY
Orange	OR
Pink	PK
Purple	PR
Red	RD
Shield	SHLD
Slate	SLT
Tan	TN
Turquoise	TQ
Violet	VT
White	WH
Yellow	YL
Black Green	BKGN
Black Red	BKRD
Blue Black	BLBK
Blue White	BLWH
Brown Green	BNGN
Brown White	BNWH
Green Yellow	GNYE
Gray Pink	GYPK
Gray White	GYWH
Orange Black	ORBK
Orange Blue	ORBL
Orange Red	ORRD
Orange White	ORWH
Red Black	RDBK
Red Blue	RDBL
Red White	RDWH
White Black	WHBK
White Blue	WHBL
White Brown	WHBN
White Green	WHGN
White Orange	WHOR
White Red	WHRD
White Yellow	WHYL
Yellow Brown	YLBN
Yellow White	YLWH


Wire Gauge Conversion Table

Component Code


COMPONENT	CODE
Adaptor	ADAP
Audible Buzzer	AB
Audible Horn	AH
Audible Alarm Indicator	IND
Battery	BAT
Busbar	BSBR
Cable / Multicore Cable	CBL
Camera	CAM
Capacitor	CP
Charger	CHG
Circuit Breaker	CB
Connector Plug	CONP
Connector Receptacle	CONR
Compressor	CMP
Contactor	CR
Current Transformer	CT
Disconnector Switch	DS
Diode	D
Device (Generic)	DEV
Fan	FN
Ferrule	FRL
Filter	FL
Fuse	FU
Fuse Holder	FH
Fuse Block	FB
Ground	GND
Heater	HTR
Lamp & LED	LT
Limit Switch	LS
Logic Module	LM
Motor	MTR
Network Switch	NW
Overload Relay	OLR
Pendant	PDT
Power Supply Unit	PSU
Pressure Switch	PS
Printed Circuit Board	PCB
Programmable Logic Controller	PLC
Push Button	PB
Pump	PUMP
Control Relay / Relay	RLY
Resistor	R
Ring Terminal	RING
Robot	RBT
Scanner	SCN
Selector Switch	SS
Sensor	SNSR
Server	SER
Solenoid	SOL
Splice	SP
Switch	SW
Terminal Block	TB
Thermocouple	TC
Time-Delay Relay	TR
Transformer	TRF

Terminal Block & its Accessories


Terminal Block with 4 Wire Connection points & 2 Jumper Points

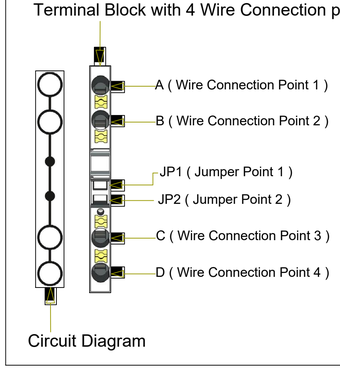


Terminal Block with 6 Wire Connection points & 2 Jumper Points

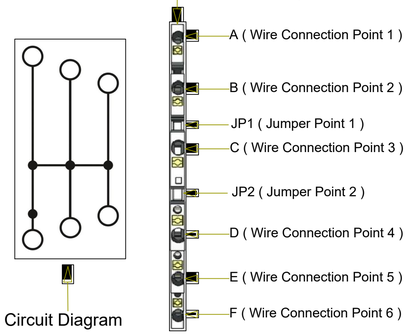


Jumper (2 Legs)




Circuit Symbol - Jumper (2 Legs)



Double-level Terminal Block with 4 Wire Connection points & 2 Jumper Points



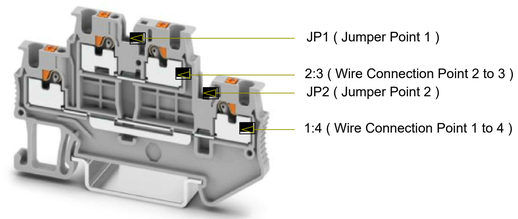

REVISION HISTORY

REV	DESCRIPTION	DATE	APPROVED
REV.A	RELEASED FOR PRODUCTION	20/10/2026	
REV.0	INITIAL RELEASE	10/10/2026	

COMMON CONTROL PANEL

HOW TO READ SCHEMATIC DIAGRAM

DRAWN VIJAYAKUMAR V S

DRAWN DATE 10/10/2026

APPROVED DATE 20/10/2026


SIZE D

DRAWING NUMBER

REV A

SCALE NTC

SHEET 004 OF 013

	2 Pole Miniature Circuit Breaker
	3 Pole Miniature Circuit Breaker
	Circuit Breaker 3 pole
	Fuse
	Circuit Breaker with Magnetic & Thermal Protection
	Coil (Relay, Contactor)
	Auxiliary Contact Normally Open/1SPST-NO (Relay, Contactor)
	Auxiliary Contact Normally Close/1SPST-NC Relay, Contactor)
	Power Supply Unit (AC-DC Converter)
	Battery / Cell

	Illuminated light
	Push button NO
	Push button NC
	Mushroom Push Button NC


REVISION HISTORY

REV	DESCRIPTION	DATE	APPROVED
REV.A	RELEASED FOR PRODUCTION	20/10/2026	
REV.0	INITIAL RELEASE	10/10/2026	

COMMON CONTROL PANEL

LEGENDS

DRAWN VIJAYAKUMAR V S	DRAWN DATE 10/10/2026	SIZE D	DRAWING NUMBER	REV A
	APPROVED DATE 20/10/2026	SCALE NTC	SHEET 005 OF 013	

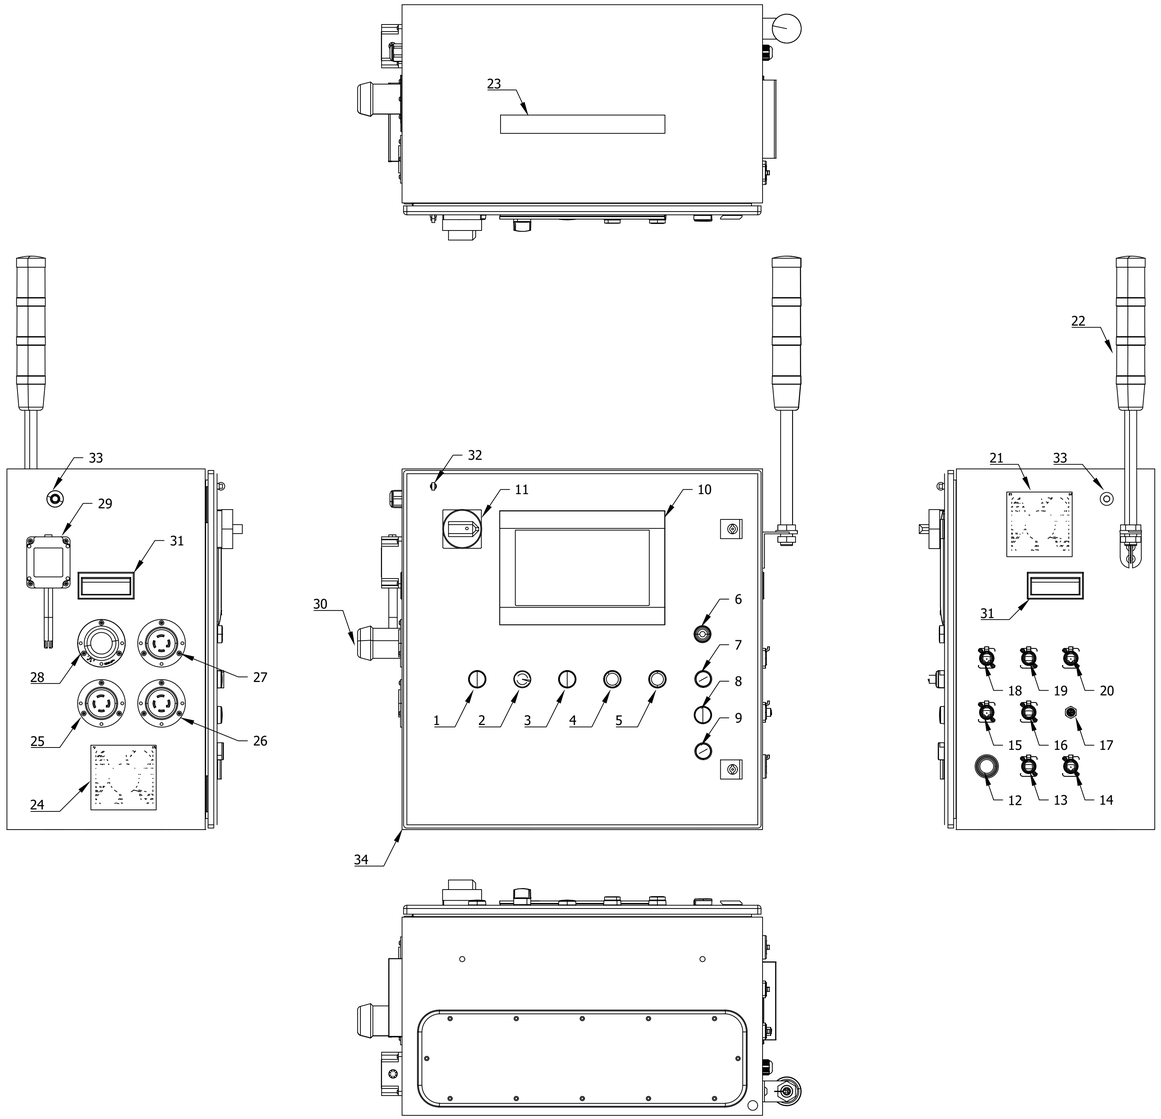

IDENTIFICATION		
ITEM	TAG / LABEL	DESCRIPTION
1	208 V AC ON	Green LED Pilot Light, 22 mm, 230 V AC
2	CONTROL OFF/ON	2-Position Selector Switch, 22 mm, 2 NO
3	CART SUPPLY ENABLE	Green LED Pilot Light, 22 mm, 24 V AC
4	CYCLE START	Illuminated Push Button, Green, 24 V AC/DC, 1 NO
5	CYCLE STOP	Push Button, Red, 22 mm, 1 NC
6	E STOP	Emergency Stop Push Button, 3 NC
7	RESET	Illuminated Push Button, Amber, 24 V AC/DC, 1 NO
8	ACK OK	Illuminated Push Button, Green, 24 V AC/DC, 1 NO
9	ACK NOT OK	Illuminated Push Button, Amber, 24 V AC/DC, 1 NO
10	HMI	Control Panel HMI, DVI/USB Interface
11	INCOMER	Main Power Incomer
12	BARCODE SCANNER	Honeywell Barcode Scanner
13	USB SPARE-2	USB 3.0 Panel-Mount Connector, IP67
14	RJ45 SPARE-2	Dual RJ45 Panel-Mount Ethernet Connector, IP67
15	RJ45 SPARE-1	Dual RJ45 Panel-Mount Ethernet Connector, IP67
16	USB SPARE-1	USB 3.0 Panel-Mount Connector, IP67
17	E STOP SAFETY IN	SACC-5P-DSI-M12MS/FS-M16
18	IPC COMMUNICATION	Dual RJ45 Panel-Mount Ethernet Connector, IP67
19	WI-FI	USB 3.0 Panel-Mount Connector, IP67
20	IPC TO COUPLER OUT	Dual RJ45 Panel-Mount Ethernet Connector, IP67
21	EXHAUST FAN	Exhaust Fan, 230 V AC
22	TOWER LAMP	Schneider Harmony XVGB3S Tower Light
23	LAMP 1	Panel Lamp, 230 V AC
24	INLET FAN	Inlet Fan, 230 V AC
25	INCOMING POWER SUPPLY	NEMA L15-30 Male Panel-Mount Power Receptacle, 30 A
26	208V, 3P POWER OUTPUT WITH OLR	NEMA L15-30 Female Panel-Mount Power Receptacle, 30 A
27	208V, 3P POWER OUTPUT TO ADAPTOR PANEL	NEMA L15-30 Female Panel-Mount Power Receptacle, 30 A
28	208V, 3P POWER OUTPUT	NEMA L15-30 Female Panel-Mount Power Receptacle, 30 A
29	TEMPERATURE AND HUMIDITY SENSOR	THD-WD2-C
30	CUSTOMER SUPPLY 208V AC	Turn-Lock Connector, Grounded Four-Slot Straight Socket, NEMA L15-30(Socket)
31	GRAB HANDLE	Panel Door Grab Handle
32	LS1	Door Limit Switch
33	PG11 GLAND	Black PG11 cable glands
34	Rittal AE 1360.500	Industrial control cabinet

REVISION HISTORY


REV	DESCRIPTION	DATE	APPROVED
REV.A	RELEASED FOR PRODUCTION	20/10/2026	
REV.0	INITIAL RELEASE	10/10/2026	

COMMON CONTROL PANEL


GENERAL ARRANGEMENT (GA)

DRAWN VIJAYAKUMAR V S | DRAWN DATE 10/10/2026 | APPROVED DATE 20/10/2026 | SIZE D | DRAWING NUMBER | REV A | SCALE NTC | SHEET 006 OF 013


TOP SIDE

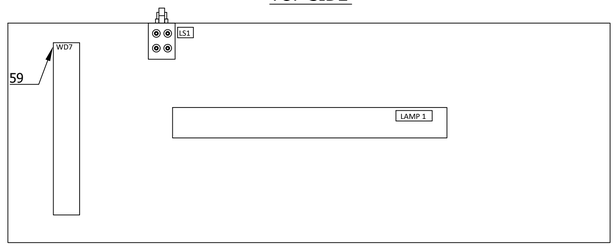


DOOR SIDE

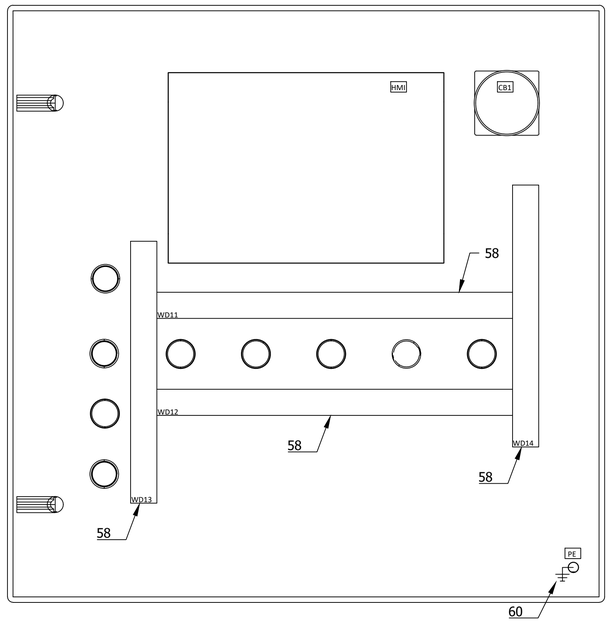


LEFT SIDE

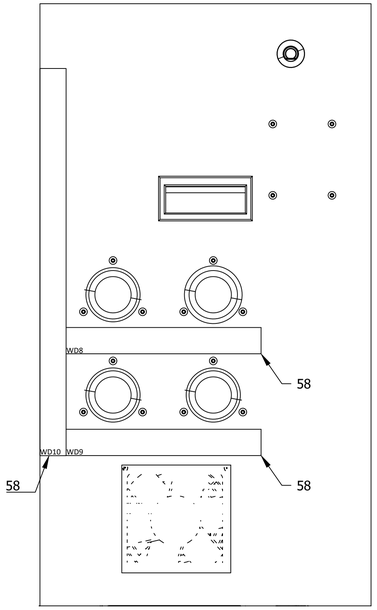

PANEL BASE PLATE

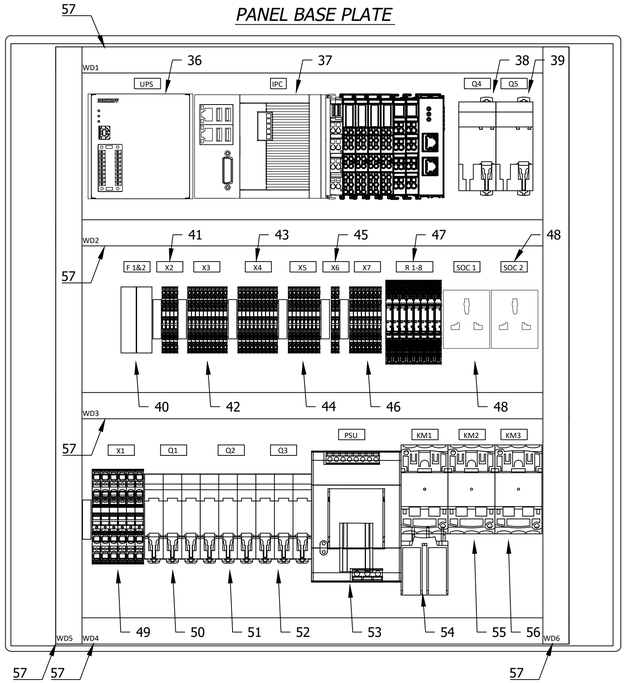

RIGHT SIDE

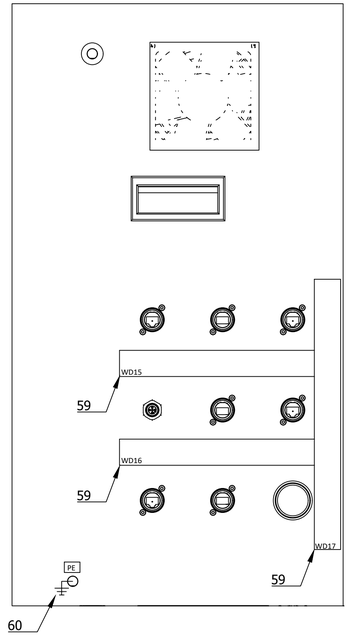


IDENTIFICATION		
ITEM	TAG / LABEL	DESCRIPTION
36	UPS	Capacitive UPS, 24 V DC, 110 W
37	IPC	01: CX5240 — Embedded PC 02: EL9550-0012 — Surge Filter Terminal 03: EL1409 — 16-Channel Digital Input, 24 V DC 04: EL2409 — 16-Channel Digital Output, 24 V DC 05: EL4374 — 2 AI + 2 AO, 16-bit 06: EL6021 — RS422/RS485 Serial Interface 07: EL6070-0033 — TwinCAT 3 License Terminal 08: EK1122 — 2-Port EtherCAT Junction 09: EL9011 — E-Bus End Cap
38	Q4	10A, 2P, MCB
39	Q5	2A, 2P, MCB
40	F1 & F2	Fuse Holder Base with 4A Ceramic Fuses
41	X2	4 Nos. PT 1,5/S-QUATTRO Terminal Blocks, Jumpered in 2 Separate Groups (1–2 and 3–4).
42	X3	10 Nos. PT 1,5/S-QUATTRO DIN Rail Terminal Blocks, Jumpered Together in One Group.
43	X4	10 Nos. PT 1,5/S-QUATTRO DIN Rail Terminal Blocks, Jumpered Together in One Group.
44	X5	8 Nos. PTTB 1,5/S - Double-level terminal block
45	X6	2 Nos. PTTB 1,5/S - Double-level terminal block
46	X7	8 Nos. PTTB 1,5/S - Double-level terminal block
47	R1 - R8	8Nos. PLC-RPT- 24DC/21 - Relay module
48	SOC - 1&2	10A 250V AC Din Rail Mounting Universal Socket
49	X1	3 Nos. – 3212950, 3 Nos. – 3212934(TB)
50	Q1	Acti 9 K60H 3P - 32 A - C curve 10 kA
51	Q2	Acti 9 K60H 3P - 32 A - C curve 10 kA
52	Q3	Acti 9 K60H 3P - 32 A - C curve 10 kA
53	PSU	DIN Rail Power Supply, 24 V DC, 20 A, 480 W
54	KM1 WITH OLR1	TeSys D Contactor, 3P, 25 A, 24 V DC Coil WITH LRD Thermal Overload Relay, 12–18 A, Class 10A.
55	KM2	TeSys D Contactor, 3P, 25 A, 24 V DC Coil
56	KM3	TeSys D Contactor, 3P, 25 A, 24 V DC Coil
57	WD 1-6	25 × 80 mm PVC Wiring Duct.
58	WD 8-14	25 × 40 mm PVC Wiring Duct.
59	WD 7, WD 15-17	25 × 25 mm PVC Wiring Duct.
60	PE	Protective Earth

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
REV.A	RELEASED FOR PRODUCTION	20/10/2026	
REV.0	INITIAL RELEASE	10/10/2026	

COMMON CONTROL PANEL

PANEL LAYOUT

DRAWN VIJAYAKUMAR V S	DRAWN DATE 10/10/2026	SIZE D	DRAWING NUMBER	REV A
	APPROVED DATE 20/10/2026	SCALE NTC	SHEET 007 OF 013	

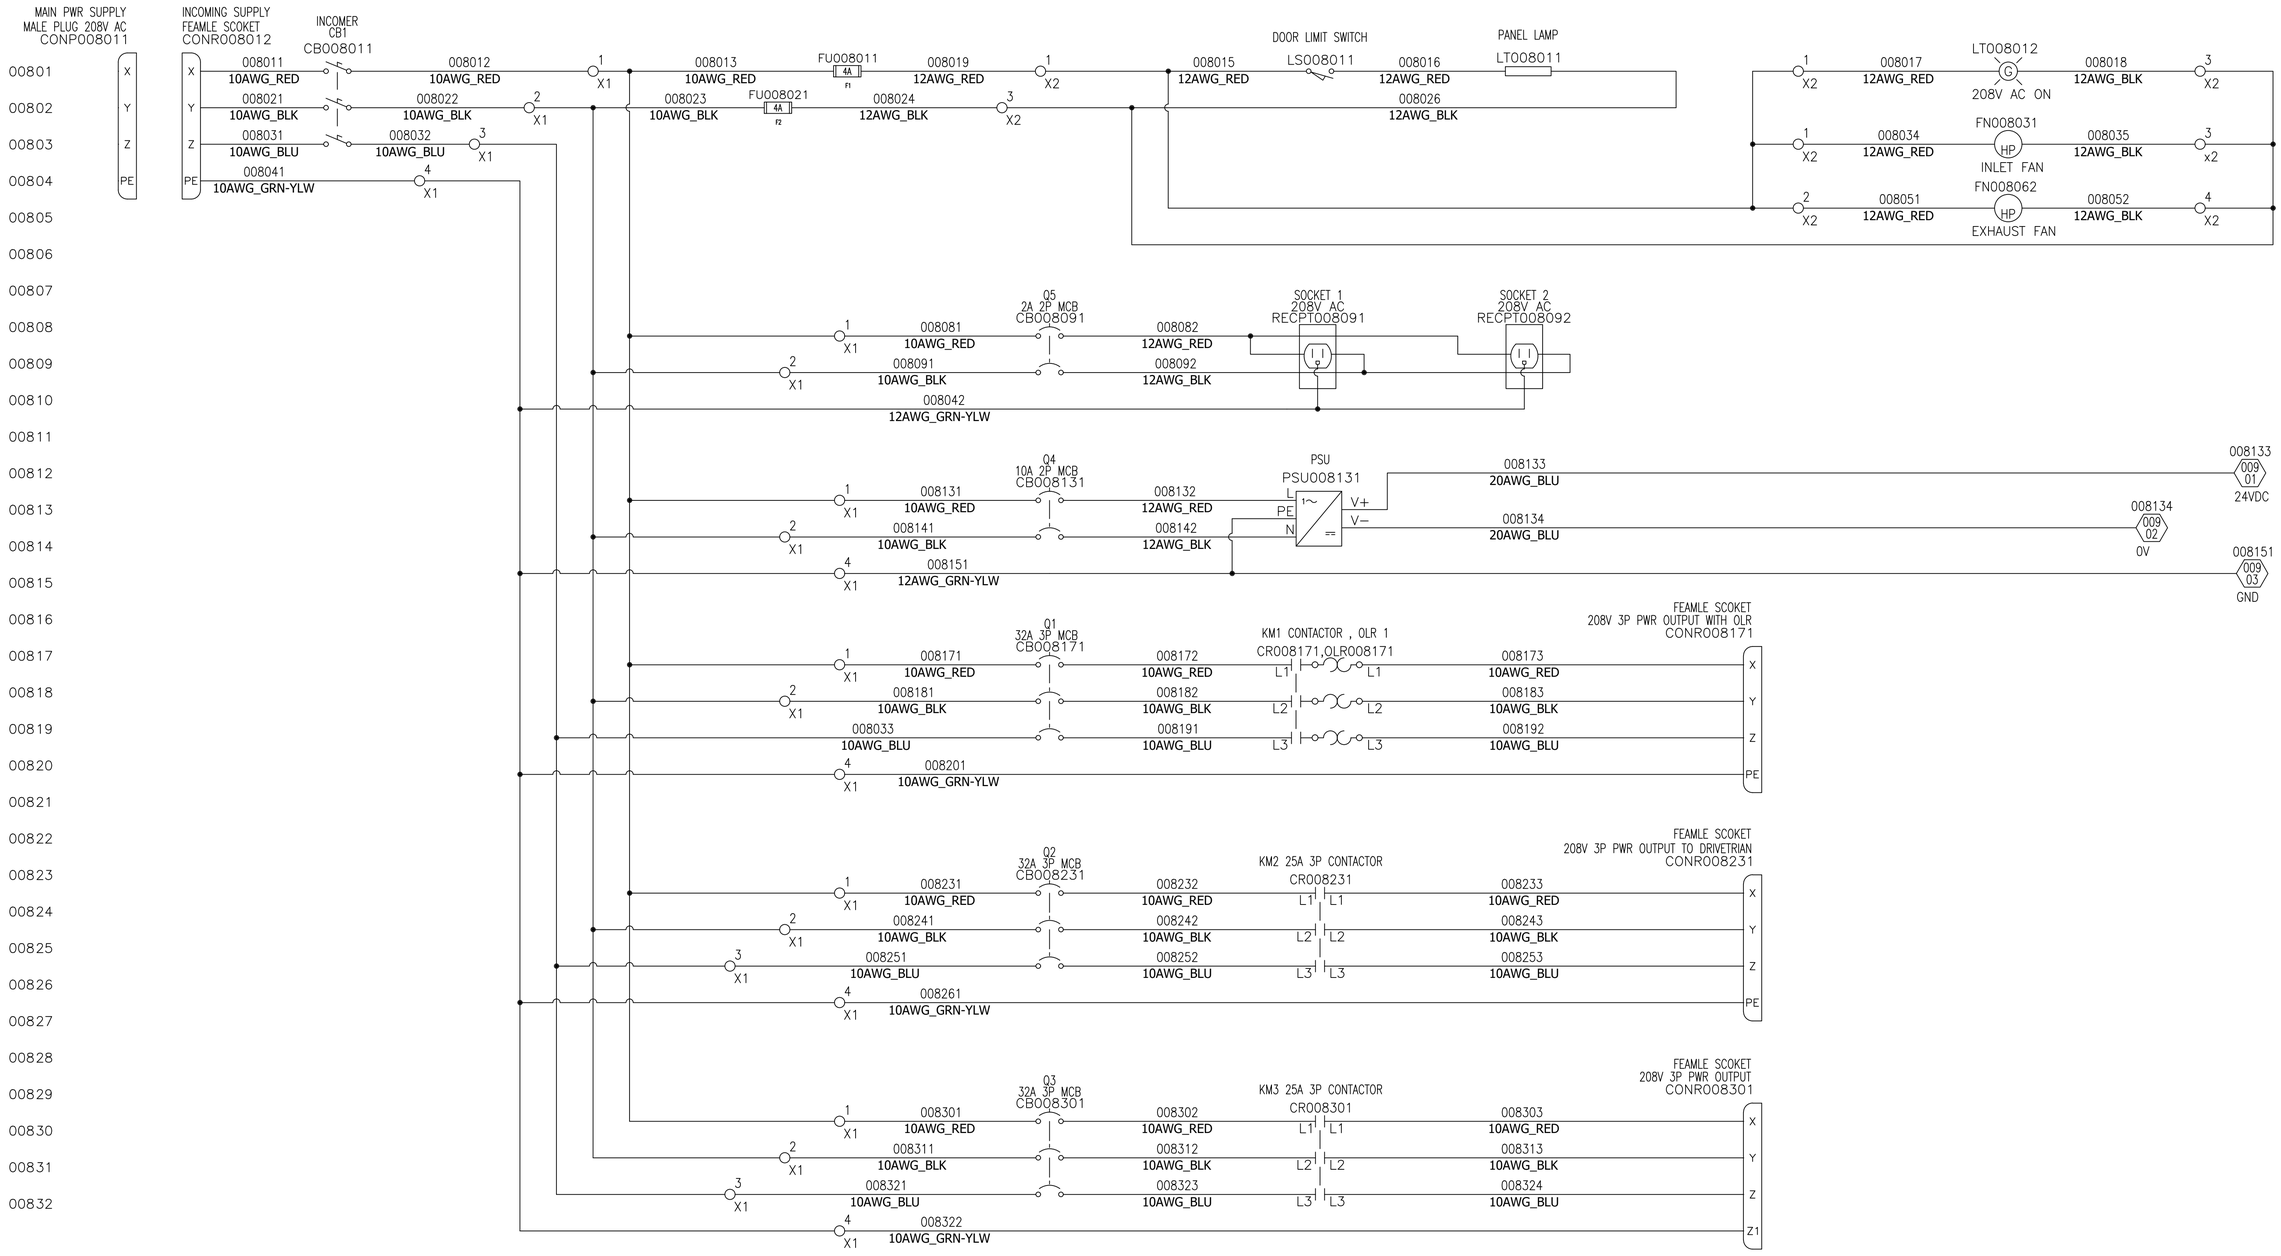


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
REV.A	RELEASED FOR PRODUCTION	20/10/2026	
REV.0	INITIAL RELEASE	10/10/2026	

COMMON CONTROL PANEL

POWER DISTRIBUTION CIRCUIT

DRAWN V.VIJAYAKUMAR V S	DRAWN DATE 10/10/2026	SIZE D	DRAWING NUMBER	REV A
APPROVED	APPROVED DATE 20/10/2026	SCALE NTC	SHEET 008 OF 013	

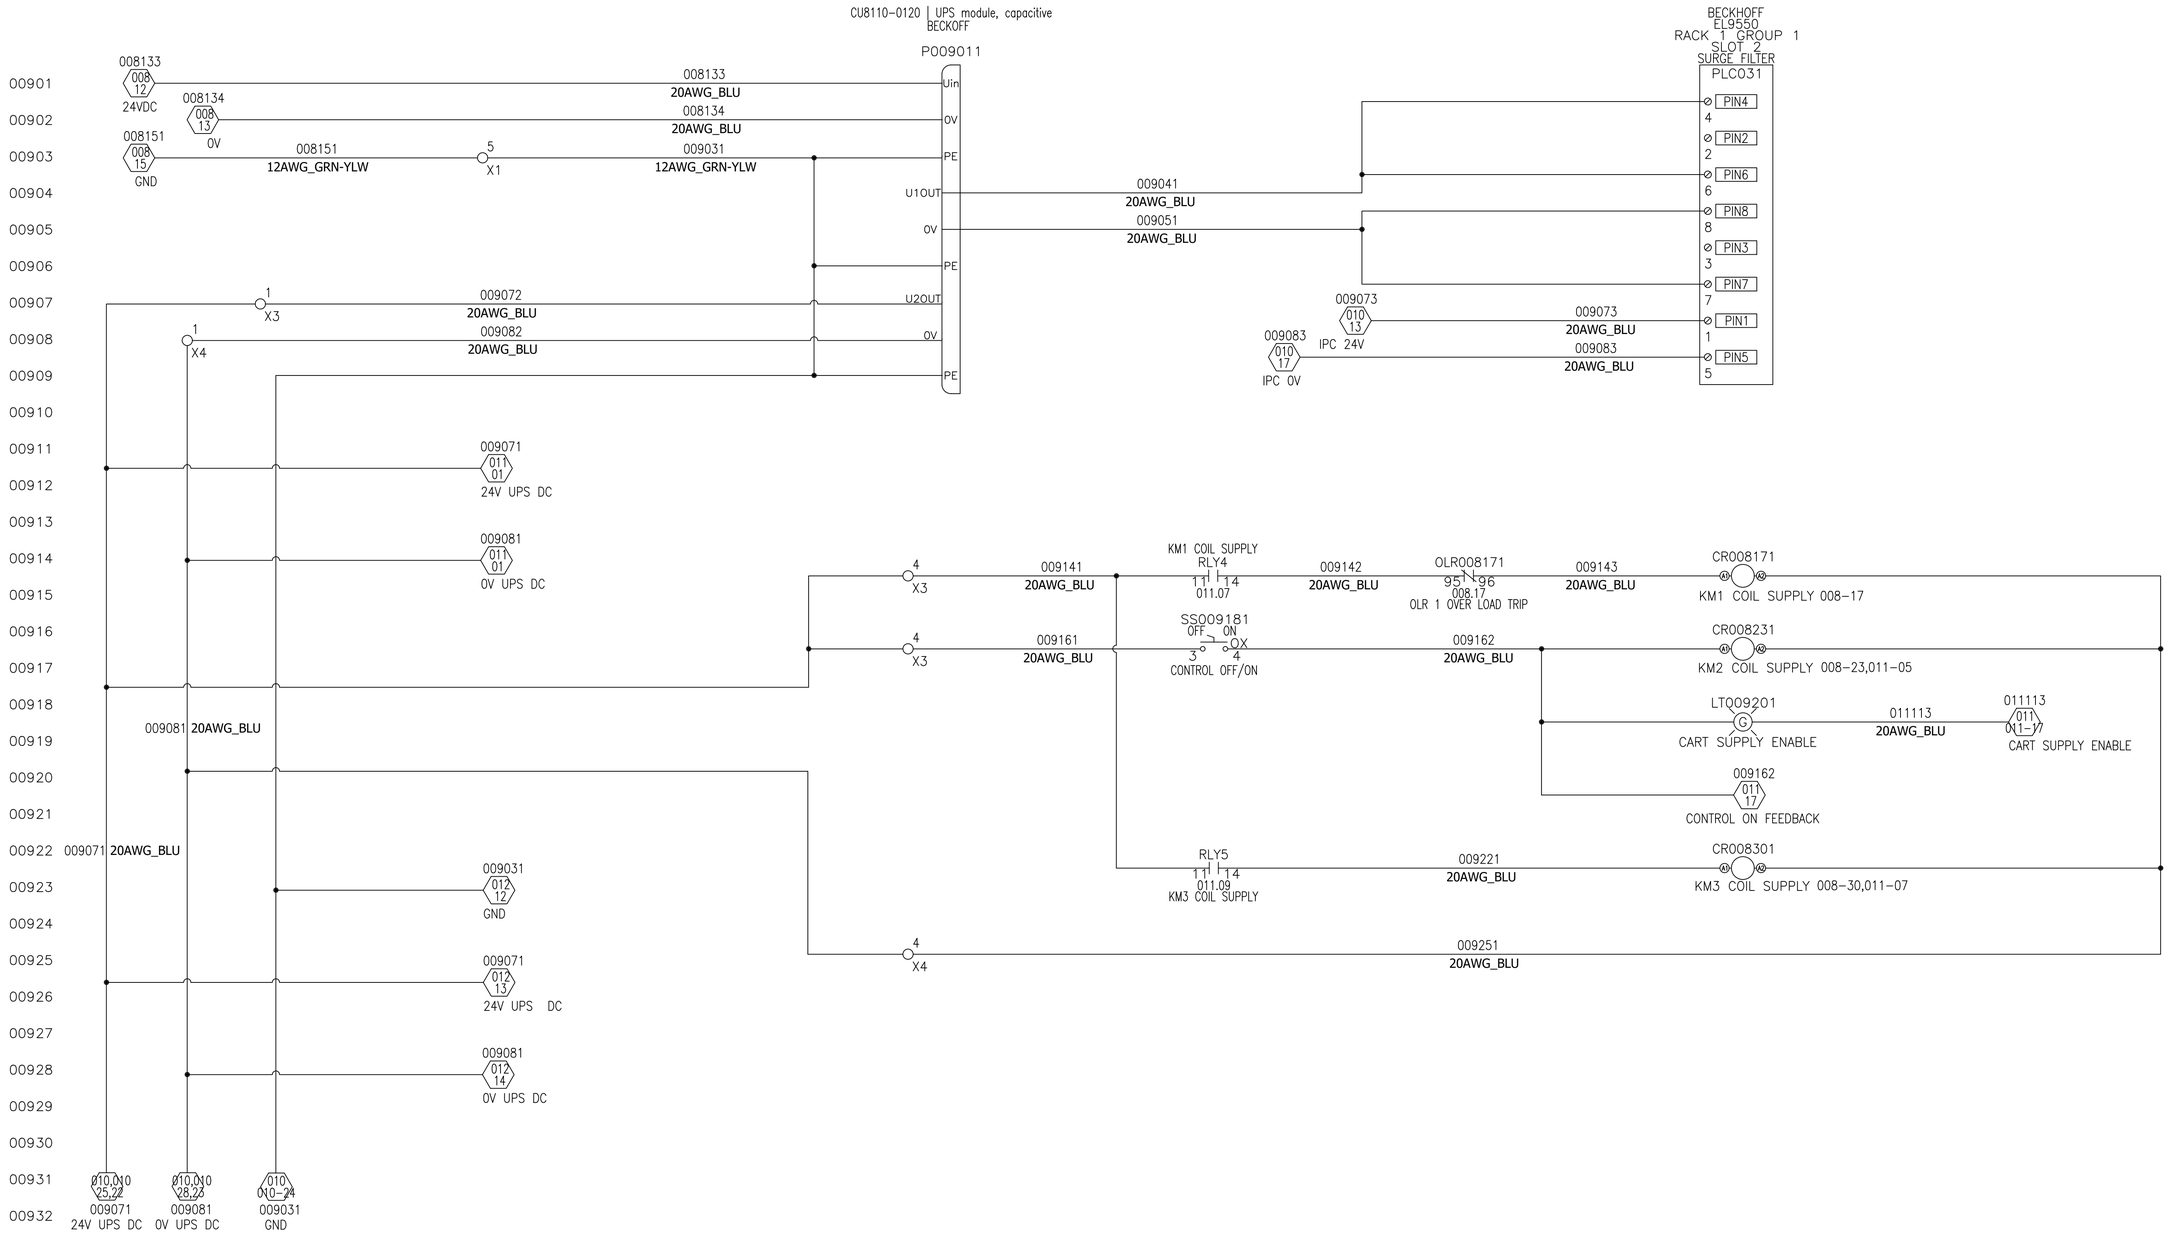


REVISION HISTORY							
REV	DESCRIPTION	DATE	APPROVED				
REV.A	RELEASED FOR PRODUCTION	20/10/2026					
REV.0	INITIAL RELEASE	10/10/2026					

[redacted]

COMMON CONTROL PANEL

CONTROL POWER


DRAWN VIJAYAKUMAR V S	DRAWN DATE 10/10/2026	SIZE D	DRAWING NUMBER [redacted] REV A
[redacted]	APPROVED DATE 20/10/2026	SCALE NTC	SHEET 009 OF 013

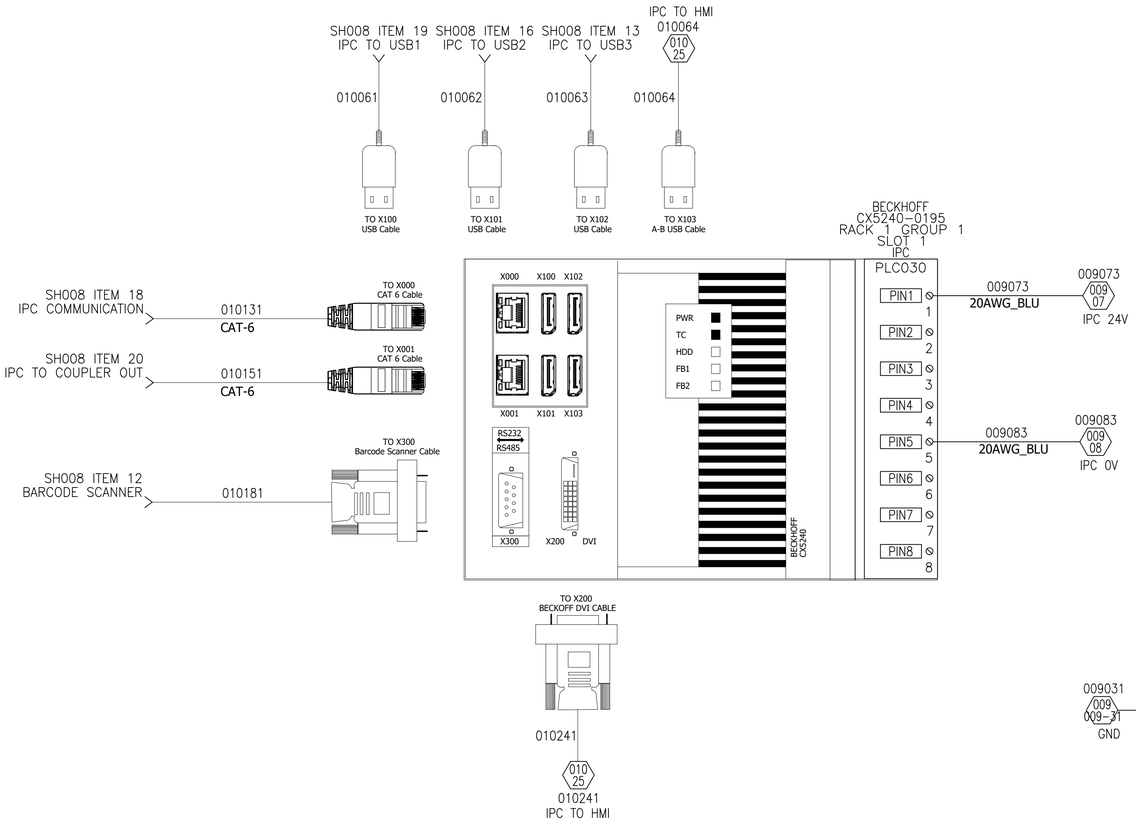


REVISION HISTORY							
REV	DESCRIPTION	DATE	APPROVED				
REV.A	RELEASED FOR PRODUCTION	20/10/2026		DRAWN VIJAYAKUMAR V S	DRAWN DATE 10/10/2026	SIZE D	REV A
REV.0	INITIAL RELEASE	10/10/2026			APPROVED DATE 20/10/2026	SCALE NTC	SHEET 010 OF 013

COMMON CONTROL PANEL

IPC AND HMI

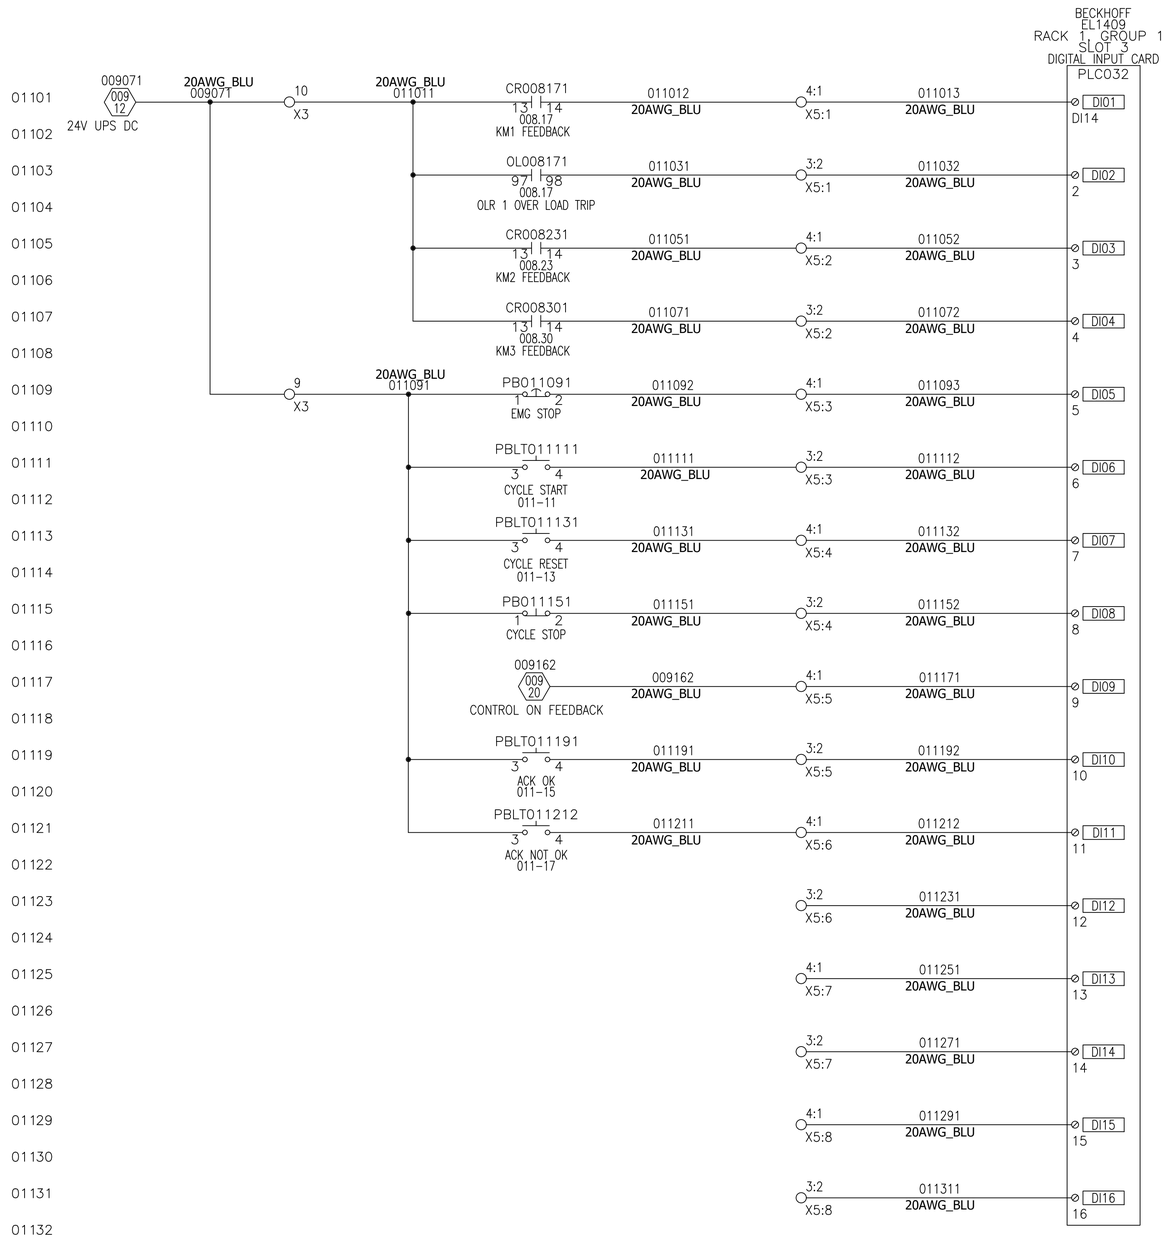

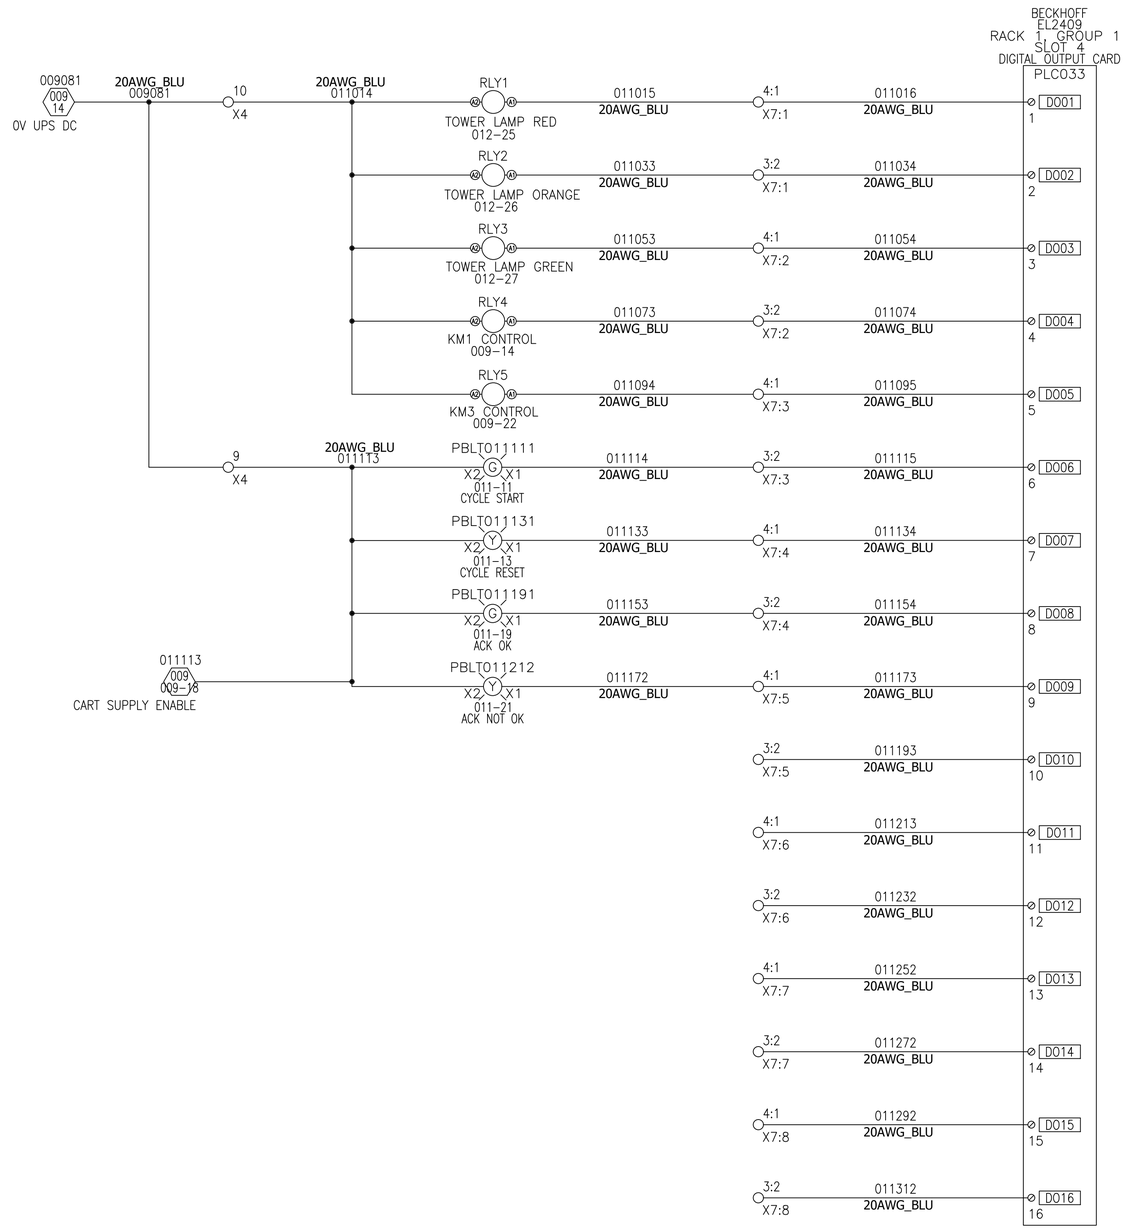


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
REV.A	RELEASED FOR PRODUCTION	20/10/2026	
REV.0	INITIAL RELEASE	10/10/2026	

COMMON CONTROL PANEL

I/O CONTROL

DRAWN VIJAYAKUMAR V S	DRAWN DATE 10/10/2026	SIZE D	DRAWING NUMBER	REV A
	APPROVED DATE 20/10/2026	SCALE NTC	SHEET 011 OF 013	

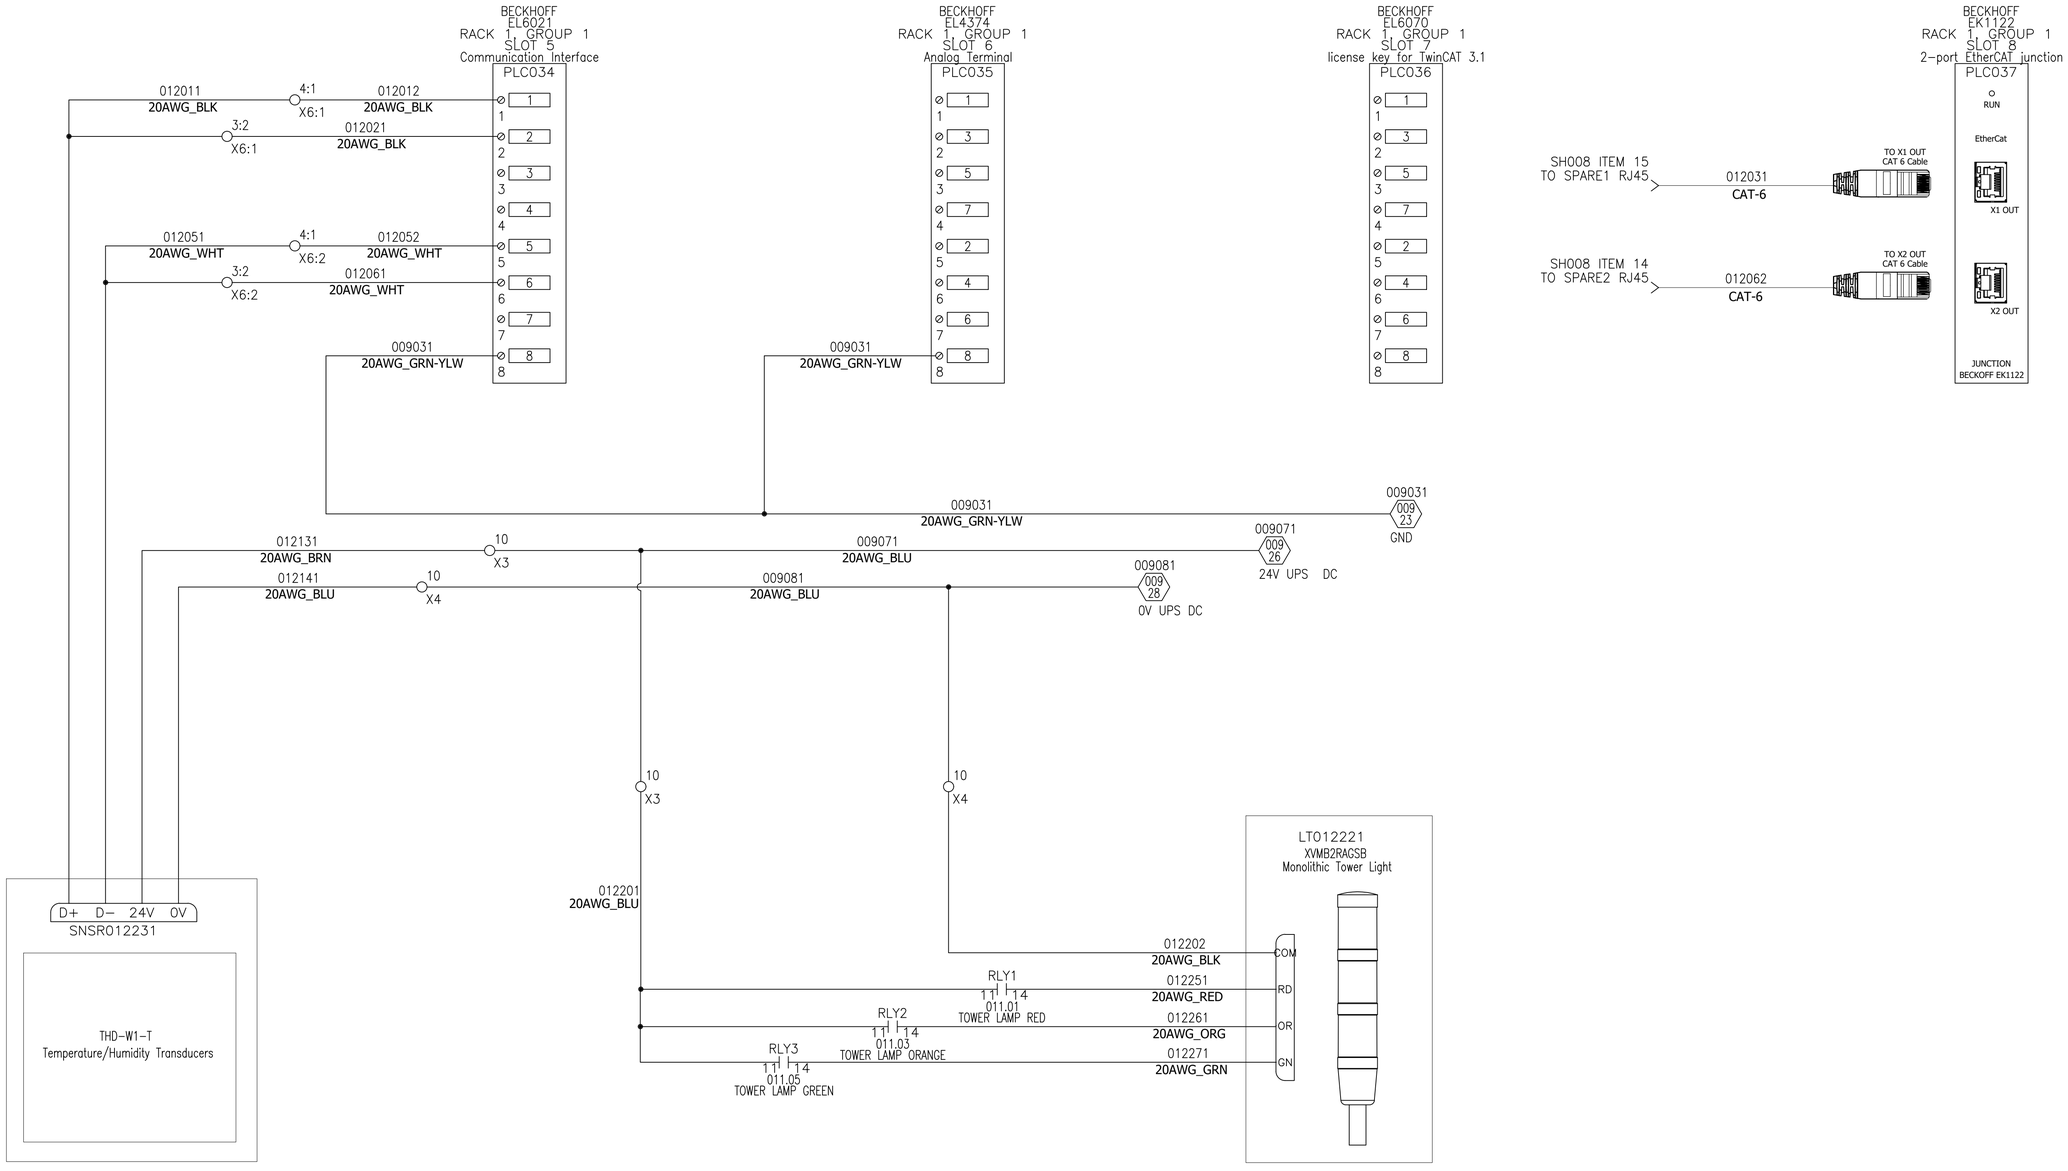

REVISION HISTORY							
REV	DESCRIPTION	DATE	APPROVED				
REV.A	RELEASED FOR PRODUCTION	20/10/2026					
REV.0	INITIAL RELEASE	10/10/2026					

COMMON CONTROL PANEL

IPC TERMINAL CONTROL

DRAWN VIJAYAKUMAR V S	DRAWN DATE 10/10/2026	SIZE D	DRAWING NUMBER	REV A
APPROVED	APPROVED DATE 20/10/2026	SCALE NTC	SHEET 012 OF 013	

SL No.	Description	Make	PartNumber	QTY
1	Embedded PC / PLC Controller	BECKHOFF	CX5240	1
2	80 GB CFast Card	BECKHOFF	CX2900-0040	1
3	Capacitive Uninterruptible Power Supply (UPS), 24 V DC, 110 W	BECKHOFF	CU8110-0120	1
4	Surge Filter Terminal for System and Field Supply	BECKHOFF	EL9550-0012	1
5	16-Channel Digital Input Terminal, 24 V DC	BECKHOFF	EL1409	1
6	16-Channel Digital Output Terminal, 24 V DC	BECKHOFF	EL2409	1
7	4-Channel Analog Output Terminal	BECKHOFF	EL4374	1
8	1-Channel Serial Communication Terminal, RS422/RS485	BECKHOFF	EL6021	1
9	EtherCAT Terminal – TwinCAT 3.1 License Key Terminal, factory-installed TwinCAT 3 licenses including Motion license	BECKHOFF	EL6070-0033	1
10	EtherCAT Junction / 2-Port EtherCAT Coupler	BECKHOFF	EK1122	1
11	EtherCAT Bus End Cover / End Terminal	BECKHOFF	EL9011	1
12	Economy built-in Control Panel with DVI/USB Extended interface	BECKHOFF	CP6900-0001-0010	1
13	Pre-Assembled USB Cable, USB A Male to USB B Male	BECKHOFF	C9900-K552	1
14	Pre-Assembled DVI-D Display Cable, Shielded, Male-to-Male	BECKHOFF	C9900-K550	1
15	Slot screwdriver 2.0 x 40 mm, HD terminals	BECKHOFF	ZB8701	1
16	100 contact labels, two of each printed with: 00 01...48 49, white	BECKHOFF	BZ1400	1
17	PT 6-QUATTRO - Feed-through terminal block	Phoenix	3212934	10 Piece
18	D-PT 6-QUATTRO - End cover	Phoenix	3212963	5 Piece
19	PT 6-QUATTRO-PE - Protective conductor terminal block	Phoenix	3212950	5Piece
20	PT 1,5/S-QUATTRO - Feed-through terminal block	Phoenix	3208197	50 Piece
21	FBS 2-3,5 - Plug-in bridge	Phoenix	3213014	50 Piece
22	D-PT 1,5/S-QUATTRO - End cover	Phoenix	3208375	50 Piece
23	PLC-RPT- 24DC/21 - Relay module	Phoenix	2900299	10 Piece
24	Yellow/Green Flexible Single-Core Copper Wire	Polycab/ lapp	6 mm²	30 Mtr
25	Red Flexible Single-Core Copper Wire	Polycab/ lapp	6 mm²	30 Mtr
26	Black Flexible Single-Core Copper Wire	Polycab/ lapp	6 mm²	30 Mtr
27	Blue Flexible Single-Core Copper Wire	Polycab/ lapp	6 mm²	30 Mtr
28	6 SQMM Wire Ferrules Copper Crimp Connectors, Pack of 100 Pcs	--	--	100 Piece
29	Turn-Lock Connector, Grounded 4-Slot Panel-Mount Receptacle, NEMA L15-30 (Female)	Hubbell	7164K84	3
30	Turn-Lock Connector, Grounded Four-Blade Straight Plug, NEMA L15-30 (Plugs)	Hubbell	7164K49	1
31	Turn-Lock Connector, Grounded 4-Blade Panel-Mount Male Receptacle, L15-30 (Male)	Hubbell	7164K74	1
32	Turn-Lock Connector, Grounded Four-Slot Straight Socket, NEMA L15-30(Socket)	Hubbell	7164K5	1
33	Panel Lamp 230VAC	Sturlite	L6-0019-6W	1
34	Monolithic pilot light, Harmony XB5N XB7N, plastic, green, 22mm, LED, 230V AC	Schneider Electric	XB7EV03MPN	3
35	32A Load Break Switch 20HP @ 600V	Salzer	31309-B13-LB232	1
36	Exhaust Fan 230VAC	Rexnord	REC-22038 A2T	2
37	4" Louvers, Screw fit (130 x 130mm)	Elettro	ETAV-01	2
38	Fan Grill (130 x 130mm)	--	--	2
39	Acti9 - fuse-disconnector STI - 1 pole - 25 A - for fuse 10.3 x 38 mm	Schneider Electric	A9N15636	1
40	Acti 9 K60H 2P - 10 A - C curve 10 kA	Schneider Electric	A9KF71210BQ	1

SL No.	Description	Make	PartNumber	QTY
41	Acti 9 K60H 2P - 2 A - C curve 10 kA	Schneider Electric	A9KF71202BQ	1
42	Acti 9 K60H 3P - 32 A - C curve 10 kA	Schneider Electric	A9KF71332BQ	3
43	TeSys D contactor - 3P(3 NO) - AC-3 - <= 440 V 25 A - 24 V DC coil	Schneider Electric	LC1D25BD	3
44	Thermal overload relay, TeSys LRD, 12...18 A, class 10A	Schneider Electric	LRD21	1
45	10A 250V AC Din Rail Mounting Universal Socket	---	---	2
46	Monolithic pilot light, Harmony XB5N XB7N, plastic, green, 22mm, LED, 24V AC DC	Schneider Electric	XB7EV03BPN	1
47	Complete Monolithic tower Light Schneider XVGB3S	Schneider Electric	XVMB2RAGSB	1
48	Barcode Scanner	Honeywell	HH492-R1-1USB-5-I / 1472G-2D	1
49	Adapter RS 232	Honeywell	---	1
50	Honeywell RS 232 Cable	Honeywell	---	1
51	LP24 USB3 Female-Female Socket IP67 Waterproof Data Connector Panel Mount (Push Lock)	CNLINKO	---	4
52	YT-RJ45-JSX-16-001-CNLINKO-YT RJ45 Female Socket Dual Port Metal Panel Ethernet Connector IP67 Panel Mount	CNLINKO	---	10
53	Cable duct 25x80	---	---	10 Mtr
54	Cable duct 25x25	---	---	2 Mtr
55	Cable duct 25x40	---	---	4 Mtr
56	DIN rail	---	---	5 Mtr
57	AC/DC Single output Industrial DIN rail power supply - Output 24Vdc at 20A - 480W - metal case.	Mean Well	NDR-480-24	1
58	Single contact block, Harmony XB4, Hamony XB5, silver alloy, compact push in terminals, 1 NC	Schneider Electric	ZBE1025	4
59	Single contact block, Harmony XB5N XB7N, silver alloy, screw clamp terminal, 1 NO	Schneider Electric	ZBE101N	3
60	Selector switch, plastic black, Ø22, 2 positions, stay put, 1 NO	Schneider Electric	XB5AD21	1
61	EMG.Stop Push Button	Schneider Electric	XB5AS542N	1
62	F16-09 Cover for 16mm Emergency cover	Robotics DNA	F16-09	1
63	Illuminated pushbutton, Harmony XB5N XB7N, plastic, flush, amber, 22mm, spring return, 24V AC DC, 1 NO	Schneider Electric	XB5AW38B1N	3
64	Illuminated pushbutton, Harmony XB5N XB7N, plastic, flush, green, 22mm, spring return, 24V AC DC, 1 NO	Schneider Electric	XB5AW33B1N	3
65	Push button, Harmony XB5, grey plastic, flush, red, 22mm, spring return, unmarked, 1 NC, compact push in terminals	Schneider Electric	XB5AA425	1
66	Grab Handles	---	DHP-94	6
67	Modular Cable Plug to Plug, Angled Right, 90° 8p8c (RJ45, Ethernet) 5.00' (1.52m) Unshielded	Eaton Tripp Lite	N204-S05-BL-RA	5
68	USB 2.0 Cable A Male to A Male, Right Angle 6.00' (1.83m)	Eaton Tripp Lite	UR020-006-RA	3
69	6 sq mm 4 Core Copper Flexible Wire	---	---	2 Mtr
70	Complete Monolithic tower Light	Schneider	XVGB3	1
71	temperature and humidity; 24VDC; OUT 1: 4÷20mA; IP65	AUTONICS	THD-WD1-C	1
72				
73				

REVISION HISTORY

REV	DESCRIPTION	DATE	APPROVED
REV.A	RELEASED FOR PRODUCTION	20/10/2026	
REV.0	INITIAL RELEASE	10/10/2026	

DRAWN VIJAYAKUMAR V S

DRAWN DATE 10/10/2026

APPROVED DATE 20/10/2026

SIZE D

DRAWING NUMBER

REV A

SCALE NTC

SHEET 013 OF 013

COMMON CONTROL PANEL

BILL OF MATERIALS (BOM)