


MØFFENMIX

INSTALLATION

Turn off your modular system before installing MØFFENMIX. Be sure that the red stripe on your ribbon cable aligns with the "-12v RED STRIPE!" silkscreen on the PCB. Double check that you have correctly connected your ribbon cable to the power distribution board before turning unit on. Improper installation or use could cause

WHAT DID I JUST BUY?

Let's face it,
some stuff
is just
too quiet.
Fret not,
you just
bought a
MØFFENMIX.

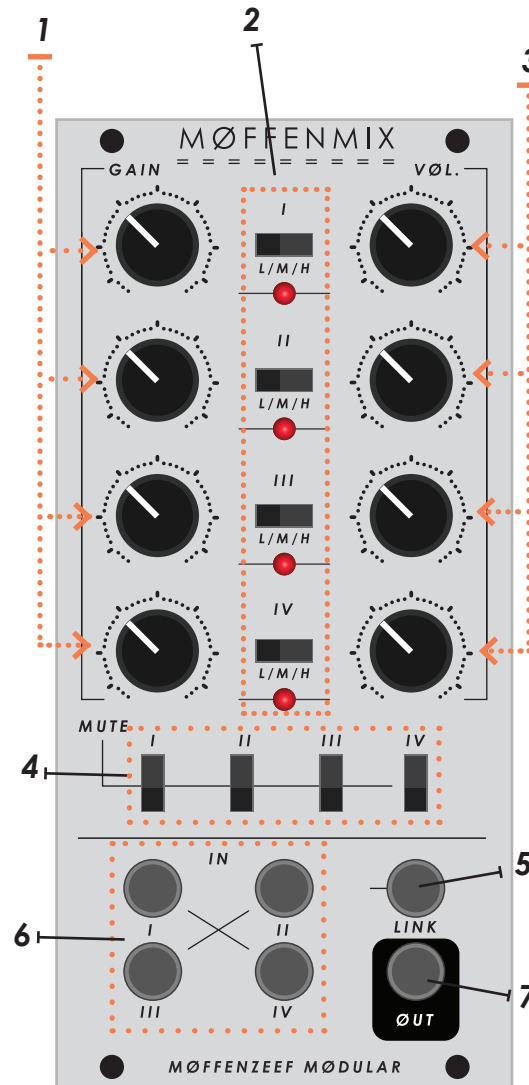

1. GAIN: Gain amount per channel.

2. L/M/H: Gain range switch. Low = unity, medium = x5 (line level to modular), high = x100 (overdrive/distortion).

3. VOL: Volume per channel.

4. MUTE: Mute per channel.

5. LINK: Unity gain input to main output. This input can be used to daisy chain mixers together.

6. IN: Audio input per channel. Inputs are AC coupled (audio only)

7. OUT: Audio output. Capable of up to ~24vpp output at highest gain settings.