Womble branding and device guide

One familiar face across the voice hub, kitchen dashboard and shopping printer.




The agreed direction

Warm serif lettering, a small raised #1 and a quiet home assistant subtitle beneath womble alone. Womble's portrait supplies the character; the interface stays calm and useful.

This first edition records the approved visual direction and provides implementation starting points. The hardware images are concept mockups, not dimensioned product drawings.

Identity and logo use

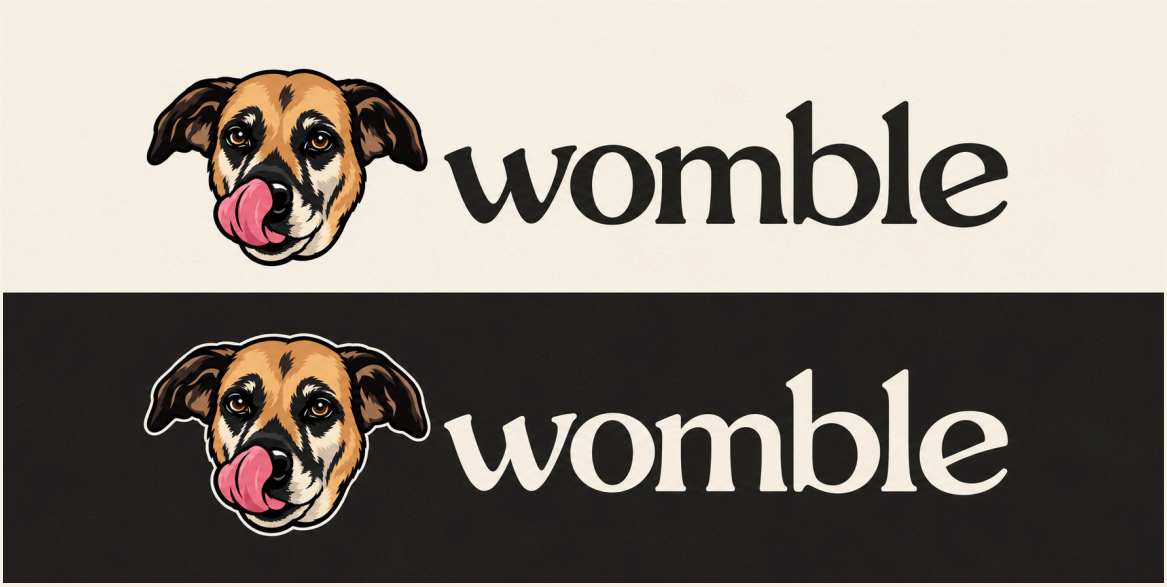


Serif and portrait pairing reference. This earlier study omits the edition number and subtitle; use the rules below for the complete identity.

Element	Rule
Wordmark	Lowercase womble in the approved warm serif lettering.
Edition number	#1 is a raised suffix at about 35–45% of wordmark height.
Descriptor	home assistant is centered beneath womble only; keep it slightly narrower than w to e.
Portrait	Place left of the wordmark for a horizontal logo, above for the compact hub.
Clear space	Allow at least one lowercase o height around the complete logo.
Small use	Use the head alone when the descriptor becomes unreadable.

On charcoal, use cream lettering and a fine cream keyline around the dark ears. Keep the tan, pink and cream portrait colours consistent. Do not stretch the head, add drop shadows or turn the entire logo into a coloured badge.

Colour and typography

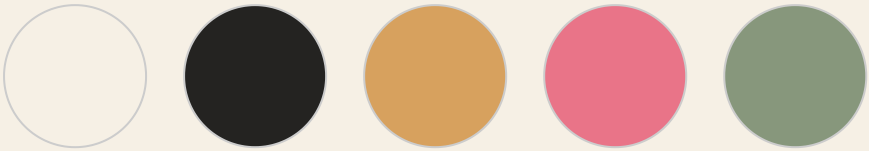

Cream
#F6F0E5

Charcoal
#242321

Tan
#D7A15E

Pink
#E97488

Sage
#87977C

Light and dark themes

Role	Light	Dark
Canvas	#F6F0E5	#242321
Primary text	#242321	#F6F0E5
Card surface	White or pale cream	#34312E
Primary action	#E97488 with charcoal text	#E97488 with charcoal text
Ready status	Dark green text on pale sage	Cream text on deep green

Pink and sage are accents, not default small-text colours. Pair them with dark text on filled controls. Validate contrast on final screens; aim for at least 4.5:1 for ordinary text and 3:1 for large text and essential control boundaries.

Type hierarchy

The wordmark is custom concept lettering generated during the design exploration; no exact font family has been established. Preserve the supplied artwork as the visual authority. A final editable vector wordmark still needs tracing and optical spacing work.

For implementation previews, Georgia is a practical serif stand-in for headings, and the system sans-serif stack suits labels, lists and settings. These are substitutes, not an exact recreation of the logo. Keep body text readable and reserve wide tracking for short descriptors.

Kitchen dashboard

The household view on the re-flashed kitchen picture frame.

Layout

Keep a small logo at the top left, time and date in the main left column, and the shopping list with its Print list action on the right. Place the greeting and ready state below the clock. Home, Calendar, Music and Settings form a restrained lower navigation strip.

Priority	Behaviour
Time and date	Readable across the kitchen; large figures with a stable layout.
Shopping list	High-contrast item names and generous check targets. Show an item count when the list extends beyond the visible area.
Print list	One explicit action. Disable while sending and show a clear outcome.
Household status	Use short phrases; keep technical diagnostics in Settings.
Theme	Dark is the preferred concept; offer the cream light theme.

Responsive rules


Use proportions rather than assuming a screen resolution. Start with two columns on a wide frame; stack the shopping list below the clock on narrower screens. Keep essential controls at least 44 CSS pixels where the device supports touch, then verify physical usability on the actual frame.

Copy examples

Ready when you are. · Added milk. · List sent to printer. · Printer is unavailable. Try again.

Calendar, music and weather are proposed interface modules shown in the concepts; show them only when their integrations are implemented.

Voice hub and listening character

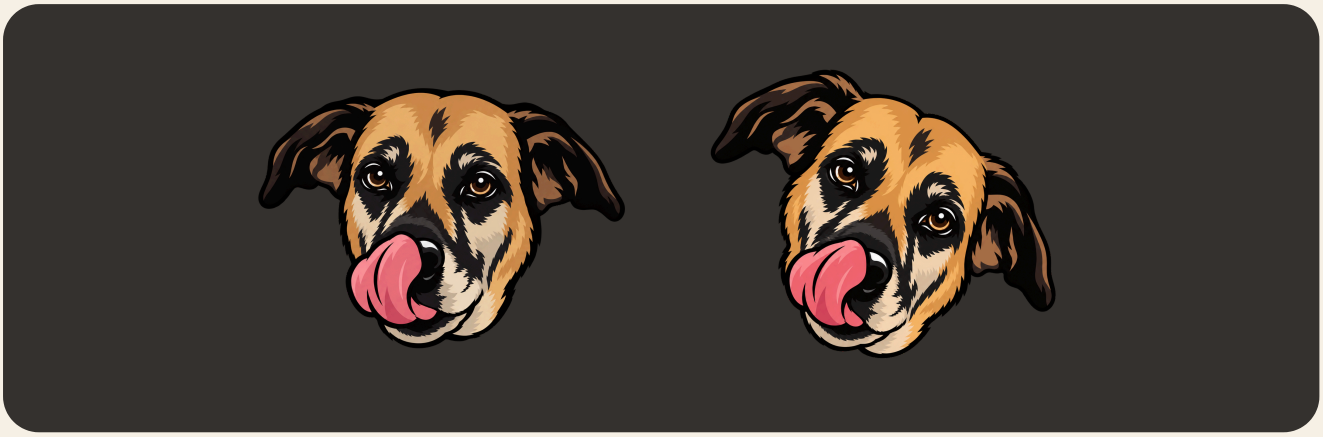

Neutral identity at left; listening pose at right, tilted towards the viewer’s right.

The signature gesture

When listening starts, tilt the neutral head clockwise by about 15 degrees and move it slightly down. The right ear on the screen drops lower. Keep the logo lettering stationary. Ease into the pose over 280 ms, hold it while listening, and return to neutral when capture ends. Do not loop a continuous head wobble.

State	Portrait and indicator	Label
Idle	Neutral head; no animated waveform	Ready when you are.
Listening	Tilt down and right; pink input waveform	Listening…
Thinking	Neutral head; quiet progress indicator	One moment…
Speaking	Neutral head; waveform follows output	Speaking…
Muted	Neutral head; microphone-off icon	Microphone off
Offline	Neutral head; clear connection icon	Connection unavailable

Activate the listening gesture only when the microphone is actually accepting input. Drive the waveform from real input level where available. With reduced motion, keep the head still and retain the label and microphone indicator. The included browser demo illustrates the state change only.

Shopping printer

A practical black-and-white expression of the same identity.

Receipt hierarchy

Use the monochrome head, followed by womble with the small #1. Include home assistant only if it remains readable. Then show SHOPPING LIST, one item per line with a clear checkbox, and Good hunting. at the bottom.

Property	Starting specification
Resolution	203 DPI, approximately 8 printer dots per millimetre
Head width	256 printer dots, approximately 32 mm
Ink	Pure black and white; no grey shading required
Lines	Prefer strokes at least 2 printer dots thick at final size
Layout	Use actual printable width, not nominal paper-roll width
Image scaling	Rasterise once to the target dot width; avoid driver rescaling

The supplied monochrome PNG is the original high-resolution artwork. Before sending to the printer, resize it to the intended dot width and threshold it to 1-bit. Print a test; inspect the eyes, tongue and ear separation. A 256-dot export has not yet been hardware validated.

Print flow

Press Print list → show Sending… → confirm List sent to printer. If the transport only confirms delivery, do not claim paper has printed. Keep the list when a connection fails, and offer retry. Guard against repeat taps producing duplicates.

Receipt text template

```
womble #1
home assistant
SHOPPING LIST
[ ] Milk
[ ] Bread
[ ] Coffee

Good hunting.
```

Motion and implementation handoff

One identity across three surfaces

The BOX-3 hub owns the listening character. The kitchen frame owns the household overview. The Bluetooth printer produces a portable list. Frida is the Alexa skill connection described in the project brief; this pack does not define its wake phrase, account linking or backend protocol.

Included implementation files

File	Purpose
tokens.json	Shared colour values for device and dashboard work.
womble.css	Theme variables and listening transform for a neutral head.
voice-state-demo.html	Local interactive listening-state preview. No microphone access.

Motion contract

Apply the CSS transform to the neutral portrait only. The separate listening-pose PNG is a visual reference and can serve as a static replacement; do not rotate that already tilted image again. Reserve enough space for ears throughout the motion and avoid shifting neighbouring text.

Build checks

Confirm each real screen’s dimensions, orientation, rendering stack and memory budget before exporting device-specific assets. Check boot, idle, listen, think, speak, mute and offline states. Test the printer at native dot size and check all text in both themes.

The first colour mascot was requested as a 256-colour version. The included master remains a full-colour transparent PNG; an indexed 256-colour device export is still required if that hardware constraint applies. The visual pack does not claim firmware or integration work is complete.

Asset register and next production steps

Asset	Status and use
womble-head-colour.png	Full-colour transparent master portrait.
womble-head-mono.png	Black-and-white portrait on white for receipt preparation.
womble-listening-pose.png	New static listening pose reference.
logo-light-dark-concept.png	Approved serif direction, raster reference.
device-branding-reference.png	Latest subtitle alignment and reduced #1 mockup.

Production priorities

1. Trace and refine the approved wordmark as true vector paths, then export horizontal and stacked lockups with the descriptor and small #1.

2. Confirm device screens and produce exact-size transparent PNGs and any required indexed palettes.

3. Export and test a native 256-dot monochrome printer head.

4. Connect the listening state to the real microphone lifecycle and validate tilt direction on the hub.

5. Confirm final brand spacing on all three devices before treating the mockups as implementation screenshots.

Version record

Version 1 · 18 October 2026. Captures the warm serif direction, subordinate #1, descriptor beneath womble, friendly dark theme and listening head tilt. This pack is a complete first-edition design handoff, with remaining production exports explicitly identified above.