

Document Title	HSD070I651 Specification	Page No.	1/26
Document No.		Revision	1.0

TO:

Date:

Customer Acceptance Specification


Model: HSD070I651- C00

Note:1.Please contact HannStar Display Corp. before designing your product based on this module specification.

^{2.} The information contained herein is presented merely to indicate the characteristics and performance of our products. No responsibility is assumed by HannStar for any intellectual property claims or other problems that may result from application based on the module described herein.

Document Title	HSD070I651 Specification	Page No.	2/26
Document No.		Revision	1.0

Record of Revisions Rev. Description of change Date 1.0 April.4, 2006 CAS of HSD070I651-C00 was first issued.



Document Title	HSD070I651 Specification	Page No.	3/26
Document No.		Revision	1.0

Contents

1.0	General description	p.4
2.0	Absolute maximum ratings	p.6
3.0	Optical characteristics	p.7
4.0	Block diagram	p.11
5.0	Interface pin connection	p.12
6.0	Electrical characteristics	p.14
7.0	Reliability test items	p.21
8.0	Outline dimension	p.22
9.0	Lot mark	p.23
10.0	Package specification	p.24
11.0	General precaution	p.25

Document Title	HSD070I651 Specification	Page No.	4/26
Document No.		Revision	1.0

1.0 GENERAL DESCRIPTION

1.1 Introduction

HannStar Display model HSD070I651-C00 is a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT LCD panel, a driving circuit and a back light system. This TFT LCD has a 7.0 (16:9) inch diagonally measured active display area with 1440 x 234 dot (480 horizontal by 234 vertical pixel) resolution.

1.2 Features

- 7 (16:9 diagonal) inch configuration
- Compatible with NTSC & PAL system
- Image Reversion: UP/DOWN and LEFT/RIGHT

1.3 Applications

- Portable TV
- Portable DVD
- Multimedia applications and Others AV system

1.4 General information

Item		Specification	Unit
Outline Dimensi	on	164.9 x 100 x 5.5 (Typ.)	mm
Display area		154.08(H) x 86.58(V)	mm
Number of Pixel		480 RGB(H) x234(V)	pixels
Pixel pitch		0.321(H) x 0.370(V)	mm
Pixel arrangement		RGB Vertical stripe	
Display mode		Normally white	
Surface treatme	nt	Antiglare, Hard-Coating(3H) with WV film	
Weight		160 (Typ.)	g
Back-light		Single CCFL (Side-Light type)	
Power	Logic System	36.4(Typ.)	mW
Consumption	B/L System	3.28(Typ.)	W

Document Title	HSD070I651 Specification	Page No.	5/26
Document No.		Revision	1.0

1.5 Mechanical Information

	Item	Min.	Тур.	Max.	Unit
Modulo	Horizontal(H)	164.4	164.9	165.4	mm
Module Size	Vertical(V)	99.5	100.0	100.5	mm
Size	Depth(D)	_	5.5	5.8	mm
Weight (With	nout inverter)	_	160	170	g

Document Title	HSD070I651 Specification	Page No.	6/26
Document No.		Revision	1.0

2.0 ABSOLUTE MAXIMUM RATINGS

2.1 Electrical Absolute Rating

2.1.1 TFT LCD Module

Item	Symbol	Min.	Max.	Unit	Note
	DV_DD	-0.3	6.0	V	GND=0
	V_{GH}	-0.3	40	V	GND=0
Power supply voltage	V_{GL}	-20	0.3	V	GND=0
	V_{GH} - V_{GL}	-0.3	40	V	
	AV_DD	-0.3	7.0	V	AGND=0
	V_{COM}	-1.6	5.2	V	
Analog Signal Input Level	$V_{R,} V_{G,} V_{B}$	-0.2	AV _{DD} +0.2	V	
Logic Signal Input Level	V_{l}	-0.3	DV _{DD} +0.3	V	

2.1.2 Back-Light Unit

Item	Symbol	Min.	Max.	Unit	Note
Lamp current	Ι _L	0	7.0	mA	(1) (2)
Lamp frequency	f_L	0	100	KHz	(1) (2)

Note (1) Permanent damage may occur to the LCD module if beyond this specification. Functional operation should be restricted to the conditions described under normal operating conditions.

(2) Ta =25±2°C

2.2 Environment Absolute Rating

Item	Symbol	Min.	Max.	Unit	Note
Operating Temperature	T_{opa}	-10	60	$^{\circ}\mathbb{C}$	
Storage Temperature	T_{stg}	-20	70	$^{\circ}\mathbb{C}$	

Document Title	HSD070I651 Specification	Page No.	7/26
Document No.		Revision	1.0

3.0 OPTICAL CHARACTERISTICS

3.1 Optical specification

opiloa opoliioaloi.								
Item		Symbol	Condition	Min.	Тур.	Max.	Unit	Note
Contrast		CR		400	500			(1)(2)
Response	Rising	T_R		_	5	7		(1) (2)
time	Falling	T_F	⊖=0 Na ::::::::::::::::::::::::::::::::::::	_	20	28	msec	(1)(3)
White luminance (Center)		Y _L	Normal viewing	255	300	ı	cd/m ²	(1)(4) (I _L =6.0mA)
Color	White	W _x	angle	0.26	0.31	0.36		
chromaticity (CIE1931)		W _y		0.28	0.33	0.38		(1)(4)
	Llow	Θ_{L}		50	60	1		
	Hor.	Θ_{R}		50	60	ı		
Viewing angle	Ver.	θυ	CR>10	30	40			
		Θ_{D}		50	60	_		
Brightness uniformity		B _{UNI}	⊖=0	70	<u> </u>	_	%	(5)

3.2 Measuring Condition

■ Measuring surrounding : dark room

■ Lamp current I_{FL}: 6.0±0.1mA(rms), Lamp freq. F_L=50KHz, Inverter: HIU-766-22pF

■ Ambient temperature : 25±2°C


■ 30min. warm-up time.

Document Title	HSD070I651 Specification	Page No.	8/26
Document No.		Revision	1.0

3.3 Measuring Equipment

- Otsuka Electrics Corp., which utilized LCD-7000 for Chromaticity and BM-5 for other optical characteristics.
- Measuring spot size : 10 ~ 12 mm

Note (1) Definition of Viewing Angle:

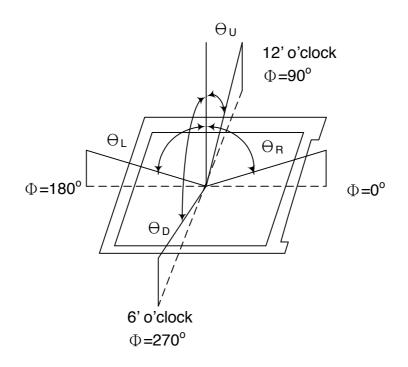


Note (2) Definition of Contrast Ratio(CR) : measured at the center point of panel


CR = Luminance with all pixels white


Luminance with all pixels black

Document Title	HSD070I651 Specification	Page No.	9/26
Document No.		Revision	1.0

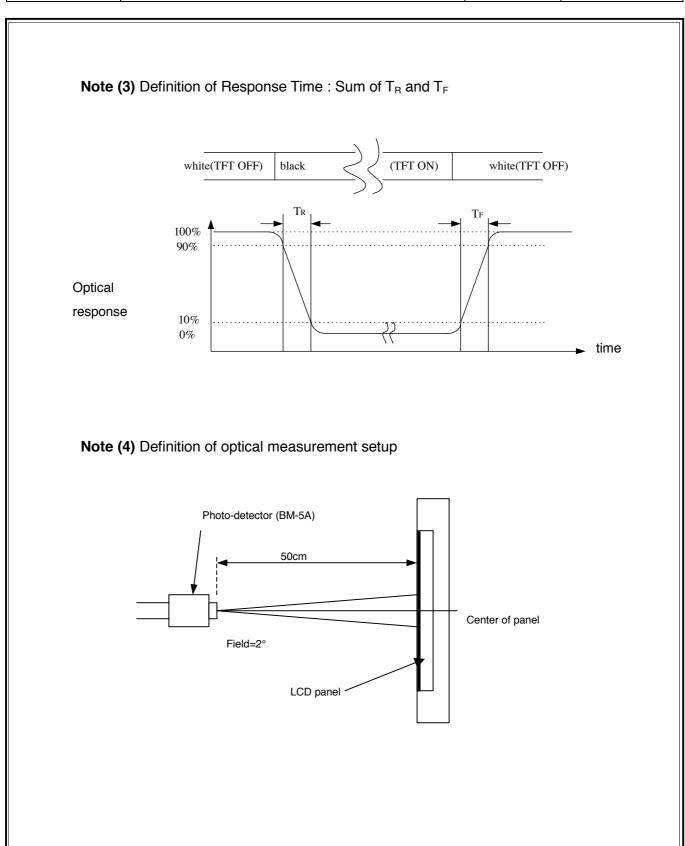


Document Title	HSD070I651 Specification	Page No.	10/26
Document No.		Revision	1.0



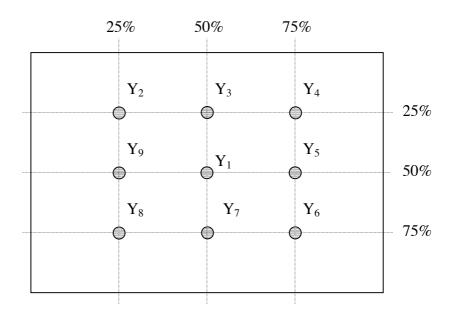

Luminance uniformity = (Min Luminance of 9 points) ×100% (Max Luminance of 9 points)

Document Title	HSD070I651 Specification	Page No.	11/26
Document No.		Revision	1.0

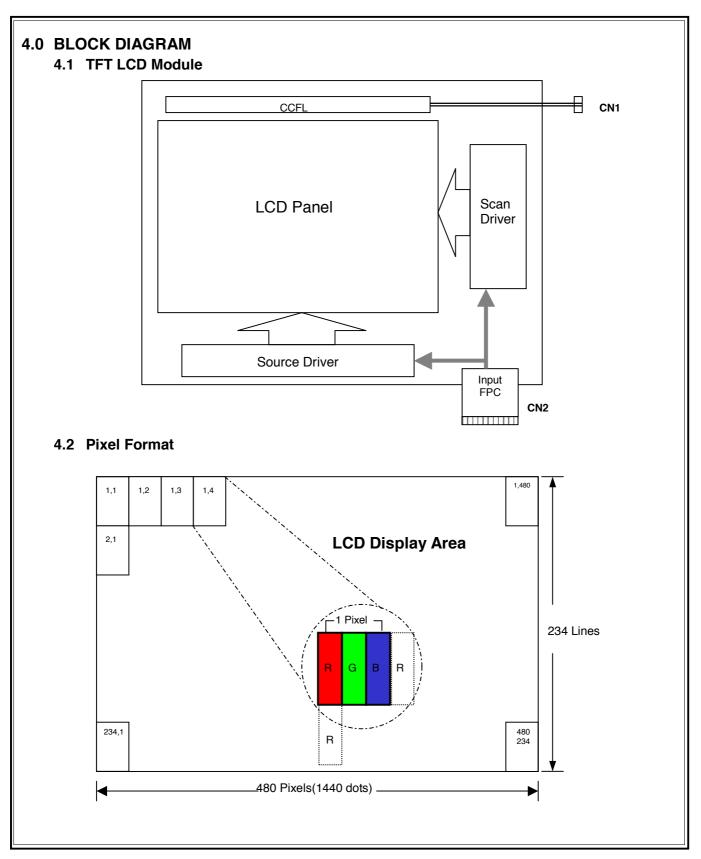

Document Title	HSD070I651 Specification	Page No.	12/26
Document No.		Revision	1.0

5.0 INTERFACE PIN CONNECTION

5.1 TFT LCD Module


CN2 (Input signal): FPC Down Connector, 26 pins, pitch: 0.5mm

Terminal no.	Symbol	I/O	Function	Note
1	DGND	-	Ground for logic circuit	
2	DV_{DD}	I	Supply voltage of logic control circuit for scan (Gate) driver	
3	V_{GL}		Negative power for scan (Gate) driver	
4	V_{GH}	- 1	Positive power for scan (Gate) driver	
5	STVD	I/O	Vertical start pulse	(1)
6	STVU	I/O	Vertical start pulse	(1)
7	CKV		Shift clock input for scan (Gate) driver	
8	U/D		UP/DOWN scan control input	(1)
9	OEV	ı	Output enable input for scan(Gate) driver	
10	Vсом		Common electrode driving signal	
11	Vсом		Common electrode driving signal	
12	L/R	ı	LEFT/RIGHT scan control input	(1)
13	MOD		Sequential sampling and simultaneous sampling setting	(2)
14	OEH		Output enable input for data (Source) driver	
15	STHL	I/O	Start pulse for horizontal scan (Gate) line	(1)
16	STHR	I/O	Start pulse for horizontal scan (Gate) line	(1)
17	CPH3		Sampling and shifting clock pulse for data (Source) driver	(2)
18	CPH2		Sampling and shifting clock pulse for data (Source) driver	(2)
19	CPH1		Sampling and shifting clock pulse for data (Source) driver	
20	DV_DD		Supply voltage of logic control circuit for data(Source) driver	
21	DGND	•	Ground for logic circuit	
22	V_{R}	ı	Alternated video signal input(Red)	
23	V G	I	Alternated video signal input(Green)	
24	V B	ı	Alternated video signal input(blue)	
25	AV_DD	I	Supply voltage for analog circuit	
26	AGND	-	Ground for analog circuit	

Note (1) Selection of scanning mode (please refer to the following table)

Setting of scan control input		IN/OUT state for start pulse				Scanning direction
U/D	L/R	STVD	STVU	STHR	STHL	
GND	DV _{DD}	Output	Input	Output	Input	up to down, and from left to right.
DV _{DD}	GND	Input	Output	Input	Output	down to up, and from right to left.
GND	GND	Output	Input	Input	Output	up to down, and from right to left.
DV _{DD}	DV _{DD}	Input	Output	Output	Input	down to up, and from left to right.

Note (2) MOD=H: Simultaneous sampling.(Please check CPH2 and CPH3 to GND when MOD=H) MOD=L: Sequential sampling.




Document Title	HSD070I651 Specification	Page No.	13/26
Document No.		Revision	1.0

5.2 Back-Light Unit

CN1 CCFL Power Source (**BHSR-02VS-1 or equivalent**) / JAPAN SOLDERLESS TERMINAL MFG CO., LTD.

Mating Connector: (SBHT-002T-P0.5) / JAPAN SOLDERLESS TERMINAL MFG CO., LTD.

	· · · · · · · · · · · · · · · · · · ·	
Terminal no.	Symbol	Function
1	VL	CCFL power supply (high voltage)
2	GL	CCFL power supply (low voltage)



Document Title	HSD070I651 Specification	Page No.	14/26
Document No.		Revision	1.0

6.0 ELECTRICAL CHARACTERISTICS

6.1 TFT LCD Module

Item	Symbol	Min.	Тур.	Max.	Unit	Note
	DV_{DD}	3	3.3	5.5	٧	
Supply Voltage	V_{GH}	14.3	15	15.7	٧	
Supply voltage	V_{GL}	-10.5	-10	-9.5	V	
	AV _{DD}	4.5	5	5.5	V	
Video signal	ViA	0.4	-	AV _{DD} -0.4	V	
amplitude	Viac	-	3	-	V	AC component,
(VR,VG,VB)	ViDC	-	AV _{DD} /2	-	V	DC component
VCOM	VCAC	-	4.7	-	VP-P	AC component
VCOIVI	Vcdc	1.6	1.8	2.0	V	DC component, (1)
Input signal	ViH	0.8DV _{DD}	-	DV _{DD}	V	(2)
voltage	ViL	0	-	0.2 DV _{DD}	V	(2)
	ldd	-	127	-	uA	DV _{DD} =3.3V
Current of power	I _{ADD}	-	7.0	-	mA	AV _{DD} =5V(Black)
supply	lgн	-	70	-	uA	V _{GH} =15V
	I GL	-	65	-	uA	V _{GL} =-10V

Note (1): The brightness of LCD panel could be changed by adjusting the AC component of VCOM.

Note (2): STHL, STHR, OEH, L/R, CPH1~CPH3, STVD, STVU, OEV, CKV, U/D

Note (3): Be sure to apply the power voltage as the power sequence spec.

Note (4): DGND=AGND=0V,)


Document Title	HSD070I651 Specification	Page No.	15/26
Document No.		Revision	1.0

6.2 Back-Light Unit

The back-light system is an edge-lighting type with 1 CCFL(Cold Cathode Fluorescent Lamp). The characteristics of the lamp is shown in the following tables.

	•			0		
Item	Symbol	Min.	Тур.	Max.	Unit	Note
Lamp current	IL	3.0	6.0	7.0	mA(rms)	(1)(6)
Lamp voltage	VL	496	548	610	V(rms)	(6)I _L =6.0mA
Frequency	fL	40	50	80	KHz	(2)
Operating lamp life time	Hr	15,000		-	Hour	(3)
Startup voltage	Vs	1000			V(rms)	(4)(5)at 25°C
Startup voltage	VS	1330	_	_	v (11115)	(4)(5)at 0°C

Note (1) Lamp current is measured with current meter for high frequency as shown below. Specified valued are for single lamp.

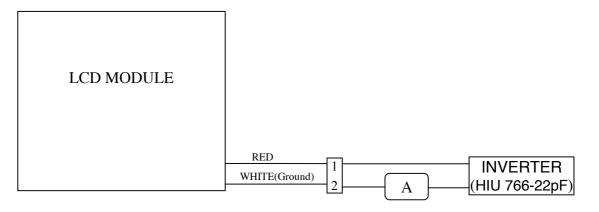

- Note (2) Lamp frequency may produce interference with horizontal synchronous frequency and this may cause ripple noise on the display. Therefore lamp frequency shall be kept away from the horizontal synchronous frequency and its harmonics as far as possible in order to avoid interference.
- Note (3) Lamp life time (Hr) can be defined as the time in which it continues to operate under the condition: Ta=25±3 °C, typical IL value indicated in the above table and fL=50kHz until the brightness becomes less than 50%.
- Note (4) CCFL inverter should be able to provide a voltage over specified value (Vs) in the above table. Lamp units need at least Vs value shown above to ignition.




Document Title	HSD070I651 Specification	Page No.	16/26
Document No.		Revision	1.0

Note (5) The voltage over specified value (Vs) should be applied to the lamp more than 1

second after startup. Otherwise, the lamp may not be turned on. The used lamp current is the lamp typical current.

- Note (6) The output voltage waveform and current waveform of the inverter must be symmetrical (Unsymmetrical ratio is less than 10%). Please do not use the inverter which has unsymmetrical voltage and current waveform, and spike waveform. The inverter design which can provide the best optical performance, power efficiency, and lamp life should under the following conditions.
 - a. The asymmetry rate of the inverter waveform should be less than 10%.
 - b. The distortion tae of the waveform should be within $\sqrt{2\pm10\%}$.
 - c. The inverter output waveform should be better similar to the ideal sine wave.

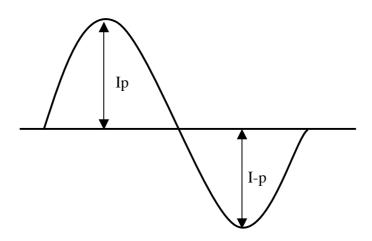

Asymmetry rate = II_p -I-pI / Irms x 100% Distortion rate = I_p (or I-p) / Irms

Document Title	HSD070I651 Specification	Page No.	17/26
Document No.		Revision	1.0


6.3 AC Characteristics

Item	Symbo I	Min.	Тур.	Max.	Unit	Note
Rising time	tr	-	•	10	ns	(1)
Falling time	t f	-	-	10	ns	(1)
High and low level pulse duty	t CPH	100	103	-	ns	CPH1~CPH3
CPH pulse duty	tсwн	40	50	60		CPH1~CPH3
STH setup time	t sun	20	-	-	ns	STHR,STHL
STH hold time	t HDH	10	-	-	ns	STHR,STHL
STH pulse width	t sтн	-	1	-	t CPH	STHR,STHL
STH period	tн	61.5	63.5	65.5	μs	STHR,STHL
OEH pulse width	t oeh	-	1.23	-	μs	OEH
Sample and hold disable time	t DIS1		8.19	-	μs	
OEV pulse width	toev	-	4.77	-	μs	OEV
CKV pulse width	t ckv	-	3.91	-	μs	CKV
Clean enable time	t DIS2	-	3.90	•	μs	
Horizontal display timing range	t DH	-	1440	-	t срн/ 3	
STV setup time	t suv	200	•	•	ns	STVD,STVU
STV hold time	t hdv	300	-	-	ns	STVD,STVU
STV pulse width	t stv	-	1	•	tн	STVD,STVU
Horizontal line per field	tv	256	262	268	tн	(2)
Vertical display start	tsv		3	•	tн	
Vertical display timing range	tov		234	-	tн	
VCOM Rising time	trсом		-	5	μs	
VCOM Falling time	t fCOM		-	5	μs	
VCOM delay time	t DCOM		ı	3	μs	
RGB delay time	t DRGB		*	1	μs	


Note (1): For all of the logic signals.

Note (2): Please don't use odd horizontal lines to drive LCD panel for both odd and even filed simultaneously.

Document Title	HSD070I651 Specification	Page No.	18/26
Document No.		Revision	1.0

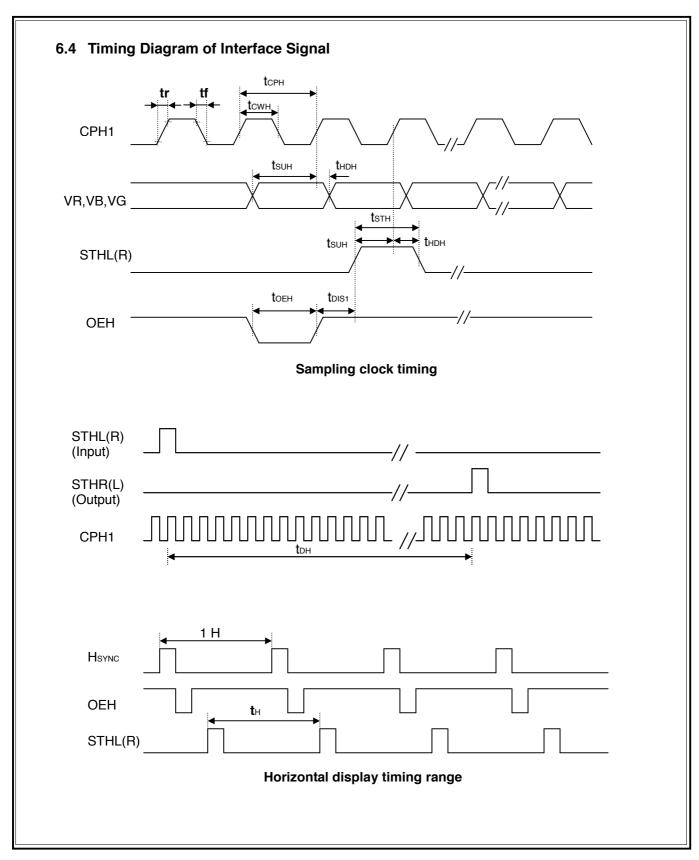


Document Title	HSD070I651 Specification	Page No.	19/26
Document No.		Revision	1.0

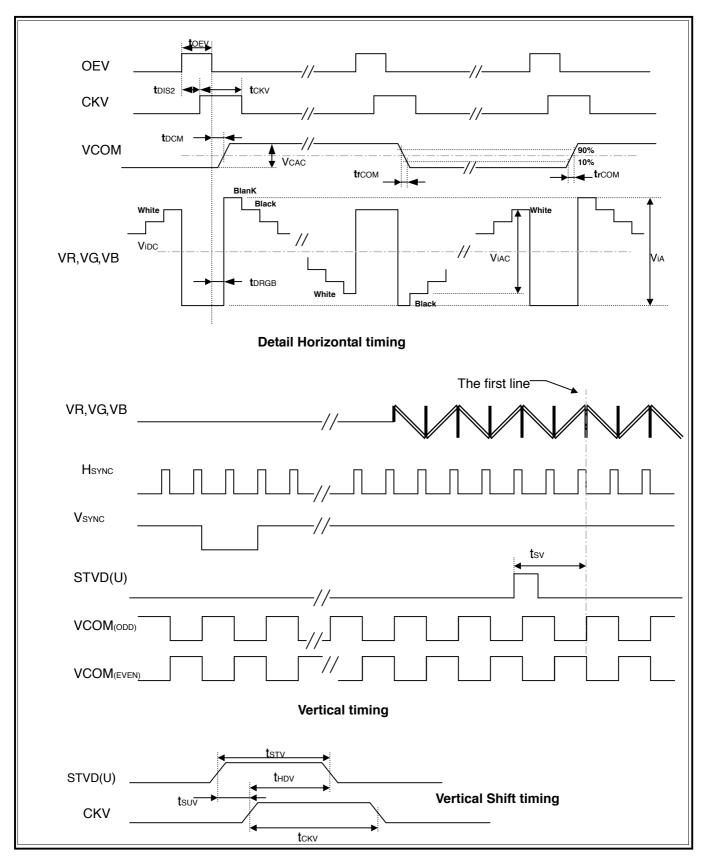



Document Title	HSD070I651 Specification	Page No.	20/26
Document No.		Revision	1.0



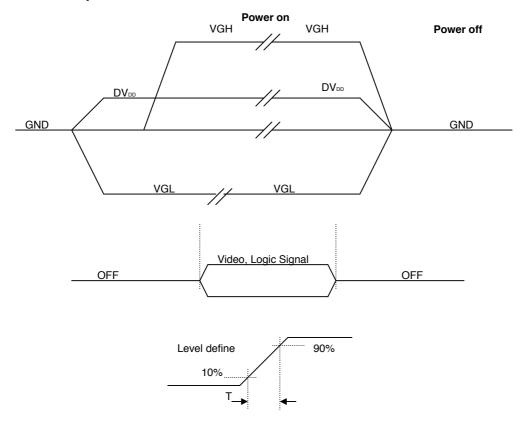

Power Sequence: DVDD -> VGL -> VGH

Note Apply the lamp volatge within the LCD operation range. When the back-light turns on before the LCD operation or the LCD truns off before the back-light turns off. the display may momentarily become white.


Document Title	HSD070I651 Specification	Page No.	21/26
Document No.		Revision	1.0

7.0 Reliability test items

No.	Item	Conditions	Remark
1	High Temperature Storage	Ta=+70°C, 240hrs	
2	Low Temperature Storage	Ta=-20°C, 240hrs	
3	High Temperature Operation	Ta=+60°C, 240hrs	
4	Low Temperature Operation	Ta=-10°C, 240hrs	
5	High Temperature and High Humidity (operation)	Ta=+60°C, 90%RH, 240hrs	
6	Thermal Cycling Test (non operation)	$-20^{\circ}\text{C}(30\text{min}) \rightarrow +70^{\circ}\text{C}(30\text{min}), 200\text{cycles}$	
7	Electrostatic Discharge	\pm 200V,200pF(0 Ω) 1 time/each terminal	
8	Vibration	1.Random: 1.04Grms, 10~500Hz, X/Y/Z, 30min/each direction	
		2.Sweep sine: 1.5G, 5~500Hr, X/Y/Z, 30min/each direction	
9	Shock	100G,6ms, ±X, ±Y, ±Z 3 time for each direction	JIS C7021, A-10 (Condition A)
10	Vibration (with carton)	Random: 1.04Grms, 10~500Hz, X/Y/Z 45min/each direction Fixed: 5Hz, 1.5Grms, X/Y/Z 45min/each direction	,
11	Drop (with carton)	Height: 60cm 1 corner, 3 edges, 6 surfaces	JIS Z0202

Note: There are no display function NG issue occurred, All the cosmetic specification is judged before the reliability stress.

Document Title	HSD070I651 Specification	Page No.	22/26
Document No.		Revision	1.0

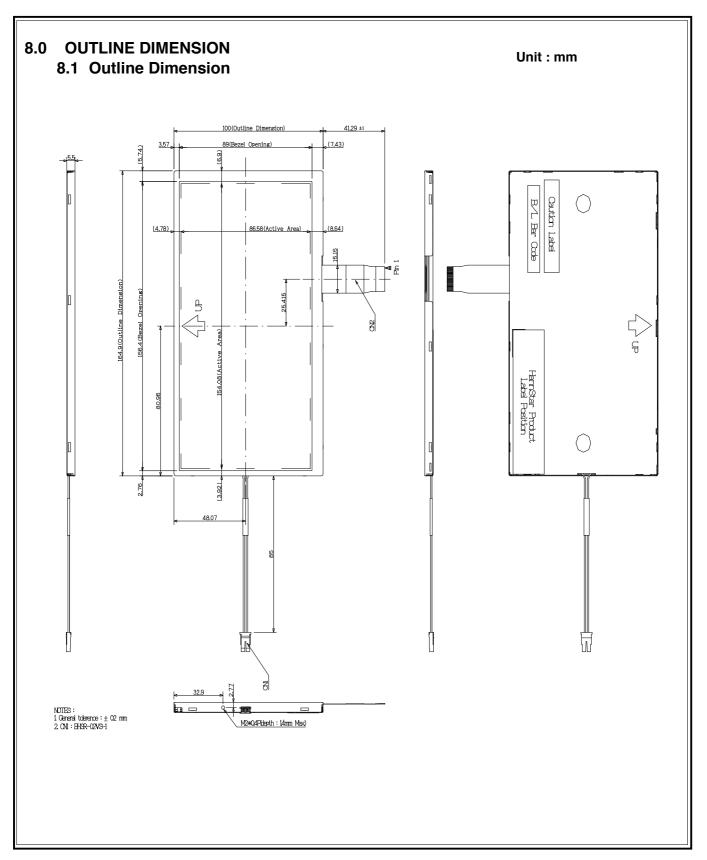

Document Title	HSD070I651 Specification	Page No.	23/26
Document No.		Revision	1.0

9.0 LOT MARK

9.1 Lot Mark

 1
 2
 3
 4
 5
 6
 7
 8
 9
 10
 11
 12
 13
 14
 15

code 1,2,3,4,5,6: HannStar internal flow control code.

code 7: production location.

code 8: production year. code 9: production month.

code 10,11,12,13,14,15: serial number.

Note (1) Production Year


Year	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008
Mark	9	0	1	2	3	4	5	6	7	8

Note (2) Production Month

Month	Jan.	Feb.	Mar.	Apr.	Мау.	Jun.	Jul.	Aug.	Sep.	Oct	Nov.	Dec.
Mark	1	2	3	4	5	6	7	8	9	Α	В	С

9.2 Location of Lot Mark

- (1) The label is attached to the backside of the LCD module.
- (2) This is subject to change without prior notice.

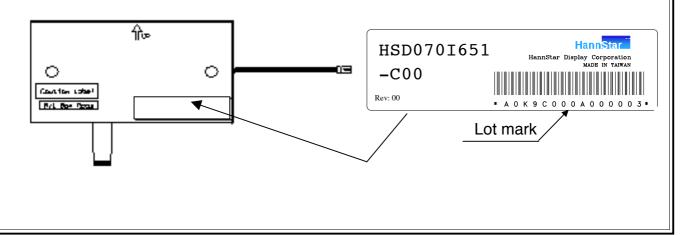


Document Title	HSD070I651 Specification	Page No.	24/26
Document No.		Revision	1.0

10.0 PACKAGE SPECIFICATION

10.1 packing form

- (1) Package quantity in one carton: 60 pieces.
- (2) Carton size: 464±3 mmx360±3 mmx370±3 mm.
- (3) For domestic transportation only.

10.2 packing assembly drawings

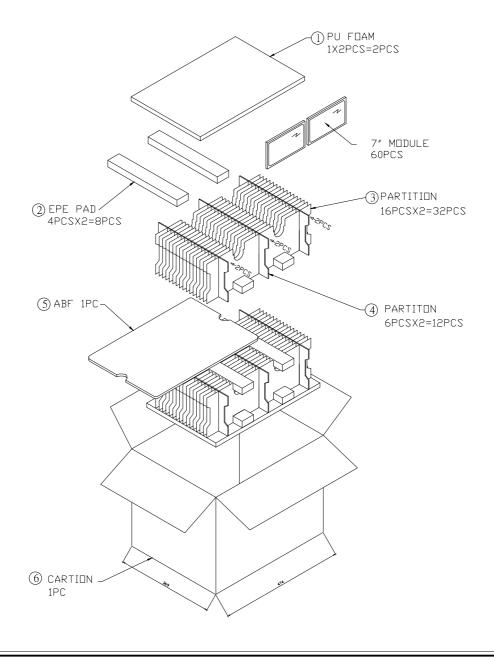

Document Title	HSD070I651 Specification	Page No.	25/26
Document No.		Revision	1.0

11.0 GENERAL PRECAUTION

11.1 Use Restriction

This product is not authorized for use in life supporting systems, aircraft navigation control systems, military systems and any other application where performance failure could be life-threatening or otherwise catastrophic.

11.2 Disassembling or Modification

Do not disassemble or modify the module. It may damage sensitive parts inside LCD module, and may cause scratches or dust on the display. HannStar does not warrant the module, if customers disassemble or modify the module.

11.3 Breakage of LCD Panel

- 11.3.1.If LCD panel is broken and liquid crystal spills out, do not ingest or inhale liquid crystal, and do not contact liquid crystal with skin.
- 11.3.2. If liquid crystal contacts mouth or eyes, rinse out with water immediately.
- 11.3.3. If liquid crystal contacts skin or cloths, wash it off immediately with alcohol and rinse thoroughly with water.
- 11.3.4. Handle carefully with chips of glass that may cause injury, when the glass is broken.

11.4 Electric Shock


- 11.4.1. Disconnect power supply before handling LCD module.
- 11.4.2. Do not pull or fold the CCFL cable.
- 11.4.3. Do not touch the parts inside LCD modules and the fluorescent lamp's connector or cables in order to prevent electric shock.

11.5 Absolute Maximum Ratings and Power Protection Circuit

- 11.5.1. Do not exceed the absolute maximum rating values, such as the supply voltage variation, input voltage variation, variation in parts' parameters, environmental temperature, etc., otherwise LCD module may be damaged.
- 11.5.2. Please do not leave LCD module in the environment of high humidity and high temperature for a long time.
- 11.5.3. It's recommended to employ protection circuit for power supply.

11.6 Operation

- 11.6.1 Do not touch, push or rub the polarizer with anything harder than HB pencil lead.
- 11.6.2 Use fingerstalls of soft gloves in order to keep clean display quality, when persons handle the LCD module for incoming inspection or assembly.
- 11.6.3 When the surface is dusty, please wipe gently with absorbent cotton or other soft material.



Document Title	HSD070I651 Specification	Page No.	26/26
Document No.		Revision	1.0

- 11.6.4 Wipe off saliva or water drops as soon as possible. If saliva or water drops contact with polarizer for a long time, they may causes deformation or color fading.
- 11.6.5 When cleaning the adhesives, please use absorbent cotton wetted with a little petroleum benzine or other adequate solvent.

11.7 Mechanism

Please mount LCD module by using mouting holes arranged in four corners tightly.

11.8 Static Electricity

- 11.8.1 Protection film must remove very slowly from the surface of LCD module to prevent from electrostatic occurrence.
- 11.8.2. Because LCD module use CMOS-IC on circuit board and TFT-LCD panel, it is very weak to electrostatic discharge. Please be careful with electrostatic discharge. Persons who handle the module should be grounded through adequate methods.

11.9 Strong Light Exposure

The module shall not be exposed under strong light such as direct sunlight. Otherwise, display characteristics may be changed.

11.10 Disposal

When disposing LCD module, obey the local environmental regulations.