


ToughEye-1700™ Web Trigger UI

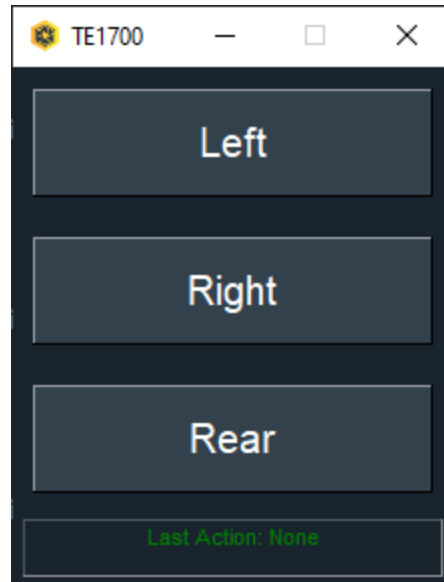

Introduction

The ToughEye-1700™ Web Trigger UI application is a simple graphical interface enabling users to trigger the self-cleaning function of the ToughEye-1700™ camera, through its network interface. This application is intended to be used as an add-on to VMS software packages, which can be used to display the ToughEye-1700™ camera stream.

Installation

The application is a single executable which can be placed wherever is convenient. Upon running for the first time a default configuration file will be generated within the same folder as the executable. This configuration can then be modified to suit the needs of the deployment.

Configuration

The configuration file is a json file with the following format:

```
{
  "cameras": [
    {
      "name": "Left",
      "ip": "192.168.0.120",
      "user": "admin",
      "password": "admin"
    },
    {
      "name": "Right",
      "ip": "192.168.0.121",
      "user": "admin",
      "password": "admin"
    }
  ],
  "location": "bottomright",
  "alwaysOnTop": true
}
```

Name	Type	Description
cameras	List	List of camera objects. Each camera object must define its name, ip address, username and password. For each listed camera object a button will be added to the user interface with the name of the camera.
location	string	The screen location where the tool will open. Values can be one of: topleft, topright, bottomleft, bottomright
alwaysOnTop	boolean	When set to true the window will remain on top of other applications.

Usage

After setting up the configuration file, run the program and check that the expected camera names appear within the UI.

Upon clicking any of the camera trigger buttons an HTTP trigger command will be sent to the specified IP address, using the specified credentials.

The bottom row of the application indicates whether the last action was successful and will indicate an error if the self-clean trigger fails.