


Network Price List *(includes GST)*



EnergyAustralia™

ABN 67 505 337 385

Effective from 1 July 2005

Network Use of System Prices

Network Price No.	Network Price	DLF	Network Access Charge c/day	Network Energy Rates				Step Rates		Monthly Demand Rates	Monthly Capacity Rates
				Non-ToU c/kWh	Peak c/kWh	Shoulder c/kWh	Off Peak c/kWh	Step 1 c/kWh	Step 2 c/kWh	Peak \$(/kW or kVA)/mth	Peak \$(/kW or kVA)/mth
10	Domestic (Obsolete)*	1.0633	14.7414					4.9329	6.4128		
25	LV Energy40 ToU (System)	1.0633	19.5802		11.7417	2.3136	0.6274				
26	LV Energy40 ToU (Substation)	1.0343	15.6642		11.5982	2.2853	0.6197				
27	Interruptible Load	1.0633	18.2600		7.4910	1.8040	0.4400				
28	Miser Seasonal 1	1.0633	19.5802		23.4929	2.3136	0.6274				
30	Controlled Load 1	1.0633	1.2106	0.4206							
40	Controlled Load 2	1.0633	1.2102	2.1821							
401	Public Lighting	1.0949		3.5769							
402	Constant Unmetered	1.0612		4.3504							
403	EnergyLight	1.0949		3.5769							
50	LV Business non-ToU (Obsolete)*	1.0612	43.9992					4.4489	5.7836		
290	LV Business ToU (System) (Obsolete)*	1.0612	171.7925		10.1181	5.0842	2.1571				
291	LV Business ToU (Substation) (Obsolete)*	1.0343	122.1996		10.1599	5.1473	2.0634				
302	LV kW Capacity ToU (System)**	1.0612	110.0000		5.6683	3.5320	1.5041				2.5787
303	LV kW Capacity ToU (Substation)**	1.0343	77.0000		5.5643	3.4342	1.4123				2.4944
304	Miser Seasonal 2	1.0612	110.0000		7.9379	3.5320	1.5041				2.5787
310	LV kVA Demand ToU (System)	1.0612	176.9203		3.3821	1.9949	0.8213			3.0257	2.5420
320	LV kVA Demand ToU (Substation)	1.0343	140.0170		3.3671	1.9852	0.8161			3.0238	2.5401
350	HV Business ToU	1.0191	467.9627		9.7917	5.5449	1.5759				
370	HV kVA Demand ToU (System)	1.0191	462.0829		2.6070	1.5552	0.6338			2.3527	2.3426
380	HV kVA Demand ToU (Substation)	1.0191	462.0829		2.5697	1.5330	0.6248			1.3005	1.1509
390	ST kVA Demand ToU	1.0168	531.9051		1.7398	1.0783	0.5221			1.0967	1.0733
	Contract - above 10MW		CRNP								


- Prices include a component for recovery of EnergyAustralia's contribution to the Energy Savings Fund.
- Prices marked * are no longer available for new installations. Existing customers will remain on these tariffs while they have a type 6 meter.
- The monthly capacity rates for prices marked ** are in \$/kW/month. Monthly demand and capacity charges are calculated in accordance with the method outlined on the Definitions page.
- The time periods for the LV Energy40 ToU and Interruptible Load prices are different to the other time of use prices. Refer to the price category section for details.
- The Step Rates are 1750kWh per 91 days for Domestic and 2500kWh per 91 days for LV Business non-ToU.
- Prices highlighted in **BOLD** print are **default prices**:

LV Energy40ToU prices apply to customers consuming between 0MWh and 40MWh pa.

kW Capacity ToU prices apply to customers consuming between 40MWh and 735MWh pa.

Demand ToU prices apply to customers consuming 735MWh pa & over.

Network Price List *(excludes GST)*



EnergyAustralia™

ABN 67 505 337 385

Effective from 1 July 2005

Network Use of System Prices

Network Price No.	Network Price	DLF	Network Access Charge c/day	Network Energy Rates				Step Rates		Monthly Demand Rates	Monthly Capacity Rates
				Non-ToU c/kWh	Peak c/kWh	Shoulder c/kWh	Off Peak c/kWh	Step 1 c/kWh	Step 2 c/kWh	Peak \$(kW or kVA)/mth	Peak \$(kW or kVA)/mth
10	Domestic (Obsolete)*	1.0633	13.4013					4.4845	5.8298		
25	LV Energy40 ToU (System)	1.0633	17.8002		10.6743	2.1033	0.5704				
26	LV Energy40 ToU (Substation)	1.0343	14.2402		10.5438	2.0776	0.5634				
27	Interruptible Load	1.0633	16.6000		6.8100	1.6400	0.4000				
28	Miser Seasonal 1	1.0633	17.8002		21.3572	2.1033	0.5704				
30	Controlled Load 1	1.0633	1.1006	0.3823							
40	Controlled Load 2	1.0633	1.1001	1.9837							
401	Public Lighting	1.0949		3.2517							
402	Constant Unmetered	1.0612		3.9549							
403	EnergyLight	1.0949		3.2517							
50	LV Business non-ToU (Obsolete)*	1.0612	39.9993					4.0445	5.2579		
290	LV Business ToU (System) (Obsolete)*	1.0612	156.1750		9.1983	4.6220	1.9610				
291	LV Business ToU (Substation) (Obsolete)*	1.0343	111.0905		9.2362	4.6794	1.8758				
302	LV kW Capacity ToU (System)**	1.0612	100.0000		5.1530	3.2109	1.3674				2.3443
303	LV kW Capacity ToU (Substation)**	1.0343	70.0000		5.0585	3.1220	1.2839				2.2676
304	Miser Seasonal 2	1.0612	100.0000		7.2162	3.2109	1.3674				2.3443
310	LV kVA Demand ToU (System)	1.0612	160.8366		3.0746	1.8136	0.7466			2.7507	2.3109
320	LV kVA Demand ToU (Substation)	1.0343	127.2881		3.0610	1.8048	0.7419			2.7489	2.3091
350	HV Business ToU	1.0191	425.4207		8.9016	5.0408	1.4327				
370	HV kVA Demand ToU (System)	1.0191	420.0754		2.3700	1.4138	0.5762			2.1389	2.1296
380	HV kVA Demand ToU (Substation)	1.0191	420.0754		2.3361	1.3936	0.5680			1.1822	1.0462
390	ST kVA Demand ToU	1.0168	483.5501		1.5817	0.9803	0.4747			0.9970	0.9757
	Contract - above 10MW		CRNP								

- Prices include a component for recovery of EnergyAustralia's contribution to the Energy Savings Fund.
- Prices marked * are no longer available for new installations. Existing customers will remain on these tariffs while they have a type 6 meter.
- The monthly capacity rates for prices marked ** are in \$/kW/month. Monthly demand and capacity charges are calculated in accordance with the method outlined on the Definitions page.
- The time periods for the LV Energy40 ToU and Interruptible Load prices are different to the other time of use prices. Refer to the price category section for details.
- The Step Rates are 1750kWh per 91 days for Domestic and 2500kWh per 91 days for LV Business non-ToU.
- Prices highlighted in **BOLD** print are **default prices**:

LV Energy40ToU prices apply to customers consuming between 0MWh and 40MWh pa.

kW Capacity ToU prices apply to customers consuming between 40MWh and 735MWh pa.

Demand ToU prices apply to customers consuming 735MWh pa & over.

Price Categories

Domestic [10 & 210]: Available for consumption in premises used wholly or principally as private residential dwellings where a single register energy only meter is installed (known as a Type 6 meter as per the National Electricity Code. A private residential dwelling is a house, flat, home unit, town house or similar qualifying residential premises.

NOTE: 1) From 1 July the energy rate will be charged on a two step basis. The first step will apply to consumption up to 1750kWh per 91 day quarter. The second step will apply to consumption in excess of the first step.

2) From 1 January 2005 this tariff will become obsolete. All new low voltage domestic customers will be placed on **LV Energy40 ToU [25]**.

Charging Periods for Time of Use Prices: From 1 August 2002, the time periods applicable for all Time of Use (ToU) prices changed. Each price category specifies the applicable time periods for that price.

LV Energy40 Time of Use [25]: Applicable to low voltage electricity supplied to premises for any purpose where the consumption is below 40MWh per annum. This price is available to customers who have interval metering (Type 5 meter or better as per the National Electricity Code) that provide the energy consumed within the following specified time periods:

Peak period is from 2.00 pm - 8.00 pm on working weekdays.

Shoulder period is from 7.00 am - 2.00 pm and 8.00 pm - 10.00 pm on working weekdays, and from 7.00am – 10.00pm on weekends and public holidays.

Off-Peak period is at all other times.

NOTE: 1) After 1 January 2002 customers who sign a negotiated supply contract with a retail supplier, have a Type 5 meter (or better) installed, and consume less than 40MWh pa will be automatically placed on the **LV Energy40 ToU** Network Price. This price will continue to apply to such a customer whether or not the customer continues to receive their supply under a negotiated customer supply contract or a standard form customer supply contract.

2) New Domestic and Small Business customers connected to EnergyAustralia's network after 1 August 2001 with a Type 5 (or better) meter installed, and assessed to consume less than 40 MWh pa will be placed on the **LV Energy40 ToU** network price.

3) From 1 January 2002 all new multi-phase installations and existing installations upgraded to a multi-phase installation (consuming below 40MWh per annum) must install an interval meter (Type 5 meter or better) and must be placed on the **LV Energy40 ToU** network price.

4) Residential customers receiving low voltage supply under a standard form customer supply contract and consuming less than 160MWh pa can receive the **LV Energy40 ToU** network price.

5) If a customer wishes to be placed on an alternative network price the customer must make application on the Network Price Application Form with supporting documentation to EnergyAustralia Network.

Interruptible Load [27]: This is a new controlled load option where the supply is generally available and may be interrupted any time at EnergyAustralia's discretion for demand management reasons. The option is available only for low voltage supplies consuming below 40MWh pa, which are separately metered and controlled by EnergyAustralia. The eligible low voltage supplies are all fixed wired appliances including air-conditioners, storage water heaters, and thermal storage space heaters. The **Interruptible Load** price is a discounted price similar in structure to the **LV Energy40 ToU** price. NOTE: This price cannot be applied until an EnergyAustralia approved control device is installed. The control device must remain in place or the supply will revert to LV Energy40 ToU price and be back billed to the time the control device was removed.

Customers placed on the Interruptible Load and Energy40 ToU prices must remain on these prices for a minimum of one year. After this period, customers on the Interruptible Load price may request to be changed to the **LV Energy40 ToU** price only.

Controlled Load: Applicable to electricity which is separately metered and controlled by EnergyAustralia and used for operating storage water heaters, thermal storage space heaters, and other approved fixed wired appliances. The **Controlled Load 1 [30, 250]** price is available for supply that is usually available for a six hour duration between 10.00 pm and 7.00 am. The **Controlled Load 2 [40, 260]** price is available for supply that is usually available for sixteen hours including more than 6 hours between 8pm and 7am and more than 4 hours between 7am and 5pm.

NOTE: EnergyAustralia reserves the right to vary the switching times of any of the above mentioned loads at its discretion. Controlled Load prices can only apply when a correctly connected and operative load control device is controlled by EnergyAustralia Network. EnergyAustralia's load control relay must not be electrically bypassed or removed without the written approval of the Manager Network Pricing and Customer Connection. If the Load Control Relay is incorporated into the meter, that meter must not be removed without EnergyAustralia's approval.

LV Business Non-Time of Use [50, 270]: Available for low voltage supplies to premises used for any non-domestic purpose where a single register energy only meter is installed (Type 6 metering installation as per the National Electricity Code). A corresponding price is not available for customers taking supply at high voltage.

NOTE: 1) From 1 July 2004 the energy rate will be charged on a two step basis. The first step will apply to consumption up to 1750kWh per 91 day quarter. The second step will apply to consumption in excess of the first step.

2) From 1 January 2005 this tariff will become obsolete. All new low voltage non-domestic customers will be placed on the default Network price appropriate to the annual consumption (eg LV Energy40 ToU, LV kW Capacity ToU, LV kVA Demand ToU).

LV Business Time of Use [290, 291] (Obsolete): This price is obsolete and is only available for existing customers at existing premises. It is available for low voltage supplies used for any non-domestic purpose, where a Type 6 meter is installed which records the energy consumption used within specified time periods as listed:

Peak period is from 2.00 pm - 8.00 pm on working weekdays.

Shoulder period is from 7.00 am - 2.00 pm and 8.00 pm - 10.00 pm on working weekdays.

Off-Peak period is at all other times.

NOTE: 1) All new low voltage non-domestic customers will be placed on the default Network price appropriate to the annual consumption (eg **LV Energy40 ToU**, **LV kW Capacity ToU**, **LV kVA Demand ToU**).

2) From 1 July 2004, all customers previously on the **LV Business ToU (obsolete)** price will be automatically placed on the **LV Energy40 ToU**, **LV kW Capacity ToU**, or **LV kVA Demand ToU**, based on annual consumption.

HV Business Time of Use [350]: Available for high voltage electricity supplied to premises used for any non-domestic purpose where the annual consumption is less than 735MWh. This price is only available to customers who have a Type 4, 5 or 6 meter which records the energy consumption within specified time periods as listed:

Peak period is from 2.00 pm - 8.00 pm on working weekdays.

Shoulder period is from 7.00 am - 2.00 pm and 8.00 pm - 10.00 pm on working weekdays.

Off-Peak period is at all other times.

LV kW Capacity Time of Use [302, 303]: Applicable to low voltage electricity supplied to premises for any purpose where the consumption is between 40MWh and 735MWh per annum and having Type 5 or better meters will be charged the **LV kW Capacity ToU (System) [302]** network price. The following time periods apply:

Peak period is from 2.00 pm - 8.00 pm on working weekdays.

Shoulder period is from 7.00 am - 2.00 pm and 8.00 pm - 10.00 pm on working weekdays.

Off-Peak period is at all other times.

To obtain a **LV kW Capacity ToU (Substation) [303]** price the customer must make an application on a Network Price Application Form with supporting documentation to EnergyAustralia Network. The monthly capacity charge is calculated in accordance with the method outlined on the definitions page attached.

kVA Demand Time of Use [310, 320, 370, 380, 390]: Customers with a load of 735MWh per annum or above will automatically be charged the **kVA Demand ToU System [310, 370, 390]** network price applicable to the voltage of their installation. To obtain a **kVA Demand ToU (Substation) [320, 380]** price the customer must make an application on a Network Price Application Form with supporting documentation to EnergyAustralia Network. The following time periods apply:

Peak period is from 2.00 pm - 8.00 pm on working weekdays.

Shoulder period is from 7.00 am - 2.00 pm and 8.00 pm - 10.00 pm on working weekdays.

Off-Peak period is at all other times.

All Demand ToU Network Prices include both a Monthly kVA maximum Demand charge and a Monthly kVA Capacity charge. Large energy users may achieve significant cost savings by correcting the power factor of their electrical installation in order to minimise the kVA demand and the kVA capacity charges. The monthly demand and capacity charges are calculated in accordance with the method outlined on the definitions page attached

Contract (generally above 10 MW): EnergyAustralia Network calculates a Cost Reflective Network Price (CRNP) specific to an individual large customer's connection to the network. To receive a CRNP price at a given connection point a customer must have a measured demand 10 MW or over, on three separate occasions over the 12 month period of assessment. The CRNP price takes into account the customer's annual utilisation of the network assets

CRNP customer's electrical supplies must be individually metered. When two or more connection points supplying the one customer utilise common network assets, EnergyAustralia may combine the loads at each point and treat them as an equivalent single point of connection for the CRNP analysis, applying the CRNP price to each separate connection point.

Public Lighting [401]: Available for metered and unmetered supplies that are deemed to have a similar usage profile to public lighting and have some form of on/off control. The form of on/off control may be photoelectric cell, timer, ripple or other control.

Constant Unmetered [402]: Available to all unmetered supplies other than those deemed to have a profile similar to public lighting. This price would generally apply to connections to certain small consumer installations located in public places e.g. bus stop shelters, public conveniences, floodlights, and public telephones.

Standby Charges: Where a customer's annual load factor at a point of supply is less than 15%, the chargeable demand may be based upon an assessment of the capacity provided. The standby arrangements are intended for application to loads not normally connected to the network. Refer to EnergyAustralia's NCP7 (previously ES7) document for more details. All applications for standby supply must be made in writing to EnergyAustralia Network. EnergyAustralia Network reserves the right to reassess existing standby supplies at any time for their impact on the electricity system and apply revised or new standby prices according to current metering and pricing methodologies. Alternatively, the standard network price may be applied where the capacity charge component would substitute for a separate standby charge.

LV Miser Seasonal ToU [28 & 304]: Available to customers consuming between 0-40 and 40-735 MWh p.a. with a Type 5 capable meter. Daily Time of Use periods are the same as for [25] and [302], respectively, with the daily peak period in effect only during the peak season. During the off-peak season the shoulder period replaces the daily peak period in both tariffs.

Peak Season June, July, August and December, January, February
Off-peak Season September, October, November and March, April, May

Network Price Changes: The Network Price for a specific installation is dependent on a number of factors including the customer's load, supply voltage, metering, and/or connection point configuration. Applications to change a network price should be made on a Network Price Application Form and if approved will apply from the start of the next billing period following the date of receipt of the price change application.

"Qualifying" in relation to particular Network Prices indicates that EnergyAustralia Network reserves the right to determine and approve the application of particular Network Prices to individual customers and/or groups of customers in its geographic area.

Default Network Prices apply to installations which have appropriate metering and with annual consumption that falls between the ranges listed in the notes to the Price List Tables e.g. **kW Capacity ToU (Types 3, 4 or 5 meters)** network prices apply to loads between 40MWh and 735MWh pa.

Daylight Saving: Daylight Saving Time applies to all EnergyAustralia Network Prices.

Interest Payable on Network Use of System Charges: EnergyAustralia may charge interest on all overdue Network Use of System Charge accounts in accordance with Market Operation Rule (Network Use of System Agreements) No.2 of 2001 made under s.63C of the Electricity Supply Act 1995.

Definitions

Supply Voltages: EnergyAustralia reserves the right to determine the voltage at which supply shall be made available to any particular customer. The general voltage levels referred to in the prices are:

Low Voltage (LV) nominally 240/415 V

High Voltage (HV) nominally 5, 6.6, 11 or 22 kV

Subtransmission (ST) 33 kV and above.

Distribution Loss Factor (DLF): This factor is used by retailers in the market to account for losses in the distribution network. The energy consumed by the customer is increased by an average energy loss factor (DLF) which can be expressed as a percentage or a factor (e.g. 5.16% or 1.05160). The distribution loss factor does not include the Transmission Loss Factor used in NEMMCO's market settlements to account for transmission network losses.

Network Access Charge (NAC): This is a fixed charge (¢/day) applied to each energised connection point at which EnergyAustralia's energy or demand/energy is measured/recorded. A separate NAC may be applied to each connection point and their associated metering point/s as determined by EnergyAustralia Network.

Non-ToU Rates: The Non Time of Use charge (¢/kWh) is applied to the total energy determined from an energy only meter. From 1 July 2004, a two step pricing structure will apply to all non-ToU energy charges. Step 1 applies to the first 1750kWh for Domestic and 2500kWh for Business Non-ToU per 91 days. Step 2 applies to all consumption in excess of Step 1.

Time of Use (ToU) Rates: All installed meters capable of recording the time of use of electricity consumption, will have the energy charged according to peak, shoulder and off-peak time periods. Refer to the specific network price details for the time periods of each component.


kVA Demand: The Demand charge may be applied to any connection points at which a Type 3 meter is installed irrespective of the annual energy consumption of the connection. The monthly kVA demand is the maximum half hour demand in the month and is calculated using the kWh and kVARh energy components recorded by the Type 3 code compliant meter. A separate demand is applied at each individual connection point and their associated metering point. **Coincident or summated demand** from multiple connection points **is not** permitted without the written approval of the Manager Network Pricing and Customer Connection.

Monthly Demand and Capacity Rates: The monthly peak demand and capacity rates are converted to an equivalent daily rate in determining the applicable monthly demand and capacity charges. Peak time periods are as defined for the LV kW Capacity ToU [302] time periods. **NOTE: The monthly demand and capacity rates are converted to an equivalent daily rate prior to the determination of the Monthly Demand charge.**

Peak Only Components: From 1 July 2005, only the Peak period is applicable to the Demand and Capacity components of a given network price. In the case of Demand ToU, the applicable Monthly Demand charge is the sum of (Peak Demand x Peak Demand Rate).

Monthly Demand Charge: The kW or kVA Demand Charge (\$/kW or \$/kVA) is recorded on a monthly basis for charging purposes.

Monthly Capacity Charge: The Capacity Charge (\$/kW or \$/kVA) is applied to the half hour maximum kW or kVA that occurs in the current month or preceding months. The maximum consumption is reset on 1 July each year to the highest recorded value in the previous 12 months, as shown in the diagram.

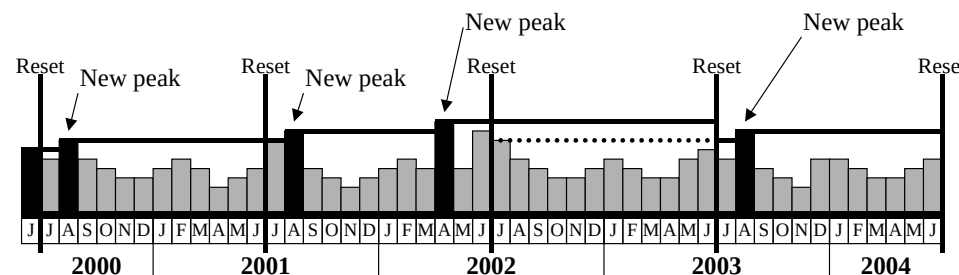

By following the above diagram it is seen, the annual capacity value is automatically increased in a month if it exceeds the previous capacity (i.e. the capacity charge has a "ratchet"). The new maximum will be used from that month onwards unless another month exceeds that figure or the charge is reset.

As with demand charges, a separate capacity charge is applied at each connection point and its associated metering point. **Coincident or summated capacity charges** from multiple connection points **are not** permitted without the written approval of the Manager Network Pricing and Customer Connection.

Further Details on the above network prices can be obtained in the following EnergyAustralia documents: "NCP7 (previously ES7) Application of Network Use of System Charges" and "Calculation of Network Price Components"

Metering: A customer's metering installation must have a meter which is capable of measuring the relevant electrical components of energy and demand before a given default price can be applied. If a customer or retailer wishes an alternative meter to be installed, they may be required to pay a contribution towards its cost.

Network Price List enquires: These can be directed to our Call Centre on telephone 13 13 67 or referenced from our website on www.energy.com.au.

Address for correspondence Manager – Network Pricing and Customer Connection
GPO Box 4009, Sydney NSW 2001