

ENERGEX

Tariff Schedule

for the period 1 July 2011–30 June 2012

Version 2 (Updated 23 June 2011)



positive energy

Version Control

Version	Date	Description
1	10 June 2011	Initial version published on ENERGEX website (excludes 2011-12 Schedule 8 prices)
2	23 June 2011	Revised version published on ENERGEX website (includes 2011-12 Schedule 8 prices)



ENERGEX Limited trading as ENERGEX
ABN 40 078 849 055
26 Reddacliff Street
NEWSTEAD QLD 4006

<http://www.energex.com.au>

Requests and inquiries concerning this document should be addressed to:

Network Pricing Manager
ENERGEX
GPO Box 1461
BRISBANE QLD 4001



Table of Contents

1	INTRODUCTION	1
2	ASSIGNING AND REASSIGNING CUSTOMERS TO TARIFF CLASSES	2
2.1	Standard Control Services	2
2.2	Alternative Control Services	4
3	NETWORK TARIFFS – STANDARD CONTROL SERVICES	6
3.1	2011-12 Tariffs	6
3.2	Terms and Conditions	9
3.3	kVA Adjustment for large customers	10
4	NETWORK TARIFFS – ALTERNATIVE CONTROL SERVICES	11
4.1	Street light services	11
4.2	Fee-based services	11
4.3	Quoted Services	13
5	WATCHMAN LIGHTS	14
6	GLOSSARY	15
7	APPENDICES	19



1 Introduction

The 2011-12 Tariff Schedule outlines the ENERGEX tariffs for both Standard Control Services (SCS) and Alternative Control Services (ACS).

For standard control services, the Network Use of System (NUOS) tariffs are provided, which incorporates both the Distribution Use of System (DUOS) charges and Designated Pricing Proposal Charges (DPPC)¹.

For alternative control services, charges for the provision of street lights and fee-based services are provided. Quoted services are performed on a price on application basis.

This Tariff Schedule also provides information on how ENERGEX assigns customers to tariff classes and the internal review process which is undertaken if an objection is raised.

This Tariff Schedule applies from 1 July 2011, or as subsequently revised.

For more information on network pricing please refer to ENERGEX's 2011-12 Pricing Proposal².

¹ Designated Pricing Proposal Charges (DPPC) is the new terminology relating to Transmission Use of System (TUOS)

² The ENERGEX Pricing Proposal can be downloaded at <http://www.energex.com.au/about-us/network-regulation-and-pricing/network-prices>



2 Assigning and Reassigning customers to tariff classes

2.1 Standard Control Services (SCS)

For SCS, the following ENERGEX tariff classes apply:

- Individually Calculated Customer (ICC)
- Connection Asset Customer (CAC) – 33kV
- CAC – 11kV Bus
- CAC – 11kV Line
- Embedded Generators
- Standard Asset Customer (SAC) Demand
- SAC Non-demand

Each customer for SCS is a member of at least one tariff class. ENERGEX's customer assignment to tariff classes is based on assessment of one or more of the following criteria:

- a) energy consumption and/or demand; and
- b) voltage level.

In addition to the above, the following guidelines apply:

- a change in connection voltage means that the connection is treated as if it was a new connection;
- customers are generally only allowed one requested tariff change per 12 month period;
- for customers with demand/energy levels which fluctuate, ENERGEX may apply a tolerance limit of up to 20 per cent around tariff thresholds to mitigate frequent tariff reassignment;
- allocation of a customer with micro-generation facilities to a tariff will be made on the same basis as other connections;
- where a new tariff is applied to a customer, it is standard practice to apply the tariff from the next billing period; and
- for new connections with no previous load history, the default tariff is based on their expected energy usage, supply voltage and meter type.

A pictorial representation of the process for assignment to tariff class for standard control services is outlined in Figure 1. Further information on tariff assignment and reassignment is provided in ENERGEX's 2011-12 Pricing Proposal.

If a customer objects to a proposed classification or reclassification, ENERGEX will follow the internal procedure for reviewing objections (as outlined in Appendix 5).



Figure 1 Assignment of customers to tariff classes – Standard control services (Load customers)


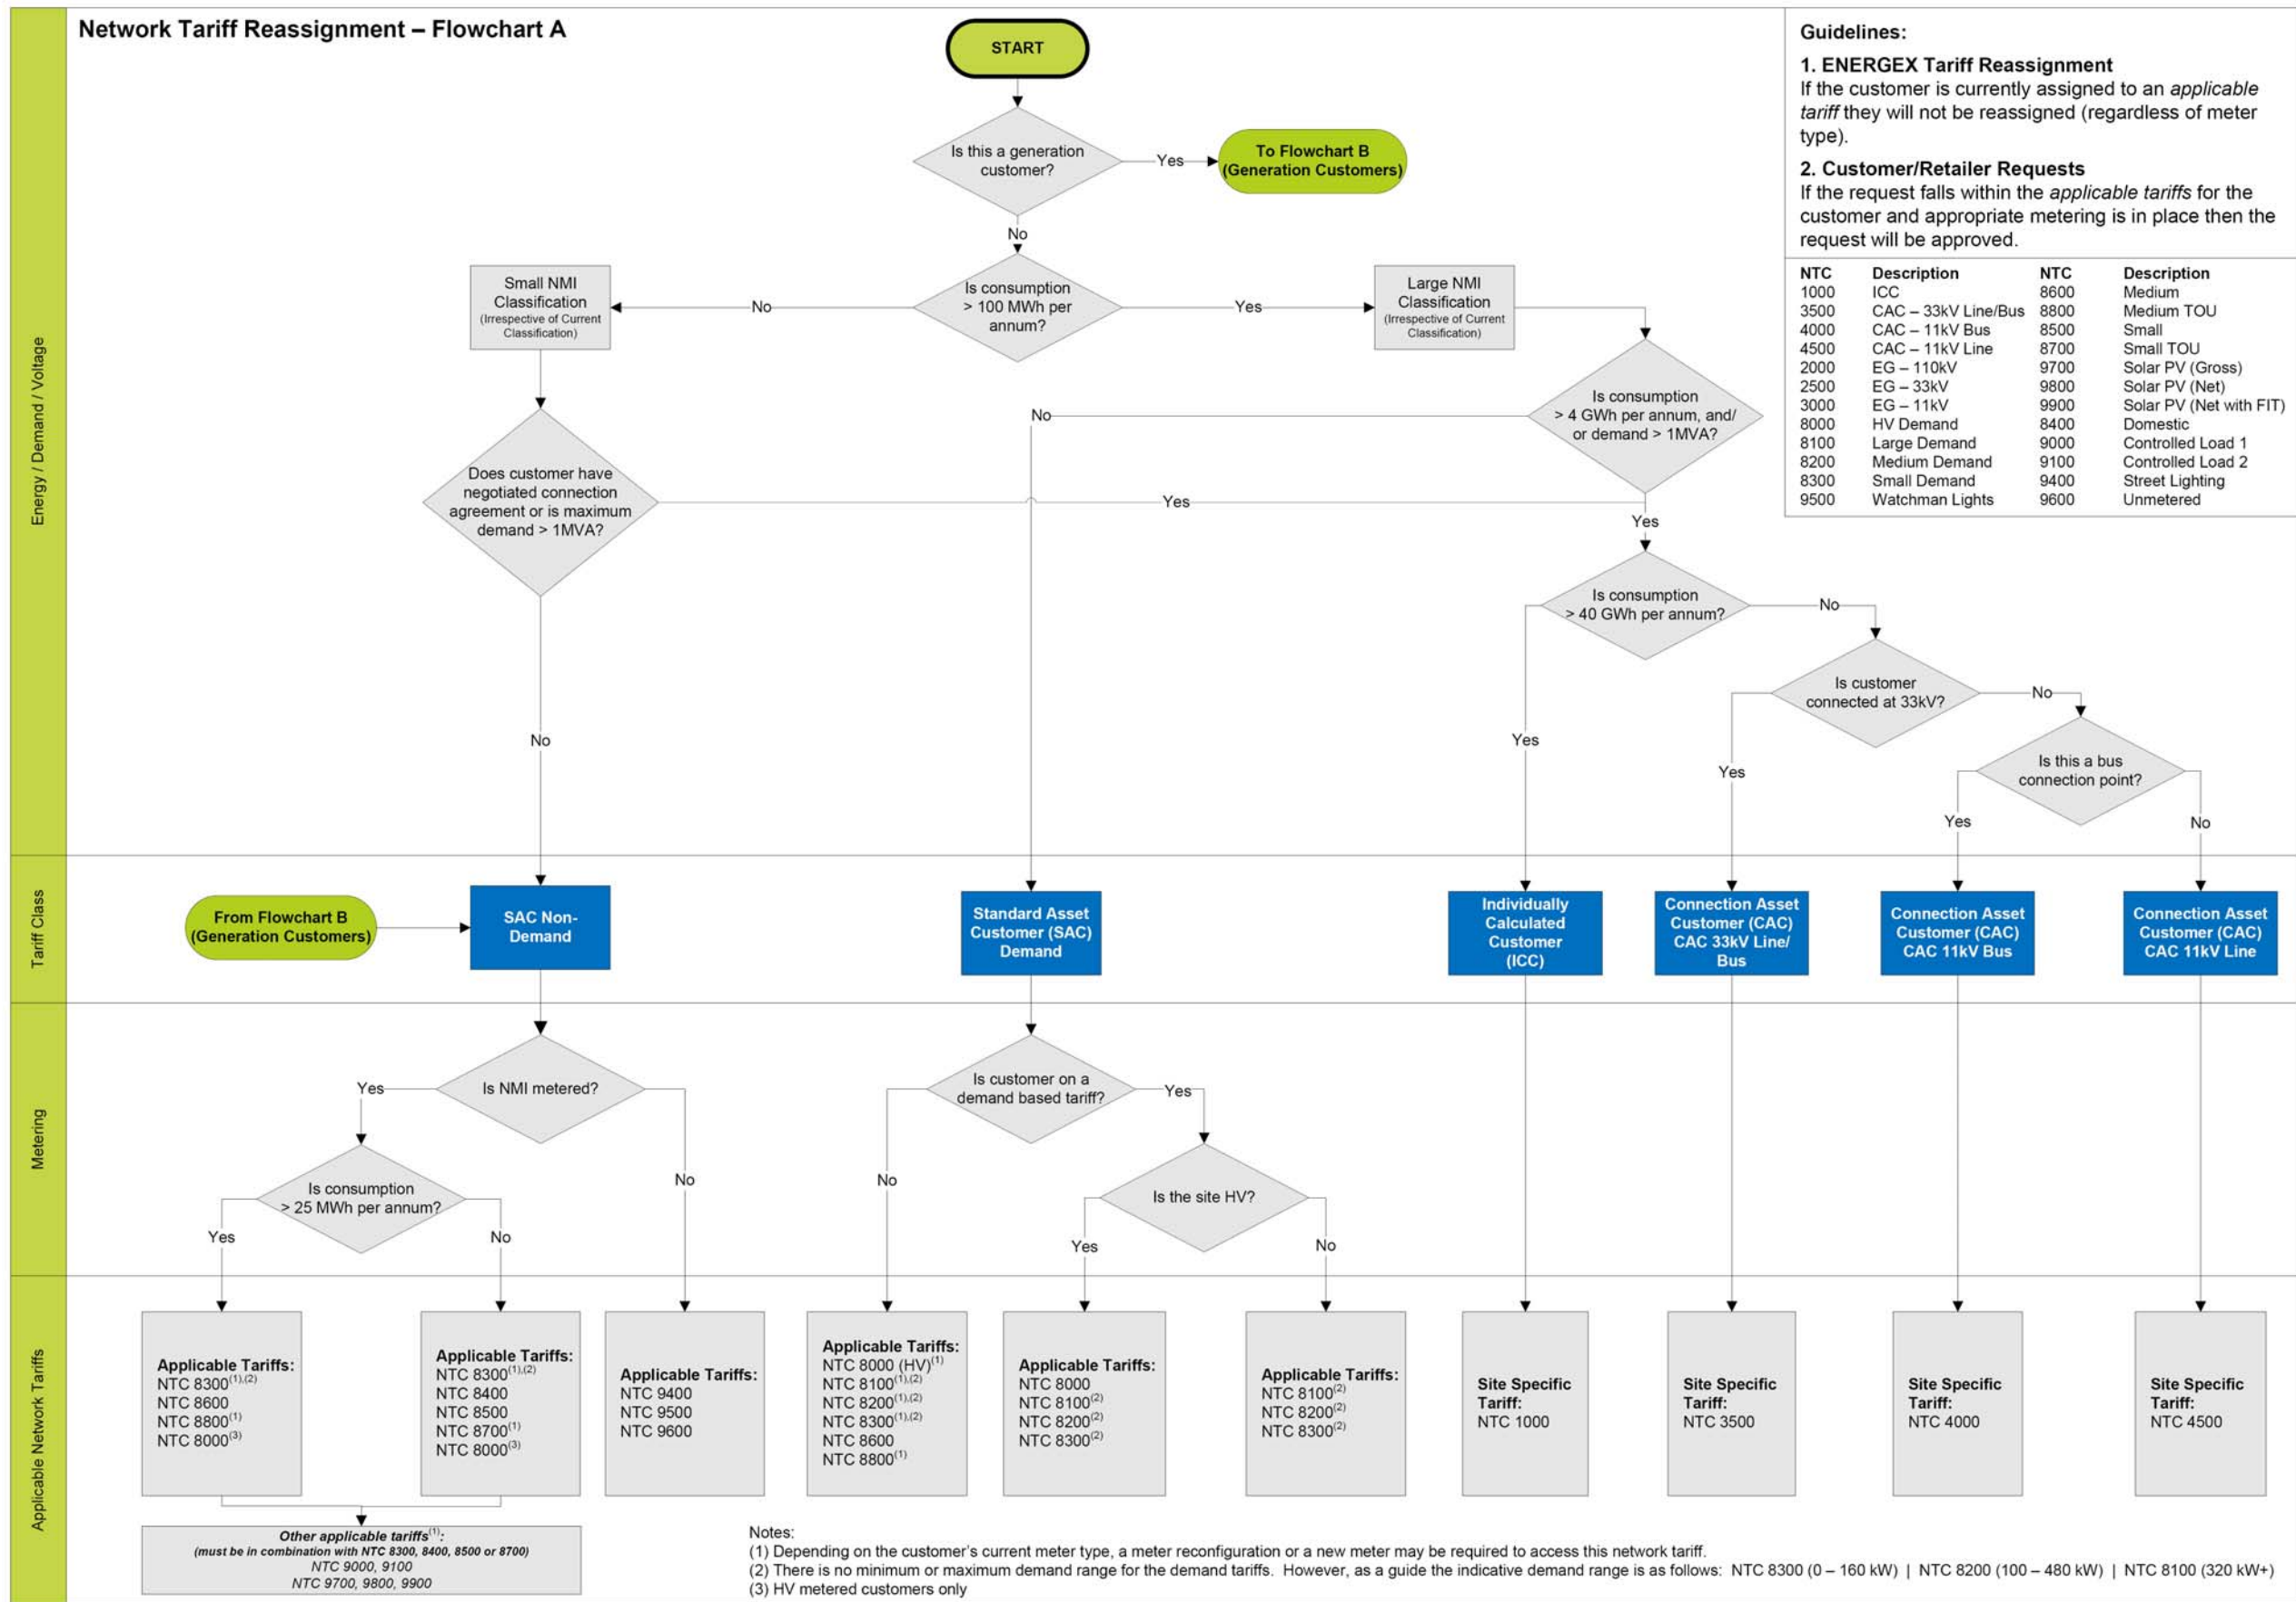



Figure 2 Assignment of customers to tariff classes – Standard control services (Generation)

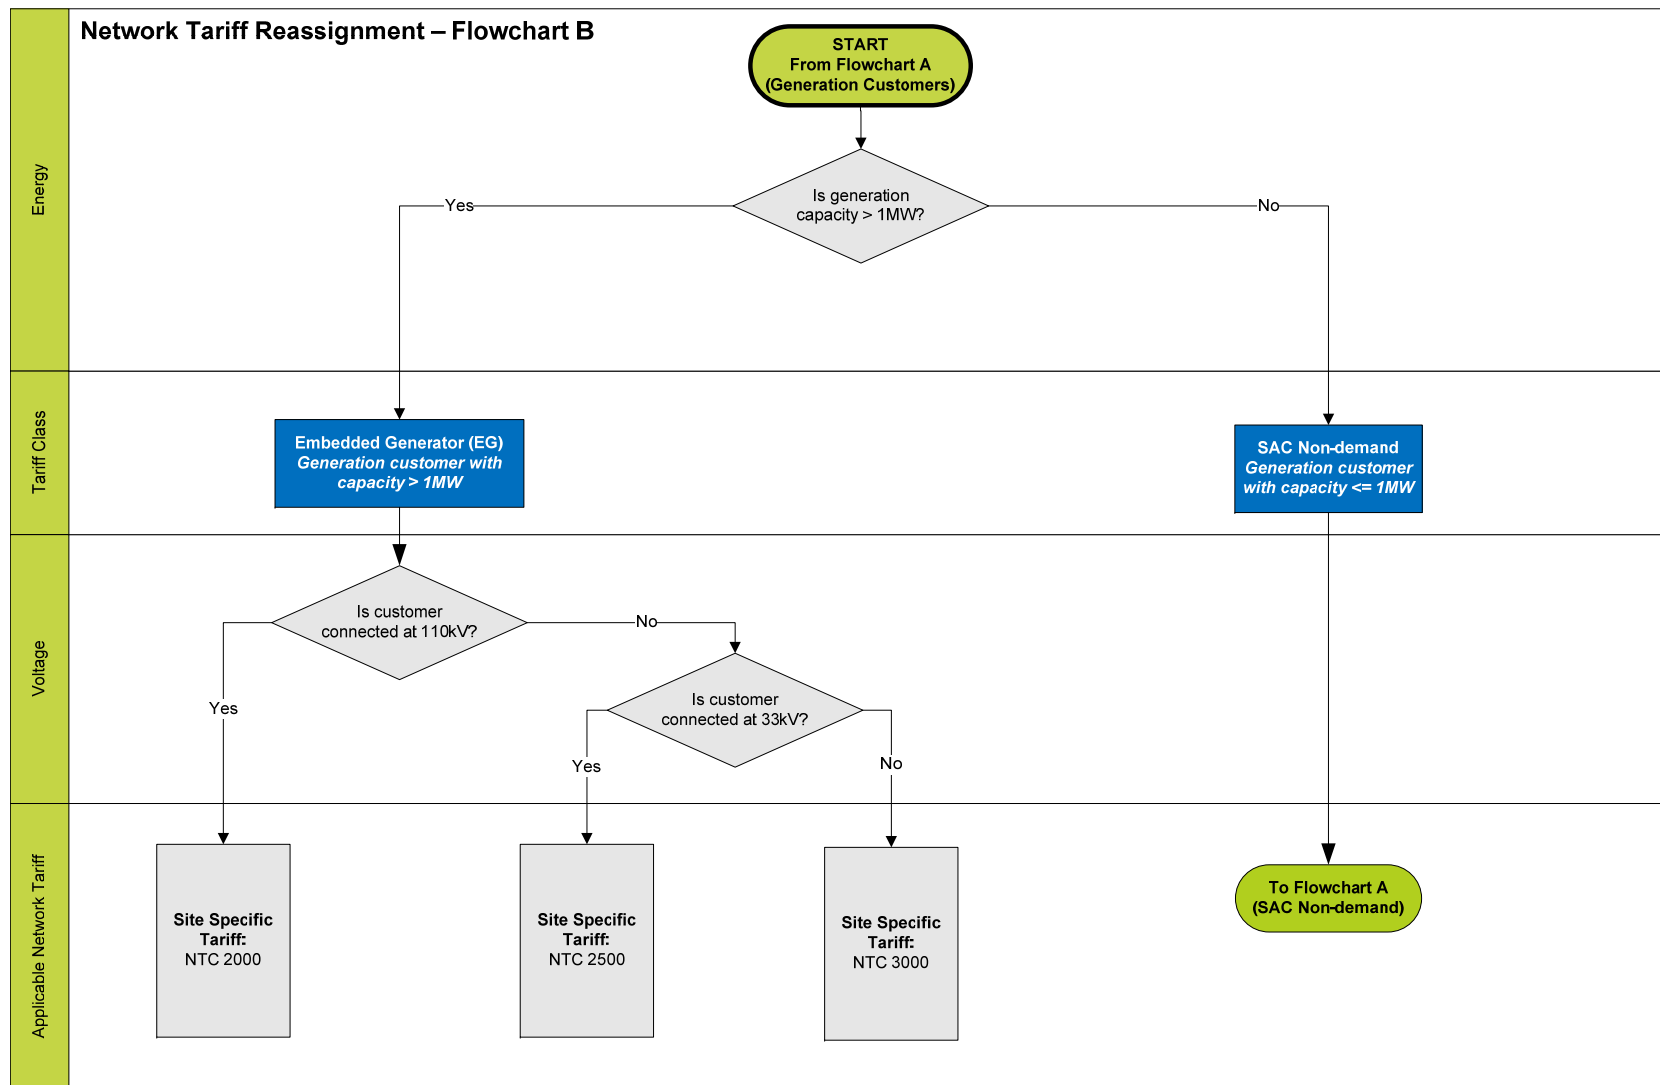

2.2 Alternative Control Services (ACS)

The assignment of customers to an ACS tariff is based on the type of service required. Figure 2 outlines the ACS tariff classes and service types.

Figure 3 Assignment of customers to tariff classes – alternative control services

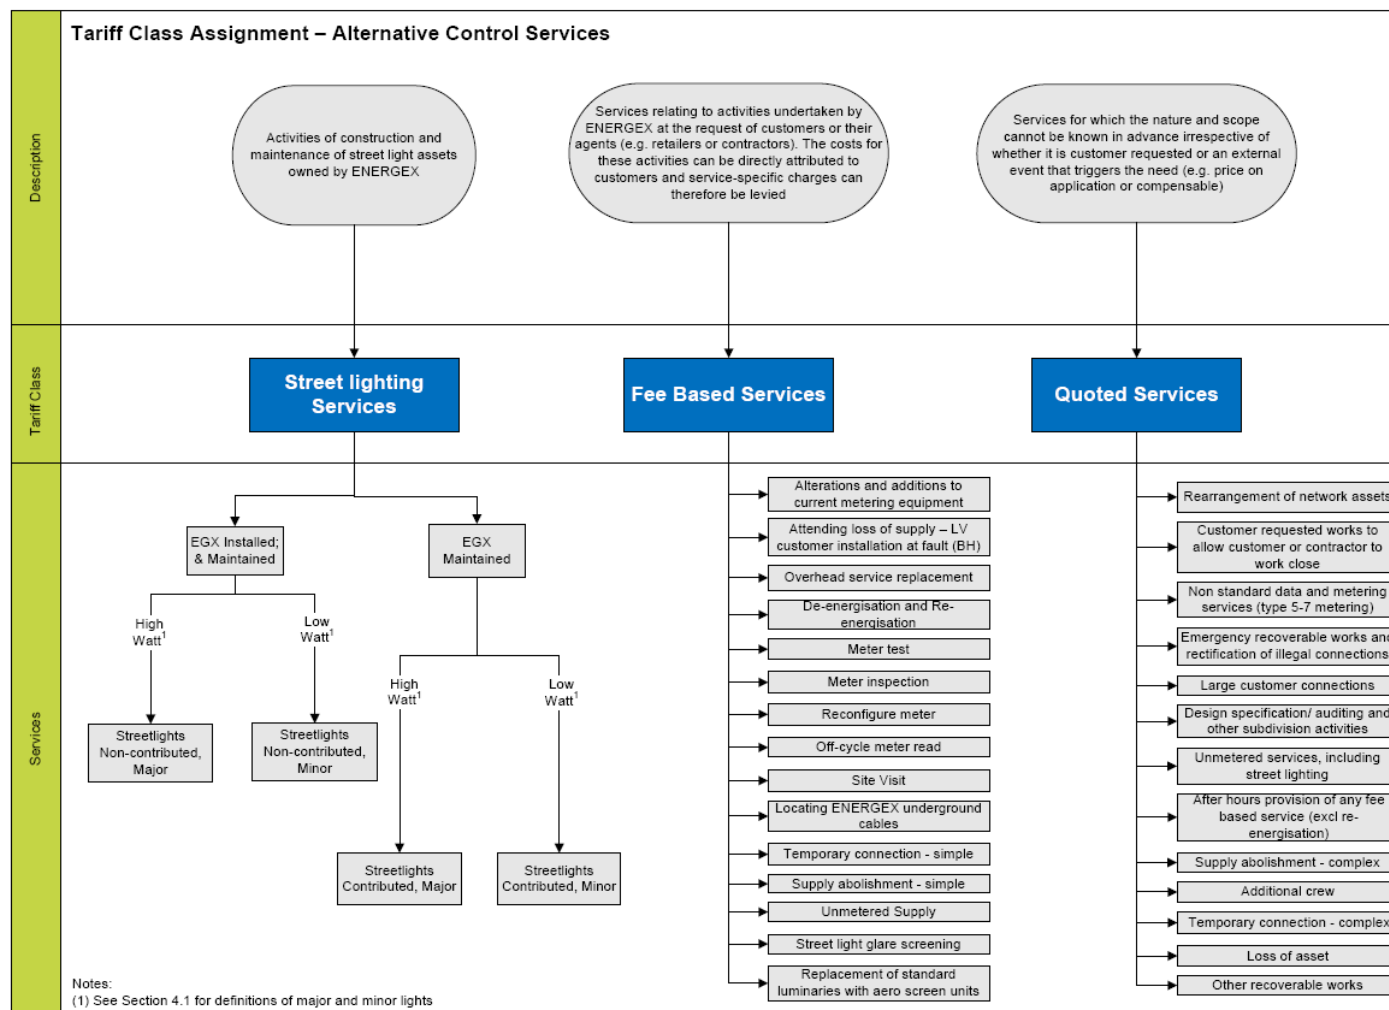

3 Network Tariffs – Standard Control Services

3.1 2011-12 Tariffs

Network tariffs are comprised of both:

- Distribution Use of System (DUOS) tariffs – which relate to the network charges incurred for use of the ENERGEX distribution network; and
- Designated Pricing Proposal Charges (DPPC) – which relate to the network charges incurred for use of the Powerlink transmission network.

The 2011-12 DUOS and DPPC tariffs for standard control services are provided in Table 1.

The Network Use of System (NUOS) tariff represents the sum of DUOS and DPPC. This is the total network tariff that may be represented on a customer's bill. The NUOS tariffs for standard control services are provided in Table 2.



Table 1 2011-12 DUOS and DPPC tariffs for standard control services

Tariff Class	Tariff Description	Network Tariff Code	DUOS Charges ¹						DPPC (TUOS) Charges ¹					
			Fixed (\$/day)	Capacity (\$/kW/month)	Demand (\$/kW/month)	Volume (Energy) (c/kWh)	Volume Peak (c/kWh)	Volume Off-Peak (c/kWh)	Fixed (\$/day)	Capacity (\$/kW/month)	Demand (\$/kW/month)	Volume (Energy) (c/kWh)	Volume Peak (c/kWh)	Volume Off-Peak (c/kWh)
ICC	ICC	1000	Tariffs for ICC customers are confidential. These will be provided directly to the customer and their retailer.											
CAC – 33kV Line/Bus	CAC – 33kV Line/Bus	3500	Site specific	0.941	2.254		0.139	0.014	Site specific	0.000	1.047		0.126	0.126
CAC – 11kV Bus	CAC – 11kV Bus	4000		1.738	3.767		0.141	0.014		0.000	1.047		0.126	0.126
CAC – 11kV Line	CAC – 11kV Line	4500		2.463	4.969		0.169	0.017		0.000	1.047		0.126	0.126
EG	EG – 110kV	2000	Site specific	0.039	0.109		0.325	0.032	Site specific	0.000	1.047		0.126	0.126
	EG – 33kV	2500		0.941	2.254		0.139	0.014		0.000	1.047		0.126	0.126
	EG – 11kV	3000		2.463	4.969		0.169	0.017		0.000	1.047		0.126	0.126
SAC Demand	HV Demand	8000	37.12		7.436	0.175			9.40		1.493	1.187		
	Large Demand	8100	32.35		9.449	0.188			9.40		1.493	1.187		
	Medium Demand	8200	13.12		10.885	0.305			9.40		1.493	1.187		
	Small Demand	8300	1.32		12.155	0.854			1.63		1.493	1.187		
SAC Non-demand	Medium	8600	0.63			7.130			0.75			1.257		
	Medium TOU	8800	0.63				7.163	5.970	0.75				1.257	1.257
	Small	8500	0.27			7.353			0.06			1.471		
	Small TOU	8700	0.27				7.430	6.192	0.06				1.471	1.471
	Solar PV (gross metering) ²	9700	0.00			0.000			0.00			0.000		
	Solar PV (net metering) ²	9800	0.00			0.000			0.00			0.000		
	Solar PV (net metering with FIT) ²	9900	0.00			-44.000			0.00			0.000		
	Domestic	8400	0.27			7.353			0.06			1.471		
	Controlled Load 1	9000	0.10			0.541			0.002			0.218		
	Controlled Load 2	9100	0.10			1.681			0.002			0.218		
	Street Lighting	9400				4.652						1.820		
	Watchman Lights	9500				4.652						1.820		
	Unmetered	9600				4.652						1.820		

Notes:

1. All tariffs are GST exclusive
2. Government mandated tariff paid by ENERGEX to the customer



Table 2 2011-12 NUOS tariffs for standard control services

Tariff Class	Tariff Description	Network Tariff Code	NUOS Charges ^{1,2}					
			Fixed (\$/day)	Capacity (\$/kW/month)	Demand (\$/kW/month)	Volume (Energy) (c/kWh)	Volume Peak (c/kWh)	Volume Off-Peak (c/kWh)
ICC	ICC	1000	Tariffs for ICC customers are confidential. These will be provided directly to the customer and their retailer.					
CAC – 33kV Line/Bus	CAC – 33kV Line/Bus	3500	Site specific	0.941	3.301		0.265	0.140
CAC – 11kV Bus	CAC – 11kV Bus	4000		1.738	4.814		0.267	0.140
CAC – 11kV Line	CAC – 11kV Line	4500		2.463	6.016		0.295	0.143
EG	EG - 110kV	2000	Site specific	0.039	1.156		0.451	0.158
	EG - 33kV	2500		0.941	3.301		0.265	0.140
	EG - 11kV	3000		2.463	6.016		0.295	0.143
SAC Demand	HV Demand	8000	46.52		8.929	1.362		
	Large Demand	8100	41.75		10.942	1.375		
	Medium Demand	8200	22.52		12.378	1.492		
	Small Demand	8300	2.95		13.648	2.041		
SAC Non-demand	Medium	8600	1.38			8.387		
	Medium TOU	8800	1.38				8.420	7.227
	Small	8500	0.33			8.824		
	Small TOU	8700	0.33				8.901	7.663
	Solar PV (gross metering) ³	9700	0.00			0.000		
	Solar PV (net metering) ³	9800	0.00			0.000		
	Solar PV (net metering with FIT) ³	9900	0.00			-44.000		
	Domestic	8400	0.33			8.824		
	Controlled Load 1	9000	0.102			0.759		
	Controlled Load 2	9100	0.102			1.899		
	Street Lighting	9400				6.472		
	Watchman Lights	9500				6.472		
	Unmetered	9600				6.472		

Notes:

1. NUOS = DUOS + DPPC
2. All tariffs are GST exclusive
3. Government mandated tariff paid by ENERGEX to the customer



3.2 Terms and Conditions

The terms and conditions relating to the standard control services tariffs are outlined below. For additional explanation regarding the tariffs please refer to ENERGEX's 2011-12 Pricing Proposal.

Table 3 Terms and conditions for standard control service tariffs

Tariff Class	Tariff	NTC	Description/Tariff Conditions
ICC	ICC	1000	ICC tariffs typically apply to customers with electricity consumption over 40GW.h per year. ICC tariffs are site specific and will be provided directly to the customer and/or the retailer. - The DPPC applies to the volume of energy delivered to the nominated Transmission Connection Point. For ICCs, the metered quantity at the customer's site will be adjusted by the given Distribution Loss Factor (DLF) to calculate the total DPPC. - The nominated capacity is either the contracted demand or the maximum demand in the previous calendar year. - The DUOS demand price applies to the actual maximum demand value recorded per month.
CAC 33kV	CAC 33kV	3500	CAC tariffs typically apply to customers with electricity consumption between 4GW.h and 40GW.h per year, or demand > 1MVA. The fixed charges for CACs are site specific and will be provided directly to the customer and/or the retailer. - The nominated capacity is either the contracted demand or the maximum demand in the previous calendar year. - The DUOS demand price applies to the actual maximum demand value recorded each month.
CAC 11kV Bus	CAC 11kV Bus	4000	
CAC 11kV Line	CAC 11kV Line	4500	
EG	EG 110kV	2000	In line with the Energy Networks Association (ENA) classification, Embedded Generators (EGs) are generally those generators with an installed capacity as follows: - Medium: 1 - 5 MW (LV) or 0 - 5 MW (HV) - Large: > 5MW Tariffs for connection and access services for Medium and Large EGs will be developed on a similar basis to site-specific customers. This is due to the nature of connections, which are typically non-standard and may require additional embedded generator protection system upgrades.
	EG 33kV	2500	
	EG 11kV	3000	
SAC Demand ¹	HV Demand	8000	This network tariff is available only to customers with consumption below 4GW.h per year, who have high voltage metering and take supply at high voltage. This network tariff is not available to customers who have non-standard or significant connection assets provided by ENERGEX.
	Large Demand	8100	SAC Demand customers have consumption below 4GW.h per year, with a meter capable of reading demand. The ENERGEX demand tariffs are <u>self selecting</u> – it is the responsibility of the customer/retailer to select the most appropriate tariff. As a guide the following demand ranges are provided: - Small Demand: 0 – 160 kW - Medium Demand: 100 – 480 kW - Large Demand: 320kW + Where the customer/retailer does not select a tariff and in the absence of historical demand information (eg. for new customers) the customer will be assigned to Small Demand.
	Medium Demand	8200	
	Small Demand	8300	



Tariff Class	Tariff	NTC	Description/Tariff Conditions
SAC Non-demand	Medium	8600	Typically business (or domestic) customers with an annual consumption between 25MW.h and 100MW.h.
	Medium TOU	8800	Typically business (or domestic) customers with an annual consumption between 25MW.h and 100MW.h, with a meter installed capable of TOU pricing.
	Small	8500	Typically business customers with an annual consumption less than 25MW.h.
	Small TOU	8700	Typically business (or domestic) customers with an annual consumption less than 25MW.h, with a meter installed capable of TOU pricing.
	Solar PV	9700 9800 9900	The solar bonus scheme applies to SACs who consume less than 100MW.h per annum. The Queensland Government sets the feed-in tariff rate (per kW.h) to be paid for the excess energy generated.
	Domestic	8400	Typically domestic customers with a consumption of up to 25MW.h per annum.
	Controlled Load 1	9000	Specified permanently connected appliances are controlled by network equipment so that supply will be permanently available for a minimum period of 8 hours at the absolute discretion of ENERGEX but usually between the hours of 10:00pm and 7:00am.
	Controlled Load 2	9100	Specified connected appliances are controlled by network equipment so that supply will be available for a minimum period of 18 hours per day during time periods set at the absolute discretion of ENERGEX.
	Street Lighting	9400	Use of system charge (conveyance of electricity) for all street light types.
	Watchman Lights	9500	Use of system charge (conveyance of electricity) for all watchman lights.
	Unmetered	9600	Use of system charge (conveyance of electricity) for all other unmetered supplies (eg. public barbeques, telephones, traffic signals)

3.3 kVA Adjustment for large customers

ENERGEX introduced kV.A tariffs for ICC and CAC customers from 1 July 2010. Network charges for ICC and CAC customers are initially calculated using the existing kW based approach. The demand and capacity charges are then adjusted up or down by a relative amount based on the difference between the customer's measured power factor and the power factor neutral point. This methodology is described further in Appendix 1.

The power factor adjustment methodology is a transitional method to help customers understand the concept of kV.A and the impact of kV.A on the network and network charges.

From 1 July 2011, the power factor adjustment will be increased to provide a stronger kV.A price signal. This will provide an additional incentive for customers with a poor power factor to improve and is more cost reflective. ENERGEX intends to move to a straight kV.A tariff, reflective of current practices in other Australian jurisdictions in the short term.



4 Network Tariffs – Alternative Control Services

4.1 Street light services

Street light services covered in alternative control services relate to the provision, construction and maintenance of street light assets owned by ENERGEX. The alternative control service prices for street light services are included in Table 4.

Table 4 Prices for street light services

Streetlight Service ²	Network Tariff Code	2011–12 Price ¹ (\$ per light per day)
Major non-contributed	9250	0.89
Major contributed	9350	0.24
Minor non-contributed	9200	0.36
Minor contributed	9300	0.10

Notes:

1. All prices are exclusive of GST.
2. Definitions of minor and major lamps is provided in the glossary under *Street Lights*
3. The use of system charge (conveyance of electricity) is a standard control service (included in Tables 1 and 2).

The applicable terms and conditions for each street light service are based on the following principles:

- the contributed street light tariff only applies where the capital cost of the street light has been paid upfront by the customer or their agent;
- at the conclusion of the street light's standard asset life, the non-contributed tariff will apply;
- where ENERGEX has supplied the street light and the capital cost has been paid upfront by the customer, the contributed street light tariff will apply for the minimum period specified in the tariff's terms and conditions; and
- where the capital cost of the street light has been funded by ENERGEX and no upfront payment made, whether the initial asset construction or replacement of an asset, the non-contributed street light tariff applies.

4.2 Fee-based services

Fee-based services relate to activities undertaken by ENERGEX at the request of customers or their agents (e.g. retailers or contractors). The costs for these activities can be directly attributed to customers and service-specific charges can therefore be levied. The prices for fee-based services are included in Table 5 below.

A description of each service and the product codes which apply are included in Appendix 2.



Table 5 Prices for Fee-based services

Fee based service	2011-12 Price ¹ (\$ per service)
Alterations and additions to current metering equipment	94.61
Attending loss of supply – low voltage customer installation at fault – business hours	105.68
Overhead service replacement – single phase	289.31
Overhead service replacement – multiple phase	340.81
De-energisation ²	Nil
Meter test ²	14.86
Meter inspection	84.56
Reconfigure meter	70.11
Off-cycle meter read	7.90
Site visit	60.72
Locating Energex underground cables	129.11
Temporary connection - simple ²	335.91
Re-energisation – business hours ²	37.27
Re-energisation – after hours ²	89.54
Re-energisation (visual) – business hours ²	0.00
Re-energisation (visual) – after hours ²	89.54
Re-energisation non-payment (visual) – business hours ²	37.27
Re-energisation non-payment (visual) – after hours ²	89.54
Supply abolishment - simple	327.67
Unmetered supply	144.61
Street light glare screening	139.76
Replacement of standard luminaries with aero screen units (per street light)	323.10

Notes:

1. All prices are exclusive of GST.

2. Services are subject to Schedule 8 of the Queensland Electricity Regulation 2006, which either caps the price or sets the price to nil.



4.3 Quoted Services

Quoted services are services for which the nature and scope cannot be known in advance irrespective of whether the service is customer requested or an external event triggers the need. A description of each service and the product codes which apply are included in Appendix 3. These services are offered on a Price on Application (POA) basis.

Table 6 Quoted service list

Quoted Service	2011-12 Price (\$ per service)
Rearrangement of network assets	POA
Customer requested works to allow customer or contractor to work close	POA
Non standard data and metering services (type 5-7 metering)	POA
Emergency recoverable works and rectification of illegal connections	POA
Large customer connections	POA
Design specification/auditing and other subdivision activities	POA
Unmetered services, including street lighting	POA
After hours provision of any fee based service (excl re-energisation)	POA
Supply abolishment - complex	POA
Additional crew	POA
Temporary connection - complex	POA
Loss of asset	POA
Other recoverable work	POA



5 Watchman Lights

The provision of watchman lights is classified as an unregulated service. This is different from the conveyance of electricity to watchman lights, which is classified as a SCS use of system charge. The unregulated price for watchman lights is included in Table 7 below.

Table 7 Prices for watchman lights

Service	Network Tariff Code	2011–12 Price ¹ (\$ per light per day)
Provision of watchman lights	9500	0.36

Notes:

1. All prices are exclusive of GST.
2. This is an unregulated service



6 Glossary

Term	Definition
Alternative Control Services (ACS)	This service class includes the provision, construction and maintenance of street light assets, and fee based and quoted services.
Capacity charge	This part of the tariff seeks to reflect the costs associated with providing network capacity required by a customer on a long-term basis. It is levied on the basis of either contracted demand or the maximum demand in the previous calendar year. The charge is applied as a fixed dollar amount per kW per month.
Connection Asset Customer (CAC)	Typically those customers with electricity consumption greater than 4GW.h (but less than 40GW.h) per year at a single connection point; or where a customer has a dedicated supply system with significant connection assets.
Connection Point	The point of electrical coupling between the electricity distribution network and a customer's electrical installation. The meter is installed as close as possible to this location.
Contributed Assets	Contributed assets are customer funded, then gifted to ENERGEX.
Controlled Load 1	Specified permanently connected appliances are controlled by network equipment so that supply will be permanently available for a minimum period of 8 hours at the absolute discretion of ENERGEX but usually between the hours of 10:00pm and 7:00am (as per notified tariff conditions for Retail Tariff 31).
Controlled Load 2	Specified connected appliances are controlled by network equipment so that supply will be available for a minimum period of 18 hours per day during time periods set at the absolute discretion of ENERGEX (as per notified tariff conditions for Retail Tariff 33).
Demand	The amount of energy being consumed at a given time measured in either watts (W) or volt amperes (VA). The difference between the two is the power factor.
Demand Metered SAC	The customer's connection point has a meter installed that is capable of measuring energy consumption (kW.h) and demand (kW). This meter records total energy consumption (kW.h) and demand over 30 minute periods. A customer's demand is the average demand (kW) over the 30 minute period.
Demand Metered Tariff	The tariff has been built to include a demand component so that the customer's actual demand is reflected in the price they pay for their electricity. The highest demand reading for that month is used to calculate the customer's electricity bill.
Demand Charge	This part of the tariff accounts for the actual demand a customer places on the electricity network. The actual demand levied for billing purposes is the metered monthly maximum demand. The charge is applied as a fixed dollar per kW per month.



Term	Definition
Designated Pricing Proposal Charges (DPPC)	This refers to the network charges for the use of the transmission network (previously termed Transmission Use of System (TUOS)).
Distribution Loss Factor (DLF)	Distribution Loss Factors (DLFs) represent the average electrical energy losses incurred when electricity is transmitted over a distribution network.
Distribution Use of System (DUOS)	This refers to the network charges for the use of the distribution network.
Embedded Generator	In line with the Energy Networks Association (ENA) classification, Embedded Generators (EGs) are generally those generators with an installed capacity as follows: Medium: 1 – 5 MW (LV) or 0 – 5 MW (HV) Large: >5 MW
Energy	The amount of electricity consumed by a consumer (or all customers) over a period of time. Energy is measured in terms of watt hours (W.h), kilowatt hours (kW.h), megawatt hours (MW.h) or gigawatt hours (GW.h).
Fixed Charge	The fixed charge seeks to reflect the costs associated with customer's dedicated connection assets. The charge is applied as a fixed dollar amount per day.
High Voltage	Refers to the 11kV or above network.
Individually Calculated Customer (ICC)	Typically those customers with electricity consumption greater than 40GWh per year at a single connection point; or where a customer's circumstances mean that the average shared network charge becomes meaningless or distorted.
Maximum Demand	The maximum demand recorded at a customer's individual meter or the maximum demand placed on the electrical distribution network system at any time or at a specific time or within a specific time period such as a month. Maximum demand is an indication of the capacity required for a customer's connection or the electrical distribution network.
Network Use of System (NUOS)	The tariff for use of the distribution and transmission networks. It is the sum of both Distribution Use of System and Designated Pricing Proposal Charges.
Non-contributed assets	Non-contributed assets are those funded by ENERGEX.
Non-Demand Metered SAC	The customer's connection point has a meter installed that is capable of measuring the total energy consumption (kW.h).
Non-Demand Metered Tariff	The tariff is based around a fixed daily component and the actual energy (kW.h) used by the customer.
Off-peak Period	All hours which are outside of Peak Period hours.
Peak Period	Meter type 1-4 (ICC, CAC & SAC demand): The hours between 7am and 11pm, Monday to Friday. Meter type 6 (SAC Non demand): The hours between 7am and 9pm, Monday to Friday.



Term	Definition
Power Factor	Power factor, is the ratio of kW to kV.A, and is a useful measure of the efficiency in the use of the network infrastructure. The closer to one the power factor, the more efficient the network assets are utilised. Power Factor = kW/kV.A
Queensland Government Solar Bonus Scheme for Standard Asset Customers	A program that pays domestic and other small energy customers for the surplus electricity generated from roof-top solar photovoltaic (PV) systems that is exported to the Queensland grid.
Site Specific Price	A charge which is calculated for a site and is specific to the individual connection point.
Solar Photovoltaic (Solar PV)	A Solar Photovoltaic system uses sunlight to generate electricity. The system provides power for the premises with any excess production feeding into the electricity grid.
Standard Asset Customer (SAC)	Generally those customers with an annual electricity consumption below 4GW.h per year, whose supply arrangements are consistent across the customer group.
Standard Control Services	This service class includes network, connection and metering services.
Street lights (Major)	Major Lamps include the following:- a) High Pressure Sodium 100 watt (S100) and above b) Metal Halide 150 watt (H150) and above c) Mercury Vapour 250 watt (M250) and above
Street lights (Minor)	Minor Lamps are all lamps other than Major Lamps and include Mercury Vapour, High Pressure Sodium and Fluorescent.
Time of Use (TOU)	Refers to tariffs that vary according to the time of day at which the electricity is consumed.
Unmetered Supply	A customer who takes supply where no meter is installed at the connection point.
Volume (Energy) Charge	This part of the tariff seeks to reflect costs not directly allocated to network drivers and costs that are proportional to the size of the customer. The energy consumption (kW.h) for the period, as recorded by the customer's meter, is utilised to calculate this part of the tariff charge. This charge is applied as a fixed amount (cents) per Kilowatt hour (kW.h).
Volume (Energy) Charge (Off-peak)	This charge is applicable to those customers who are on a Time of Use tariff. The energy consumption (kW.h) during Off-peak periods (refer to Off-peak Period for Off-peak Period times), as recorded by the customer's meter, is utilised to calculate this part of the tariff. This charge is applied as a fixed amount (cents) per Kilowatt hour (kW.h).



Term	Definition
Volume (Energy) Charge (Peak)	This charge is applicable to those customers who are on a Time of Use tariff. The energy consumption (kW.h) during Peak periods (refer to Peak Period for Peak Period times), as recorded by the customer's meter, is utilised to calculate this part of the tariff. This charge is applied as a fixed amount (cents) per Kilowatt hour (kW.h).



7 Appendices

No.	Title
1	kV.A adjustment methodology
2	Fee-based services product codes
3	Quoted services product codes
4	Additional Business-2-Business codes
5	Internal procedure for reviewing objections



Appendices

No.	Title
1	kV.A Adjustment Methodology
2	Fee-based services product codes
3	Quoted services product codes
4	Additional Business-2-Business codes
5	Internal procedure for reviewing objections

Appendix 1

kV.A Adjustment Methodology

Commencing 1 July 2010, charges for ICC's and CAC's have been adjusted up or down by a relative amount based on the difference between the customers' measured power factor and the power factor neutral point. The adjustment will be applied to the demand and capacity charge elements for 2011-12 as outlined below.

1. kV.A Tariff Adjustment Calculation Methodology

a.
$$\text{Actual Power Factor (APF)} = \frac{\text{Maximum monthly kW}}{\text{Maximum monthly kV.A}}$$

where monthly kW and monthly kV.A data is collected from the customer's meter

b.
$$\text{Power Factor Adjustment (PFA)} = \text{Multiplier} \times (\text{TPF} - \text{APF}) \times (1 + \text{TPF} - \text{APF})^{\text{index}}$$

where TPF = Target Power Factor (Power factor neutral point of 0.9 for ICCs, 0.85 for CACs)

Multiplier and index are variables set by ENERGEX (as per table below)

The PFA will be limited to the maximum and minimum bounds defined by ENERGEX as required

c.
$$\text{Demand Adjustment (kW)} = \text{PFA} \times \text{Maximum monthly demand}$$

$$\text{Capacity Adjustment (kW)} = \text{PFA} \times \text{Nominated monthly demand}$$

The adjustments (measured in kW) will be positive or negative depending on the difference between the customer's actual power factor (APF) and target power factor (TPF). This will result in an increase or decrease to the monthly charge as shown in the formula below.

d.
$$\text{Monthly charge for DUOS(\$)} = \underbrace{\text{Fixed} + \text{Demand} + \text{Capacity} + \text{Volume Peak} + \text{Volume Off Peak}}_{\text{Existing parameters}} + \underbrace{\text{Demand Adjustment} + \text{Capacity Adjustment}}_{\text{kV.A adjustments for 2011/12}}$$

where Demand Adjustment (\$) = PFA x Maximum monthly demand (kW) x Demand Charge (\$/kW/month)

Capacity Adjustment (\$) = PFA x Nominated monthly demand (kW) x Capacity Charge (\$/kW/month)

2. kV.A Tariff Adjustment Parameters for 2011-12

Customer Type	Target Power Factor	Index	Multiplier	Maximum Adjustment	Minimum Adjustment
ICC - 110B ¹	0.90	1.0000	1.0	0%	0%
ICC - 33B	0.90	-3.3000	1.0	10%	-10%
ICC - 11B	0.90	-3.3000	1.0	10%	-10%
CAC - 33L	0.85	2.5672	0.8	20%	-25%
CAC - 11B	0.85	-0.0897	1.2	20%	-15%
CAC - 11L	0.85	4.4650	0.6	20%	-10%

1 The power factor adjustment will not be applied to ICC 110 customers due to metering limitations



Appendix 2

Fee-based services – Product Codes

Category	Service	Price (GST Exclusive)	Price (GST Inclusive)	Product Code	Peace Charge Code	Service Description
Alterations and additions to current metering equipment	Addition &/or alteration to current metering arrangement including exchange &/or move meter	\$94.61	\$104.07	AAEM1M	500	Exchange of one meter for another
				AAEM2M	502	Exchange of one meter for another – CT Metering. This product code will always have an Additional Crew product code applied.
				AAMM1M	512	Meter requires relocation
				AAMM2M	514	Meter requires relocation – CT Metering. This product code will always have an Additional Crew product code applied.
		\$35.90	\$39.49	AAMR1M	528	Installation test/meter reseal following customer initiated work eg. the relocation of an existing meter.
				AAMR2M	530	Installation test/meter reseal following customer initiated work eg. the relocation of an existing meter – CT Metering. This product code will always have an Additional Crew product code applied.
Attending loss of supply – low voltage customer installation at fault – business hours	ENERGEX attends trouble call during business hours and found fault in LV customer's installation	\$105.68	\$116.25	LOS	1500	ENERGEX attended LV customer's trouble call during business hours and found fault in LV customer's installation (includes tripped safety switch, internal fault, customer overload, etc)
Overhead service replacement – single phase	To replace an existing overhead service at customer's request. No material change to load	\$289.31	\$318.24	MSOR1P2	920	To replace an existing overhead service at customer's request. No material change to load. Single Phase – 2 visit.
				MSRO1P1	1028	To replace an existing overhead service at customer's request. No material change to load. Single Phase – 1 visit.

Category	Service	Price (GST Exclusive)	Price (GST Inclusive)	Product Code	Peace Charge Code	Service Description
Overhead service replacement – multiple phase	To replace an existing overhead service at customer's request. No material change to load	\$340.81	\$374.89	MSOR2P1	916	To replace an existing overhead service at customer's request. No material change to load. Two Phase – 1 visit.
				MSOR2P2	1006	To replace an existing overhead service at customer's request. No material change to load. Two Phase – 2 visit.
				MSOR3P1	918	To replace an existing overhead service at customer's request. No material change to load. Three Phase – 1 visit.
				MSOR3P2	924	To replace an existing overhead service at customer's request. No material change to load. Three Phase – 2 visit.
De-energisation¹	De-energisation, commenced during business hours	Nil	Nil	DNSD1MB	300	De-en Pole, Pillar, Post - No CT
				DNSD2MB	302	De-en Pole, Pillar, Post - CT
				DN\$1MB	304	De-en - No Pay, Pole, Pillar, Post - No CT
				DN\$2MB	306	De-en - No Pay, Pole, Pillar, Post - CT
				DNF1MB	308	De-en - Remove Fuse - No CT
				DNF2MB	310	De-en - Remove Fuse - CT
				DNF\$1MB	312	De-en - No Pay Remove Fuse - No CT
				DNF\$2MB	314	De-en - No Pay Remove Fuse - CT
				DNS	320	De-en Main Switch Sealed
				DNPN+10	318	De-en planned notification > 10 customers
				DNPNU10	322	De-en planned notification < 10 customers
Meter test¹	Check that metering installation is accurately measuring energy consumed	\$14.86	\$16.35	MIMT1MB	704	Meter Test - NoCT B/H Only
				MIMT2MB	706	Meter Test - CT B/H Only



Category	Service	Price (GST Exclusive)	Price (GST Inclusive)	Product Code	Peace Charge Code	Service Description
Meter inspection	Inspection required to check reported or suspected fault and no fault in meter is found	\$84.56	\$93.02	MSINSS	957	Meter Inspection - Simple
Reconfigure meter	Adjustment to meter setting due to change in tariff and/or time of use settings	\$70.11	\$77.12	MRCT1M	1204	Tariff change required - No CT
				MRCT2M	1206	Tariff change required - CT Metering. This product code will always have an Additional Crew product code applied.
				MRCTS1M	1208	Change Timeswitch - No CT
				MRCTS2M	1210	Change Timeswitch - CT Metering. This product code will always have an Additional Crew product code applied.
				MRCL1M	1200	Change Control Load - No CT
				MRCL2M	1202	Change Control Load - CT Metering. This product code will always have an Additional Crew product code applied.
Off-cycle meter read	Meter read taken off-cycle	\$7.90	\$8.69	SRCR	400	Check Read required due to reported error in the meter reading. This is used to check the accuracy of the meter reading only.
				SRTR	404	Special read – transfer. Required when a customer transfers to a different Retailer during a billing period.
Site visit	Where crew attends site & either a) service is unable to be performed due to customer's fault (i.e. unfulfilled site visit due to customer missed appointment etc.), or b) crew attends site at customer request where the service is not covered by another fee based service (eg. to provide notification)	\$60.72	\$66.79	MSWTV	1044	Unfulfilled site visit - Business Hours
Locating Energex underground cables	Customer requested assistance, from a single crew for a period of up to one hour, in locating ENERGEX underground cables	\$129.11	\$142.02	MSAPLC	938	Customer requests assistance, from a single crew for a period of up to one hour, in locating ENERGEX underground cables



Category	Service	Price (GST Exclusive)	Price (GST Inclusive)	Product Code	Peace Charge Code	Service Description
Temporary connection¹ - Simple	Temporary Connection – Simple. Applies to temporary connections (<12 months) for SACs (incl; temporary builders supplies), typically up to 10 kVA where minimum technical standards are required. It excludes complex requirements such as those that require greater capacity, longer distance, and/or difficult terrain or temporary large customer connections..	\$335.91	\$369.50	NCT1MB	120	Temporary connection – Simple - No CT. Recovery of the temporary builders supply is inclusive.
				NCT2MB	122	Temporary connection – Simple - CT Metering. Recovery of the temporary builders supply is inclusive.
Re-energisation – business hours¹	Re-energisation commenced during business hours, visual inspection not required	\$37.27	\$41.00	RN\$1MB	200	Re-energisation No Pay - No CT. Business hours.
				RN\$2MB	202	Re-energisation No Pay - CT Metering. Business hours.
	Reading provided for an active site	Nil	Nil	RNMSS	406	Premise requires re-energisation following a main switch seal. Business hours.
				RNNR	238	Retailer requests a reading be taken, on an already energised site, rather than using a deemed meter reading. May also be used for Retrospective move-in requests.
				RNRR	236	Re-en for Read Required. Reading only provided – fieldwork undertaken if necessary.
Re-energisation – after hours¹	Re-energisation commenced after hours, visual inspection not required	\$89.54	\$98.49 ²	RN\$1MA	204	Re-energisation No Pay - No CT. After hours.
				RN\$2MA	206	Re-energisation No Pay - CT Metering. After hours.
				RN\$1MT	208	Re-energisation No Pay - No CT where the retailer has requested a service time of AnyTime.
				RN\$2MT	210	Re-energisation No Pay - CT Metering where the retailer has requested a service time of AnyTime.
		\$40.83	\$44.91	RNMSSA	408	Premise requires re-energisation following a main switch seal. After hours.
				RNMSST	410	Premise requires re-energisation following a main switch seal. Anytime.



Category	Service	Price (GST Exclusive)	Price (GST Inclusive)	Product Code	Peace Charge Code	Service Description
Re-energisation (visual) – business hours¹	Re-energisation commenced during business hours, visual inspection required	Nil	Nil	RNV1MB	224	Re-energisation (visual) - No CT. Business hours.
				RNV2MB	226	Re-energisation (visual) - CT Metering. Business hours.
Re-energisation (visual) – after hours¹	Re-energisation commenced after hours, visual inspection required	\$89.54	\$98.49 ²	RNV1MA	228	Re-energisation (visual) - No CT. After hours.
				RNV2MA	230	Re-energisation (visual) - CT Metering. After hours.
				RNV1MT	232	Re-energisation (visual) - No CT where the retailer has requested a service time of AnyTime.
				RNV2MT	234	Re-energisation (visual) - CT Metering where the retailer has requested a service time of AnyTime.
Re-energisation non-payment (visual) – business hours¹	Re-energisation, following de-energisation for non payment, commenced during business hours, visual inspection required	\$37.27	\$41.00	RN\$V1MB	212	Re-energisation No Pay - No CT. NMI de-energised >30 day - visual inspection required. Business hours.
				RN\$V2MB	214	Re-energisation No Pay - CT Metering. NMI de-energised >30 day - visual inspection required. Business hours.
Re-energisation non-payment (visual) – after hours¹	Re-energisation, following de-energisation for non payment, commenced after hours, visual inspection required	\$89.54	\$98.49 ²	RN\$V1MA	216	Re-energisation No Pay - No CT. NMI de-energised >30 day - visual inspection required. After hours.
				RN\$V2MA	218	Re-energisation No Pay - CT Metering. NMI de-energised >30 day - visual inspection required. After hours.
				RN\$V1MT	220	Re-energisation No Pay - No CT where the retailer has requested a service time of AnyTime. NMI de-energised >30 day - visual inspection required.
				RN\$V2MT	222	Re-energisation No Pay - CT Metering where the retailer has requested a service time of AnyTime. NMI de-energised >30 day - visual inspection required.



Category	Service	Price (GST Exclusive)	Price (GST Inclusive)	Product Code	Peace Charge Code	Service Description
Supply abolishment - Simple	Retailer requests the service provider to abolish supply at a given connection point.	\$327.67	\$360.44	SA1	800	Retailer requests the Service Provider to abolish supply at a given Connection Point. To be used for Single Dwellings; the Community or Unit one of Multi-Unit Residential complexes.
	Applies to LV overhead services from an ENERGEX distribution pole to a house, building or property pole; or underground supply arrangements fed from a distribution pillar with fuses not exceeding 100a/ph.	\$52.33	\$57.56	SA3	803	Retailer requests the Service Provider to abolish supply at a given Connection Point. To be used for Multi-Unit Residential complexes, for all units after the Community or Unit One.
Unmetered supply	Provision of temporary connection and recovery of permanent connection for approved unmetered equipment where an existing LV supply exists	\$144.61	\$159.07	DNUMS	328	Request to de-energise an Unmetered Supply Point
				TUMS	1400	Temporary connection of unmetered equipment to an existing LV supply
Street light glare screening	The supply & installation of glare shields	\$139.76	\$153.74	SLLGAD	602	Adhesive Lumin Glare Screen
				SLLGSDI	604	Standard Lumin Glare Screen - Internal
Replacement of standard luminaries with aero screen units (per street light)	Replacement of existing luminaries with aero screen low glare luminaries	\$323.10	\$355.41	SLAU	600	Replacement of existing streetlight luminaries with aero screen low glare luminaries

Notes:

1. Services are subject to Schedule 8 of the Queensland Electricity Regulation 2006, which either caps the price or sets the price to nil.
2. This service is capped by Schedule 8 at a maximum of \$98.50 (GST inclusive), however ENERGEX will charge \$89.54 (GST exclusive) resulting in \$98.49 (GST inclusive) due to rounding limitations.



Appendix 3

Quoted services – Product Codes

Category	Service	Product Code	Peace Charge Code	Ellipse Product Code	Service Description
Rearrangement of network assets	Where ENERGEX assets are rearranged at customer's request.	MSREL	1026	P051	Where ENERGEX assets are moved at customer's request
		MSOhtoUG	1004		Upgrade from Overhead to Underground Service - Customer requested conversion of existing overhead service to underground service
Customer requested works to allow customer or contractor to work close	Customer requested disconnection & reconnection of supply, coverage of LV mains and/or switching to allow customer/contractor to work close.	MSTT	1038	P011	Coverage of Low Voltage Mains (eg tiger tails) - Charge where customer requests the line close to a construction site be physically covered to prevent risk of electrocution
		MSDNNDB	902	P011	Temporary LV Service Disconnection - no dismantling – BH
		MSDNNDA	908	P011	Temporary LV Service Disconnection - no dismantling – AH
		MSDNPDB	904	P011	Temporary LV Service Disconnection - physical dismantling – BH
		MSDNPDA	910	P011	Temporary LV Service Disconnection - physical dismantling – AH
		MSDNHVB	906	P011	Temporary HV Service Disconnection – BH
		MSDNHVA	912	P011	Temporary HV Service Disconnection – AH
Non standard data and metering services (type 5-7 metering)	Includes provision of meter data above the minimum requirements & meter inspection to check a reported or suspected fault. Does not include provision of any hardware.	MSOBD	1002	P053	Provision of metering data above Minimum Regulatory Requirements
		MSLPD	990	P053	Provision of load profile data where available on request by retailer
		MEMDP	1300	P053	Collection, processing and transfer of higher standard energy data for customers than would otherwise be provided - retailer requested
		MSINS	955	P053	Meter Inspection - Multi dwellings

Category	Service	Product Code	Peace Charge Code	Ellipse Product Code	Service Description
Emergency recoverable works and rectification of illegal connections	Work carried out by ENERGEX as a result of an emergency or third party action.	MSERW	978	P002	Emergency Recoverable Works - Charges for work carried out by ENERGEX as a result of emergency or third party action
		MSAPIC	930	P002	Rectification of Illegal Connections - Charges for work required as a consequence of illegal connections resulting to damage to the network
Large customer connections	Design & construct of connection assets for large customers.			P060	Large customer connections
Design specification/auditing and other subdivision activities	Provision of a detailed estimate/design and/or checking of designs for subdivisions and streetlight services. Also includes other subdivision activities such as pole inspections.	MSDD	958	P006	Provision of Detailed Design Estimate for LV Customer Requested Extension/Connection
		MSSF	1032	P006	Specification Fees - Fee for service when ENERGEX prepares and issues specifications for customer extension works
Unmetered services, including street lighting	Provision of services, other than standard connection, for approved unmetered equipment, including street lights.	SLLGUNI	606	P005	Unique Luminaries Glare Screening - External
				P054	Unmetered services (excl street lighting)
After hours provision of any fee based service (excl re-energisation)	The provision of any fee-based service, excluding re-energisation, after hours.	LOST	1602	P062	ENERGEX attended LV customer's trouble call after hours and found fault in LV customer's installation (includes tripped safety switch, internal fault, customer overload, etc)
		MSWTVA	1045	P062	Unfulfilled site visit - After Hours
		NCT1MA	124	P062	Temporary connection - No CT where the retailer has requested a service time of after hours. Recovery of the temporary builders supply is inclusive.
		NCT2MA	126	P062	Temporary connection - CT Metering where the retailer has requested a service time of after hours. Recovery of the temporary builders supply is inclusive.
		NCT1MT	128	P062	Temporary connection - No CT where the retailer has requested a service time of anytime. Recovery of the temporary builders supply is inclusive.
		NCT2MT	130	P062	Temporary connection - CT Metering where the retailer has requested a service time of anytime. Recovery of the temporary builders supply is inclusive.
		AAEM1MAH	501	P062	Adds & Alts - Exchange meter No CT - After Hours / Anytime
		AAEM2MAH	503	P062	Adds & Alts - Exchange meter CT - After Hours / Anytime

Category	Service	Product Code	Peace Charge Code	Ellipse Product Code	Service Description
		AAMM1MAH	513	P062	Adds & Alts - Move meter No CT - After Hours / Anytime
		AAMM2MAH	515	P062	Adds & Alts - Move meter CT - After Hours / Anytime
		SA1AH	801	P062	Retailer requests the Service Provider to abolish supply at a given Connection Point. To be used for Single Dwellings; the Community or Unit one of Multi-Unit Residential complexes (after hours).
		SA3AH	804	P062	Retailer requests the Service Provider to abolish supply at a given Connection Point. To be used for Multi-Unit Residential complexes, for all units after the Community or Unit One (after hours).
Supply abolishment - complex	Retailer requests the service provider to abolish supply at a given connection point. Applies where there are complex arrangements requiring extra resources above that supplied under a simple supply abolishment. Including, underground LV service cables direct jointed to the LV mains cable in the footpath or connected to the LV transformer bushings and terminated on a building wall or other structure inside property; or underground supply arrangements fed from a distribution pillar with fuses exceeding 100a/ph; or HV metered sites.	SA2	802	P056	Supply Abolishment - complex
Additional crew	Where additional crew are required at a service call for health, safety or security reasons.	MSAC	926	P055	Where additional single crew for a period up to one hour is required at a service call for health, safety or security reasons during business hours.
		MSACA	1700	P055	Where additional single crew for a period of up to one hour is required at a service call for health, safety or security reasons after hours.
		MSACT	1702	P055	Where additional single crew for a period of up to one hour is required at a service call for health, safety or security reasons and the retailer has nominated a service time of AnyTime.
		MSAC2	939	P055	Where additional single crew for a period > than one hour < 2 hours is required at a service call for health, safety or security reasons during business hours.



Category	Service	Product Code	Peace Charge Code	Ellipse Product Code	Service Description
		MSACA2	1701	P055	Where additional single crew for a period of greater than one hour is required at a service call for health, safety or security reasons after hours.
		MSACT2	1703	P055	Where additional single crew for a period of greater than one hour is required at a service call for health, safety or security reasons and the retailer has nominated a service time of AnyTime.
		MSACB	1704	P055	Where additional single crew for a period of greater than two hours is required at a service call for health, safety or security reasons during business hours.
Temporary connection - complex	Applies to temporary connections, typically above 10 kVA, where there are complex arrangements requiring extra resources above that supplied under simple temporary supply. Applies to all HV connections and construction supplies. Complex arrangements may be due to long distances, a transformer installation and/or difficult terrain.			P057	Temporary connection - complex
Loss of asset	The residual asset value of non-contributed (Rate 1) & contributed (Rate 2) street lights when removed from service before the end of their useful life at the request of the customer.			P052	Loss of asset (eg streetlighting)
Other recoverable work (opex)	Customer requested opex services that would not otherwise have been requested for the efficient management of the network, or covered by another service.	MSORW	945	P061	Other Recoverable Works - Opex
Other recoverable work (capex)	Customer requested services that would not otherwise have been requested for the efficient management of the network, or covered by another service which results in a contributed asset.	MSREAC	1024	P064	Provision of Reactive Power - Charges for the provision or receipt of reactive power and energy to and from a connection point
		MSAPABC	928	P065	Conversion to Aerial Bundled Cables - Bundling of cables which is carried out at the request of another party



Appendix 4

Other Business-2-Business services (no charge)

In addition to the Alternative Control Services provided by ENERGEX on a fee for service basis, ENERGEX provides a number of services free of charge (DUOS services). These services are requested through the usual Business-2-Business communication channels. A list of services with full description and product code are provided in the additional product code listing below.

Product Codes	Description	Full Description	Peace Charge Code	Price
New Connections				
NCUP2MB	U/G Perm Supply - CT B/H	New Connection underground with CT during business hours	100	\$ -
NCUP1MB	U/G Perm Supply - No CT B/H	New Connection underground with no CT during business hours	158	\$ -
NCUP2MA	U/G Perm Supply - CT A/H	New Connection underground with CT after hours	106	\$ -
NCUP1MA	U/G Perm Supply - No CT A/H	New Connection underground with no CT after hours	156	\$ -
NCUP2MT	U/G Perm Supply - CT Anytime	New Connection underground with CT anytime	118	\$ -
NCUP1MT	U/G Perm Supply - No CT Anytime	New Connection underground with no CT anytime	116	\$ -
NCOP2MB	O/H Perm Supply - CT B/H	New Connection overhead with CT during business hours	104	\$ -
NCOP1MB	O/H Perm Supply - No CT B/H	New Connection overhead with no CT during business hours	102	\$ -
NCOP2MA	O/H Perm Supply - CT A/H	New Connection overhead with CT after hours	110	\$ -
NCOP1MA	O/H Perm Supply - No CT A/H	New Connection overhead with no CT after hours	108	\$ -
NCOP2MT	O/H Perm Supply - CT Anytime	New Connection overhead with CT anytime	114	\$ -
NCOP1MT	O/H Perm Supply - No CT Anytime	New Connection overhead with no CT anytime	112	\$ -
NCTP2MB	Temp/Perm - CT B/H	New Connection temporary in permanent CT during business hours	150	\$ -
NCTP1MB	Temp/Perm - No CT B/H	New Connection temporary in permanent no CT during business hours	148	\$ -
NCTP2MA	Temp/Perm - CT A/H	New Connection temporary in permanent CT after hours	134	\$ -
NCTP1MA	Temp/Perm - No CT A/H	New Connection temporary in permanent no CT after hours	132	\$ -
NCTP2MT	Temp/Perm - CT Anytime	New Connection temporary in permanent CT anytime	138	\$ -
NCTP1MT	Temp/Perm - No CT Anytime	New Connection temporary in permanent no CT anytime	136	\$ -



Product Codes	Description	Full Description	Peace Charge Code	Price
Unmetered Supply				
NCUMSC	UMS Connection Point Available	New connection unmetered where connection point is available	152	\$ -
NCUMSCN	UMS Connection Point Not Available	New connection unmetered where connection point is not available	153	\$ -
Special Read				
SRFR	Meter Final Read	Special Read - final read	402	\$ -
Additions & Alterations				
AAICL	Install Ctrl Load	Adds & Alts - installed controlled load	516	\$ -
AAIHW	Install Hot Water	Adds & Alts - installed hot water	518	\$ -
AAIM2MB	Install Meter - CT B/H	Adds & Alts - install meter CT during business hours	522	\$ -
AAIM1MB	Install Meter - No CT B/H	Adds & Alts - install meter no CT during business hours	520	\$ -
AAIM2MA	Install Meter - CT A/H	Adds & Alts - install meter CT after hours	506	\$ -
AAIM1MA	Install Meter - No CT A/H	Adds & Alts - install meter no CT after hours	504	\$ -
AAIM2MT	Install Meter - CT Anytime	Adds & Alts - install meter CT anytime	510	\$ -
AAIM1MT	Install Meter - No CT Anytime	Adds & Alts - install meter no CT anytime	508	\$ -
AARM2M	Remove Meter - CT	Adds & Alts - remove meter CT during business hours	526	\$ -
AARM1M	Remove Meter - No CT	Adds & Alts - remove meter no CT during business hours	524	\$ -
Meter Investigation				
MIT2MB	Tamper - CT B/H Only	Meter investigation for tamper CT during business hours	710	\$ -
MIT1MB	Tamper - No CT B/H Only	Meter investigation for tamper no CT during business hours	708	\$ -
Customer Initiated Service Upgrades				
MSOU1P2	OH Single Phase - 2 visit	Overhead Service Upgrade	1008	\$ -
MSOU2P1	OH 2 Phase - 1 visit	Overhead Service Upgrade	1010	\$ -
MSOU2P2	OH 2 Phase - 2 visit	Overhead Service Upgrade	1012	\$ -
MSOU3P1	OH 3 Phase - 1 visit	Overhead Service Upgrade	1014	\$ -
MSOU3P2	OH 3 Phase - 2 visit	Overhead Service Upgrade	1016	\$ -
MSUU2P	U/G Upgrade to 2ph Connection	Underground service upgrade to 2 phase	1040	\$ -
MSUU3P	U/G Upgrade to 3ph Connection	Underground service upgrade to 3 phase	1042	\$ -
No Charge				
NoCharge	No Charge	No Charge	9999	\$ -



Appendix 5

Internal procedure for reviewing objections

1.1 Internal procedure for reviewing objections to tariff class assignment

When ENERGEX (Retail Escalation Manager or Network Pricing Manager) receives written notification that a customer has an objection to a proposed tariff classification, the following procedures will be followed.

Where the objection does not involve a site specific price, the review process will be performed by the Retail Escalation Department. This includes tariff reclassifications for SAC Demand to or from SAC Non-demand.

Where the objection involves a customer moving to or from site specific prices, the review process will be performed by the Network Pricing Department. This includes tariff reclassifications to or from CAC and ICC.

The internal objection process is as follows:

- a) The customer's written objection will be reviewed and ENERGEX will consider any additional information that the customer has provided.
- b) ENERGEX will determine the energy usage for the customer based on:
 - i. Any information which the customer has provided, or
 - ii. Historical consumption data for existing customers; or
 - iii. Estimated energy for new customers.
- c) ENERGEX will assess the nature of the customer's connection to the network.
- d) ENERGEX will determine the correct tariff classification (using data collected and as outlined in Figure 1). There may be exceptions to the application of the first criteria, energy consumption, depending on the nature of a connection.
- e) In all cases, the tariff class assignment will be reconsidered and will be escalated to the Retail Escalation Manager and Network Pricing Manager for review.
- f) The customer (or Retailer) will be notified in writing of the tariff classification review within 7 days.

