

Energex

Tariff Schedule

for the period 1 July 2012 to 30 June 2013

Version 9 11 February 2013



positive energy

Version Control

Version	Date	Description
1	07/06/2012	Initial version published on ENERGEX website (excludes 2012-13 Schedule 8 prices)
2	15/06/2012	Table 5 for Schedule 8 capped prices, to show 2011-12 prices instead of 2012-13 AER approved prices (as per previous years). Still excludes 2012-13 Schedule 8 prices, will be updated again once released.
3	29/06/2012	Figure 1 updated for NTC7500; Table 1 and 2 updated for new tariff NTC7500 Solar PV 2 – this will take effect from 10/7/12 and NTC8400 (Residential Flat) updated in line with QLD Government Policy (28/06/12); Terms & Conditions updated for NTC7500.
4	29/06/2012	Table 5 updated to include 2012-13 Schedule 8 Prices
5	09/07/2012	New section added: 3.2 – variations between regulatory years and Section 3.3, Terms and Conditions updated for SAC Demand.
6	02/08/2012	Table 5 updated – re-energisations categories
7	16/08/2012	Table 5 updated – numbering for notes updated
8	17/10/2012	Service Descriptions for Quoted Services Product Codes updated in Appendix 3.
9	11/02/2013	Updated to reflect AER approved prices for NTC8400 (in line with QLD Government Direction 31/1/13)



Energex Limited trading as Energex
ABN 40 078 849 055
26 Reddacliff Street
NEWSTEAD QLD 4006

<http://www.energex.com.au>

Requests and inquiries concerning this document should be addressed to:

Pricing Manager
Energex
GPO Box 1461
BRISBANE QLD 4001



Table of Contents

1	INTRODUCTION	1
2	ASSIGNING AND REASSIGNING CUSTOMERS TO TARIFF CLASSES	2
2.1	Standard Control Services (SCS)	2
2.2	Alternative Control Services (ACS)	5
3	NETWORK TARIFFS – STANDARD CONTROL SERVICES	6
3.1	2012-13 Tariffs	6
3.2	Variations between regulatory years 2011-12 and 2012-13	9
3.3	Terms and Conditions	10
3.4	kV.A Adjustment for large customers	12
4	NETWORK TARIFFS – ALTERNATIVE CONTROL SERVICES	13
4.1	Street light services	13
4.2	Fee-based services	14
4.3	Quoted Services	15
5	WATCHMAN LIGHTS	16
6	GLOSSARY	17
6.1	Abbreviations	17
6.2	Definitions	17
7	APPENDICES	23



1 Introduction

The Tariff Schedule for 2012-13 outlines Energex's tariffs for both Standard Control Services (SCS) and Alternative Control Services (ACS).

For SCS, the Network Use of System (NUOS) tariffs are provided, which incorporates both the Distribution Use of System (DUOS) charges and Designated Pricing Proposal Charges (DPPC)¹.

For ACS, charges for the provision of street lights, fee-based services and quoted services are provided. Quoted services are performed on a price on application basis.

This Tariff Schedule also provides information on how Energex assigns customers to tariff classes and the internal review process which is undertaken if an objection is raised.

This Tariff Schedule applies from 1 July 2012, or as subsequently revised.

For more information on network pricing please refer to Energex's 2012-13 Pricing Proposal².

¹ Designated Pricing Proposal Charges (DPPC) previously referred to as Transmission Use of System (TUOS)

² The ENERGEX Pricing Proposal can be downloaded at <http://www.energex.com.au/about-us/network-regulation-and-pricing/network-prices>



2 Assigning and Reassigning customers to tariff classes

2.1 Standard Control Services (SCS)

For SCS, the following Energex tariff classes apply:

- Individually Calculated Customer (ICC)
- Connection Asset Customer (CAC) – 33kV
- CAC – 11kV Bus
- CAC – 11kV Line
- Embedded Generators (EG)
- Standard Asset Customer (SAC) Demand
- SAC Non-demand

Each customer for SCS is a member of at least one tariff class. Energex's customer assignment to tariff classes is based on assessment of one or more of the following criteria:

- a) energy consumption and/or demand; and
- b) voltage level.

In addition to the above, the following guidelines apply:

- a change in connection voltage means that the connection is treated as if it was a new connection;
- customers are generally only allowed one requested tariff change per 12 month period;
- for customers with demand/energy levels which fluctuate, Energex may apply a tolerance limit of up to 20 per cent around tariff thresholds to mitigate frequent tariff reassignment;
- allocation of a customer with micro-generation facilities to a tariff will be made on the same basis as other connections;
- where a new tariff is applied to a customer, it is standard practice to apply the tariff from the next billing period; and
- for new connections with no previous load history, the default tariff is based on their expected energy usage, supply voltage and meter type.

A pictorial representation of the process for assignment to tariff class for SCS is outlined in Figure 1. Further information on tariff assignment and reassignment is provided in Energex's 2012-13 Pricing Proposal.

If a customer objects to a proposed classification or reclassification, Energex will follow the internal procedure for reviewing objections (as outlined in Appendix 5).



Figure 1 Assignment of customers to tariff classes – SCS (Load customers)


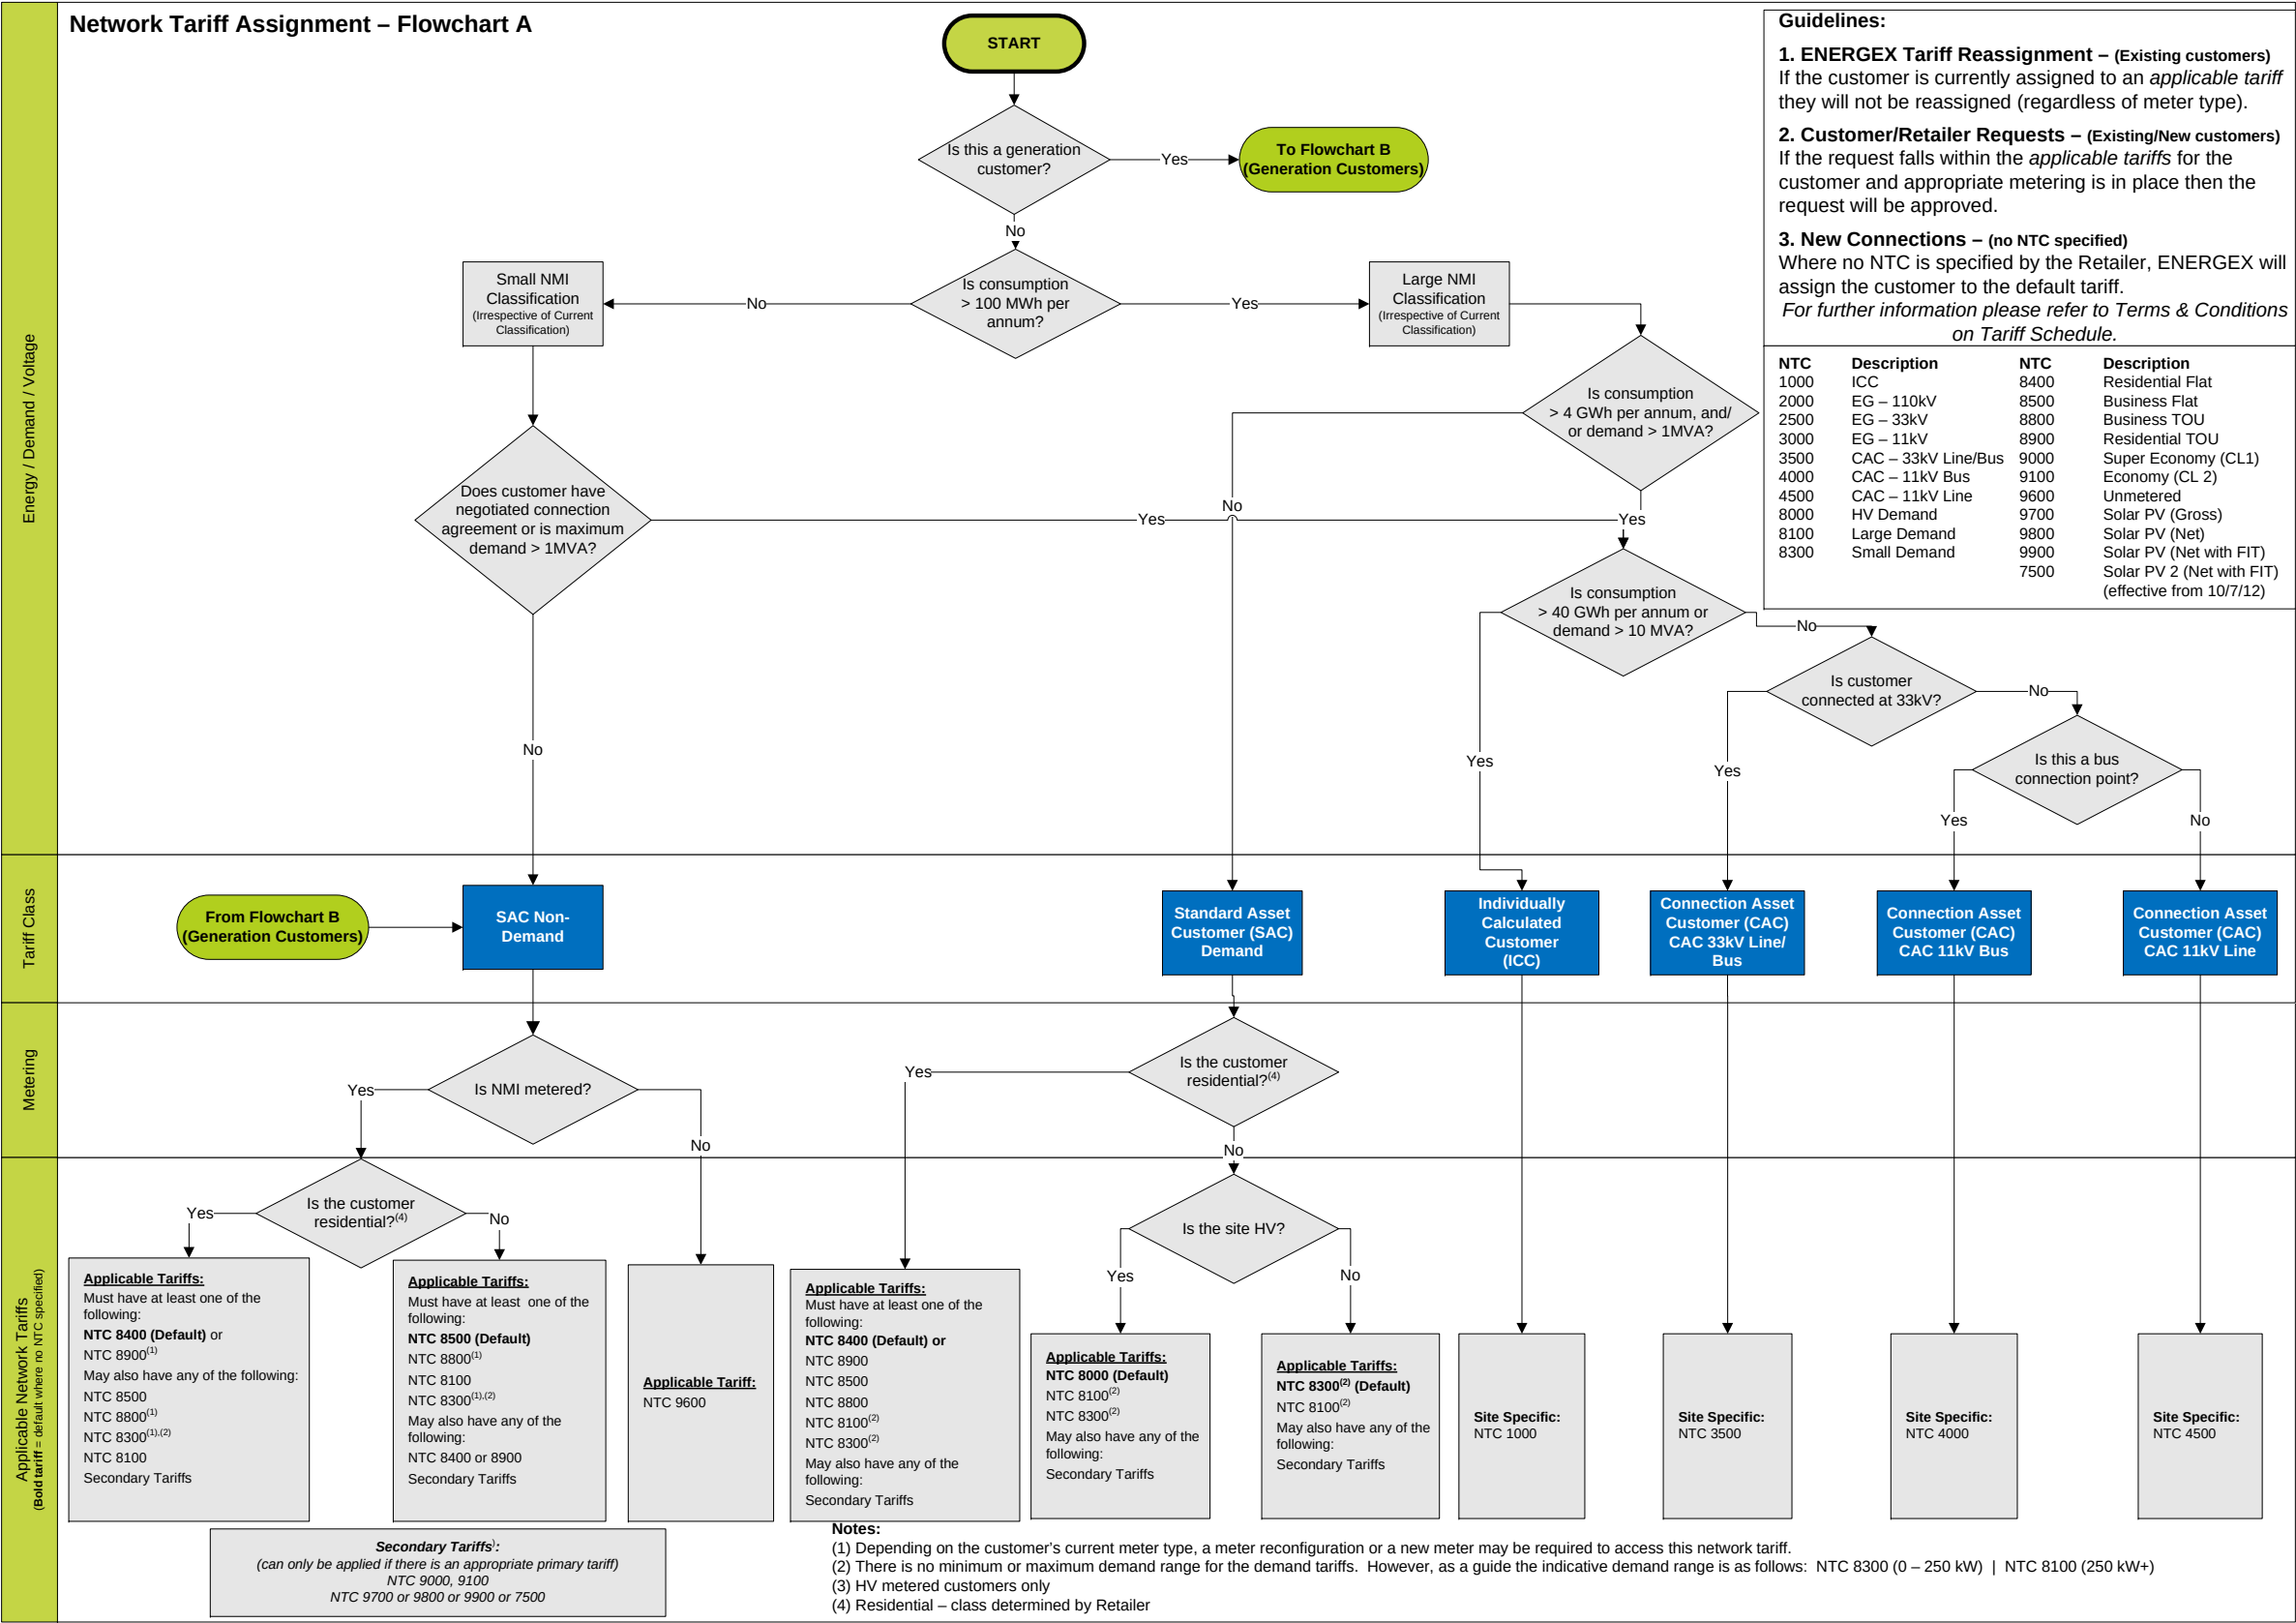



Figure 2 Assignment of customers to tariff classes – SCS (Generation)

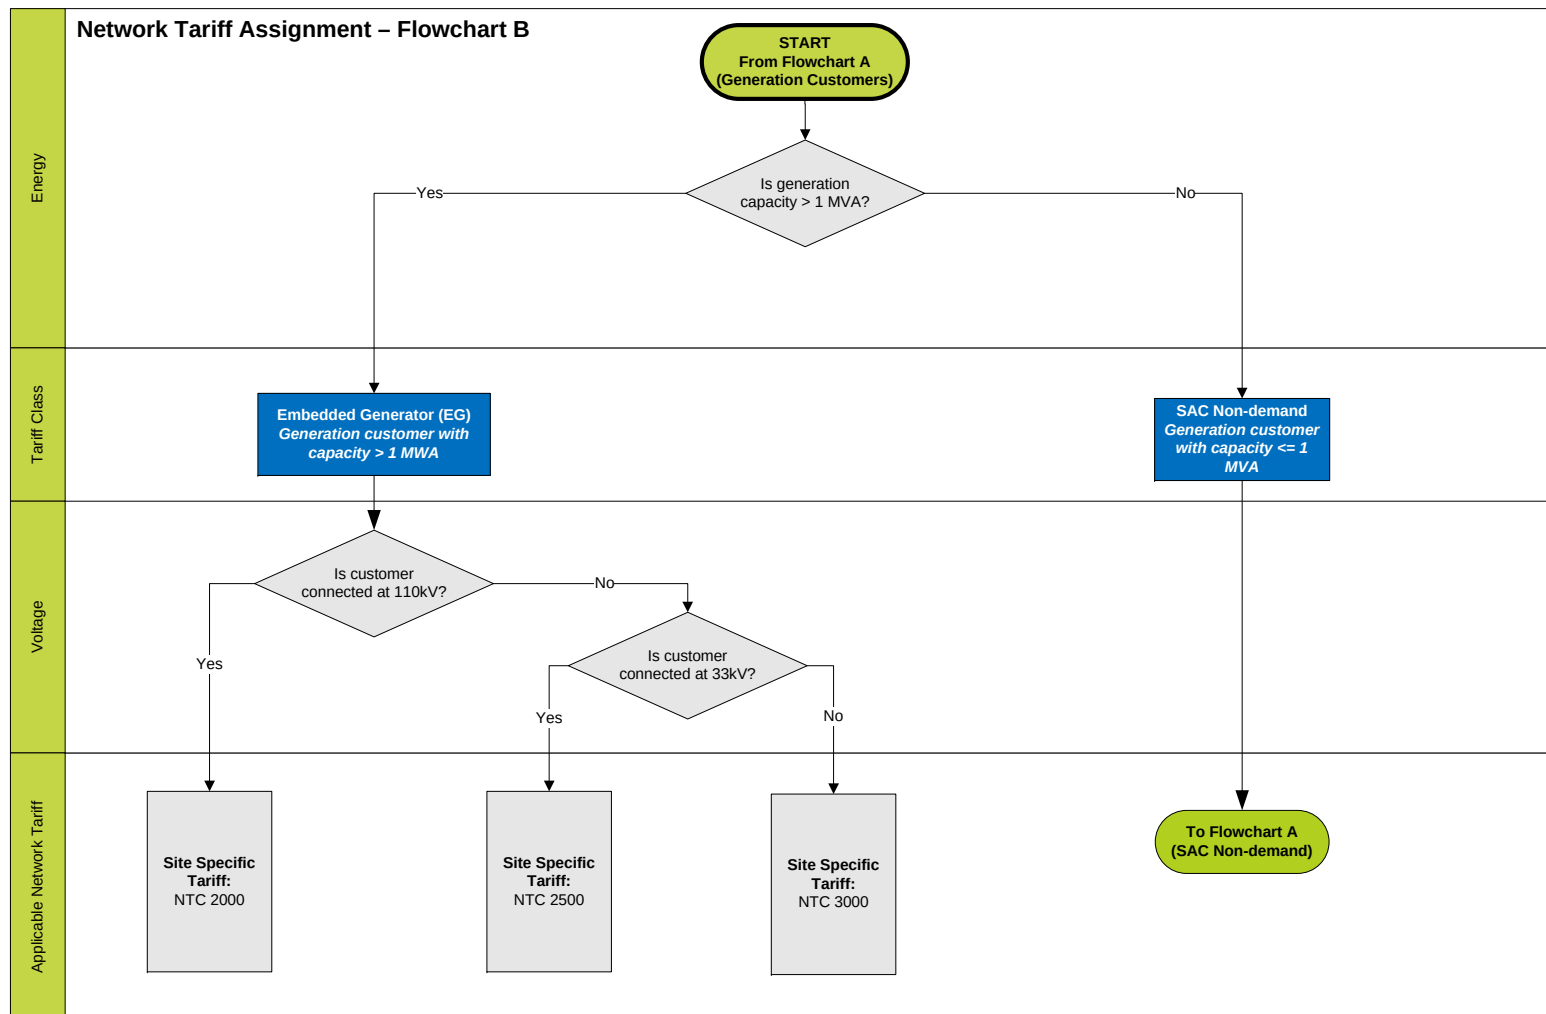

2.2 Alternative Control Services (ACS)

The assignment of customers to an ACS tariff is based on the type of service required. Figure 3 outlines the ACS tariff classes and service types.

Figure 3 Assignment of customers to tariff classes – ACS

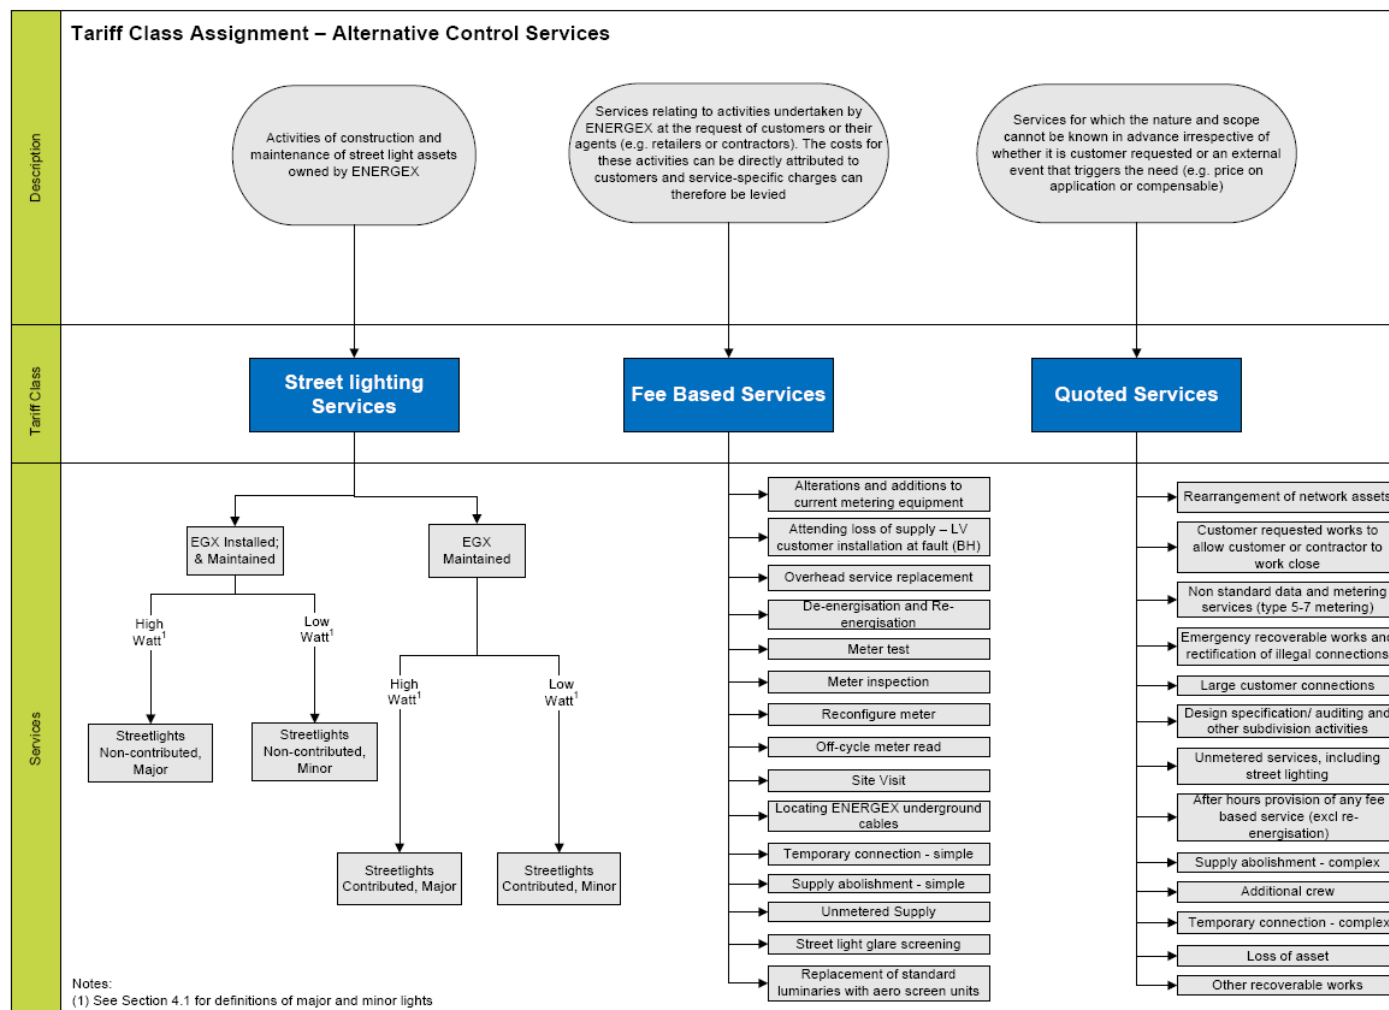

3 Network Tariffs – Standard Control Services

3.1 2012-13 Tariffs

Network tariffs are comprised of both:

- DUOS tariffs – which relate to the network charges incurred for use of the Energex distribution network; and
- DPPC – which relate to the network charges incurred for use of the Powerlink transmission network.

The 2012-13 DUOS and DPPC tariffs for SCS are provided in Table 1.

The NUOS tariff represents the sum of DUOS and DPPC. This is the total network tariff that may be represented on a customer's bill. The NUOS tariffs for SCS are provided in Table 2.

On the 28 June 2012 and 31 January 2013, Energex received directions under section 115 of the Government Owned Corporations Act 1993 in relation to the charging of Network Tariff 8400.



Table 1 2012-13 DUOS and DPPC tariffs for SCS

Tariff Class	Tariff Description	Network Tariff Code	DUOS Charges ^a							DPPC Charges ^a					
			Fixed (\$/day)	Capacity (\$/kW/month)	Demand (\$/kW/month)	Volume Flat (c/kW.h)	Volume Off Peak (c/kW.h)	Volume Shoulder (c/kW.h)	Volume Peak (c/kW.h)	Fixed (\$/day)	Demand (\$/kW/month)	Volume Flat (c/kW.h)	Volume Off Peak (c/kW.h)	Volume Shoulder (c/kW.h)	Volume Peak (c/kW.h)
ICC	ICC	1000	Tariffs for ICC customers are confidential. These will be provided directly to the customer and their Retailer.												
CAC 33kV Line/Bus	CAC 33kV Line/Bus	3500	Site Specific	1.063	2.596		0.058		0.073	Site Specific	1.112		0.133		0.133
CAC 11kV Bus	CAC 11kV Bus	4000		2.062	4.202		0.052		0.075		1.112		0.133		0.133
CAC 11kV Line	CAC 11kV Line	4500		2.727	5.921		0.053		0.074		1.112		0.133		0.133
EG's	EG – 33kV	2500	Site Specific	1.063	2.596		0.058		0.073	Site Specific	1.112		0.133		0.133
	EG – 11kV	3000		2.727	5.921		0.053		0.074		1.112		0.133		0.133
SAC Demand	HV Demand	8000	39.08		9.948	0.071				10.12	2.251	0.947			
	Large Demand	8100	18.86		13.718	0.071				10.12	2.251	0.947			
	Small Demand	8300	4.76		15.429	0.071				10.12	2.251	0.947			
SAC Non-demand	Business Flat	8500/8600 ^b	0.37			8.469				0.24		1.619			
	Business ToU	8800/8700 ^c	0.37				6.922		8.471	0.24			1.461		1.788
	Solar PV (gross)	9700													
	Solar PV (net)	9800													
	Solar PV (net with FIT)	9900				-44.000									
	Solar PV 2 (net with FIT) ^d	7500				-8.000									
	Residential Flat ^e	8400	0.18802 0.09198 ^f			8.728				0.07		1.472			
	Residential ToU	8900	0.28				6.309	9.566	19.771	0.07			1.187	1.803	3.754
	Super Economy (controlled load 1)	9000				3.475						0.637			
	Economy (controlled load 2)	9100				6.302						1.154			
	Unmetered	9600				6.836						1.252			

a. All tariffs are GST exclusive.

b. Customers on Network Tariff Code 8600 will be transitioned to NTC 8500 by 31/12/12.

c. Customers on Network Tariff Code 8700 will be transitioned to NTC 8800 by 31/12/12.

d. Effective from 10/7/12.

e. This tariff is subject to Shareholding Minister's Directions dated 28 June 2012 and 31 January 2013.

f. Only chargeable according to the terms of the Shareholding Minister's Directions dated 31 January 2013.



Table 2 2012-13 NUOS tariffs for SCS

Tariff Class	Tariff Description	Network Tariff Code	NUOS Charges ^a						
			Fixed (\$/day)	Capacity (\$/kW/month)	Demand (\$/kW/month)	Volume Flat (c/kW.h)	Volume Off Peak (c/kW.h)	Volume Shoulder (c/kW.h)	Volume Peak (c/kW.h)
ICC	ICC	1000	Tariffs for ICC customers are confidential. These will be provided directly to the customer and their Retailer.						
CAC 33kV	CAC 33kV Line/Bus	3500	Site specific	1.063	3.708		0.191		0.206
CAC 11kV Bus	CAC 11kV Bus	4000		2.062	5.314		0.185		0.208
CAC 11kV Line	CAC 11kV Line	4500		2.727	7.033		0.186		0.207
EG's	EG – 33kV	2500	Site specific	1.063	3.708		0.191		0.206
	EG – 11kV	3000		2.727	7.033		0.186		0.207
SAC Demand	HV Demand	8000	49.20		12.199	1.018			
	Large Demand	8100	28.98		15.969	1.018			
	Small Demand	8300	14.88		17.680	1.018			
SAC Non-demand	Business Flat	8500/ 8600 ^b	0.61			10.088			
	Business ToU	8800/ 8700 ^c	0.61				8.383		10.259
	Solar PV (gross)	9700							
	Solar PV (net)	9800							
	Solar PV (net with FIT)	9900				-44.000			
	Solar PV 2 (net with FIT) ^d	7500				-8.000			
	Residential Flat ^e	8400	0.25802 0.09198 ^f			10.200			
	Residential ToU	8900	0.35				7.496	11.369	23.525
	Super Economy (controlled load 1)	9000				4.112			
	Economy (controlled load 2)	9100				7.456			
	Unmetered	9600				8.088			

a. All tariffs are GST exclusive. NUOS = DUOS + DPPC

b. Customers on Network Tariff Code 8600 will be transitioned to NTC 8500 by 31/12/12.

c. Customers on Network Tariff Code 8700 will be transitioned to NTC 8800 by 31/12/12.

d. Effective from 10/7/12.

e. This tariff is subject to Shareholding Minister's Directions dated 28 June 2012 and 31 January 2013.

f. Only chargeable according to the terms of the Shareholding Minister's Directions dated 31 January 2013.



3.2 Variations between regulatory years 2011-12 and 2012-13

Energex has recently conducted a review of the existing network tariffs for standard asset customers (SAC). The various changes proposed for 2012-13, as outlined below, are designed to:

- support more specific pricing signals for residential customers through the introduction of a voluntary TOU tariff structure which more adequately reflects the cost of network augmentation thereby assisting in the management of peak demand;
- provide a more robust suite of network tariffs to aid customer understanding and simplify tariff application
- removal of fixed charges for super economy and economy tariffs; and
- enable market efficiency under the new Network plus Retail (N+R) methodology by supporting a 1:1 mapping of network tariffs to notified tariffs.

Table 3 Tariff Changes for 2012-13

Old Tariff	Revised Tariff
New	8900 – Residential TOU
8500 – Business Small – Flat 8600 – Business Medium - Flat ¹	Combined into one tariff: 8500 – Business Flat
8700 – Business Small – TOU 8800 – Business Medium - TOU ²	Combined into one tariff: 8800 – Business TOU
8200 – Demand Medium	Network tariff removed – all existing customers transferred to Demand Small or Demand Large.

¹ Customers on Network Tariff Code 8600 will be transitioned to NTC 8500 by 31/12/12.

² Customers on Network Tariff Code 8700 will be transitioned to NTC 8800 by 31/12/12.



3.3 Terms and Conditions

The Terms and Conditions relating to the SCS tariffs are outlined below.

Energex will apply the rules outlined in Table 3 below, when assigning network tariffs. Whilst Energex may undertake periodic reviews, Energex does not constantly monitor tariffs to ensure they are the most appropriate tariff.

In the event that a customer/Retailer believes a more appropriate tariff is available for the customer, the Retailer should request Energex to change the tariff. This change is dependant upon the necessary metering being installed. Except with Energex's agreement, tariff changes will become effective from the most recent actual read or at completion of field work required to install appropriate meter. Only one free change per year is allowed, thereafter, a charge may apply.

For additional explanation regarding the tariffs please refer to Energex's 2012-13 Pricing Proposal.

Table 4 Terms and conditions for standard control service tariffs

Tariff Class	Tariff	NTC	Description/Tariff Conditions
ICC	ICC	1000	ICC tariffs apply to customers with electricity consumption greater than 40 GW.h per year at a single connection point; or where the customers demand is greater than or equal to 10 MVA; or where a customer's circumstances mean that the average shared network charge becomes meaningless or distorted. ICC tariffs are site specific and will be provided directly to the customer and/or the Retailer. - The DPPC applies to the volume of energy delivered to the nominated Transmission Connection Point. For ICCs, the metered quantity at the customer's site will be adjusted by the given Distribution Loss Factor (DLF) to calculate the total DPPC. - The nominated capacity is either the contracted demand or the maximum demand in the previous calendar year. - The DUOS demand price applies to the actual maximum demand value recorded per month.
CAC 33kV	CAC 33kV	3500	CAC tariffs applies to customers with electricity consumption greater than 4 GW.h (but less than 40 GW.h) per year at a single connection point; or where demand is greater than or equal to 1 MVA at a single connection point; or where the customer has a dedicated supply system with significant connection assets; or where the customer has contributed to their dedicated connection assets. The fixed charges for CACs are site specific and will be provided directly to the customer and/or the Retailer. - The nominated capacity is either the contracted demand or the maximum demand in the previous calendar year. - The DUOS demand price applies to the actual maximum demand value recorded each month.
CAC 11kV Bus	CAC 11kV Bus	4000	
CAC 11kV Line	CAC 11kV Line	4500	
EG	EG 33kV	2500	In line with the Energy Networks Association (ENA) classification, Embedded Generators (EGs) are generally those generators with an installed capacity as follows:



Tariff Class	Tariff	NTC	Description/Tariff Conditions
	EG 11kV	3000	- Medium: 1 - 5 MVA (LV or HV) or < 1 MVA (HV); and - Large: > 5 MVA. Tariffs for connection and access services for Medium and Large EGs will be developed on a similar basis to site-specific customers. This is due to the nature of connections, which are typically non-standard and may require additional embedded generator protection system upgrades.
SAC Demand	HV Demand	8000	This tariff is available for customers connected at HV with consumption below 4GW.h per annum, and demand up to 1000 kW. This network tariff is not available to customers who have non-standard or significant connection assets provided by Energex.
	Large Demand	8100	These tariffs apply to customers connected at LV with consumption below 4GW.h per annum, and demand up to 1000 kW. Customers with consumption less than 100 MW.h can choose to access this tariff on a voluntary basis. The Energex demand tariffs are <u>self selecting</u> - it is the responsibility of the customer/Retailer to select the most appropriate tariff. As a guide the following demand ranges are provided: - Small Demand: 0 – 275 kW - Large Demand: 250 - 1000 kW.
	Small Demand	8300	Where the customer/Retailer does not select a tariff and in the absence of historical demand information (eg. for new customers) the customer will be assigned to Small Demand. Refer to section 2.1. Business customers with consumption > 100 MW.h must be on a demand tariff. However, if existing metering is not programmed to provide a demand read, ENEGEX will apply another appropriate business tariff until such time as the metering is upgraded.



Tariff Class	Tariff	NTC	Description/Tariff Conditions
SAC Non-Demand ¹	Business Flat	8500	This tariff applies to business customers with consumption less than 100 MW.h per annum .
	Business ToU	8800	This tariff applies to business customers with consumption less than 100 MW.h per annum with a ToU capable meter.
	Solar PV	9700 9800 9900 7500	The solar bonus scheme applies to SACs who consume less than 100 MW.h per annum . The Queensland Government sets the feed-in tariff rate (per kW.h) for NTC9900 and NTC7500, to be paid for the excess energy generated. For further information refer to The Office of Clean Energy. Solar PV tariffs can only be applied if there is an appropriate primary tariff at the NMI.
	Residential Flat	8400	Default tariff for residential customers, and can not be used in conjunction with residential ToU (8900). Customers with the same tariff assigned to multiple meters will have the consumption across each meter aggregated for billing purposes.
	Residential ToU	8900	This is a voluntary tariff for residential customers, regardless of their size. Customers must have a ToU capable meter to access this tariff and can not use this tariff in conjunction with residential flat (8400). Customers with the same tariff assigned to multiple meters will have the consumption across each meter aggregated for billing purposes.
	Super Economy (controlled load 1)	9000	Specified permanently connected appliances are controlled by network equipment so that supply will be permanently available for a minimum period of 8 hours at the absolute discretion of Energex but usually between the hours of 10:00pm and 7:00am.
	Economy (controlled load 2)	9100	Specified connected appliances are controlled by network equipment so that supply will be available for a minimum period of 18 hours per day during time periods set at the absolute discretion of Energex.
	Unmetered	9600	Use of system charge (conveyance of electricity) for all unmetered supplies (eg. street lighting, watchman lighting, public barbeques, telephones, traffic signals)

¹ Small Business customers may also have a residential tariff at their NMI (noting customers cannot have both residential flat and residential ToU on the same NMI), provided there is also a Business tariff.

3.4 kV.A Adjustment for large customers

Energex introduced kV.A tariffs for ICC and CAC customers from 1 July 2010. Network charges for ICC and CAC customers are initially calculated using the existing kW based approach. The demand and capacity charges are then adjusted up or down by a relative amount based on the difference between the customers's measured power factor and the power factor neutral point. This methodology is described further in Appendix 1.

The power factor adjustment methodology is a transitional method to help customers understand the concept of kV.A and the impact of kV.A on the network and network charges.

From 1 July 2012, the power factor adjustment will be increased to provide a stronger kV.A price signal. This will provide an additional incentive for customers with a poor power factor to improve and is more cost reflective. Energex intends to move to a straight kV.A tariff, reflective of current practices in other Australian jurisdictions, from July 2013.



4 Network Tariffs – Alternative Control Services

4.1 Street light services

Street light services covered in ACS relate to the provision, construction and maintenance of street light assets owned by Energex. The ACS prices for street light services are included in Table 4.

Table 5 Prices for street light services

Streetlight Service ²	Network Tariff Code	2012–13 Price ¹ (\$ per light per day)
Major non-contributed	9250	1.01
Major contributed	9350	0.27
Minor non-contributed	9200	0.41
Minor contributed	9300	0.11

Notes:

1. All prices are exclusive of GST.
2. Definitions of minor and major lamps is provided in the glossary under *Street Lights*
3. The use of system charge (conveyance of electricity) is a standard control service (included in Tables 1 and 2).

The applicable terms and conditions for each street light service are based on the following principles:

- the contributed street light tariff only applies where the capital cost of the street light has been paid upfront by the customer or their agent;
- at the conclusion of the street light's standard asset life, the non-contributed tariff will apply due to Energex being responsible for the replacement;
- where Energex has supplied the street light and the capital cost has been paid upfront by the customer, the contributed street light tariff will apply for the minimum period specified in the tariff's terms and conditions; and
- where the capital cost of the street light has been funded by Energex and no upfront payment made, whether the initial asset construction or replacement of an asset, the non-contributed street light tariff applies.



4.2 Fee-based services

Fee-based services relate to activities undertaken by Energex at the request of customers or their agents (e.g. Retailers or contractors). The costs for these activities can be directly attributed to customers and service-specific charges can therefore be levied. The prices for fee-based services are included in Table 5 below.

For a full list of fee based services and product codes refer to Appendix 2.

Table 6 Summary of Prices for commonly used Fee-based services

Fee-based service ¹	2012-13 Price ² (\$ per service)
Alterations and additions to current metering equipment	101.61
Attending loss of supply – low voltage customer installation at fault – business hours	113.50
Overhead service replacement – single phase	310.73
Overhead service replacement – multiple phase	366.04
De-energisation ³	Nil
Meter test ³	15.36
Meter inspection	90.82
Reconfigure meter	75.30
Off-cycle meter read	8.48
Site visit	65.22
Locating Energex underground cables	n/a
Temporary connection – simple ³	347.64
Re-energisation – business hours ³	Nil
Re-energisation non-payment – business hours ³	38.55
Re-energisation – after hours ³	92.64
Supply abolishment - simple	351.93
Unmetered supply	155.32
Street light glare screening	150.11
Replacement of standard luminaires with aero screen units (per street light)	347.02

Notes:

1. A full list of fee based services and product codes can be found in Appendix 2.
2. All prices are exclusive of GST.
3. Services are subject to Schedule 8 of the Queensland Electricity Regulation 2006, which either caps the price or sets the price to nil.



4.3 Quoted Services

Quoted services are services for which the nature and scope cannot be known in advance irrespective of whether the service is customer requested or an external event triggers the need. A description of each service and the product codes which apply are included in Appendix 3. These services are offered on a Price on Application (POA) basis.

Table 7 Quoted service list

Quoted Service	2012-13 Price (\$ per service)
Rearrangement of network assets	POA
Customer requested works to allow customer or contractor to work close	POA
Non standard data and metering services (type 5-7 metering)	POA
Emergency recoverable works and rectification of illegal connections	POA
Large customer connections	POA
Design specification/auditing and other subdivision activities	POA
Unmetered services, including street lighting	POA
After hours provision of any fee-based service (excl re-energisation)	POA
Supply abolishment - complex	POA
Additional crew	POA
Temporary connection - complex	POA
Loss of asset	POA
Other recoverable work	POA



5 Watchman Lights

The provision of watchman lights consists of two fees:

1. SCS - a volume charge for the conveyance of electricity to watchman lights (refer to section 3.1 above, unmetered), charged at a c/kW.h.
2. Unregulated service - a fee for the capital outlay, operations and maintenance associated with watchman lights. It is charged at \$ per light per day and is shown in the Table 7, below.

Table 8 Prices for watchman lights

Service	Network Tariff Code	2012–13 Price ¹ (\$ per light per day)
Provision of watchman lights	9500	0.48

Notes:

1. All prices are exclusive of GST.
2. This is an unregulated service



6 Glossary

6.1 Abbreviations

Term	Definition
ACS	Alternative Control Service
AER	Australian Energy Regulator
ATMD	Anytime Maximum Demand
c/kW.h	cents per Kilowatt hour
CAC	Connection Asset Customers
CPI	Consumer Price Index
DPPC	Designated Pricing Proposal Charges (previously known as TUOS)
DUOS	Distribution Use of System
ICC	Individually Calculated Customers
kV.A	Kilovolt Amperes
NUOS	Network Use of System
POA	Price on Application
SAC	Standard Asset Customer
SCS	Standard Control Services
TUOS	Transmission Use of System

6.2 Definitions

Term	Definition
After Hours (A/H)	Anytime outside of business hours
Alternative Control Service	This service class includes the provision, construction and maintenance of street lighting assets, and fee-based and quoted services.
Anytime (Any)	At the Retailer's request, the work is performed within business hours to speed up the completion, and, where necessary after hour fees are charged.
Anytime Maximum Demand (ATMD)	This is the maximum demand recorded at anytime. It can be used to indicate the maximum demand that occurs anytime within a specified time period such as a 12 calendar month period or a specific month.
Business Hours (B/H)	Monday to Friday, 8am to 5pm.



Term	Definition
Capacity charge	This part of the tariff seeks to reflect the costs associated with providing network capacity required by a customer on a long-term basis. It is levied on the basis of either contracted demand or the maximum demand in the previous calendar year. The charge is applied as a fixed dollar amount per kW per month.
Capacity - Network	The maximum demand (kW) that the distribution network can provide for at any one time.
Charging Parameter	The constituent elements of a tariff (as per the <i>Rules</i> definition).
Common Service	A service that ensures the integrity of a distribution system and benefits all Distribution Customers and cannot reasonably be allocated on a locational basis.
Connection Asset Customer (CAC)	Typically, those customers with electricity consumption greater than 4GW.h (but less than 40GW.h) per year at a single connection point; or where demand is greater than or equal to 1 MVA; or where a customer has a dedicated supply system with significant connection assets or the customer has contributed to their dedicated connection assets.
Connection Asset (Contributed or Non-contributed)	Related to building connection assets at a customer's premises as well as the connection of these assets to the distribution network. Connection assets can be contributed (customer funded, then gifted to Energex) or non-contributed (Energex funded).
Connection Point	The point of electrical coupling between the electricity distribution network and a customer's electrical installation. The meter is installed as close as possible to this location.
Controlled Load 1	Refer to Super Economy
Controlled Load 2	Refer to Economy
Demand	The amount of electricity energy being consumed at a given time measured in either watts (W) or volt amperes (VA). The difference between the two is the power factor.
Demand Metered SAC	The customer's connection point has a meter installed that is capable of measuring energy consumption (kW.h) and demand (kW). This meter records total energy consumption (kW.h) and demand over 30 minute periods. A customer's demand is the average demand (kW) over the 30 minute period.
Demand Metered Tariff	The tariff has been structured to include a demand component so the customer's actual demand is reflected in the price they pay for their electricity. The highest demand reading for that month is used to calculate the customer's electricity bill.
Demand Charge	This part of the tariff accounts for the actual demand a customer places on the electricity network. The actual demand levied for billing purposes is the metered monthly maximum demand. The charge is applied as a fixed dollar amount per kW per month.
Distribution Cost of Supply (DCOS) Model	The Energex model used to allocate costs approved by the AER to the various tariff classes.



Term	Definition
Distribution Loss Factor (DLFs)	These represent the average electrical energy losses incurred when electricity is transmitted over a distribution network.
Distribution Use of System (DUOS)	This refers to the network charges for the use of the distribution network.
Designated Pricing Proposal Charge (DPPC)	Refers to the charges incurred for use of the transmission network; previously referred to as Transmission Use of System (TUOS).
Economy (controlled load 2)	Specified connected appliances are controlled by network equipment so that supply will be available for a minimum period of 18 hours per day during time periods set at the absolute discretion of Energex. Refer to Appendix 6.
Embedded Generator (EG)	In line with the Energy Networks Association (ENA) classification, Embedded Generators (EGs) are generally those generators with an installed capacity as follows: Medium: 1-5 MW (LV or HV) or <1MW (HV) Large: > 5MW
Energy	The amount of electricity consumed by a consumer (or all customers) over a period of time. Energy is measured in terms of watt hours (W.h), kilowatt hours (kW.h), megawatt hours (MW.h) or gigawatt hours (GW.h).
Fixed Charge	The fixed charge seeks to reflect the costs associated with customer's dedicated connection assets. The charge is applied as a fixed dollar amount per day.
High Voltage (HV)	Refers to the 11kV or above network.
Individually Calculated Customer (ICC)	Typically those customers with electricity consumption greater than 40GW.h per year at a single connection point; or where the customers demand is greater than or equal to 10 MVA; or where a customer's circumstances mean that the average shared network charge becomes meaningless or distorted.
kV.A	Kilovolt Amperes, which is a measure of the apparent power being consumed and is used to measure demand. One kV.A equals 1,000 Volt Amperes.
Low Voltage (LV)	Refers to the sub-11 kV network
Maximum Allowable Revenue (MAR)	The maximum revenue which can be recovered through tariffs for the regulatory year.
Maximum Demand	The maximum demand recorded at a customer's individual meter or the maximum demand placed on the electrical distribution network system at any time or at a specific time or within a specific time period, such as a month. Maximum demand is an indication of the capacity required for a customer's connection or the electrical distribution network.
Micro Generator	AS4777 compliant generators with an installation size of less than 10kW (single phase) or 30kW (three phase) connected to the LV network.



Term	Definition
Market Settlement and Transfer Solution (MSATS)	The central repository for Standing Data for all NMIs in contestable markets.
National Electricity Market (NEM)	The interconnected electricity grid covering Queensland, New South Wales, Victoria, Tasmania, South Australia and the Australian Capital Territory.
National Metering Identifier (NMI)	A unique number assigned to each metering installation.
Network Use of System (NUOS)	The tariff for use of the distribution and transmission networks. It is the sum of both Distribution Use of System (DUOS) and Designated Pricing Proposal Charge (DPPC).
Non-demand Metered SAC	The customer's connection point has a meter installed that is capable of measuring the total energy consumption (kW.h).
Non-demand Metered Tariff	The tariff is based around a fixed daily component and the actual energy (kW.h) used by the customer.
Off-peak Period	All hours which are outside of Peak Period and Shoulder hours.
Peak Period	Meter type 1-4 (ICC, CAC & SAC demand): The hours between 7am and 11pm, Monday to Friday. Meter type 6 (SAC Non-demand - Business): The hours between 7am and 9pm, Monday to Friday. Meter type 6 (SAC Non-demand - Residential): The hours between 4pm and 8pm, Monday to Friday.
Power Factor	Power factor, is the ratio of kW to kV.A, and is a useful measure of the efficiency in the use of the network infrastructure. The closer to one the power factor, the more efficient the network assets are utilised. Power Factor = kW/kV.A
Price Path	Outlines the escalation factors to be applied to the initial price over the regulatory control period.
Primary Tariff	A tariff that is capable of existing by itself against a NMI.
Queensland Government Solar Bonus Scheme for Standard Asset Customers	A program that pays residential and other small energy customers for the surplus electricity generated from roof-top solar photovoltaic (PV) systems that is exported to the Queensland grid.
Regulatory Depreciation	Also referred to as the return of capital—the sum of the (negative) straight-line depreciation and the (positive) annual inflation effect on the opening regulatory asset base (RAB).
Return on Capital	The return necessary to achieve a fair and reasonable rate of return on the assets necessarily invested in the business.
Shoulder Period	Meter type 6 (SAC Non-demand - Residential): The hours between 7am to 4pm and 8pm to 10pm, Monday to Friday and 7am to 10pm weekends.
Site Specific Charge	This charge is calculated specifically for a site and is specific to the individual connection point.



Term	Definition
Small generator	AS4777 compliant generators with an installation size of less than 1MW, connected to the LV network.
Solar Photovoltaic (Solar PV)	A system that uses sunlight to generate electricity for residential use. The system provides power for the premises with any excess production feeding into the electricity grid.
Standard Asset Customer (SAC)	Generally those customers with an annual electricity consumption below 4GW.h per year, whose supply arrangements are consistent across the customer group; and where there is no contribution for their dedicated connection assets.
Standard Control Service	This service class includes network, connection and metering services.
Street lights (Major)	Lamps in common use for Major Road lighting including: a) High Pressure Sodium 100 watt (S100) and above; b) Metal Halide 150 watt (H150) and above; and c) Mercury Vapour 250 watt (M250) and above.
Street lights (Minor)	All lamps in common use for Minor Road lighting, including Mercury Vapour, High Pressure Sodium and Fluorescent.
Super Economy (controlled load 1)	Specified permanently connected appliances are controlled by network equipment so that supply will be permanently available for a minimum period of 8 hours at the absolute discretion of Energex but usually between the hours of 10:00pm and 7:00am. Refer to Appendix 6.
Tariff class	A class of customers for one or more direct control services <i>who</i> are subject to a particular tariff or particular tariffs (as per the <i>Rules</i> definition).
Time of Use (ToU)	Refers to tariffs that vary according to the time of day at which the electricity is consumed.
Transmission Use of System (TUOS)	Refers to the charges incurred for use of the transmission network.
Unmetered Supply	A customer who takes supply where no meter is installed at the connection point.
Volume (Energy) Charge	This part of the tariff seeks to reflect costs not directly allocated to network drivers and costs that are proportional to the size of the customer. The energy consumption (kW.h) for the period, as recorded by the customer's meter, is utilised to calculate this part of the tariff charge. This charge is applied as a fixed amount (cents) per Kilowatt hour (kW.h).
Volume (Energy) Charge (Off-peak)	This charge is applicable to those customers who are on a Residential and Business, Time of Use tariff. The energy consumption (kW.h) during Off-peak periods (refer to Off-peak Period for Off-peak period times), as recorded by the customer's meter, is utilised to calculate this part of the tariff. This charge is applied as a fixed amount (cents) per Kilowatt hour (kW.h).



Term	Definition
Volume (Energy) Charge (Peak)	This charge is applicable to those customers who are on a Residential and Business, Time of Use tariff. The energy consumption (kW.h) during Peak periods (refer to Peak Period for Peak period times), as recorded by the customer's meter, is utilised to calculate this part of the tariff. This charge is applied as a fixed amount (cents) per Kilowatt hour (kW.h).
Volume (Energy) Charge (Shoulder)	This charge is applicable to those customers who are on a Residential Time of Use tariff. The energy consumption (kW.h) during shoulder periods (refer to Shoulder Period for Shoulder period times), as recorded by the customer's meter, is utilised to calculate this part of the tariff. This charge is applied as a fixed amount (cents) per Kilowatt hour (kW.h).



7 Appendices

No.	Title
1	kV.A adjustment methodology
2	Fee-based services product codes
3	Quoted services product codes
4	Additional Business-2-Business codes
5	Internal procedure for reviewing objections



Appendices

No.	Title
1	kV.A Adjustment Methodology
2	Fee-based services product codes
3	Quoted services product codes
4	Additional Business-2-Business codes
5	Internal procedure for reviewing objections
6	Terms and Conditions for Super Economy & Economy (controlled load) Tariffs

Appendix 1

kV.A Adjustment Methodology

Commencing 1 July 2010, charges for ICC's and CAC's have been adjusted up or down by a relative amount based on the difference between the customers' measured power factor and the power factor neutral point. The adjustment will be applied to the demand and capacity charge elements for 2012-13 as outlined below.

1. kV.A Tariff Adjustment Calculation Methodology

a.
$$\text{Actual Power Factor (APF)} = \frac{\text{Maximum monthly kW}}{\text{Maximum monthly kV.A}}$$

where monthly kW and monthly kV.A data is collected from the customer's meter

b.
$$\text{Power Factor Adjustment (PFA)} = \text{Multiplier} \times (\text{TPF} - \text{APF}) \times (1 + \text{TPF} - \text{APF})^{\text{Index}}$$

where TPF = Target Power Factor (Power factor neutral point of 0.9 for ICCs, 0.85 for CACs)

Multiplier and index are variables set by Energex (as per table below)

The PFA will be limited to the maximum and minimum bounds defined by Energex as required

c.
$$\text{Demand Adjustment (kW)} = \text{PFA} \times \text{Maximum monthly demand}$$

$$\text{Capacity Adjustment (kW)} = \text{PFA} \times \text{Nominated monthly demand}$$

The adjustments (measured in kW) will be positive or negative depending on the difference between the customer's actual power factor (APF) and target power factor (TPF). This will result in an increase or decrease to the monthly charge as shown in the formula below.

d.
$$\text{Monthly charge for DUOS(\$)} = \underbrace{\text{Fixed} + \text{Demand} + \text{Capacity} + \text{Volume Peak} + \text{Volume Off Peak}}_{\text{Existing parameters}} + \underbrace{\text{Demand Adjustment} + \text{Capacity Adjustment}}_{\text{kV.A adjustments for 2012-13}}$$

where Demand Adjustment (\$) = PFA x Maximum monthly demand (kW) x Demand Charge (\$/kW/month)

Capacity Adjustment (\$) = PFA x Nominated monthly demand (kW) x Capacity Charge (\$/kW/month)

2. kV.A Tariff Adjustment Parameters for 2012-13

Customer Type	Target Power Factor	Index	Multiplier	Maximum Adjustment	Minimum Adjustment
ICC - 110B ¹	0.9000	1.0000	1.0000	0%	0%
ICC - 33B	0.8939	1.5138	1.0900	30%	-30%
ICC - 11B	0.8939	1.5138	1.0900	30%	-30%
CAC - 33L	0.8691	1.4306	1.1500	40%	-40%
CAC - 11B	0.8691	1.4306	1.1500	40%	-40%
CAC - 11L	0.8691	1.4306	1.1500	40%	-40%

¹ The power factor adjustment will not be applied to ICC 110 customers due to metering limitations



Appendix 2

Fee-based services – Product Codes

Category	Service	Price (GST Exclusive)	Price (GST Inclusive)	Product Code	Peace Charge Code	Service Description
Alterations and additions to current metering equipment	Addition and/or alteration to current metering arrangement including exchange and/or move meter.	\$101.61	\$111.77	AAEM1M	500	Customer requests exchange of their current meter for alternative metering configuration e.g. consolidation of multiple meters for one meter.
				AAEM2M	502	Customer requests exchange of their current meter for alternative metering configuration – Current Transformer (CT) Metering. This product code will always have an Additional Crew product code applied.
				AAMM1M	512	Meter is being relocated and requires Energex to visit site to verify the integrity of the metering equipment.
				AAMM2M	514	Meter is being relocated and requires Energex to visit site to verify the integrity of the metering equipment - Current Transformer (CT) Metering. This product code will always have an Additional Crew product code applied.
Attending loss of supply – low voltage customer installation at fault – business Hours	Energex attends trouble call during business hours and found fault in LV customer's installation.	\$113.50	\$124.85	LOS	1500	Energex attends loss of supply at the customers request and fault is found to be at the customers installation (switchboard) including tripped safety switch, internal fault, customer overload etc.
Overhead service replacement – single phase	To replace an existing overhead service at customer's request. No material change to load.	\$310.73	\$341.80	MSOR1P2	920	Customer requests their existing overhead service to be replaced or relocated e.g. as a result of a point of attachment (POA) relocation. No material change to load. Two Phase.
Overhead service replacement – multiple phase	To replace an existing overhead service at customer's request. No material change to load.	\$366.04	\$402.65	MSOR3P2	924	Customer requests their existing overhead service to be replaced or relocated e.g. as a result of a point of attachment (POA) relocation. No material change to load. Multiple Phases.

Category	Service	Price (GST Exclusive)	Price (GST Inclusive)	Product Code	Peace Charge Code	Service Description
De-energisation ¹	De-energisation, commenced during business hours.	Nil	Nil	DNSD1MB	300	Retailer requests de-energisation of the customer's premises where the de-energisation can be performed by Pole, Pillar, Post or Fuse.
				DNSD2MB	302	Retailer requests de-energisation of the customer's premises where the de-energisation can be performed by Pole, Pillar, Post or Fuse – Current Transformer (CT) Metering.
				DN\$1MB	304	Retailer requests de-energisation of the customer's premises where the customer has not paid their electricity account and the de-energisation can be performed by Pole, Pillar, Post or Fuse.
				DN\$2MB	306	Retailer requests de-energisation of the customer's premises where the customer has not paid their electricity account and the de-energisation can be performed by Pole, Pillar, Post or Fuse – Current Transformer (CT) Metering.
				DNS	320	Retailer requests de-energisation of the customers' premises - Main Switch Sealed .
				DNPN+10	318	Retailer requests de-energisation of the customers premises, and the planned notification > 10 customers .
				DNPNU10	322	Retailer requests de-energisation of the customers premises, and the planned notification < 10 customers .
Meter test ¹	Check that metering installation is accurately measuring energy consumed.	\$15.36	\$16.90	MIMT1MB	704	A request to conduct a comprehensive review of the customer's metering installation to determine that a customer's energy consumption is being accurately metered by physically testing the meter with a controlled load and calibrating the metering equipment. Business Hours (B/H) Only.



Category	Service	Price (GST Exclusive)	Price (GST Inclusive)	Product Code	Peace Charge Code	Service Description
				MIMT2MB	706	A request to conduct a comprehensive review of the customer's metering installation to determine that a customer's energy consumption is being accurately metered by physically testing the meter with a controlled load and calibrating the metering equipment. Current Transformer (CT) Metering. Business Hours (B/H) Only.
Meter inspection	Inspection required to check reported or suspected fault and no fault in meter is found.	\$90.82	\$99.91	MSINSS	957	A request to conduct a site review of the state of the customer's metering installation without physically testing the metering equipment i.e. single premise.
Reconfigure meter	Adjustment to meter setting due to change in tariff and/or time of use settings.	\$75.30	\$82.83	MRCT1M	1204	A request to make a change from one non-economy (non controlled load) tariff to another non-controlled tariff.
				MRCT2M	1206	A request to make a change from one non-economy (non controlled load) tariff to another non-controlled tariff - Current Transformer (CT) Metering. This product code will always have an Additional Crew product code applied.
				MRCTS1M	1208	A request to make changes to the hours of operation of different meter registers.
				MRCTS2M	1210	A request to make changes to the hours of operation of different meter registers – Current Transformer (CT) Metering. This product code will always have an Additional Crew product code applied.
				MRCL1M	1200	A request to change from one economy (controlled load) tariff to another economy tariff.
				MRCL2M	1202	A request to change from one economy (controlled load) tariff to another economy tariff - Current Transformer (CT) Metering. This product code will always have an Additional Crew product code applied.



Category	Service	Price (GST Exclusive)	Price (GST Inclusive)	Product Code	Peace Charge Code	Service Description
		Nil	Nil	MRRT1M	1201	A request to make change from Residential Flat to Residential TOU.
				MRRT2M	1203	A request to make change from Residential Flat to Residential TOU - Current Transformer (CT) Metering. This product code will always have an Additional Crew product code applied.
				MRRV1M	1205	A request to revert back from Residential TOU to Residential Flat tariff - (both Current Transformer (CT) Metering and no Current Transformer (CT) Metering.
Off-cycle meter read	Meter read taken off-cycle.	\$8.48	\$9.33	SRCR	400	Customer requests a check read on the meter due to reported error in the meter reading. This is only used to check the accuracy of the meter reading.
				SRTR	404	Customer requests a transfer read, as a result of transferring to a different Retailer during a billing period.
Site visit	Where crew attends site and either a) service is unable to be performed due to customer's fault (i.e. unfulfilled site visit due to customer missed appointment etc.), or b) crew attends site at customer request where the service is not covered by another fee based service (eg. to provide notification).	\$65.22	\$71.74	MSWTV	1044	Energex attends a site at the customers request and is unable to perform job due to customers fault - Business Hours (B/H).
		\$10.72	\$11.79	MSWTV2	1046	Energex (non technical) attends a site at the customers request and is unable to perform job due to customers fault - Business Hours (B/H).
Locating ENERGEX underground cables	Customer requested assistance, from a single crew for a period of up to one hour, in locating ENERGEX underground cables.	n/a	n/a	MSAPLC	938	Customer requests assistance, from a single crew for a period of up to one hour, in locating Energex underground cables. Site visit required.
Temporary connection ¹ - Simple	Temporary Connection – Simple. Applies to temporary connections (<12 months) for SACs (incl; temporary builders supplies), typically up to 10 kV.A where minimum technical	\$347.64	\$382.40	NCT1MB	120	Customer requests a temporary connection and recovery of the temporary builders supply. Small residential and small business (< 25000 kWh).



Category	Service	Price (GST Exclusive)	Price (GST Inclusive)	Product Code	Peace Charge Code	Service Description
	standards are required. It excludes complex requirements such as those that require greater capacity, longer distance, and/or difficult terrain or temporary large customer connections.			NCT2MB	122	Customer requests a temporary connection and recovery of the temporary builders supply. Small residential and small business (< 25000 kWh) - Current Transformer (CT) Metering.
Re-energisation – business hours	Re-energisation commenced during business hours, visual inspection not required ¹ .	\$38.55	\$42.40	RN\$1MB	200	Retailer requests a re-energisation of the customer's premises where the customer has not paid their electricity account - Business hours (BH).
				RN\$2MB	202	Retailer requests a re-energisation of the customer's premises where the customer has not paid their electricity account - Current Transformer (CT) Metering. Business hours (BH).
		Nil	Nil	RNMSS	406	Retailer requests a re-energisation of the customer's premises following a main switch seal . Business hours (BH).
	Reading provided for an active site.	\$8.48	\$9.33	RNNR	238	Retailer requests that fieldwork be undertaken to obtain a new reading rather than using a deemed meter reading. May also be used for Retrospective move-in requests.
				RNRR	236	Retailer requests that a meter read be provided, with Energex to determine whether fieldwork is necessary to obtain reading.
Re-energisation (visual) – business hours ¹	Re-energisation commenced during business hours, visual inspection required.	Nil	Nil	RNV1MB	224	Retailer requests a visual examination upon re-energisation of the customer's premises. Business hours (BH).
				RNV2MB	226	Retailer requests a visual examination upon re-energisation of the customer's premises – Current Transformer (CT) Metering. Business hours (BH).
Re-energisation non-payment (visual) – business hours ¹	Re-energisation, following de-energisation for non payment, commenced during business hours, visual inspection required.	\$38.55	\$42.40	RN\$V1MB	212	Retailer requests a visual examination upon re-energisation of the customer's premises where the customer has not paid their electricity account. NMI de-energised >30 day. Business hours (BH).



Category	Service	Price (GST Exclusive)	Price (GST Inclusive)	Product Code	Peace Charge Code	Service Description
				RN\$V2MB	214	Retailer requests a visual examination upon re-energisation of the customer's premises where the customer has not paid their electricity account - Current Transformer (CT) Metering. NMI de-energised >30 day. Business hours (BH).
Re-energisation – after hours	Re-energisation commenced after hours, visual inspection not required.	\$92.64 ¹	\$101.90	RN\$1MA	204	Retailer requests a re-energisation of the customer's premises where the customer has not paid their electricity account. After hours (AH).
				RN\$2MA	206	Retailer requests a re-energisation for the customer's premises where the customer has not paid their electricity account - Current Transformer (CT) Metering. After hours (AH).
				RN\$1MT	208	Retailer requests a re-energisation for the customer's premises where the customer has not paid their electricity account. Retailer has requested a service time of Anytime.
				RN\$2MT	210	Retailer requests a re-energisation of the customer's premises where the customer has not paid their electricity account - Current Transformer (CT) Metering where the Retailer has requested a service time of Anytime.
		\$42.63	\$46.89	RNMSSA	408	Retailer requests a re-energisation of the customer's premises following a main switch seal . After hours (AH).
				RNMSST	410	Retailer requests a re-energisation of the customer's premises following a main switch seal . Anytime.
Re-energisation (visual) – after hours ¹	Re-energisation commenced after hours, visual inspection required.	\$92.64	\$101.90	RNV1MA	228	Retailer requests a visual examination upon re-energisation of customer's premises. After hours (AH).
				RNV2MA	230	Retailer requests a visual examination upon re-energisation of the customer's premises - Current Transformer (CT) Metering. After hours (AH).
				RNV1MT	232	Retailer requests a visual examination upon re-energisation of the customer's premises where the Retailer has requested a service time of Anytime.

Category	Service	Price (GST Exclusive)	Price (GST Inclusive)	Product Code	Peace Charge Code	Service Description
				RNV2MT	234	Retailer requests a visual examination upon re-energisation of the customer's premises - Current Transformer (CT) Metering where the Retailer has requested a service time of Anytime.
Re-energisation non-payment (visual) – after hours¹	Re-energisation, following de-energisation for non payment, commenced after hours, visual inspection required.	\$92.64	\$101.90	RN\$V1MA	216	Retailer requests visual examination upon re-energisation of a customer's premises where the customer has not paid their electricity account. NMI de-energised >30 days and where Retailer has requested service time of After Hours (A/H).
				RN\$V2MA	218	Retailer requests a visual examination upon re-energisation of the customer's premises where the customer has not paid their electricity account - Current Transformer (CT) Metering. NMI de-energised >30 days and where Retailer has requested service time of After Hours (A/H).
				RN\$V1MT	220	Retailer requests a visual examination upon re-energisation of the customer's premises where the customer has not paid their electricity account, and where the Retailer has requested a service time of Anytime. NMI de-energised >30 days.
				RN\$V2MT	222	Retailer requests a visual examination upon re-energisation of the customer's premises where the customer has not paid their electricity account and where the Retailer has requested a service time of Anytime. NMI de-energised >30 days. Current Transformer (CT) Metering.
Supply abolishment - Simple	Retailer requests the service provider to abolish supply at a given connection point. Applies to LV overhead services from an Energex distribution pole to a house, building or property pole; or underground supply arrangements fed from a distribution pillar with fuses not exceeding 100a/ph.	\$351.93	\$387.12	SA1	800	Retailer requests the Service Provider to abolish supply at a given Connection Point. To be used for Single Dwellings and the Community or Unit one of Multi-Unit Residential complexes.
		\$56.33	\$61.96	SA3	803	Retailer requests the Service Provider to abolish supply at a given Connection Point. To be used for Multi-Unit Residential complexes, for all units after the Community or Unit One.



Category	Service	Price (GST Exclusive)	Price (GST Inclusive)	Product Code	Peace Charge Code	Service Description
Unmetered supply	Provision of temporary connection and recovery of permanent connection for approved unmetered equipment where an existing LV supply exists.	\$155.32	\$170.85	DNUMS	328	Customer requests an unmetered supply point to be de-energised.
				TUMS	1400	Customer requests a temporary connection of unmetered equipment to an existing LV supply.
Street light glare screening	The supply and installation of glare shields.	\$150.11	\$165.12	SLLGAD	602	Customer requests the supply and install of adhesive luminaires glare screen(s).
				SLLGSDI	604	Customer requests the supply and install of standard luminaires glare screen(s) – Internal.
Replacement of standard luminaries with aero screen units (per street light)	Replacement of existing luminaries with aero screen low glare luminaries.	\$347.02	\$381.72	SLAU	600	Customer requests the replacement of existing streetlight luminaries with aero screen low glare luminaires.

Notes:

1. Services are subject to Schedule 8 of the *Queensland Electricity Regulation 2006*, which either caps the price or sets the price to nil.



Appendix 3

Quoted services – Product Codes

Category	Service	Product Code	Peace Charge Code	Ellipse Product Code	Service Description
Rearrangement of network assets	Where Energex assets are rearranged at customer's request.	MSREL	1026	P051	Where Energex assets are moved at customer's request and estimated expenditure is less than \$150k.
		MSOHToUG	1004		Upgrade from Overhead to Underground Service - Customer requested conversion of existing overhead service to underground service and estimated expenditure is less than \$150k.
Customer requested works to allow customer or contractor to work close	Customer requested disconnection and reconnection of supply, coverage of LV mains and/or switching to allow customer/contractor to work close.	MSTT	1038	P011	Coverage of Low Voltage Mains (eg tiger tails) - Charge where customer requests the line close to a construction site be physically covered to prevent risk of electrocution.
		MSDNNDDB	902		Temporary Low Voltage (LV) Service Disconnection - no dismantling – Business Hours (BH).
		MSDNNDAA	908		Temporary Low Voltage (LV) Service Disconnection - no dismantling – After Hours (AH).
		MSDNPDDB	904		Temporary Low Voltage (LV) Service Disconnection - physical dismantling – Business Hours.
		MSDNPDAA	910		Temporary Low Voltage (LV) Service Disconnection - physical dismantling – After Hours (AH).
		MSDNHVB	906		Temporary HV Service Disconnection – Business Hours (BH).
		MSDNHVA	912		Temporary HV Service Disconnection – After Hours (AH).
Non standard data and metering services (type 5-7 metering)	Includes provision of meter data above the minimum requirements and meter inspection to check a reported or suspected fault. Does not include provision of any hardware.	MSOBD	1002	P053	Provision of metering data above Minimum Regulatory Requirements.
		MSLPD	990		Provision of load profile data where available on request by Retailer.

Category	Service	Product Code	Peace Charge Code	Ellipse Product Code	Service Description
		MEMDP	1300		Collection, processing and transfer of higher standard energy data for customers than would otherwise be provided - Retailer requested.
		MSINS	955		A request to conduct a site review of the state of the customer's metering installation(s) without physically testing the metering equipment i.e. multiple premises.
Emergency recoverable works and rectification of illegal connections	Work carried out by Energex as a result of an emergency or third party action.	MSERW	978	P002	Emergency Recoverable Works - Charges for work carried out by Energex as a result of emergency or third party action.
		MSAPIC	930		Rectification of Illegal Connections - Charges for work required as a consequence of illegal connections resulting in damage to the network
Large customer connections	Design & construct of connection assets for large customers.			P060	Design & construct of connection assets for large customers. Generally, large customers have annual consumption > 4 GW.h or Estimated maximum demand > 1 MVA or Estimated generation capacity > 1 MVA.
Design specification/auditing and other subdivision activities	Provision of a detailed estimate/design and/or checking of designs for subdivisions and streetlight services. Also includes other subdivision activities such as pole inspections.	MSDD	958	P006	Provision of Detailed Design Estimate for Low Voltage (LV) Customer Requested Extension/Connection.
		MSSF	1032		Specification Fees - Fee for service when Energex prepares and issues specifications for customer extension works.
					Provision of checking of materials, or a group of similar materials, that are a like for like replacement of current Energex stores materials.
Unmetered services, including street lighting	Provision of services, other than standard connection, for approved unmetered equipment, including street lights.	SLLGUNI	606	P005	Planning, design and installation of unique luminaries glare screening – External.
				P054	Provision of services, other than standard connection for approved unmetered equipment. This includes facilities such as public telephones, traffic signals and public barbecues.



Category	Service	Product Code	Peace Charge Code	Ellipse Product Code	Service Description
After hours provision of any fee based service (excl re-energisation)	The provision of any fee-based service, excluding re-energisation, After Hours.	LOST	1602	P062	Energex attends loss of supply at the customers request, After Hours (AH) and fault is found to be at the customers installation (switchboard) including tripped safety switch, internal fault, customer overload etc.
		MSWTVA	1045		Unfulfilled site visit - After Hours (AH).
		NCT1MA	124		Customer requests a temporary connection and recovery of the temporary builders supply, and where the Retailer has requested a service time of After Hours (AH). Small residential and small business (<25 000 kW.h).
		NCT2MA	126		Customer requests a temporary connection and recovery of the temporary builders supply – Current Transformer (CT) Metering, and where the Retailer has requested a service time of After Hours (AH). Small residential and small business (<25 000 kW.h).
		NCT1MT	128		Customer requests a temporary connection and recovery of the temporary builders supply, and where the Retailer has requested a service time of Anytime. Small residential and small business (<25 000 kW.h).
		NCT2MT	130		Customer requests a temporary connection and recovery of the temporary builders supply – Current Transformer (CT) Metering, and where the Retailer has requested a service time of Anytime. Small residential and small business (<25 000 kW.h).
		AAEM1MAH	501		Adds & Alts - Exchange meter No Current Transformer (CT) Metering - After Hours (AH) / Anytime.
		AAEM2MAH	503		Adds & Alts - Exchange meter Current Transformer (CT) Metering - After Hours (AH) / Anytime.
		AAMM1MAH	513		Adds & Alts - Move meter No Current Transformer (CT) Metering - After Hours (AH) / Anytime.
		AAMM2MAH	515		Adds & Alts - Move meter Current Transformer (CT) Metering - After Hours (AH) / Anytime.
		SA1AH	801		Retailer requests the Service Provider to abolish supply at a given Connection Point. To be used for Single Dwellings; the Community or Unit one of Multi-Unit Residential complexes – After Hours (AH).

Category	Service	Product Code	Peace Charge Code	Ellipse Product Code	Service Description
		SA3AH	804		Retailer requests the Service Provider to abolish supply at a given Connection Point. To be used for Multi-Unit Residential complexes, for all units after the Community or Unit One – After Hours (AH) / Anytime.
Supply abolishment - complex	Retailer requests the service provider to abolish supply at a given connection point. Applies where there are complex arrangements requiring extra resources above that supplied under a simple supply abolishment. Including, underground LV service cables direct jointed to the LV mains cable in the footpath or connected to the LV transformer bushings and terminated on a building wall or other structure inside property; or underground supply arrangements fed from a distribution pillar with fuses exceeding 100a/ph; or HV metered sites.	SA2	802	P056	Retailer requests the service provider to abolish supply at a given connection point. Applies where there are complex arrangements requiring extra resources above that supplied under a simple supply abolishment. Including, underground LV service cables direct jointed to the LV mains cable in the footpath or connected to the LV transformer bushings and terminated on a building wall or other structure inside property; or underground supply arrangements fed from a distribution pillar with fuses exceeding 100a/ph; or HV metered sites.
Additional crew	Where additional crew are required at a service call for health, safety or security reasons.	MSAC	926	P055	Where additional single crew for a period up to one hour is required at a service call for health, safety or security reasons during Business Hours (BH).
		MSACA	1700		Where additional single crew for a period of up to one hour is required at a service call for health, safety or security reasons After Hours (AH).
		MSACT	1702		Where additional single crew for a period of up to one hour is required at a service call for health, safety or security reasons and the Retailer has nominated a service time of AnyTime.
		MSAC2	939		Where additional single crew for a period greater than one hour but less 2 hours is required at a service call for health, safety or security reasons during Business Hours (BH).
		MSACA2	1701		Where additional single crew for a period of greater than one hour is required at a service call for health, safety or security reasons After Hours (AH).
		MSACT2	1703		Where additional single crew for a period of greater than one hour is required at a service call for health, safety or security reasons and the Retailer has nominated a service time of AnyTime.



Category	Service	Product Code	Peace Charge Code	Ellipse Product Code	Service Description
		MSACB	1704		Where additional single crew for a period of greater than two hours is required at a service call for health, safety or security reasons during Business Hours (BH).
Temporary connection - complex	Applies to temporary connections, typically above 10 kV.A, where there are complex arrangements requiring extra resources above that supplied under simple temporary supply. Applies to all HV connections and construction supplies. Complex arrangements may be due to long distances, a transformer installation and/or difficult terrain.			P057	Applies to temporary connections, typically above 10 kV.A, where there are complex arrangements requiring extra resources above that supplied under simple temporary supply. Applies to all HV connections and construction supplies. Complex arrangements may be due to long distances, a transformer installation and/or difficult terrain. Also includes temporary supply to construction sites for periods greater than 12 months.
Loss of asset	The residual asset value of non-contributed (Rate 1) & contributed (Rate 2) street lights when removed from service before the end of their useful life at the request of the customer.			P052	Customer requests the removal of non-contributed (Rate 1) and contributed (Rate 2) street lights from service before the end of their useful life.
Other recoverable work (opex)	Customer requested opex services that would not otherwise have been requested for the efficient management of the network, or covered by another service.	MSORW	945	P061	Customer requests OPEX services that would not otherwise have been requested for the efficient management of the network, or covered by another service.
				P044	Customer requests the provision of electricity network data including pole asset information.
				P046	Customer requests application for negotiated connections.
Other recoverable work (capex)	Customer requested services that would not otherwise have been requested for the efficient management of the network, or covered by another service which results in a contributed asset.	MSREAC	1024	P064	Customer requests the provision or receipt of reactive power and energy to and from a connection point.
		MSAPABC	928	P065	Bundling of cables which are carried out at the request of another party.



Appendix 4

Other Business-2-Business services (no charge)

In addition to the Alternative Control Services provided by Energex on a fee for service basis, Energex provides a number of services free of charge (DUOS services). These services are requested through the usual Business-2-Business communication channels. A list of services with full description and product code are provided in the additional product code listing below.

Product Codes	Description	Full Description	Peace Charge Code	Price
New Connections				
NCUP2MB	U/G Perm Supply - CT B/H	New Connection underground with CT during Business Hours	100	\$ -
NCUP1MB	U/G Perm Supply - No CT B/H	New Connection underground with no CT during Business Hours	158	\$ -
NCUP2MA	U/G Perm Supply - CT A/H	New Connection underground with CT After Hours	106	\$ -
NCUP1MA	U/G Perm Supply - No CT A/H	New Connection underground with no CT After Hours	156	\$ -
NCUP2MT	U/G Perm Supply - CT Anytime	New Connection underground with CT anytime	118	\$ -
NCUP1MT	U/G Perm Supply - No CT Anytime	New Connection underground with no CT anytime	116	\$ -
NCOP2MB	O/H Perm Supply - CT B/H	New Connection overhead with CT during Business Hours	104	\$ -
NCOP1MB	O/H Perm Supply - No CT B/H	New Connection overhead with no CT during Business Hours	102	\$ -
NCOP2MA	O/H Perm Supply - CT A/H	New Connection overhead with CT After Hours	110	\$ -
NCOP1MA	O/H Perm Supply - No CT A/H	New Connection overhead with no CT After Hours	108	\$ -
NCOP2MT	O/H Perm Supply - CT Anytime	New Connection overhead with CT anytime	114	\$ -
NCOP1MT	O/H Perm Supply - No CT Anytime	New Connection overhead with no CT anytime	112	\$ -
NCTP2MB	Temp/Perm - CT B/H	New Connection temporary in permanent CT during Business Hours	150	\$ -
NCTP1MB	Temp/Perm - No CT B/H	New Connection temporary in permanent no CT during Business Hours	148	\$ -
NCTP2MA	Temp/Perm - CT A/H	New Connection temporary in permanent CT After Hours	134	\$ -
NCTP1MA	Temp/Perm - No CT A/H	New Connection temporary in permanent no CT After Hours	132	\$ -
NCTP2MT	Temp/Perm - CT Anytime	New Connection temporary in permanent CT anytime	138	\$ -
NCTP1MT	Temp/Perm - No CT Anytime	New Connection temporary in permanent no CT anytime	136	\$ -



Product Codes	Description	Full Description	Peace Charge Code	Price
Unmetered Supply				
NCUMSC	UMS Connection Point Available	New connection unmetered where connection point is available	152	\$ -
NCUMSCN	UMS Connection Point Not Available	New connection unmetered where connection point is not available	153	\$ -
Special Read				
SRFR	Meter Final Read	Special Read - final read	402	\$ -
Additions & Alterations				
AAICL	Install Ctrl Load	Adds & Alts - installed controlled load	516	\$ -
AAIHW	Install Hot Water	Adds & Alts - installed hot water	518	\$ -
AAIM2MB	Install Meter - CT B/H	Adds & Alts - install meter CT during Business Hours	522	\$ -
AAIM1MB	Install Meter - No CT B/H	Adds & Alts - install meter no CT during Business Hours	520	\$ -
AAIM2MA	Install Meter - CT A/H	Adds & Alts - install meter CT After Hours	506	\$ -
AAIM1MA	Install Meter - No CT A/H	Adds & Alts - install meter no CT After Hours	504	\$ -
AAIM2MT	Install Meter - CT Anytime	Adds & Alts - install meter CT anytime	510	\$ -
AAIM1MT	Install Meter - No CT Anytime	Adds & Alts - install meter no CT anytime	508	\$ -
AARM2M	Remove Meter - CT	Adds & Alts - remove meter CT during Business Hours	526	\$ -
AARM1M	Remove Meter - No CT	Adds & Alts - remove meter no CT during Business Hours	524	\$ -
Meter Investigation				
MIT2MB	Tamper - CT B/H Only	Meter investigation for tamper CT during Business Hours	710	\$ -
MIT1MB	Tamper - No CT B/H Only	Meter investigation for tamper no CT during Business Hours	708	\$ -
Customer Initiated Service Upgrades				
MSOU1P2	OH Single Phase - 2 visit	Overhead Service Upgrade	1008	\$ -
MSOU2P1	OH 2 Phase - 1 visit	Overhead Service Upgrade	1010	\$ -
MSOU2P2	OH 2 Phase - 2 visit	Overhead Service Upgrade	1012	\$ -
MSOU3P1	OH 3 Phase - 1 visit	Overhead Service Upgrade	1014	\$ -
MSOU3P2	OH 3 Phase - 2 visit	Overhead Service Upgrade	1016	\$ -
MSUU2P	U/G Upgrade to 2ph Connection	Underground service upgrade to 2 phase	1040	\$ -
MSUU3P	U/G Upgrade to 3ph Connection	Underground service upgrade to 3 phase	1042	\$ -
No Charge				
NoCharge	No Charge	No Charge	9999	\$ -



Appendix 5

Internal procedure for reviewing objections

5.1 Internal procedure for reviewing objections to tariff class assignment

When Energex (Retail Escalation Manager or Pricing Manager) receives written notification that a customer has an objection to a proposed tariff classification, the procedures described below will be followed.

Where the objection does not involve a site specific price, the review process will be performed by the Retail Escalation Department. This includes tariff reclassifications for SAC Demand to or from SAC Non-demand.

Where the objection involves a customer moving to or from site specific prices, the review process will be performed by the Pricing Department. This includes tariff reclassifications to or from CAC and ICC.

The internal objection process is as follows:

- a) The customer's written objection will be reviewed and Energex will consider any additional information that the customer has provided.
- b) Energex will determine the energy usage for the customer based on:
 - i. Any information which the customer has provided, or
 - ii. Historical consumption data for existing customers; or
 - iii. Estimated energy for new customers.
- c) Energex will assess the nature of the customer's connection to the network.
- d) Energex will determine the correct tariff classification (using data collected and as outlined in Figure 1). There may be exceptions to the application of the first criteria, energy consumption, depending on the nature of a connection.
- e) In all cases, the tariff class assignment will be reconsidered and will be escalated to the Retail Escalation Manager and Pricing Manager for review.
- f) The customer (or Retailer) will be notified in writing of the tariff classification review within 7 days.



Appendix 6

Terms and Conditions for Super Economy & Economy (controlled load) Tariffs

6.1 Super Economy

Customers can access this tariff providing it is in conjunction with a residential or business tariff at the same NMI at the discretion of the distribution entity. The tariff is applicable when electricity supply is:

- permanently connected to apparatus; or
- connected to apparatus by means of a socket-outlet as approved by the distribution entity; or
- permanently connected to specified parts of apparatus as approved by the distribution entity.

Supply will be available for a minimum of 8 hours per day; the times when supply is available is subject to variation at the absolute discretion of the distribution entity. Typically, supply will be available between the hours of 10pm to 7am.

Refer to Figure 1 in Tariff Schedule for assignment of customers to tariff classes for further information.

6.2 Economy

Customers can access this tariff providing it is in conjunction with a residential or business tariff at the same NMI at the discretion of the distribution entity.

This tariff is applicable when electricity supply is:

- connected to apparatus by means of a socket-outlet as approved by the distribution entity; or
- permanently connected to apparatus as approved by the distribution entity except if provision has been made to supply such apparatus under a different tariff in the periods during which supply is not available under this tariff.

Supply will be available for a minimum of 18 hours per day; the times when supply is available is subject to variation at the absolute discretion of the distribution entity.

Refer to Figure 1 in Tariff Schedule for assignment of customers to tariff classes for further information.

