

Energex

Tariff Schedule

1 July 2014 to 30 June 2015



positive energy

Version control

Version	Date	Description
1.0	16 June 2014	Published on Energex's website
1.1	25 June 2014	Correction to Table 3.1. NTC 4500 DUOS Off Peak Volume charge was missing a decimal point and was changed from 0107 c/kWh to 0.107 c/kWh.
1.2	27 June 2014	Adjustment to Fee-Based Services fees that are capped by Schedule 8 in Table 4.2 & Appendix 1 – Fee-based services product codes.

Energex Limited (Energex) is a Queensland Government Owned Corporation that builds, owns, operates and maintains the electricity distribution network in the region of South East Queensland. Energex provides distribution services to almost 1.4 million domestic and business connections, delivering electricity to a population base of around 3.2 million people.

Energex's key focus is distributing safe, reliable and affordable electricity in a commercially balanced way that provides value for its customers, manages risk and builds a sustainable future.

© Energex Limited, Australia

This work is copyright. Material contained in this document may be reproduced for personal, in-house or non-commercial use, without formal permission or charge, provided there is due acknowledgment of Energex Limited as the source.

Requests and enquiries concerning reproduction and rights for a purpose other than personal, in-house or non-commercial use should be addressed to:

Network Pricing Manager
Energex
GPO Box 1461
BRISBANE QLD 4001

Table of Contents

1	INTRODUCTION	1
2	ASSIGNMENT AND REASSIGNMENT OF CUSTOMERS TO TARIFF CLASSES ..	2
2.1	Standard Control Services	2
2.1.1	Tariff classes.....	2
2.1.2	Determining the applicable tariff class	3
2.1.3	Assigning and reassigning SCS customers to tariff classes	3
2.1.4	Reviewing SCS tariff class assignment or reassignment.....	4
2.2	Alternative Control Services.....	7
2.2.1	Tariff classes.....	7
2.2.2	Assigning and reassigning ACS customers to tariff classes	7
3	NETWORK TARIFFS – SCS.....	9
3.1	2014/15 network tariffs.....	9
3.2	Changes to tariffs from previous regulatory year	11
3.2.1	Other changes from previous regulatory year	11
3.3	Terms and conditions	11
4	NETWORK TARIFFS – ACS.....	20
4.1	Street lighting services	20
4.1.1	Terms and conditions.....	20
4.2	Fee-based services	20
4.3	Quoted services	22
5	OTHER SERVICES.....	23
5.1	Watchman lights.....	23
5.2	Other Business-2-Business services.....	23
6	APPENDICES	24

List of appendices

APPENDIX 1 – FEE-BASED SERVICES PRODUCT CODES	2
APPENDIX 2 – QUOTED SERVICES PRODUCT CODES.....	11
APPENDIX 3 – ADDITIONAL BUSINESS-TO-BUSINESS CODES	23
APPENDIX 4 - TARIFF CLASS ASSIGNMENT REVIEW PROCESS	27

List of tables

Table 3.1 – 2014/15 SCS tariff charges.....	10
Table 3.2 - Description of SCS tariffs and details of terms and conditions.....	12
Table 4.1 – 2014/15 prices for street lighting services	20
Table 4.2 – 2014/15 prices for fee-based services	21
Table 4.3 – 2014/15 prices for quoted services	22
Table 5.1 – 2014/15 charges for watchman lights	23

List of figures

Figure 2.1 - Assignment of customers to SCS tariff classes (Flowchart A)	5
Figure 2.2 - Assignment of customers to SCS tariff classes (Flowchart B)	6
Figure 2.3 – Assignment of customers to ACS tariff classes.....	8

1 Introduction

RULE REQUIREMENT

Clause 6.18.9 Publication of information about tariffs and tariff classes

- (a) A Distribution Network Service Provider must maintain on its website:
- (1) a statement of the provider's tariff classes and the tariffs applicable to each class.

This document is Energex's Tariff schedule for 2014/15. It has been prepared for the final year of Energex's 2010–2015 regulatory control period in accordance with Clause 6.18.9(a)(1) of the National Electricity Rules (the Rules). As per the Rules, the document outlines Energex's tariffs and charges for direct control services, comprising Standard Control Services (SCS) and Alternative Control Services (ACS), for the period from 1 July 2014 to 30 June 2015.

For SCS, the Network Use of System (NUOS) charges, incorporating Distribution Use of System (DUOS) charges and Designated Pricing Proposal Charges (DPPC)¹, are provided. For ACS, charges for the provision of street lights, fee-based services and quoted services are provided. Quoted services are performed on a Price on Application (POA) basis.

This Tariff Schedule also provides information on how Energex assigns customers to tariff classes and the internal review process.

This Tariff Schedule applies from 1 July 2014.

This document supports Energex's 2014/15 Pricing Proposal² which contains additional information about network pricing, including tariffs and charges and was approved by the Australian Energy Regulator (AER) on 13 June 2014.

Energex is currently working on its Regulatory Proposal for the 2015-20 regulatory control period which will be submitted to the AER in October 2014. The proposal sets out the detail of our proposed capital and operating programs necessary to deliver our service obligations. More information is available on the Energex website.³

¹ DPPC (Designated Pricing Proposal Charges) is new terminology for what was previously known as Transmission Use of System (TUOS) Charges.

² Energex's 2014/15 Pricing Proposal, as approved by the AER, is available on the AER's website at [<http://www.aer.gov.au/node/24850>].

³ <https://www.energex.com.au/about-us/network-regulation-and-pricing/energex-regulatory-proposal>

2 Assignment and reassignment of customers to tariff classes

Energex's network tariff classes have been designed to group similar customers together according to voltage level, customer size and usage profiles, and connection characteristics. The underpinning characteristics of the existing tariff classes broadly reflect the costs associated with provision of service to those customers within the tariff class.

Each tariff class consists of a grouping of individual tariffs that are established on the same basis as the tariff classes. This ensures there are not an excessive number of tariffs and that available tariffs are clear and easily understood. Ultimately, this minimises transaction costs that may be incurred by customers from switching between tariffs and by Energex in managing the provision of an excessive number of tariffs.

All customers who take supply from Energex for direct control services are a member of at least one tariff class. To access the appropriate tariff within the tariff class, all customers with metered supply must have suitable metering installed. A National Metering Identifier (NMI) will be assigned to each connection point and the applicable tariff/s will be applied to the NMI.

Direct control services comprise SCS and ACS. For the 2010–15 regulatory control period⁴, the AER has classified network services, connection services and metering services as SCS; fee-based services, quoted services and street lighting are classified as ACS. Where a customer has both SCS and ACS supplied, they may be a member of two or more tariff classes.

2.1 Standard Control Services

2.1.1 Tariff classes

For SCS, the following Energex tariff classes apply:

- Individually Calculated Customer (ICC)
- Connection Asset Customer (CAC) – 33 kV; 11 kV Bus; 11 kV Line
- Embedded Generator (EG)
- Standard Asset Customer (SAC) Demand
- SAC Non-Demand.

⁴ AER, 2010. Energex - Distribution determination 2010-11 to 2014-15, 4 May 2010.
<http://www.aer.gov.au/sites/default/files/Queensland%20determination%20-%20Energex.pdf>.

2.1.2 Determining the applicable tariff class

The following customer characteristics are taken into account by Energex when determining the applicable tariff class for a potential customer:

- voltage level
- customer size and usage profiles
- connection characteristics.

In addition to the above, the following guidelines apply:

- Allocation of a customer with micro-generation facilities to a tariff will be made on the same basis as other connections. Details of this policy are included in Energex's 2014/15 Pricing Proposal⁵
- Where a new tariff is applied to a customer, it is standard practice to apply the tariff from the next billing period
- For new connections with no previous load history, the default tariff is based on their expected energy usage, supply voltage and meter type
- Instead of the default tariff, a customer will be assigned to a specific tariff for which they are eligible if requested by their electricity retailer or electrical contractor
- In accordance with clauses 6.18.4(a)(4) and 6.18.4(b), assignment of customers to tariff classes is reviewed periodically to assess if the tariff assignment is still applicable, given potential changes in usage. A change in connection voltage means that the connection is treated as if it is a new connection and the process in Figure 2.1 and Figure 2.2 will be followed to assign the customer to a suitable tariff class.

2.1.3 Assigning and reassigning SCS customers to tariff classes

The procedure for assigning and reassigning customers to tariff classes relates specifically to the application of mandated tariffs. Customers who have chosen to participate in a tariff trial will not normally be subject to this review process.

The process for assigning a customer to a tariff class (and applicable network tariff codes) for SCS is outlined in Figure 2.1 and Figure 2.2. As depicted, within each tariff class there are a number of tariffs available; typically, a specific tariff will be applied to customers within the same tariff class.

Further information on tariff class assignment and reassignment is provided in Energex's 2014/15 Pricing Proposal.⁶

⁵ Refer to Footnote 2 (pg 1)

⁶ Refer to Footnote 2 (pg 1)

2.1.4 Reviewing SCS tariff class assignment or reassignment

In accordance with Appendix B of the Final Determination, customers and their electricity retailer will be notified of the tariff class to which they have been assigned or reassigned. The process for notifying customers of tariff class changes is provided in Energex's 2014/15 Pricing Proposal.⁷

Under market rules, it is the responsibility of a customer's electricity retailer to provide Energex with the correct customer details. Where the customer contact details are known, the customer will be notified directly; their retailer will also be notified. If the customer details are unknown or if the letter is returned to Energex, Energex will notify the customer's retailer.

If a customer requests a review of the proposed assignment or reassignment, Energex will reconsider the request in accordance with the process outlined in Appendix 4.

⁷ Refer to Footnote 2 (pg 1)

Figure 2.1 - Assignment of customers to SCS tariff classes (Flowchart A)


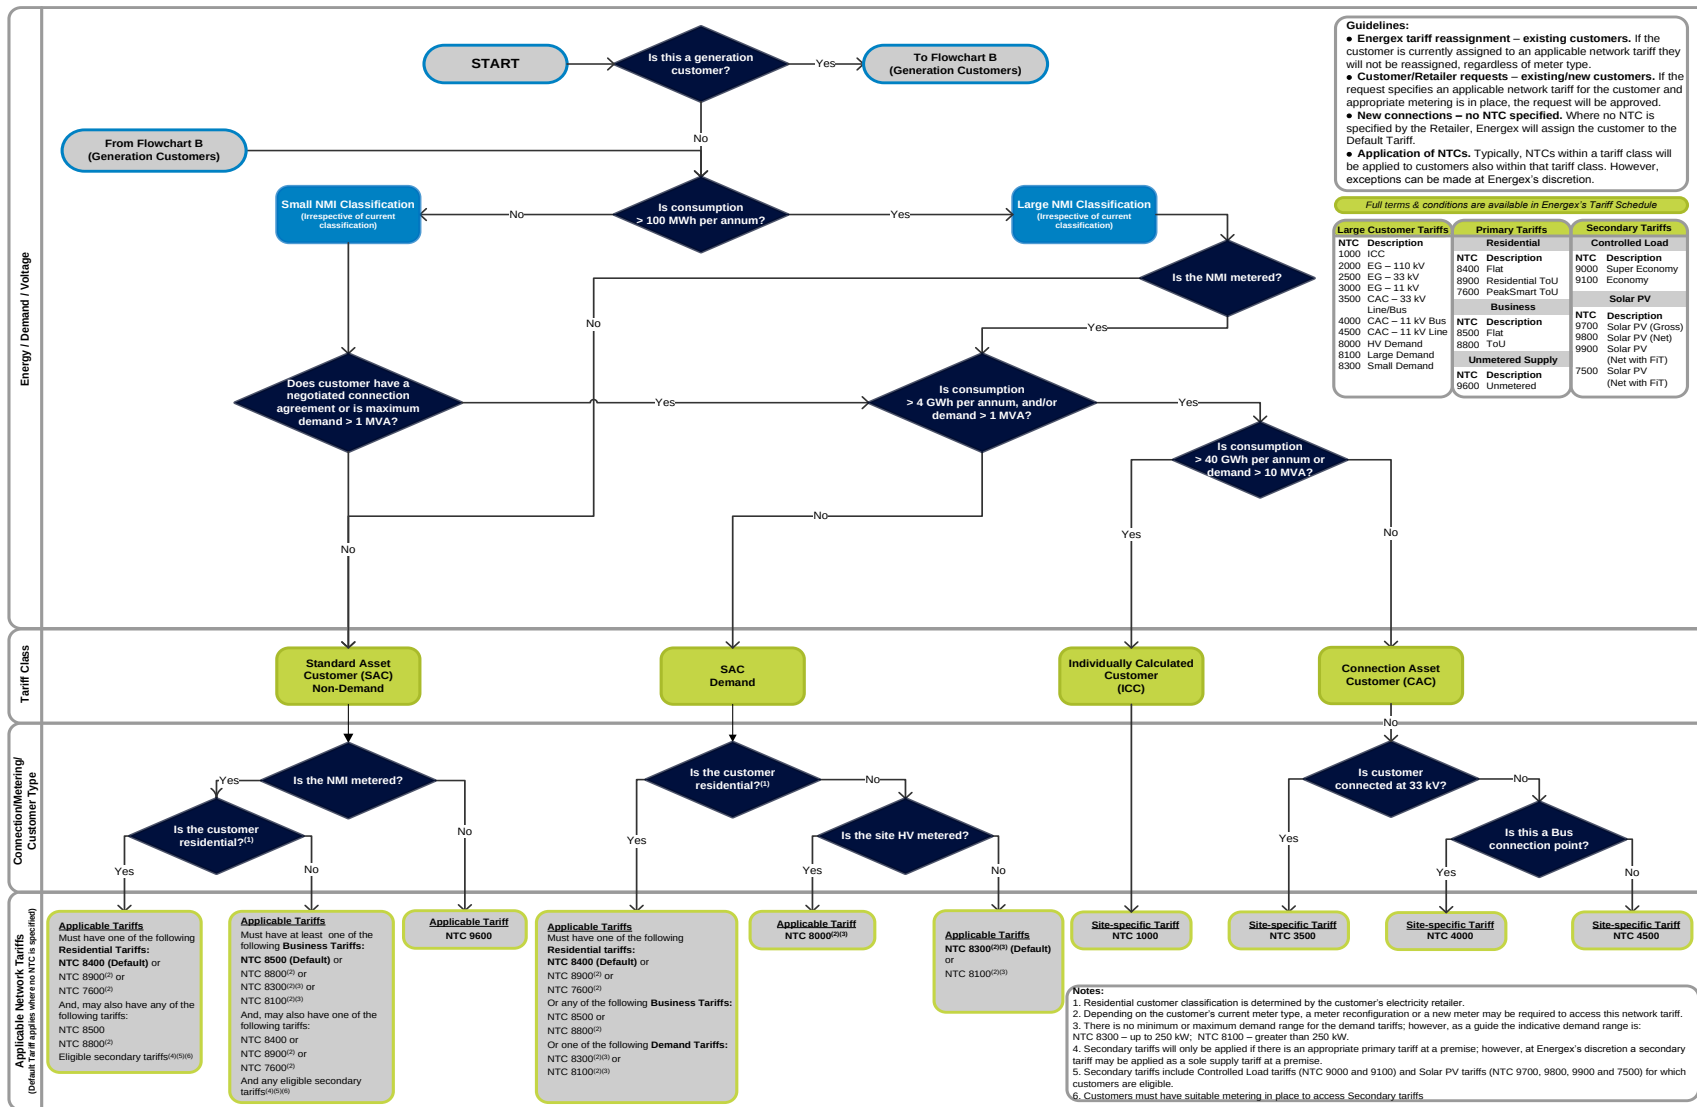


Figure 2.2 - Assignment of customers to SCS tariff classes (Flowchart B)

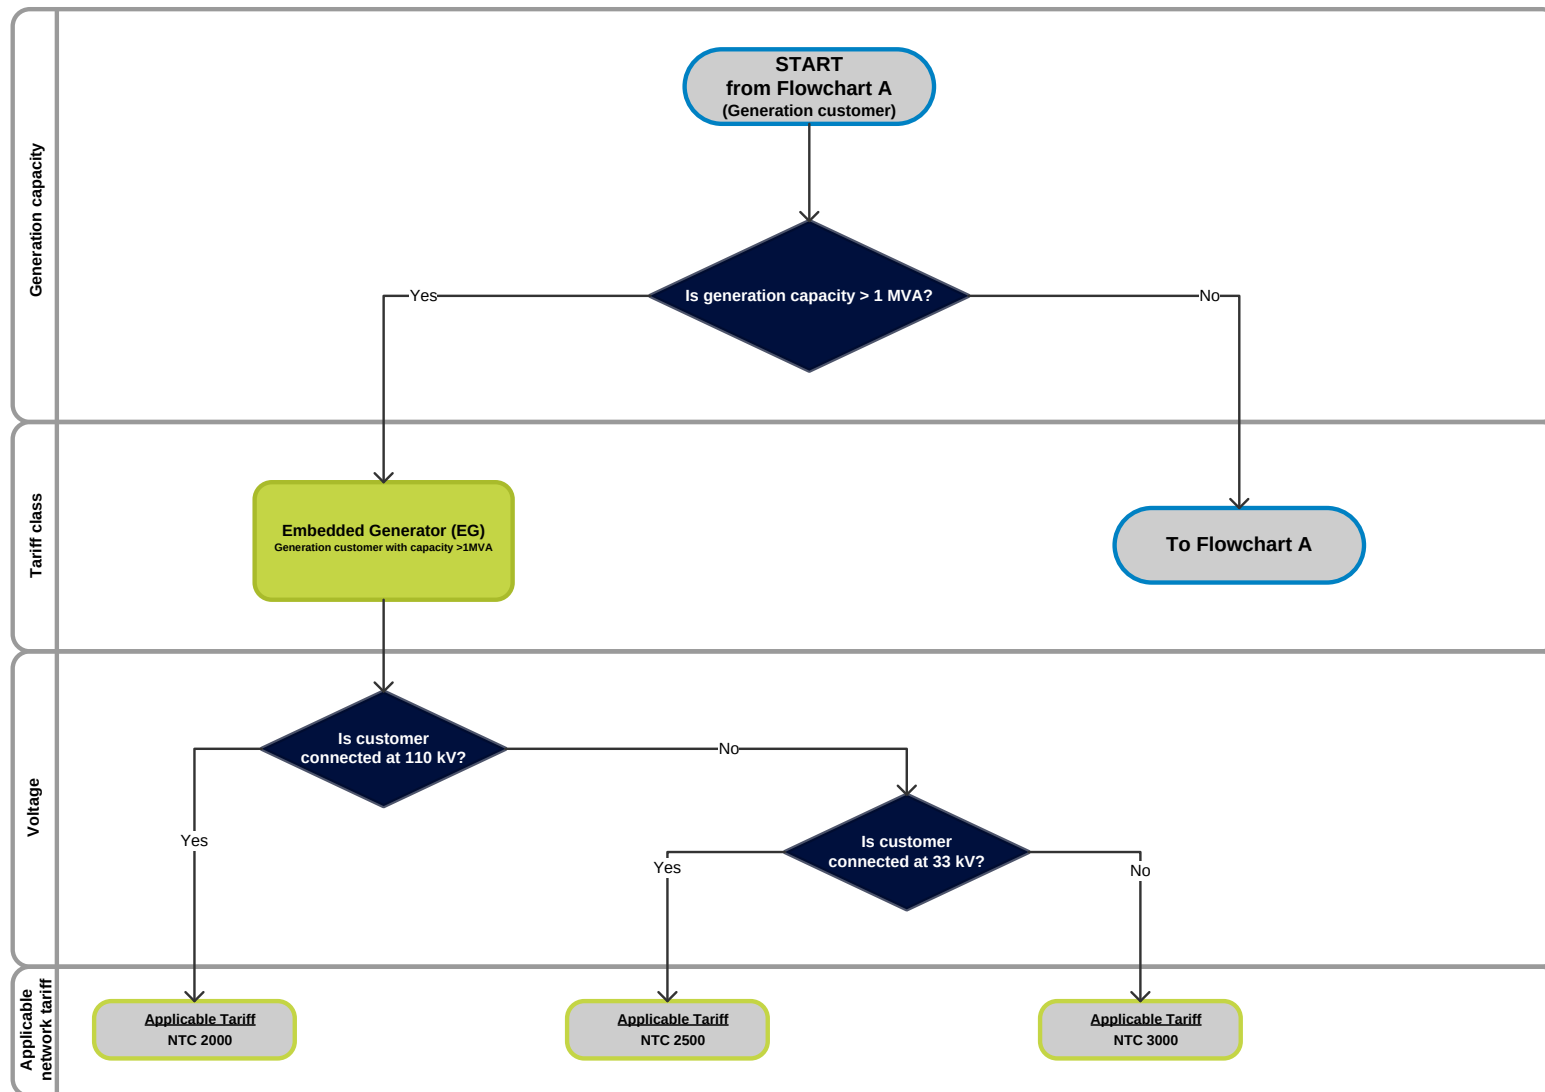

2.2 Alternative Control Services

2.2.1 Tariff classes

There are three ACS tariff classes that are based on the type of service a customer requires:

- street lighting services
- fee-based services
- quoted services.


2.2.2 Assigning and reassigning ACS customers to tariff classes

The process for assigning a customer to a tariff class for ACS is outlined in Figure 2.3.

Further information on tariff class assignment and reassignment is provided in Energex's 2014/15 Pricing Proposal.⁸

⁸ Refer to Footnote 2 (pg1)

Figure 2.3 – Assignment of customers to ACS tariff classes

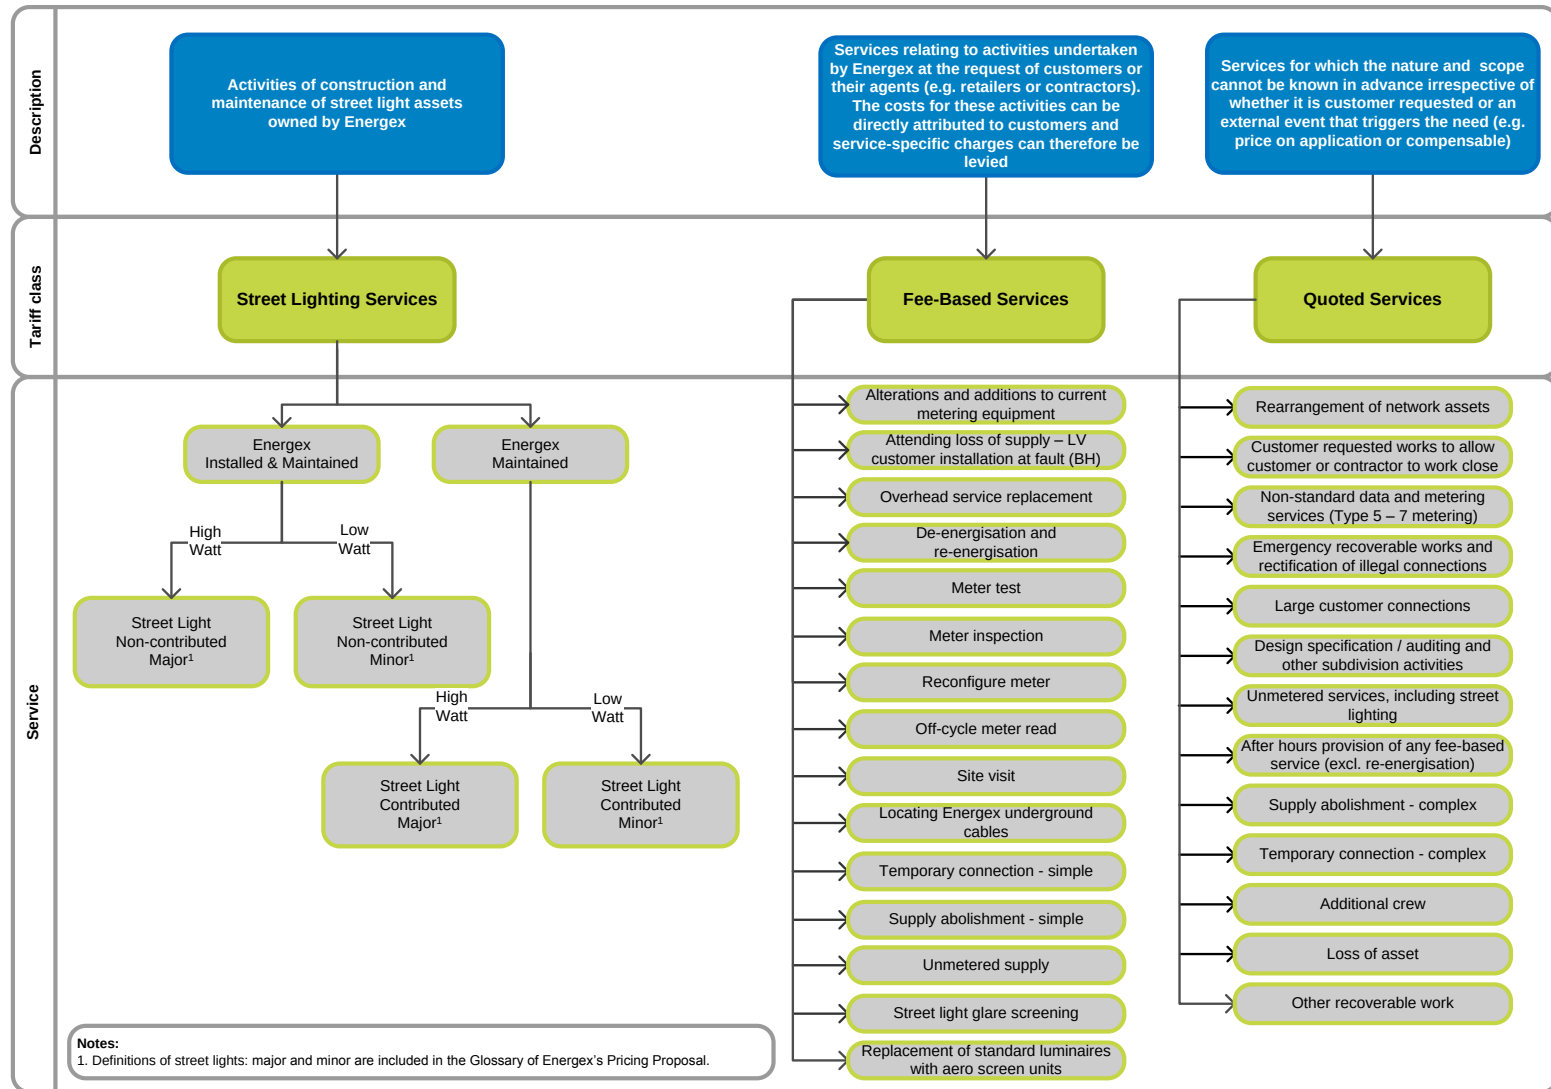

3 Network tariffs – SCS

3.1 2014/15 network tariffs

Network tariffs comprise:

- DUOS charges – incurred for use of the Energex distribution network; and
- DPPC – incurred for use of the Powerlink transmission network.

The NUOS tariff represents the sum of DUOS charges and DPPC and is the total network tariff that may be represented on a customer's bill.

The 2014/15 DUOS charges and DPPC, and NUOS charges for SCS tariffs are provided in Table 3.1.

Table 3.1 – 2014/15 SCS tariff charges

Tariff Class	Tariff Description	NTC	DUOS Charges ¹								DPPC Charges ¹							NUOS Charges ¹										
			Fixed (\$/day)	Capacity (\$/kVA/month)	Demand (\$/kVA/month)	Demand (\$/kW/month)	Volume Flat (c/kWh)	Off Peak Volume (c/kWh)	Shoulder Volume (c/kWh)	Peak Volume (c/kWh)	Fixed (\$/day)	Demand (\$/kVA/month)	Demand (\$/kW/month)	Volume Flat (c/kWh)	Off Peak Volume (c/kWh)	Shoulder Volume (c/kWh)	Peak Volume (c/kWh)	Fixed (\$/day)	Capacity (\$/kVA/month)	Demand (\$/kVA/month)	Demand (\$/kW/month)	Volume Flat (c/kWh)	Off Peak Volume (c/kWh)	Shoulder Volume (c/kWh)	Peak Volume (c/kWh)			
ICC	ICC	1000	Tariffs for ICC customers are confidential																									
CAC	CAC - 33 kV Line/Bus	3500	Site-specific	1.016	3.166			0.107		0.163	Site-specific	1.000			0.137		0.137	Site-specific	1.016	4.166			0.244		0.300			
	CAC - 11 kV Bus	4000		2.313	5.025			0.107		0.163		1.000			0.137		0.137		2.313	6.025			0.244		0.300			
	CAC - 11 kV Line	4500		3.481	8.046			0.107		0.163		1.000			0.137		0.137		3.481	9.046			0.244		0.300			
EG	EG – 110 kV	2000		Site Specific								Site Specific								Site Specific								
	EG - 33 kV	2500		1.016	3.166			0.107		0.163		1.000			0.137		0.137		1.016	4.166			0.244		0.300			
	EG - 11 kV	3000		3.481	8.046			0.107		0.163		1.000			0.137		0.137		3.481	9.046			0.244		0.300			
SAC Demand	HV Demand	8000	41.765			14.341	0.102				9.827		2.282	0.954				51.592			16.623	1.056						
	Demand Large	8100	29.807			19.845	0.102				9.827		2.282	0.954				39.634			22.127	1.056						
	Demand Small	8300	4.894			22.730	0.102				1.878		1.409	1.395				6.772			24.139	1.497						
SAC Non-Demand	Business Flat	8500	0.550				12.177				0.255			1.255				0.805				13.432						
	Business ToU	8800	0.550					7.985		13.985	0.255				1.255		1.255	0.805					9.240		15.240			
	Residential Flat ²	8400	0.500				10.947				0.091			1.693				0.591				12.640						
	Residential ToU ²	8900	0.500					6.235	9.375	18.349	0.091				1.693	1.693	1.693	0.591					7.928	11.068	20.042			
	PeakSmart ToU ²	7600	0.500					4.263	9.109	17.867	0.091				1.693	1.693	1.693	0.591					5.956	10.802	19.560			
	Super Economy	9000					3.994							1.550								5.544						
	Economy	9100					8.511							1.550								10.061						
	Unmetered	9600					8.511							1.550								10.061						
	Solar PV (net with FiT)	7500	FiT rate negotiated with third party (SEQ) or set by QCA (Regional Queensland)																									
	Solar PV (net with FiT)	9900	FiT rate legislated by State Government																									
	Solar PV (gross)	9700	FiT rate negotiated with third party																									
	Solar PV (net)	9800	FiT rate negotiated with third party																									

Notes:

- All prices exclude GST.
- Rates differ from AER approved rates. Energex has reduced its network charges for NTC8400 to limit the retail bill increase for a typical tariff 11 residential customer to the level indicated in the QCA Draft Determination. Energex has also reduced its network charges for tariffs NTC8900 and NTC7600.

3.2 Changes to tariffs from previous regulatory year

Energex has an ongoing program for reviewing network tariffs for its customers. The changes for 2014/15 are designed to improve cost-reflectivity in tariffs.

- Continuation of kVA pricing for large customers: From 1 July 2014, DPPC demand will be charged in kVA for CAC and EG customers, replacing the current kW charge. This is a continuation of the straight kVA pricing that was rolled out to ICC, CAC and EG customers for DUOS in 2013/14.
- SAC Non-Demand customers: From 1 July 2014 DPPC volume charges will be passed on as flat volume charges, regardless of the DUOS structure. This differs from 2013/14 where a ToU signal was included for both DUOS and DPPC charges for ToU tariffs.

More information about the changes to network tariffs is available in Energex's 2014/15 Pricing Proposal.⁹

3.2.1 Other changes from previous regulatory year

In addition to tariff changes, a range of other changes occur between regulatory years, including adjustment to revenue cap components and the approach to price setting. The details of the changes between regulatory years 2013/14 and 2014/15 are available in Energex's 2014/15 Pricing Proposal.¹⁰

3.3 Terms and conditions

The terms and conditions relating to SCS tariffs that Energex will apply when assigning network tariffs are included in Table 3.2. Although Energex undertakes periodic reviews of tariff assignment, Energex does not constantly monitor customers to ensure they are on most appropriate tariff. In the event that a customer or their retailer believes a more appropriate tariff is available for the customer, the retailer should request Energex to change the tariff. Outside the Business-2-Business (B2B) procedures, a requested change is dependent upon the necessary metering being installed.

Except with Energex's consent, tariff changes will become effective from the most recent actual read or at completion of field work required to install appropriate metering. To limit transaction costs and ensure pricing signals are not distorted by constant changes in customer tariff assignment, SAC customers are generally only allowed one requested tariff change per 12 month period. For customers with demand levels that fluctuate annually, Energex may apply a reasonable tolerance limit up to 20 per cent on tariff thresholds to mitigate frequent tariff reassignment, and subsequently limit customer impact. Additional explanation regarding tariffs is available in Energex's 2014/15 Pricing Proposal¹¹.

⁹ Refer to Footnote 2 (pg1)

¹⁰ Refer to Footnote 2 (pg1)

¹¹ Refer to Footnote 2 (pg1)

Table 3.2 - Description of SCS tariffs and details of terms and conditions

Tariff class	Tariff	NTC	Tariff description	Tariff terms and conditions
ICC	ICC	1000	Tariff class typically applies to customers: - with electricity consumption greater than 40 GWh per year at a single connection point; and/or - where demand is greater than or equal to 10 megavolt amperes (MVA); or - where a customer's circumstances mean that the average shared network charge becomes meaningless or distorted.	ICC tariffs are site-specific and will be provided directly to the customer and/or the customer's retailer. - DPPC applies to the volume of the energy delivered to the nominated transmission connection point. For ICCs, the metered quantity at the customer's site will be adjusted by the given distribution loss factor to calculate the total DPPC. - The nominated capacity is either the contracted demand or the maximum demand. - The DUOS demand charge applies to the actual maximum demand (kVA) recorded each month.
CAC	CAC 33 kV Line/Bus	3500	Tariff class typically applies to customers: - with electricity consumption greater than 4 GWh, but less than 40 GWh per year at a single connection point; and/or - where demand is greater than or equal to 1 MVA at a single connection point, but less than 10MVA; and/or - where a customer has a dedicated supply system with connection assets; or - where the customer has contributed to their dedicated connection assets; or - where the uniqueness of the connection assets would result in distortion of the SAC pricing.	The fixed charges for CACs are site-specific and will be provided directly to the customer and/or the customer's retailer. - The nominated capacity is either the contracted demand or the maximum demand. - The DUOS demand price applies to the actual maximum demand (kVA) recorded each month.
	CAC 11 kV Bus	4000		
	CAC 11 kV Line	4500		
EG	EG 110 kV	2000	Tariff class typically applies to generators: - with an installed capacity greater than 1 MVA in accordance with the Energy Networks Association definition as follows: - Medium: 1 – 5 MVA (Low Voltage - LV or High Voltage - HV) or less than 1 MVA (HV); and - Large: greater than 5 MVA.	- Due to the nature of connections, which are typically non-standard and may require additional embedded generation protection system upgrades, tariffs for connection and access services for medium and large EGs will be developed on a similar basis to site-specific customers. - The DUOS demand charge applies to the actual maximum demand (kVA) recorded each month.
	EG 33 kV	2500		
	EG 11 kV	3000		

Tariff class	Tariff	NTC	Tariff description	Tariff terms and conditions
SAC Demand	All SAC Demand tariff classes		Tariff class typically applies to customers: - with consumption less than 4 GWh per year, but greater than 100 megawatt hours (MWh) or 1 MVA per year; and - where a customer has a meter installed that is capable (and programmed) to measure both energy consumption (kilowatt hours - kWh) and demand (kilowatts - kW), and is capable (and programmed) to measure demand over 30 minute periods.	Customers must have a meter installed that is capable (and programmed) to measure energy consumption (kWh) and demand (kW), and records total energy consumption and demand over 30 minute periods.
	HV Demand	8000	This tariff applies to customers connected at High Voltage (HV) with demand up to 1,000 kVA.	This network tariff is not available to customers who have non-standard or significant connection assets provided by Energex.
	Large Demand	8100	These tariffs apply to customers connected at Low Voltage (LV).	Customers with annual consumption less than 100 MWh can choose to access this tariff voluntarily.

Tariff class	Tariff	NTC	Tariff description	Tariff terms and conditions
	Small Demand	8300		- The Energex demand tariffs are self-selecting. It is the responsibility of the customer and/or retailer to select the most appropriate tariff. - As a guide, the following demand ranges are provided: Small Demand: Up to 250 kW Large Demand: 250 – 1,000 kW - Where the customer and/or retailer does not select a tariff, and in the absence of historical demand information (e.g. for new customers) the customer will be assigned to Small Demand, as per Energex's process for assigning customers to SCS tariff classes. - Business customers with consumption greater than 100 MWh must be on a demand tariff. However, if existing metering is not programmed to provide a demand read, Energex will apply another appropriate business tariff until such time as the metering is upgraded.
SAC Non-Demand	All SAC Non-Demand tariff classes		Tariff class typically applies to customers - with consumption below 100 MWh per year - where the customer's connection point has a meter installed that is capable (and programmed) of measuring energy consumption (kWh) only.	A Non-Demand tariff may also apply when the customer's connection point has a meter installed that is capable of measuring total energy consumption (kWh) only.
	Business Flat	8500	This tariff is the default tariff for business customers with consumption less than 100 MWh per year .	Customers may have a residential tariff at their NMI (noting customers cannot have more than one residential tariff on the same NMI), provided there is also a business tariff.

Tariff class	Tariff	NTC	Tariff description	Tariff terms and conditions											
SAC Non-Demand	Business ToU	8800	This tariff is available to business customers with consumption less than 100 MWh per year .	- Customers must have a meter installed that is capable of measuring ToU energy consumption (kWh). - Small business customers may have a residential tariff at their NMI (noting customers cannot have more than one residential tariff on the same NMI), provided there is also a business tariff.											
	Residential Flat	8400	This tariff is the default tariff for residential customers , regardless of their size.	This tariff can not be used in conjunction with Residential ToU (8900) and/or PeakSmart ToU (7600).											
	Residential customer ToU tariffs (8900 and 7600)		These tariffs are voluntary for residential customers .	- Customers must have a meter installed that is capable (and programmed) to measure energy consumption (kWh) and demand (kW), and records total energy consumption and demand over 30 minute periods - Customers with the same tariff assigned to multiple meters will have the consumption across each meter aggregated for billing purposes.											
	Residential ToU	8900	This tariff is available to all residential customers .	- This tariff can not be used in conjunction with Residential Flat (8400) or PeakSmart ToU (7600). - The charging timeframes for this tariff are:<table><tr><th>Charging timeframe</th><th>Weekdays</th><th>Weekends</th></tr><tr><td>Off-peak</td><td>10:00 pm – 7:00 am</td><td>10:00 pm – 7:00 am</td></tr><tr><td>Shoulder</td><td>7:00 am – 4:00 pm 8:00 pm – 10:00 pm</td><td>7:00 am – 10:00 pm</td></tr><tr><td>Peak</td><td>4:00 pm – 8:00 pm</td><td>No weekend peak</td></tr></table> - Customers must have a ToU-capable meter to access this tariff.	Charging timeframe	Weekdays	Weekends	Off-peak	10:00 pm – 7:00 am	10:00 pm – 7:00 am	Shoulder	7:00 am – 4:00 pm 8:00 pm – 10:00 pm	7:00 am – 10:00 pm	Peak	4:00 pm – 8:00 pm
Charging timeframe	Weekdays	Weekends													
Off-peak	10:00 pm – 7:00 am	10:00 pm – 7:00 am													
Shoulder	7:00 am – 4:00 pm 8:00 pm – 10:00 pm	7:00 am – 10:00 pm													
Peak	4:00 pm – 8:00 pm	No weekend peak													
SAC Non-	PeakSmart ToU	7600	This tariff is available to eligible residential customers .	This tariff can not be used in conjunction with Residential Flat (8400) or Residential ToU (8900).											

Tariff class	Tariff	NTC	Tariff description	Tariff terms and conditions
Demand				- The charging timeframes for this tariff are the same as for Residential ToU (8900) - This tariff is only available to customers who have a total of at least 4 kW cooling capacity (or equivalent rated input load) at the NMI that is under demand management by Energex, including at least one activated PeakSmart Air-Conditioning Unit (connected with a signal receiver). - A 'PeakSmart Air-Conditioning Unit' means an A/C system with functionality added by the manufacturer that meets all specific criteria as indicated in the Australian Standard AS4755.3.1, 'Interaction of demand response enabling devices and electricity products – Operational instructions and connections for air conditioners.' - Under this tariff, supply will be available to the premise at all times; however, demand management of PeakSmart Air Conditioning units is variable and will be managed at Energex's absolute discretion. - Periodic validation of system compliance may be required and will be undertaken at Energex's absolute discretion. - Where a customer becomes ineligible for this tariff, due to their load under demand management falling below 4kW cooling capacity (or equivalent rated input load) and/or this load no longer including at least one activated PeakSmart A/C unit, Energex will assign this customer to Residential ToU (8900) in accordance with its tariff class assignment review process.

Tariff class	Tariff	NTC	Tariff description	Tariff terms and conditions
SAC Non-Demand	Solar PV (net with FiT)	9900	These tariffs are available to residential and business customers with consumption less than 100 MWh per year and who participate in the Queensland Government Solar Bonus Scheme (SBS).	- These tariffs can only be applied if there is an appropriate primary tariff at the NMI. - The Queensland Government sets the Feed-in-Tariff (FiT) rate (cents per kWh – c/kWh) that is to be paid for the excess energy generated by customers and fed back into the grid. More information is available in Energex’s 2014/15 Pricing Proposal.
	Solar PV (net with FiT)	7500		- From 1 July 2014, no FiT is payable by Energex under this tariff. - For customers in South East Queensland, there will be no regulated FiT. The rate that is paid is negotiated between the customer and the electricity retailer or other third party. - For customers in regional Queensland, the FiT will be set by the QCA based on the market value of electricity being exported.
	Solar PV (net)	9800	These tariffs are available to any customer and are not part of the SBS.	- These tariffs can only be applied if there is an appropriate primary tariff at the NMI. - No FiT is payable by Energex for these tariffs; the FiT rate is negotiated between the customer and retailer or other third party. More information is available in Energex’s 2014/15 Pricing Proposal.
	Solar PV (gross)	9700		

Tariff class	Tariff	NTC	Tariff description	Tariff terms and conditions
SAC Non-Demand	Super Economy	9000	These are controlled load tariffs and are available to residential and business customers with consumption less than 100 MWh per year	- Customers can access this tariff providing it is in conjunction with a residential or business tariff at the same NMI, at Energex's discretion. - The tariff is applicable when electricity supply is: - permanently connected to apparatus; or - connected to apparatus by means of a socket-outlet as approved by Energex; or - permanently connected to specified parts of apparatus as approved by Energex. - Supply will be available for a minimum of 8 hours per day. The times when supply is available is subject to variation at Energex's absolute discretion but will typically be between 10:00 pm and 7:00 am.
	Economy	9100		- Customers can access this tariff providing it is in conjunction with a residential or business tariff at the same NMI, at Energex's discretion. - The tariff is applicable when electricity supply is: - Connected to apparatus by means of a socket-outlet as approved by Energex; or - Permanently connected to apparatus as approved by Energex, except if provision has been made to supply such apparatus under a different tariff in the periods during which supply is not available under this tariff. - Supply will be available for a minimum of 18 hours per day. The times when supply is available is subject to variation at Energex's absolute discretion.

Tariff class	Tariff	NTC	Tariff description	Tariff terms and conditions
	Unmetered	9600	This tariff is applicable to unmetered supplies and is the use of system charge (conveyance of electricity).	Unmetered supplies include but are not limited to: street lighting; watchman lighting; public barbeques; telephones; and, traffic signals.

4 Network tariffs – ACS

4.1 Street lighting services

Street light services covered in ACS relate to the provision, construction and maintenance of street light assets owned by Energex. The ACS prices for street light services are included in Table 4.1.

Table 4.1 – 2014/15 prices for street lighting services

Street light service^{2,3}	Price¹ (\$/light/day)
Major non-contributed	1.20
Major contributed	0.33
Minor non-contributed	0.48
Minor contributed	0.13
Notes	
1. All prices exclude GST.	
2. Definitions for major and minor street lights are included in the glossary.	
3. The Use of System Charges (conveyance of electricity) is an SCS; charges for SCS are included in Table 3.1.	

4.1.1 Terms and conditions

The applicable terms and conditions for each street light service are based on the following principles:

- The contributed street light tariff only applies where the capital cost of the street light has been paid upfront by the customer or their agent
- At the conclusion of the street light's standard asset life, the non-contributed tariff will apply due to Energex being responsible for the replacement
- Where the capital cost of the street light has been funded by Energex and no upfront payment made, whether the initial asset construction or replacement of an asset, the non-contributed street light tariff applies.

4.2 Fee-based services

Fee-based services relate to activities undertaken by Energex at the request of customers or their agents, such as their retailer or contractor. The costs for these activities can be directly attributed to a customer and, therefore, a service-specific charge can be levied. The prices for fee-based services are included in Table 4.2. A full list of fee-based services and product codes is included in Appendix 1.

Table 4.2 – 2014/15 prices for fee-based services

Fee-based service¹	Price² (\$/service)
Alterations and additions to current metering equipment	109.67
Attending loss of supply – low voltage customer installation at fault (BH)	122.50
Overhead service replacement – single phase	335.38
Overhead service replacement – multiple phase	395.08
De-energisation ³	Nil
Meter test ³	16.41
Meter inspection	98.03
Re-configure meter	81.27
Off-cycle meter read	9.15
Site visit	70.39
Locating Energex underground cables	n/a
Temporary connection - simple ³	372.36
Re-energisation (BH) ³	41.23
Re-energisation (AH) ³	99.18
Re-energisation (visual) (BH) ³	Nil
Re-energisation (visual) (AH) ³	99.18
Re-energisation non-payment (visual) (BH) ³	41.23
Re-energisation non-payment (visual) (AH) ³	99.18
Supply abolishment - simple	379.84
Unmetered supply	167.64
Street light glare screening	162.01
Replacement of standard luminaires with aero screen units (per street light)	374.55
Notes: 1. A full list of fee-based services and product codes is included in Appendix 1. 2. All prices exclude GST. 3. Prices for these services are subject to Schedule 8 of the Queensland Electricity Regulation 2006, which either caps the price or sets the price to nil.	

4.3 Quoted services

Quoted services are services for which the nature and scope can not be known in advance, irrespective of whether the service is customer-requested or an external event triggers the need for the service. A description of each service and applicable product codes is included in Appendix 2. These services (listed in Table 4.3) are offered on a POA basis.

Table 4.3 – 2014/15 prices for quoted services

Quoted service	Price (\$/service)
Rearrangement of network assets	POA
Customer requested works to allow customer or contractor to work close	POA
Non-standard data and metering services (Type 5 – 7 metering)	POA
Emergency recoverable works and rectification of illegal connections	POA
Large customer connections	POA
Design specification / auditing and other subdivision activities	POA
Unmetered services, including street lighting	POA
After hours provision of any fee-based service (excluding re-energisation)	POA
Supply abolishment – complex	POA
Additional crew	POA
Temporary connection – complex	POA
Loss of asset	POA
Other recoverable work	POA

5 Other services

5.1 Watchman lights

Watchman lights are classified as unmetered supply; they have unregulated service charges and SCS charges. Table 5.1 provides the charges for watchman lights.

Table 5.1 – 2014/15 charges for watchman lights

Classification of service	Service	Network Tariff Code	Price ¹
SCS	Unmetered Supply – all consumption	9600	Refer Table 3.1
Unregulated Services	Charges for capital outlay, operations and maintenance	9500	\$0.54/light/day
	Charges for standard watchman light design only ²	N/A	\$335.71/application
	Charges for non-standard watchman light design only ³	N/A	POA
	Removal of watchman light	N/A	POA

Notes

1. All prices exclude GST.
2. Standard design is up to a maximum of three watchman lights at:
 - (a) a property on land not exceeding 4,000 square meters in area and with no more than two road frontages; or,
 - (b) premises located within a 50 km radius of Brisbane General Post Office.
3. Non-standard design is any design that is outside the definition of standard design as described in Note 2.

5.2 Other Business-2-Business services

In addition to the ACS provided by Energex on a fee-for-service basis, Energex provides a number of DUOS services free of charge. These services are requested through the usual B2B communication channels. A list of services with full descriptions and product codes is included in Appendix 3.

6 Appendices

APPENDIX 1 – FEE-BASED SERVICES PRODUCT CODES	A-2
APPENDIX 2 – QUOTED SERVICES PRODUCT CODES.....	A-11
APPENDIX 3 – ADDITIONAL BUSINESS-TO-BUSINESS CODES	A-23
APPENDIX 4 - TARIFF CLASS ASSIGNMENT REVIEW PROCESS	A-27

APPENDIX 1

Fee-based services product codes

Appendix 1 – Fee-based services product codes

Table A1.1 – Fee-based services product codes

Category	Service	Price excl GST (\$)	Price incl GST (\$)	Product code	Peace charge code	Tariff terms and conditions
Alterations and additions to current metering equipment	Addition and/or alteration to current metering arrangement including exchange and/or move meter.	109.67	120.64	AAEM1M	500	Customer requests exchange of their current meter for alternative metering configuration e.g. consolidation of multiple meters for one meter.
				AAEM2M	502	Customer requests exchange of their current meter for alternative metering configuration. Current Transformer (CT) Metering. This product code will always have the quoted service “Additional Crew” product code applied.
		80.00	88.00	AAMM1M	512	Meter wiring altered or meter being relocated and requires Energex to visit site to verify the integrity of the metering equipment.
				AAMM2M	514	Meter wiring altered or meter being relocated and requires Energex to visit site to verify the integrity of the metering equipment. CT Metering. This product code will always have the quoted service “Additional Crew” product code applied.
Attending loss of supply-low voltage customer installation at fault – Business Hours (BH)	Energex attends trouble call during BH and found fault in LV customer’s installation.	122.50	134.75	LOS	1500	Energex attends loss of supply at the customer’s request and fault is found to be at the customer’s installation (switchboard) including tripped safety switch, internal fault, customer overload etc.
Overhead service replacement – single phase	To replace an existing overhead service at customer’s request. No material change to load.	335.38	368.92	MSOR1P2	920	Customer requests their existing overhead service to be replaced or relocated, e.g.as a result of a POA relocation. No material change to load. Single phase.

Category	Service	Price excl GST (\$)	Price incl GST (\$)	Product code	Peace charge code	Tariff terms and conditions
Overhead service replacement – multiple phase	To replace an existing overhead service at customer's request. No material change to load.	395.08	434.59	MSOR3P2	924	Customer requests their existing overhead service to be replaced or relocated, e.g. as a result of a POA relocation. No material change to load. Multiple phases.
De-energisation¹	De-energisation, commenced during BH.	Nil	Nil	DN\$D1MB	300	Retailer requests de-energisation of the customer's premises where the de-energisation can be performed at the premise by a method other than Main Switch Seal.
				DN\$D2MB	302	Retailer requests de-energisation of the customer's premises where the de-energisation can be performed at the premise by a method other than Main Switch Seal. CT Metering.
				DN\$1MB	304	Retailer requests de-energisation of the customer's premises where the customer has not paid their electricity account and the de-energisation can be performed at the premise by a method other than Main Switch Seal.
				DN\$2MB	306	Retailer requests de-energisation of the customer's premises where the customer has not paid their electricity account and the de-energisation can be performed at the premise by a method other than Main Switch Seal. CT Metering.
				DNS	320	Retailer requests de-energisation of the customers' premises. Main Switch Sealed.
				DN\$1MB	324	Retailer requests de-energisation of the customer's premises where the customer has not paid their electricity account. Main Switch Sealed.

Category	Service	Price excl GST (\$)	Price incl GST (\$)	Product code	Peace charge code	Tariff terms and conditions
Meter test¹	Check that metering installation is accurately measuring energy consumed.	16.41	18.05	MIMT1MB	704	A request to conduct a comprehensive review of the customer's metering installation to determine that a customer's energy consumption is being accurately metered by physically testing the meter with a controlled load and calibrating the metering equipment. BH.
				MIMT2MB	706	A request to conduct a comprehensive review of the customer's metering installation to determine that a customer's energy consumption is being accurately metered by physically testing the meter with a controlled load and calibrating the metering equipment. CT Metering. BH.
Meter inspection	Inspection required to check reported or suspected fault and no fault in meter is found.	98.03	107.83	MSINSS	957	A request to conduct a site review of the state of the customer's metering installation without physically testing the metering equipment, i.e. single premise.
				MSINSC	959	A request to conduct a site review of the state of the customer's metering installation without physically testing the metering equipment, i.e. single premise. CT Metering. This product code will always have the quoted service "Additional Crew" product code applied.
Reconfigure meter	Adjustment to meter setting due to change in tariff and/or time of use settings.	81.27	89.40	MRCT1M	1204	A request to make a change from one tariff to another tariff.
				MRCT2M	1206	A request to make a change from one tariff to another non-controlled tariff. CT Metering. This product code will always have the quoted service "Additional Crew" product code applied.
		Nil	Nil	MRRT1M	1201	A request to make a change from Residential Flat (NTC 8400) to Residential ToU (NTC 8900).

Category	Service	Price excl GST (\$)	Price incl GST (\$)	Product code	Peace charge code	Tariff terms and conditions
				MRRT2M	1203	A request to make a change from Residential Flat (NTC 8400) to Residential ToU (NTC 8900).CT Metering.
				MRRV1M	1205	A request to make a change from Residential ToU (NTC 8900) to Residential Flat (NTC 8400).CT Metering and No CT Metering.
				MRPS1M	1207	A request to make a change from Residential Flat (NTC 8400) or Residential ToU (NTC 8900) to PeakSmart ToU (NTC 7600).
				MRPS2M	1209	A request to make a change from Residential Flat (NTC 8400) or Residential ToU (NTC 8900) to PeakSmart ToU (NTC 7600). CT Metering.
Off-cycle meter read	Meter read taken off-cycle	9.15	10.07	SRCR	400	Customer requests a check read on the meter due to reported error in the meter reading. This is only used to check the accuracy of the meter reading.
				SRTR	404	Customer requests a transfer read, as a result of transferring to a different retailer during a billing period.
Site visit	Where crew attends site during BH and either: - service is unable to be performed due to customer's fault (e.g. unfilled site visit due to customer missed appointment etc.); or - crew attends site at customer request where the service is not covered by another fee based service (e.g. to provide notification).	70.39	77.43	MSWTV	1044	Energex attends a site at the customer's request and is unable to perform job due to customer's fault.
		11.57	12.72	MSWTV2	1046	Energex (non-technical) attends a site at the customer's request and is unable to perform job due to customer's fault.

Category	Service	Price excl GST (\$)	Price incl GST (\$)	Product code	Peace charge code	Tariff terms and conditions
Locating Energex underground cables	Customer-requested assistance, from a single crew for a period of up to one hour, in locating Energex underground cables.	n/a	n/a	MSAPLC	938	Customer requests assistance, from a single crew for a period of up to one hour, in locating Energex underground cables. Site visit required.
Temporary connection – simple ¹	Applies to temporary connections (<12 months) for SACs (including temporary builders supplies), typically up to 10 kVA where minimum technical standards are required. This category excludes complex requirements such as those that require greater capacity, longer distance, and/or difficult terrain or temporary large customer connections.	372.36	409.60	NCT1MB	120	Customer requests a temporary connection and recovery of the temporary builders supply. Small residential and small business (< 25,000 kWh).
				NCT2MB	122	Customer requests a temporary connection and recovery of the temporary builders supply. Small residential and small business (< 25,000 kWh). CT Metering.
Re-energisation – BH ¹	Re-energisation commenced during BH. Visual inspection not required.	41.23	45.35	RN\$1MB	200	Retailer requests a re-energisation of the customer's premises where the customer has not paid their electricity account. BH.
				RN\$2MB	202	Retailer requests a re-energisation of the customer's premises where the customer has not paid their electricity account. CT Metering. BH.
				RNS\$1MB	412	Retailer requests a re-energisation of the customer's premises where the customer has not paid their electricity account. Main switch seal. BH.
	Reading provided for an active site.	Nil	Nil	RNMSS	406	Retailer requests a re-energisation of the customer's premises following a main switch seal. BH.
		9.15	10.07	RNNR	238	Retailer requests that field work be undertaken to obtain a new reading rather than using a deemed meter reading. May also be used for retrospective move-in requests.

Category	Service	Price excl GST (\$)	Price incl GST (\$)	Product code	Peace charge code	Tariff terms and conditions
		Nil	Nil	RNRR	236	Retailer requests that a meter read be provided, with Energex to determine whether field work is necessary to obtain reading.
Re-energisation (visual) – BH ¹	Re-energisation commenced during BH. Visual inspection required.	Nil	Nil	RNV1MB	224	Retailer requests a visual examination upon re-energisation of the customer's premises. BH.
				RNV2MB	226	Retailer requests a visual examination upon re-energisation of the customer's premises. CT Metering. BH.
Re-energisation non-payment (visual) – BH ¹	Re-energisation, following de-energisation for non-payment, commenced during BH. Visual inspection required.	41.23	45.35	RN\$V1MB	212	Retailer requests a visual examination upon re-energisation of the customer's premises where the customer has not paid their electricity account. NMI de-energised >30 days. BH.
				RN\$V2MB	214	Retailer requests a visual examination upon re-energisation of the customer's premises where the customer has not paid their electricity account. CT Metering. NMI de-energised >30 days. BH.
Re-energisation – After Hours (AH) ¹	Re-energisation commenced AH. Visual inspection not required.	99.18	109.10	RN\$1MA	204	Retailer requests a re-energisation of the customer's premises where the customer has not paid their electricity account. After hours (AH).
				RN\$2MA	206	Retailer requests a re-energisation for the customer's premises where the customer has not paid their electricity account. CT Metering. AH.
				RNS\$1MA	416	Retailer requests a re-energisation for the customer's premises where the customer has not paid their electricity account. Main switch seal . AH.
				RN\$1MT	208	Retailer requests a re-energisation for the customer's premises where the customer has not paid their electricity account. Anytime service (Anytime).
				RN\$2MT	210	Retailer requests a re-energisation of the customer's premises where the customer has not paid their electricity account. CT Metering. Anytime.

Category	Service	Price excl GST (\$)	Price incl GST (\$)	Product code	Peace charge code	Tariff terms and conditions
		49.17	54.08	RNS\$1MT	414	Retailer requests a re-energisation for the customer's premises where the customer has not paid their electricity account. Main switch seal . Anytime.
				RNMSSA	408	Retailer requests a re-energisation of the customer's premises following a main switch seal . AH.
				RNMSST	410	Retailer requests a re-energisation of the customer's premises following a main switch seal . Anytime.
Re-energisation (visual) – AH¹	Re-energisation commenced AH. Visual inspection required.	99.18	109.10	RNV1MA	228	Retailer requests a visual examination upon re-energisation of customer's premises. AH.
				RNV2MA	230	Retailer requests a visual examination upon re-energisation of the customer's premises. CT Metering. AH.
				RNV1MT	232	Retailer requests a visual examination upon re-energisation of the customer's premises. Anytime.
				RNV2MT	234	Retailer requests a visual examination upon re-energisation of the customer's premises. CT Metering. Anytime.
Re-energisation non-payment (visual) – AH¹	Re-energisation, following de-energisation for non-payment, commenced AH. Visual inspection required.	99.18	109.10	RN\$V1MA	216	Retailer requests visual examination upon re-energisation of a customer's premises where the customer has not paid their electricity account. NMI de-energised > 30 days. AH.
				RN\$V2MA	218	Retailer requests a visual examination upon re-energisation of the customer's premises where the customer has not paid their electricity account. CT Metering. NMI de-energised > 30 days. AH.
				RN\$V1MT	220	Retailer requests a visual examination upon re-energisation of the customer's premises where the customer has not paid their electricity account. NMI de-energised > 30 days. Anytime.

Category	Service	Price excl GST (\$)	Price incl GST (\$)	Product code	Peace charge code	Tariff terms and conditions
				RN\$V2MT	222	Retailer requests a visual examination upon re-energisation of the customer's premises where the customer has not paid their electricity account. CT Metering. NMI de-energised > 30 days. Anytime.
Supply abolishment – simple	Retailer requests the service provider to abolish supply at a specific connection point.	379.84	417.83	SA1	800	Retailer requests the Service Provider to abolish supply at a specific connection point. To be used for single dwellings and the community / unit one of multi-unit residential complexes.
		61.62	67.78	SA3	803	Retailer requests the Service Provider to abolish supply at a specific connection point. To be used for multi-unit residential complexes for all units after the community / unit one.
Unmetered supply	Provision of temporary connection and recovery of permanent connection for approved unmetered equipment where an existing LV supply exists.	167.64	184.40	DNUMS	328	Customer requests an unmetered supply point to be de-energised.
				TUMS	1400	Customer requests a temporary connection of unmetered equipment to an existing LV supply.
Street light glare screening	The supply and installation of glare shields.	162.01	178.21	SLLGAD	602	Customer requests the supply and installation of adhesive luminaire glare screen(s).
				SLLGSDI	604	Customer requests the supply and installation of standard luminaire glare screen(s) – internal.
Replacement of standard luminaires with aero screen units (per street light)	Replacement of existing luminaires with aero screen low glare luminaires.	374.55	412.00	SLAU	600	Customer requests the replacement of existing street light luminaires with aero screen low glare luminaires.

Note 1: Services are subject to Schedule 8 of the Queensland *Electricity Regulation 2006*, which either caps the price or sets the price to nil.

APPENDIX 2

Quoted services product codes

Appendix 2 – Quoted services product codes

Table A2.1 – Quoted services product codes

Category	Service	Product code	Peace charge code	Ellipse product code	Service description
Rearrangement of network assets	Where Energex assets are rearranged at customer's request.	MSREL	1026	P051	Where Energex assets are moved at customer's request and estimated expenditure is less than \$150k. Includes upgrade from overhead to underground service.
		MSOHToUG	1004		Recovery of the overhead service and connection of the consumer mains to the pillar. Customer-requested conversion of existing overhead to underground service. BH.
		MSOHToUG2	1005		Recovery of the overhead service and connection of the consumer mains to the pillar. Customer-requested conversion of existing overhead to underground service. CT Metering. BH.
		MSOHToUGA	1019		Recovery of the overhead service and connection of the consumer mains to the pillar. Customer-requested conversion of existing overhead to underground service. AH.
		MSOHToUG2A	1021		Recovery of the overhead service and connection of the consumer mains to the pillar. Customer-requested conversion of existing overhead to underground service. CT Metering. AH.
		MSOHToUGT	1035		Recovery of the overhead service and connection of the consumer mains to the pillar. Customer-requested conversion of existing overhead to underground service. Anytime.
		MSOHToUG2T	1037		Recovery of the overhead service and connection of the consumer mains to the pillar. Customer-requested conversion of existing overhead to underground service. CT Metering. Anytime.

Category	Service	Product code	Peace charge code	Ellipse product code	Service description
Customer requested works to allow customer or contractor to work close	Customer-requested disconnection and reconnection of supply, coverage of LV mains and/or switching to allow customer/contractor to work close.	MSTT	1038	P011	Coverage of LV Mains (E.G. tiger tails). Charge where customer requests the line close to a construction site be physically covered to prevent risk of electrocution.
		MSDNNDB	902		Temporary LV service disconnection – no dismantling. BH.
		MSDNNDA	908		Temporary LV service disconnection – no dismantling. AH.
		MSDNNDT	914		Temporary LV service disconnection – no dismantling. Anytime.
		MSDNPDB	904		Temporary LV service disconnection – physical dismantling. BH.
		MSDNPDA	910		Temporary LV service disconnection – physical dismantling. AH.
		MSDNPDT	915		Temporary LV service disconnection – physical dismantling. Anytime.
		MSDNHVB	906		Temporary HV service disconnection. BH.
		MSDNHVA	912		Temporary HV service disconnection. AH.
		MSDNHVT	913		Temporary HV service disconnection. Anytime.
Non-standard data and metering services (Type 5 – 7 metering)	Includes provision of meter data above the minimum requirements and meter inspection to check a reported or suspected fault. Does not include provision of any hardware.	MSOBD	1002	P053	Provision of metering data above minimum regulatory requirements.
		MSLPD	990		Provision of load profile data where available – retailer requested.
		MEMDP	1300		Collection, processing and transfer of higher standard energy data for customers than would otherwise be provided – retailer requested.

Category	Service	Product code	Peace charge code	Ellipse product code	Service description
		MSINS	955		A request to conduct a site review of the state of the customer's metering installation(s) without physically testing the metering equipment, i.e. multiple premises. BH.
		MSINSA	961		A request to conduct a site review of the state of the customer's metering installation(s) without physically testing the metering equipment, i.e. multiple premises. AH.
		MSINST	963		A request to conduct a site review of the state of the customer's metering installation(s) without physically testing the metering equipment, i.e. multiple premises. Anytime.
Emergency recoverable works and rectification of illegal connections	Work carried out by Energex as a result of an emergency or third party action.	MSERW	978	P002	Emergency Recoverable Works: Work undertaken by Energex as a result of emergency or third party action.
		MSAPIC	930		Rectification of illegal connections: Work undertaken as a consequence of illegal connections resulting in damage to the network.
Large Customer Connections	Design and construct of connection assets for large customers			P060	Design and construction of connection assets for large customers. Generally, large customers have annual consumption > 4 GWh or estimated maximum demand > 1 MVA or estimated generation capacity > 1 MVA.
Design specification / auditing and other subdivision activities	Provision of a detailed estimate/design and/or checking of designs for subdivisions and street light services. Also includes other subdivision activities such as pole inspections.	MSDD	958	P006	Provision of detailed design estimate for LV customer requested extension / connection.
		MSSF	1032		Specification fees: Fee for service when Energex prepares and issues specifications for customer extension works.
					Provision of checking of materials, or a group of similar materials, that are a like-for-like replacement of current Energex stores materials.

Category	Service	Product code	Peace charge code	Ellipse product code	Service description
Unmetered services, including street lighting	Provision of services, other than standard connection, for approved unmetered equipment, including street lights.	SLLGUNI	606	P005	Planning, design and installation of unique luminaire glare screening – external.
				P054	Provision of services, other than standard connection for approved unmetered equipment. This includes facilities such as public telephones, traffic signals and public barbecues.
AH provision of any fee-based service (excluding re-energisation)	The AH provision of any fee-based service excluding re-energisation.	LOST	1602	P062	Energex attends loss of supply at the customer's request and fault is found to be at the customer's installation (switchboard) including tripped safety switch, internal fault, customer overload etc. AH.
		LOSA	1600		Energex attends loss of supply at the customer's request and fault is found to be at the customer's installation (switchboard) including tripped safety switch, internal fault, customer overload etc. Anytime.
		MSWTVVA	1045		Unfulfilled site visit. AH.
		MSWTVT	1047		Unfulfilled site visit. Anytime.
		MSWTV2A	1048	P062	Unfulfilled site visit (non-technical). AH.
		MSWTV2T	1049		Unfulfilled site visit (non-technical). Anytime.
		NCT1MA	124		Customer requests a temporary connection and recovery of the temporary builders' supply. Small residential and small business (< 25,000 kWh). AH.
		NCT1MAT	125		Customer requests a temporary connection and recovery of the temporary builders' supply. Work requires traffic control due to imposed rules from external authorities. Small residential and small business (< 25,000 kWh). AH.
		NCT2MA	126		Customer requests a temporary connection and recovery of the temporary builders' supply. Small residential and small business (< 25,000 kWh). CT Metering. AH.

Category	Service	Product code	Peace charge code	Ellipse product code	Service description
		NCT2MAT	127		Customer requests a temporary connection and recovery of the temporary builders' supply. Work requires traffic control due to imposed rules from external authorities. Small residential and small business (< 25,000 kWh). CT Metering. AH.
		NCT1MT	128		Customer requests a temporary connection and recovery of the temporary builders' supply. Small residential and small business (< 25,000 kWh). Anytime.
		NCT1MTT	129		Customer requests a temporary connection and recovery of the temporary builders' supply. Work requires traffic control due to imposed rules from external authorities. Small residential and small business (< 25,000 kWh). Anytime.
		NCT2MT	130		Customer requests a temporary connection and recovery of the temporary builders supply. Small residential and small business (< 25,000 kWh). CT Metering. Anytime.
		NCT2MTT	131		Customer requests a temporary connection and recovery of the temporary builders supply. Work requires traffic control due to imposed rules from external authorities. Small residential and small business (< 25,000 kWh). CT Metering. Anytime.
		AAEM1MAH	501	P062	Adds & Alts: Exchange meter. AH.
		AAEM1MAT	505		Adds & Alts: Exchange meter. Anytime.
		AAEM2MAH	503		Adds & Alts: Exchange meter. CT Metering. AH.
		AAEM2MAT	507		Adds & Alts: Exchange meter. CT Metering. Anytime.
		AAMM1MAH	513		Adds & Alts: Meter wiring altered or meter being relocated requiring Energex to visit site to verify the integrity of the metering equipment. AH.

Category	Service	Product code	Peace charge code	Ellipse product code	Service description
		AAMM1MAT	517		Adds & Alts: Meter wiring altered or meter being relocated requiring Energex to visit site to verify the integrity of the metering equipment. Anytime.
		AAMM2MAH	515		Adds & Alts: Meter wiring altered or meter being relocated requiring Energex to visit site to verify the integrity of the metering equipment. CT Metering. AH.
		AAMM2MAT	519		Adds & Alts: Meter wiring altered or meter being relocated requiring Energex to visit site to verify the integrity of the metering equipment. CT Metering. Anytime.
		SA1AH	801		Retailer requests the Service Provider to abolish supply at a specific connection point. To be used for single dwellings; the community or unit one of multi-unit residential complexes. AH.
		SA1AHT	805		Retailer requests the Service Provider to abolish supply at a specific connection point. To be used for single dwellings; the community / unit one of multi-unit residential complexes. Work requires traffic control due to imposed rules from external authorities. AH.
		SA1AT	806		Retailer requests the Service Provider to abolish supply at a specific connection point. To be used for single dwellings; the community or unit one of multi-unit residential complexes. Anytime.
		SA1ATT	807		Retailer requests the Service Provider to abolish supply at a specific connection point. To be used for single dwellings; the community / unit one of multi-unit residential complexes. Work requires traffic control due to imposed rules from external authorities. Anytime.
		SA3AH	804	P062	Retailer requests the Service Provider to abolish supply at a specific connection point. To be used for multi-unit residential complexes for all units after the community / unit one. AH.

Category	Service	Product code	Peace charge code	Ellipse product code	Service description
		SA3AT	808		Retailer requests the Service Provider to abolish supply at a specific connection point. To be used for multi-unit residential complexes for all units after the community / unit one. Anytime.
		MSOR1P2A	921		Customer requests their existing overhead service to be replaced or relocated, e.g. due to a POA relocation. No material change to load. Single phase. AH.
		MSOR1P2AT	922		Customer requests their existing overhead service to be replaced or relocated, e.g. due to a POA relocation. Work requires traffic control due to imposed rules from external authorities. No material change to load. Single phase. AH.
		MSOR1P2T	923		Customer requests their existing overhead service to be replaced or relocated, e.g. due to a POA relocation. No material change to load. Single phase. Anytime.
		MSOR1P2TT	925		Customer requests their existing overhead service to be replaced or relocated, e.g. due to a POA relocation. Work requires traffic control due to imposed rules from external authorities. No material change to load. Single phase. Anytime.
		MSOR3P2A	927		Customer requests their existing overhead service to be replaced or relocated, e.g. due to a POA relocation. No material change to load. Multiple phases. AH.
		MSOR3P2AT	929		Customer requests their existing overhead service to be replaced or relocated, e.g. due to a POA relocation. Work requires traffic control due to imposed rules from external authorities. No material change to load. Multiple phases. AH.
		MSOR3P2T	931		Customer requests their existing overhead service to be replaced or relocated, e.g. due to a POA relocation. No material change to load. Multiple phases. Anytime.

Category	Service	Product code	Peace charge code	Ellipse product code	Service description
		MSOR3P2TT	933		Customer requests their existing overhead service to be replaced or relocated, e.g. due to a POA relocation. Work requires traffic control due to imposed rules from external authorities. No material change to load. Multiple phases. Anytime.
		MRCT1MA	1212		A requested change from one tariff to another tariff. AH.
		MRCT1MT	1220		A requested change from one tariff to another tariff. Anytime.
		MRCT2MA	1214		A requested change from one tariff to another tariff. CT Metering. AH. This product code will always have the "Additional Crew" product code applied.
		MRCT2MT	1222	P062	A requested change from one tariff to another tariff. CT Metering. Anytime. This product code will always have the "Additional Crew" product code applied.
		MCINSSA	965		A requested site review of the condition of the customer's metering installation without physically testing the metering equipment, i.e. single premise. AH.
		MCINSST	967		A requested site review of the condition of the customer's metering installation without physically testing the metering equipment, i.e. single premise. Anytime.
		MCINSCA	969		A requested site review of the condition of the customer's metering installation without physically testing the metering equipment, i.e. single premise. AH. This product code will always have the "Additional Crew" product code applied.

Category	Service	Product code	Peace charge code	Ellipse product code	Service description
		MCINSCT	971		A requested site review of the condition of the customer's metering installation without physically testing the metering equipment, i.e. single premise. Anytime. This product code will always have the "Additional Crew" product code applied.
Supply abolishment - complex	Retailer requests the service provider to abolish supply at a given connection point where there are complex arrangements requiring extra resources above those supplied under a simple supply abolishment.	SA2	802	P056	Retailer requests the Service Provider to abolish supply at a specific connection point. Applies where there are complex arrangements requiring extra resources above that supplied under a simple supply abolishment. Complex arrangements may include: underground LV service cables direct jointed to the LV mains cable in the footpath or connected to the LV transformer bushings and terminated on a building wall or other structure inside property; or underground supply arrangements fed from a distribution pillar with fuses exceeding 100 amps/phase; or HV metered sites.
Additional Crew	Where additional crew are required at a service call for health, safety or security reasons.	MSAC	926	P055	Where an additional single crew is required at a service call for up to one hour for health, safety or security reasons. BH.
		MSACA	1700		Where an additional single crew is required at a service call for up to one hour for health, safety or security reasons. AH.
		MSACT	1702		Where an additional single crew is required at a service call for up to one hour for health, safety or security reasons. Anytime (Retailer request).
		MSAC2	939		Where an additional single crew is required at a service call for more than one hour but less than two hours for health, safety or security reasons. BH.
		MSACA2	1701		Where an additional single crew is required at a service call for more than one hour but less than two hours for health, safety or security reasons. AH.

Category	Service	Product code	Peace charge code	Ellipse product code	Service description
		MSACT2	1703		Where an additional single crew is required at a service call for more than one hour but less than two hours for health, safety or security reasons. Anytime (retailer request).
		MSACB	1704		Where an additional single crew is required at a service call for more than two hours for health, safety or security reasons.
Temporary connection – complex	Applies to temporary connections, typically above 10 kVA, where there are complex arrangements requiring extra resources above those supplied under simple temporary supply.			P057	Applies to temporary connections, typically above 10 kVA, where there are complex arrangements requiring extra resources above that supplied under simple temporary supply. Applies to all HV connections and construction supplies. Complex arrangements may be due to long distances, a transformer installation and/or difficult terrain. Also includes temporary supply to construction sites for periods greater than 12 months.
Loss of asset	The residual asset value of non-contributed and contributed street lights due to their early removal.			P052	Customer requests the removal of non-contributed (Rate 1) and contributed (Rate 2) street lights from service before the end of their useful life.
Other recoverable work (opex)	Customer-requested opex work that would not otherwise have been required.	MSORW	945	P061	Customer requests opex services that would not otherwise have been requested for the efficient management of the network, or not covered by another service.
				P044	Customer requests the provision of electricity network data, such as the provision of capital and operational works information (including estimates), provision of electricity network data (including pole asset information) and associated planning.
				P044	Specific Request for the provision of zone substation data
				P046	Non-refundable fee for network assessment and preparation of offer. Includes initial review of request for negotiated contract and ongoing/complex review of contract

Category	Service	Product code	Peace charge code	Ellipse product code	Service description
				P045	Preparatory (physical) field work to configure Energex assets to enable the installation of third party assets
				P079	Work associated with installation of energy efficient street lighting lamps.
Other recoverable work (capex)	Customer requested capex work that would not otherwise have been required, or covered by another service which results in a contributed asset.	MSAPABC	928	P065	Bundling of cables which are carried out at the request of another party.

APPENDIX 3

Additional Business-to-Business codes

Appendix 3 – Additional Business-to-Business codes

In addition to ACS provided on a fee-for-service basis, Energex provides a number of DUOS services which are requested through the usual B2B communication channels. A list of services with full description and product code is provided in the additional product code listing in Table A-4.1.

Table A-3.1 - Additional B2B product codes

Category	Description	Product code	Full description	Peace charge code	Price (\$)
New Connections	U/G Perm Supply - CT BH	NCUP2MB	New underground connection. CT. BH.	100	-
	U/G Perm Supply - No CT BH	NCUP1MB	New underground connection. No CT. BH.	158	-
	U/G Perm Supply - CT AH	NCUP2MA	New underground connection. CT. AH.	106	-
	U/G Perm Supply - No CT AH	NCUP1MA	New underground connection. No CT. AH.	156	-
	U/G Perm Supply - CT Anytime	NCUP2MT	New underground connection. CT. Anytime.	118	-
	U/G Perm Supply - No CT Anytime	NCUP1MT	New underground connection. No CT. Anytime.	116	-
	O/H Perm Supply - CT BH	NCOP2MB	New overhead connection. CT. BH.	104	-
	O/H Perm Supply - No CT BH	NCOP1MB	New overhead connection. No CT. BH.	102	-
	O/H Perm Supply - CT AH	NCOP2MA	New overhead connection. CT. AH.	110	-
	O/H Perm Supply - No CT AH	NCOP1MA	New overhead connection. No CT. AH.	108	-
	O/H Perm Supply - CT Anytime	NCOP2MT	New overhead connection. CT. Anytime.	114	-
	O/H Perm Supply - No CT Anytime	NCOP1MT	New overhead connection. No CT. Anytime.	112	-
	Temp/Perm - CT BH	NCTP2MB	New temporary connection in permanent. CT. BH.	150	-
	Temp/Perm - No CT BH	NCTP1MB	New temporary connection in permanent. No CT. BH.	148	-

Category	Description	Product code	Full description	Peace charge code	Price (\$)
	Temp/Perm - CT AH	NCTP2MA	New temporary connection in permanent. CT. AH.	134	-
	Temp/Perm - No CT AH	NCTP1MA	New temporary connection in permanent. No CT. AH.	132	-
	Temp/Perm - CT Anytime	NCTP2MT	New temporary connection in permanent. CT. Anytime.	138	-
	Temp/Perm - No CT Anytime	NCTP1MT	New temporary connection in permanent. No CT. Anytime.	136	-
Unmetered Supply	UMS Connection Point Available	NCUMSC	New unmetered connection where connection point is available.	152	-
	UMS Connection Point Not Available	NCUMSCN	New unmetered connection where connection point is unavailable.	153	-
Special Read	Meter Final Read	SRFR	Special Read – Final Read	402	-
Additions & Alterations	Install Ctrl Load	AAICL	Adds & Alts: Installed controlled load	516	-
	Install Hot Water	AAIHW	Adds & Alts: Installed hot water	518	-
	Install Meter - CT BH	AAIM2MB	Adds & Alts: Install meter. CT. BH	522	-
	Install Meter - No CT BH	AAIM1MB	Adds & Alts: Install meter. No CT. BH.	520	-
	Install Meter - CT AH	AAIM2MA	Adds & Alts: Install meter. CT. AH	506	-
	Install Meter - No CT AH	AAIM1MA	Adds & Alts: Install meter. No CT. AH.	504	-
	Install Meter - CT Anytime	AAIM2MT	Adds & Alts: Install meter. CT. Anytime.	510	-
	Install Meter - No CT Anytime	AAIM1MT	Adds & Alts: Install meter. No CT. Anytime.	508	-
	Remove Meter - CT	AARM2M	Adds & Alts: Remove meter. CT. BH	526	-
	Remove Meter - No CT	AARM1M	Adds & Alts: Remove meter. No CT. BH.	524	-
Meter Investigations	Tamper - CT B/H Only	MIT2MB	Investigate meter for tampering. CT. BH.	710	-
	Tamper - No CT B/H Only	MIT1MB	Investigate meter for tampering. No CT. BH.	708	-

Category	Description	Product code	Full description	Peace charge code	Price (\$)
Customer initiated service upgrades	OH Single Phase - 2 visit	MSOU1P2	Overhead service upgrade. Single phase. 2 visits.	1008	-
	OH 2 Phase - 1 visit	MSOU2P1	Overhead service upgrade. Two phase. 1 visit.	1010	-
	OH 2 Phase - 2 visit	MSOU2P2	Overhead service upgrade. Two phase. 2 visits.	1012	-
	OH 3 Phase - 1 visit	MSOU3P1	Overhead service upgrade. Three phase. 1 visit.	1014	-
	OH 3 Phase - 2 visit	MSOU3P2	Overhead service upgrade. Three phase. 2 visits.	1016	-
	U/G Upgrade to 2ph Connection	MSUU2P	Underground service – upgrade to 2 phase	1040	-
	U/G Upgrade to 3ph Connection	MSUU3P	Underground service – upgrade to 3 phase	1042	-
No Charge	No Charge	NoCharge	No Charge	9999	-

APPENDIX 4

Tariff class assignment review process

Appendix 4 - Tariff class assignment review process

Energex provides notice to customers and their retailers about proposed tariff class assignment/reassignment. The notice given includes advice that the customer may request further information from Energex and that they may object to the proposed tariff assignment or reassignment and request that Energex undertake a review. More information is available in Energex's 2014/15 Pricing Proposal.¹²

Responsibility for review

When Energex receives a written objection and request for review of a proposed tariff assignment/reassignment from a customer or their retailer, the below process is followed:

- Where the objection and request for review does not involve a site-specific price, the review process will be performed by the Retailer Escalation Department. This includes reviews pertaining to transition between SAC Non-Demand and SAC Demand tariff classes.
- Where the objection and request for review involves site-specific prices, the review process will be performed by the Network Pricing. This includes tariff reassignments to or from EG, CAC and ICC.

The final decision pertaining to the review, i.e. whether the tariff assignment / reassignment is approved to proceed, is the responsibility of the manager for the reviewing department.

Review process

When Energex receives a written objection and request for review of a proposed tariff assignment/reassignment from a customer or their retailer, the following process will be followed:

- 1) The customer's written objection will be reviewed and Energex will consider any additional information that the customer has provided.
- 2) Energex will determine the energy usage for the customer based on:
 - i. Any information which the customer has provided; and/or
 - ii. Historical consumption data for existing customers; and/or
 - iii. Estimated energy for new customers.
- 3) Energex will assess the nature of the customer's connection to the network.
- 4) Energex will determine the correct tariff classification (using data collected and as outlined in Figure 2.1 and in accordance with Appendix B, Clauses 3 and 4 of the


¹² Refer to Footnote 2

Final Determination). There may be exceptions to the application of the first criteria (Figure 2.1), energy consumption, depending on the nature of the connection.

- 5) In all cases, the tariff class assignment will be reconsidered and will be escalated to the Retail Escalation Manager and Network Pricing Manager for review.
- 6) The customer (or retailer) will be notified in writing of the outcomes of the tariff classification review within 7 days in accordance with requirement as outlined in Appendix B of the Final Determination.
- 7) Where a customer is not satisfied with the outcome of the review of their objection, they may choose to escalate their objection to the relevant body (e.g. Ombudsman).

Figure A-5.1 provides a detailed outline of the internal process for reviewing objections.

Figure A-5.1 - Tariff class assignment review of objections process

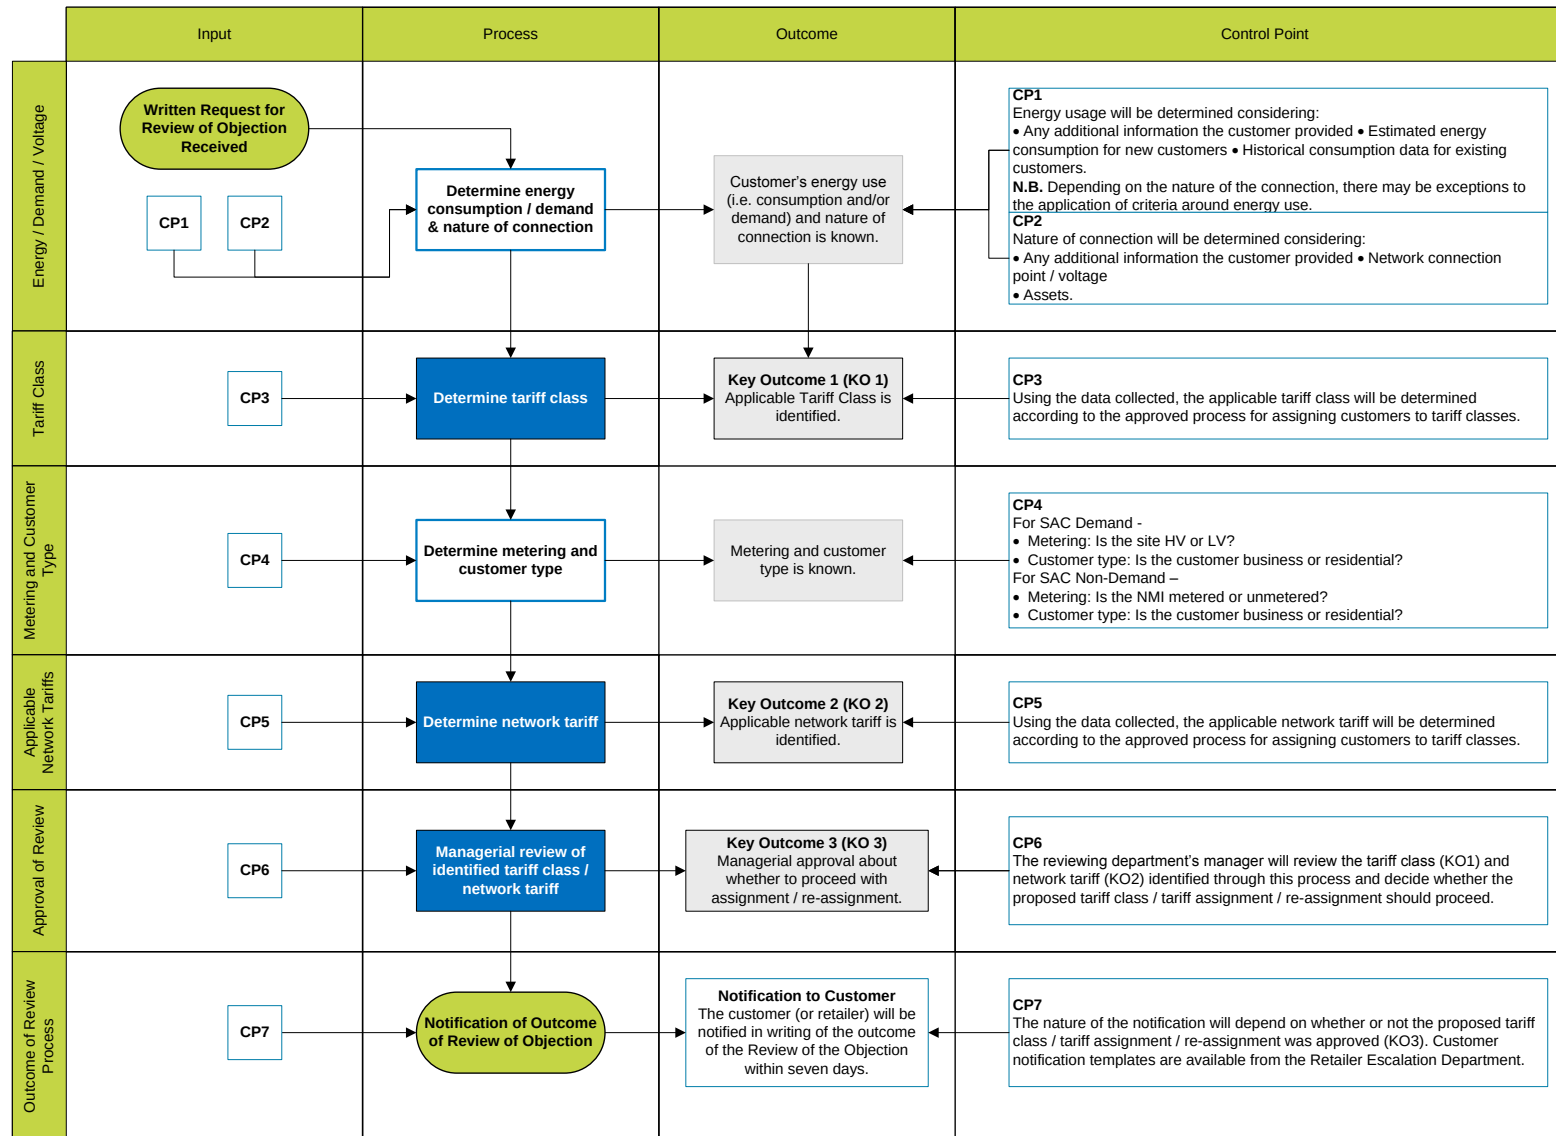

APPENDIX 5

Glossary

Appendix 5 – Glossary

Table A-5.1 – Acronyms and abbreviations

Abbreviation	Description
A/C	Air-conditioning
ACS	Alternative Control Service
AER	Australian Energy Regulator
AH	After Hours
BH	Business Hours
CAC	Connection Asset Customers
CSO	Community Service Obligation
CT	Current Transformer
DLF	Distribution Loss Factor
DNSP	Distribution Network Service Provider
DPPC	Designated Pricing Proposal Charges (previously known as TUOS)
DUOS	Distribution Use of System
EG	Embedded Generators
ENA	Energy Network Australia
ENCAP	Electricity Network Capital Program
FiT	Feed-in Tariff (Solar PV)
HV	High Voltage
ICC	Individually Calculated Customers
LCC	Large Customer Connection
LV	Low Voltage
MAR	Maximum Allowable Revenue
NEL	National Electricity Law
NEM	National Electricity Market
NER	National Electricity Rules (or <i>Rules</i>)
NMI	National Meter Identifier
NTC	Network Tariff Code
NUOS	Network Use of System
Opex	Operational Expenditure
PV	Photovoltaic (Solar PV)
QCA	Queensland Competition Authority
QESI	Queensland Electricity Supply Industry

Abbreviation	Description
RAB	Regulatory Asset Base
<i>Rules</i>	National Electricity Rules (or NER)
SAC	Standard Asset Customers
SACD	Standard Asset Customers (demand)
SCS	Standard Control Service
SEQ	South East Queensland
Solar PV	Solar Photovoltaic
STPIS	Service Target Performance Incentive Scheme
ToU	Time of Use
TUOS	Transmission Use of System

Table A-5.2 - Units of measurement used throughout this document

Base Unit	Unit name	Multiples used in this document
h	hour	GWh, kWh, MWh
V	volt	kV
VA	volt-ampere	kVA, MVA
W	watt	W, kW, kWh, MW

Table A-5.3 - Multiples of prefixes (units) used throughout this document

Prefix symbol	Prefix name	Prefix multiples by unit	Prefixes used in this document
G	giga	10^9	GWh
M	mega	1 million or 10^6	MW, MWh, MVA
k	kilo	1 thousand or 10^3	kV, kVA, kvar, kW, kWh

Table A-5.4 - Definitions of terminology used throughout this document

Term	Abbreviation / Acronym	Definition
After hours	AH	Any time outside business hours.
Air-conditioning	A/C	An air-conditioning appliance; commonly used in the context of a unit, i.e. A/C unit, including in reference to the PeakSmart ToU tariff.
Alternative Control Service	ACS	This service class includes the provision, construction and maintenance of street lighting assets, and fee-based and quoted services.
Australian Energy Regulator	AER	The economic regulator of the national electricity market established under Section 44AE of the <i>Competition and Consumer Act 2010</i> (Commonwealth).
Business hours	BH	8 am to 5 pm, Monday to Friday.
Capacity charge		This part of the tariff seeks to reflect the costs associated with providing network capacity required by a customer on a long term basis. It is levied on the basis of either contracted demand or forecasted capacity using prior year information. The charge is applied as a fixed dollar amount per kVA per month.
Capacity - network		The maximum demand (kW) that the distribution network can provide for at any one time.
Capital expenditure		Expenditure typically resulting in an asset (or the amount Energex has spent on assets).
Charging parameter		The charges comprising a tariff. Parameters include demand, capacity, fixed and volume (flat or ToU) charges.
Connection Asset Customer	CAC	Typically, those customers with electricity consumption greater than 4 GWh, but less than 40 GWh, per year at a single connection point; or where demand is greater than or equal to 1 MVA; or where a customer has a dedicated supply system with significant connection assets or the customer has contributed to their dedicated connection assets.
CAC 11Line		CAC customer where the point of connection to the electricity distribution network is on the 11 kV line shared between other customers.
CAC 11Bus		CAC customer where the point of connection to the electricity distribution network is directly to the 11 kV Bus. The customer is supplied by a dedicated connection that is not shared with any other customer directly from the substation.

Term	Abbreviation / Acronym	Definition
Connection asset (Contributed or non-contributed)		Related to building connection assets at a customer's premises as well as the connection of these assets to the distribution network. Connection assets can be contributed (customer funded, then gifted to Energex) or non-contributed (Energex funded).
Connection point		The point of electrical coupling between the electricity distribution network and a customer's electrical installation. The meter is installed as close as possible to this location.
Customer		At Energex we define our customers through their mutual relationships with us. Through the diversity of our local and broader influences, they are the many who influence how we make decisions and provide services to our region. Energex has categorized customers into 4 broad categories: Community and Connected Customers (who we do work for) & Stakeholders and Partners (who we do work with).
Demand		The amount of electrical power being consumed at a given time measured in either kilowatts (kW) or kilovolt amperes (kVA). The ratio between the two is the power factor.
Demand charge		This part of the tariff accounts for the actual demand a customer places on the electricity network. The actual demand levied for billing purposes is the metered monthly maximum demand. The charge is applied as: • a fixed dollar price per kW per month or kVA per month for DPPC charges, and • a fixed dollar price per kVA per month for DUOS charges (ICC, CAC and EG customers) or • a fixed dollar price per kW per month for DUOS charges (SAC Demand customers)
Demand-metered SAC		The customer's connection point has a meter installed that is capable of measuring energy consumption (kWh) and demand (kW). This meter records total energy consumption (kWh) and demand over 30 minute periods. A customer's demand is the average demand (kW) over the 30 minute period.
Demand-metered tariff		The tariff has been structured to include a demand component so the customer's actual demand is reflected in the price they pay for their electricity. The highest demand reading for that month is used to calculate the customer's electricity bill.
Distribution Loss Factor	DLFs	These represent the average electrical energy losses incurred when electricity is transmitted over a distribution network.

Term	Abbreviation / Acronym	Definition
Distribution Use of System	DUOS	This refers to the network charges for the use of the distribution network.
Designated Pricing Proposal Charge	DPPC	Refers to the charges incurred for use of the transmission network; previously referred to as Transmission Use of System (TUOS).
Economy		Specified connected appliances are controlled by network equipment so that supply will be available for a minimum period of 18 hours per day during time periods set at the absolute discretion of Energex.
Embedded Generator	EG	In line with the ENA classification, EGs are generally those generators with an installed capacity as follows: Medium: 1-5 MVA (LV or HV) or < 1 MVA (HV) Large: > 5 MVA
Electricity Network Capital Program Review	ENCAP	The ENCAP Review was commissioned by the Queensland Government in late 2011. An independent panel was established to undertake a review of the capital infrastructure programs of Energex, Ergon Energy and Powerlink with the view to achieving efficiencies and cost savings while maintaining network security and reliability. The panel identified significant potential capital expenditure savings and Energex's program of capital work was reduced in line with these findings.
Energy		The amount of electricity consumed by a customer (or all customers) over a period of time. Energy is measured in terms of watt hours (Wh), kilowatt hours (kWh), megawatt hours (MWh) or gigawatt hours (GWh).
Feed-in Tariff	FiT	The rate that is to be paid for the excess energy generated by customers and fed back into the electricity grid under the Queensland Solar Bonus Scheme. The FiT rate is determined by the Queensland Government and is paid by the purchaser of the excess energy.
Final Determination		A distribution Determination document published by the AER in its role as Energex's economic regulator that provides for distribution charges to increase during Energex's Regulatory Control Period.
Fixed Charge		For large customers, reflects the incremental costs that arise from the connection and management of the customer. For small customers, reflects the average capacity set aside on the shared network for a typical customer using the tariff.

Term	Abbreviation / Acronym	Definition
Form 1634 – QESI		An Energex form, “Queensland Electricity Supply Industry (QESI) – Application for Review” which allows a customer’s retailer to request a change to the customer’s NTC or NMI Classification.
High Voltage	HV	Refers to the 11 kV or above network.
Individually Calculated Customer	ICC	Typically those customers with electricity consumption greater than 40 GWh per year at a single connection point; or where the customers demand is greater than or equal to 10 MVA; or where a customer’s circumstances mean that the average shared network charge becomes meaningless or distorted.
Large customer classification		As per tariff class assignment process for customers with consumption greater than 100 MWh per year.
Large customer connection		New or upgraded connections of greater than 1 MVA or 4 GWh per year, or where the uniqueness of the connection assets would result in distortion of the SAC pricing.
Low Voltage	LV	Refers to the sub-11 kV network
Maximum Allowable Revenue	MAR	The maximum revenue which can be recovered through tariffs for the regulatory year.
Maximum demand		The maximum demand recorded at a customer’s individual meter or the maximum demand placed on the electrical distribution network system at any time or at a specific time or within a specific time period, such as a month. Maximum demand is an indication of the capacity required for a customer’s connection or the electrical distribution network.
Micro Generator		AS4777-compliant generators with an installation size of less than 10 kW (single phase) or 30 kW (three phase) connected to the LV network.
National Electricity Law	NEL	The legislation that establishes the role of the AER as the economic regulator of the NEM and the regulatory framework under which the AER operates.
National Electricity Market	NEM	The interconnected electricity grid covering Queensland, New South Wales, Victoria, Tasmania, South Australia and the Australian Capital Territory.
National Electricity Rules	NER (the <i>Rules</i>)	The legal provisions (enforced by the AER) that regulate the operation of the NEM and the national electricity systems, the activities of market participants and the provision of connection services to retail customers.

Term	Abbreviation / Acronym	Definition
National Metering Identifier	NMI	A unique number assigned to each metering installation.
Network Tariff Code	NTC	Energex's nominated code that represents the network tariff being charged to customers for network services.
Network Use of System	NUOS	The tariff for use of the distribution and transmission networks. It is the sum of both Distribution Use of System (DUOS) and Designated Pricing Proposal Charges (DPPC).
Non-Demand metered SAC		The customer's connection point has a meter installed that is capable of measuring the total energy consumption (kWh).
Non-Demand metered tariff		The tariff is based around a fixed daily component and the actual energy (kWh) used by the customer.
Off-peak period		All hours which are outside Peak and Shoulder periods.
Operational expenditure	Opex	Opex is the combined total of maintenance and operating costs. Maintenance Costs are those that are directly and specifically attributable to the repair and maintenance of network assets, while Operating Costs are those that relate to the day to day operations of Energex which are not maintenance costs.
Peak period		Meter type 1–4 (ICC, CAC & SAC Demand): The hours between 7 am and 11 pm, Monday to Friday. Meter type 6 (SAC Non-Demand - Business): The hours between 7 am and 9 pm, Monday to Friday. Meter type 6 (SAC Non-Demand - Residential): The hours between 4 pm and 8 pm, Monday to Friday.
PeakSmart A/C		A PeakSmart A/C unit is a DRR A/C unit that, when its signal receiver is activated, allows it to be demand managed by Energex. In addition to other criteria, eligibility for the PeakSmart ToU tariff includes a customer activating at least one PeakSmart A/C at their premise.
Power factor		Power factor is the ratio of kW to kVA, and is a useful measure of the efficiency in the use of the network infrastructure. The closer the power factor is to one (1), the more efficiently the network assets are utilised. Power factor = kW / kVA
Price path		Outlines the escalation factors to be applied to the initial price over the <i>Regulatory Control Period</i> .

Term	Abbreviation / Acronym	Definition
Pricing objectives		Objectives established by Energex to complement (and ensure compliance with) the pricing principles and to provide clarity when formulating tariffs.
Pricing principles		The pricing principles are established in Clause 6.18.5 of the NER and provide guidance to Energex for setting tariffs.
Pricing Proposal		Prepared by Energex in accordance with Clause 6.18.2(a)(2) of the <i>Rules</i> , it is provided to the AER for approval and outlines how Energex will collect its revenue during the relevant regulatory year.
Queensland Government Solar Bonus Scheme	SBS	A program that pays residential and other small energy customers for the surplus electricity generated from roof-top solar photovoltaic (PV) systems that is exported to the Queensland electricity grid.
Regulatory control period		A standard regulatory control period for DNSPs is a period of not less than 5 regulatory years; Energex's current regulatory control period is 2010-2015, as per the Final Determination.
Regulatory depreciation		Also referred to as the return of capital – the sum of the (negative) straight-line depreciation and the (positive) annual inflation effect on the opening regulatory asset base (RAB).
Regulatory year		A specific year within the Regulatory Control Period.
Return on capital		The return necessary to achieve a fair and reasonable rate of return on the assets necessarily invested in the business.
Revenue cap		The amount of revenue Energex is approved by the AER to recover during the Regulatory Control Period and specific regulatory years.
Service Target Performance Incentive Scheme	STPIS	A scheme developed and published by the AER, in accordance with clause 6.6.2 of the <i>Rules</i> , that provides incentives (that may include targets) for DNSPs (including Energex) to maintain and improve network performance.
Shoulder period		Meter type 6 (SAC Non-Demand – Residential): The hours between 7 am to 4 pm and 8 pm to 10 pm, Monday to Friday and 7 am to 10 pm weekends.
Side constraint		A side constraint is an upper limit on price increases applied at the tariff class level and is calculated by taking into account volume forecasts, CPI, X Factor, STPIS and capital Contributions. The purpose of a side constraint is to mitigate the impact of prices on customers from one year to the next.

Term	Abbreviation / Acronym	Definition
Site-specific charge		This charge is calculated for a site and is specific to the individual connection point.
Small customer classification		As per tariff class assignment process for customers with consumption less than 100 MWh per year.
Solar Photovoltaic	Solar PV	A system that uses sunlight to generate electricity for residential use. The system provides power for the premises with any excess production feeding into the electricity grid.
Standard Asset Customer	SAC	Generally those customers with annual electricity consumption below 4 GWh per year, whose supply arrangements are consistent across the customer group; and where there is no contribution for their dedicated connection assets. SAC Non-Demand are customers within SAC with consumption less than 100 MWh per year and who are on consumption (kWh) tariffs. SAC Demand are customers within SAC with consumption greater than 100 MWh per year and less than 4 GWh per year and who are on demand (kW) tariffs.
Standard Control Service	SCS	This service class includes network, connection and metering services.
Street lights (Major)		Lamps in common use for major road lighting including: a) High Pressure Sodium 100 watt (S100) and above; b) Metal Halide 150 watt (H150) and above; and c) Mercury Vapour 250 watt (M250) and above.
Street lights (Minor)		All lamps in common use for minor road lighting, including Mercury Vapour, High Pressure Sodium and Fluorescent.
Super economy		Specified permanently connected appliances are controlled by network equipment so that supply will be permanently available for a minimum period of 8 hours at the absolute discretion of Energex but usually between the hours of 10:00 pm and 7:00 am.
Tariff		The set of charges applied to a customer in the respective billing period. A tariff consists of one or more charging parameters that comprise the total tariff rate.
Tariff class		A class of customers for one or more <i>direct control services</i> who are subject to a particular tariff or particular tariffs (as per the <i>Rules</i> definition).

Term	Abbreviation / Acronym	Definition
Tariff schedule		The Tariff Schedule is published by Energex annually at the beginning of the financial year and outlines its tariffs for SCS and ACS. It also provides information about how Energex assigns customers to tariff classes and the internal review process undertaken if a customer requests a review of a decision. The Tariff Schedule applies for the duration of the relevant financial year.
Time of Use	ToU	Refers to tariffs that vary according to the time of day at which the electricity is consumed.
Transmission Use of System	TUOS	Superseded terminology for Designated Pricing Proposal Charges (DPPC) which are charges incurred for use of the transmission network.
Unmetered supply		A customer who takes supply where no meter is installed at the connection point.
Volume (energy) charge		This part of the tariff seeks to reflect costs not directly allocated to network drivers and costs that are proportional to the size of the customer. The energy consumption (kWh) for the period, as recorded by the customer's meter, is utilised to calculate this part of the tariff charge. This charge is applied as a fixed amount (cents) per kilowatt hour (kWh), i.e. c/kWh.
Volume (energy) charge (Off-peak)		This charge is applicable to those customers who are on a Residential and/or Business Time of Use tariff. The energy consumption (kWh) during off-peak periods (refer to Off-peak Period for times), as recorded by the customer's meter, is utilised to calculate this part of the tariff. This charge is applied as a fixed amount (cents) per kilowatt hour (kWh), i.e. c/kWh.
Volume (energy) charge (Peak)		This charge is applicable to those customers who are on a Residential and/or Business Time of Use tariff. The energy consumption (kWh) during peak periods (refer to Peak Period for times), as recorded by the customer's meter, is utilised to calculate this part of the tariff. This charge is applied as a fixed amount (cents) per kilowatt hour (kWh) i.e. c/kWh.
Volume (energy) charge (Shoulder)		This charge is applicable to those customers who are on a Residential Time of Use tariff. The energy consumption (kWh) during shoulder periods (refer to Shoulder Period for times), as recorded by the customer's meter, is utilised to calculate this part of the tariff. This charge is applied as a fixed amount (cents) per kilowatt hour (kWh), i.e. c/kWh.

Term	Abbreviation / Acronym	Definition
X Factor		Under the CPI – X form, prices or allowed revenues are adjusted annually for inflation (CPI) less an adjustment factor ‘X’. The X Factor represents the change in real prices or revenues each year, so the DNSP can recover the costs that it expects to incur over the Regulatory Control Period.