


NETWORK TARIFF GUIDE FOR STANDARD CONTROL SERVICES

1 JULY 2011 TO 30 JUNE 2012

Release 1

Date: 10 June 2011

Ergon Energy Corporation Limited ABN 50 087 646 062

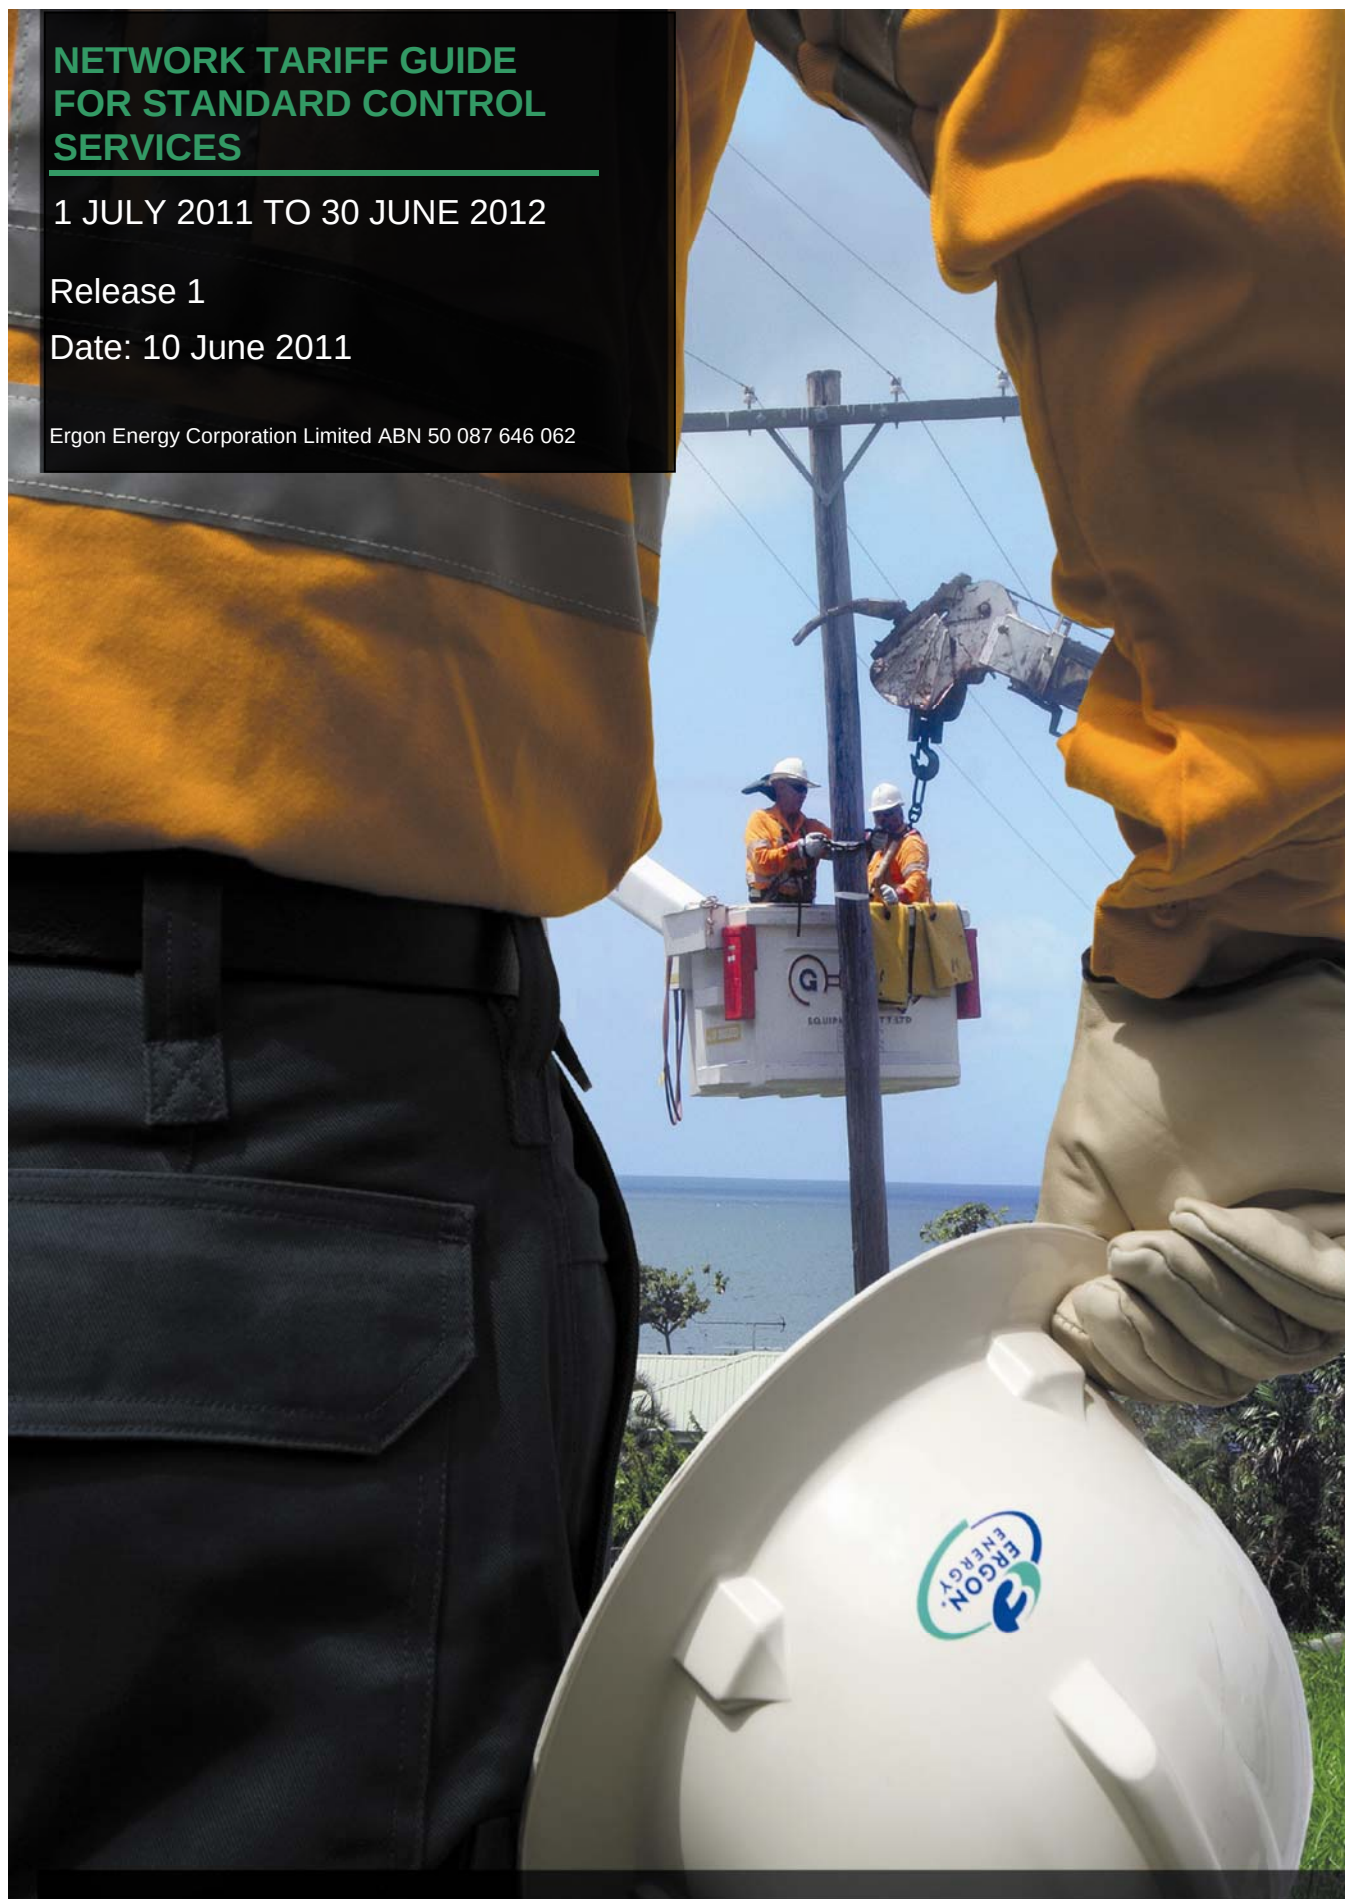

everything in our power



CONTENTS

CONTENTS	2
1. INTRODUCTION	4
1.1. Who this Network Tariff Guide applies to.....	4
1.2. 2011-12 Network Tariff Code Rates	4
1.3. Format of this Tariff Guide	4
1.4. How Network Tariffs are derived for Standard Control Services.....	4
1.5. Where Can More Information Be Obtained?	5
1.6. How To Contact Ergon Energy	5
2. COMMON TERMS	6
3. GENERAL REQUIREMENTS	7
4. TARIFF CLASSES.....	8
4.1. Assignment and Re-Assignment of Customer to Tariff Classes	10
4.2. Notification of Tariff Class Assignments and Reassignments	10
4.3. Review of a Customer's Assigned Tariff Class	11
4.4. Objections to a Tariff Class Assignment or Reassignment	13
4.5. Network Tariff Reviews.....	13
5. ZONES	14
5.1. Number of Zones	14
5.2. Definitions of Zones	14
5.3. Zone Map.....	16
6. DISTRIBUTION LOSS FACTORS (DLFS)	17
6.1. General Information	17
6.2. DLF Rules.....	18
6.3. DLF Categories.....	18
6.4. DLF Applications.....	18

7.	TRANSMISSION NODE IDENTIFIERS (TNIS).....	19
8.	NETWORK USER GROUPS.....	19
8.1.	INDIVIDUALLY CALCULATED CUSTOMERS (ICCs).....	19
8.2.	CONNECTION ASSET CUSTOMERS (CACs)	21
8.3.	EMBEDDED GENERATORS (EGs)	22
8.4.	STANDARD ASSET CUSTOMERS >100 MWh Per Annum	23
8.5.	STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – VOLUME LARGE	29
8.6.	STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – VOLUME SMALL.....	31
8.7.	STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – CONTROLLED SUPPLIES	33
8.8.	STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – UNMETERED SUPPLIES	37
8.9.	QUEENSLAND GOVERNMENT SOLAR BONUS SCHEME FOR STANDARD ASSET CUSTOMERS < 100 MWh Per Annum.....	41
	APPENDIX 1 – TUOS REGIONAL INDICATORS.....	42
	APPENDIX 2 – TABLE OF SITE-SPECIFIC NMIS.....	44

Network Tariff Guide for Standard Control Services

1. INTRODUCTION

1.1. Who this Network Tariff Guide applies to

Network tariffs are a charge for the services associated with using the network to transport electricity from Generators to the end-use customer.

This Network Tariff Guide for Standard Control Services (Tariff Guide) sets out Network Tariff Codes and application rules. Rates for each Network Tariff Code are included in this Tariff Guide.

This Tariff Guide has been developed for use by customers, retailers and consultants and applies to network users connected to Ergon Energy Corporation Limited's (Ergon Energy) distribution supply network.

1.2. 2011-12 Network Tariff Code Rates

The rates provided for each Network Tariff Code are shown GST Exclusive and GST Inclusive.

1.3. Format of this Tariff Guide

Each network user category has a separate section within this Tariff Guide. Where applicable, a description of standard Network Tariff Codes and rates are shown within those sections.

Details on standard Distribution Loss Factors are provided in Section 6.

National Metering Identifiers (NMIs) for customers with site-specific tariffs are listed in **Appendix 2**. This table of NMIs should be checked prior to determining applicable network tariff rates for customers.

Site-specific tariffs are issued by Ergon Energy Network Pricing and are available with the customer's written consent. See section 1.6 for appropriate contact details.

1.4. How Network Tariffs are derived for Standard Control Services

The Australian Energy Regulator (AER), as the economic regulator, determines the amount of revenue Ergon Energy can earn in providing Standard Control Services under Chapter 6 of the National Electricity Rules (Rules). This revenue amount is termed the Annual Revenue Requirement (ARR) and is recovered from various customer groups through network tariffs. The AER will only approve network tariffs developed by Ergon Energy if they comply with Chapter 6 of the Rules.

1.5. Where Can More Information Be Obtained?

Ergon Energy publishes the following documents relating to network pricing for its Standard Control Services:

- (a) An “Information Guide for Standard Control Services” to assist external parties understand the relationship between the approved ARR and network tariffs, and understand how Ergon Energy calculates network tariffs for all users of Ergon Energy’s distribution network; and
- (b) This “Network Tariff Guide for Standard Control Services” which sets out the application rules and rates applicable for network tariffs for the 2011-12 financial year

Ergon Energy is also required to submit a Pricing Proposal to the AER each regulatory year as part of the annual pricing approval process. This document provides additional guidance on the compliance requirements of Chapter 6 of the Rules, and how Ergon Energy’s network prices for its Standard Control Services and Alternative Control Services meet the requirements of the Rules.

Copies of the abovementioned documents are available on the Ergon Energy web site at:

www.ergon.com.au/contractors,-suppliers--and--developers/electricity-distribution-pricing-methodologies/network-tariffs

1.6. How To Contact Ergon Energy

Network users and retailers who are uncertain about the network pricing process or their particular circumstances are encouraged to contact us for assistance.

CONTACT DETAILS

Manager Regulatory Affairs – Tariff Strategy

P O Box 1090

Townsville Q 4810

Ph 13 10 46

E-mail: netprice@ergon.com.au

2. COMMON TERMS

The following acronyms are applied throughout this Tariff Guide:

- AD - Authorised Demand in kilowatts
- AEMO – Australian Energy Market Operator
- AER – Australian Energy Regulator
- CAC - Connection Asset Customer
- CPI - Consumer Price Index
- DLF - Distribution Loss Factor
- DNSP - Distribution Network Service Provider
- DUOS - Distribution Use of System.
- EG - Embedded Generator
- ICC - Individually Calculated Customer
- Network Tariffs - consist of rates for DUOS and TUOS
- NTC - Network Tariff Code
- NMI - National Metering Identifier
- Pricing Zones - East, West and Mount Isa zones
- Rules – means the National Electricity Rules
- SAC - Standard Asset Customer
- TNI - Transmission Node Identifier
- TUOS - Transmission Use of System.

3. GENERAL REQUIREMENTS

The following general requirements apply to the selection and amendment of network tariffs:

- (a) It is intended that a Network Tariff Code will apply to each meter data stream. Network users with multiple network connections will pay network charges for each connection point;

This approach is consistent with the NMI Procedure issued by the Australian Energy Market Operator (AEMO);

- (b) If requested, Ergon Energy will provide the customer or the customer's retailer with reasonable assistance in identifying the network tariffs which may be applicable to the customer's installation;
- (c) Demand and/or volume are to be measured at each individual network connection point;
- (d) Where applicable, demand based charges will be calculated on a pro rata daily basis for initial and final accounts;
- (e) Where Ergon Energy's load control equipment exists (including associated metering), this may not be disconnected without Ergon Energy's prior written consent; and
- (f) Network charges will be billed by Ergon Energy on a monthly basis.

4. TARIFF CLASSES

Ergon Energy's tariffs are currently differentiated at the highest level by:

- Network user groupings – ICC, SAC, CAC and EG;
- Zones – East, West and Mount Isa; and
- Whether the customer has connected under the previous regulatory arrangements where connection assets form part of the network tariff or the new Large Customer Connection arrangements where assets are paid for or contributed by the customer.

A list of Ergon Energy's tariff classes and corresponding Network Tariff Codes for its Standard Control Services are set out in the table below.

Table 1: Tariff Classes and Network Tariff Codes

Tariff Class	Network Tariff Codes / Product Codes
Individually Calculated Customer (Pre 30 June 2010) – East	EICCA1 onwards
Individually Calculated Customer (Pre 30 June 2010) – West	WICCA1 onwards
Individually Calculated Customer (Pre 30 June 2010) – Mount Isa	MICCA1 onwards
Individually Calculated Customer (Post 30 June 2010) - East	EICCB1 onwards
Individually Calculated Customer (Post 30 June 2010) – West	WICCB1 onwards
Individually Calculated Customer (Post 30 June 2010) – Mount Isa	MICCB1 onwards
Connection Asset Customers – (Pre 30 June 2010) – East	ECACA1 onwards
Connection Asset Customers – (Pre 30 June 2010) – West	WCACA1 onwards
Connection Asset Customers – (Pre 30 June 2010) – Mount Isa	MCACA1 onwards
Connection Asset Customers – (Post 30 June 2010) - East	ECACB1 onwards
Connection Asset Customers – (Post 30 June 2010) – West	WCACB1 onwards
Connection Asset Customers – (Post 30 June 2010) – Mount Isa	MCACB1 onwards
Embedded Generation (Pre 30 June 2010) – East	EEGA1 onwards

Tariff Class	Network Tariff Codes / Product Codes
Embedded Generation (Pre 30 June 2010) – West	WEGA01 onwards
Embedded Generation (Pre 30 June 2010) – Mount Isa	MEGA01 onwards
Embedded Generation (Post 30 June 2010) - East	EEGB1 onwards
Embedded Generation (Post 30 June 2010) – West	WEGB01 onwards
Embedded Generation (Post 30 June 2010) – Mount Isa	MEGB01 onwards
Standard Asset Customer – Large (>100MWH pa) - East	EDHT1, EDHT2, EDHT3, EDLT1, EDLT2, EDLT3, EDMT1, EDMT2, EDMT3, EDST1, EDST2, EDST3
Standard Asset Customer – Large (>100MWH pa) – West	WDHT1, WDHT2, WDHT3, WDLT1, WDLT2, WDLT3, WDMT1, WDMT2, WDMT3, WDST1, WDST2, WDST3
Standard Asset Customer – Large (>100MWH pa) – Mount Isa	MIDH, MIDL, MIDM, MIDS
Standard Asset Customer – Small (<100MWH pa) - East	EVL1, EVL2, EVL3, EVS1, EVS2, EVS3, EVNT1, EVNT2, EVNT3, EVCT1, EVCT2, EVCT3
Standard Asset Customer – Small (<100MWH pa) – West	WVLT1, WVLT2, WVLT3, WVST1, WVST2, WVST3, WVNT1, WVNT2, WVNT3, WVCT1, WVCT2, WVCT3
Standard Asset Customer – Small (<100MWH pa) – Mount Isa	MTVL, MIVS, MIVN, MIVC
Standard Asset Customer – Unmetered - East	EVUT1, EVUT1MI, EVUT1MA, EVUT2, EVUT2MI, EVUT2MA, EVUT3, EVUT3MI, EVUT3MA
Standard Asset Customer – Unmetered – West	WVUT1, WVUT1MI, WVUT1MA, WVUT2, WVUT2MI, WVUT2MA, WVUT3, WVUT3MI, WVUT3MA
Standard Asset Customer – Unmetered – Mount Isa	MIVU, MIVUMI, MIVUMA
ACS - Fee Based Services (urban/short rural)	DEENBHU, DEENBHS, REENBHU, REENBHS, REDDBHU, REDDBHS, REINSPU, REINSPS, SUPABOLU, SUPABOLS, TBSSPU, TBSSPS, TBSMPU, TBSMPS, SFRBHU, SFRBHS, WTVU, WTVS, WVTU, WTVTS.
ACS - Fee Based Services (long rural/isolated)	DEENBHL, DEENBHI, REENBHL, REENBHI, REDDBHL, REDDBHI, REINSPL, REINSPI, SUPABOLL, SUPABOLI, TBSSPL, TBSSPI, TBSMPL, TBSMPI, SFRBHL, SFRBHI, WTVL, WTVI, WTVTL, WTVTI.
ACS - Quoted Services	As Quoted; or CHTARIFU, CHTARIFS, CHTARIFL, CHTARIFI, CHTSRAU, CHTSRAS, CHTSRAL, CHTSRAI, DEENAHU, DEENAHS, DEENAH, DEENAH, MOVEMTRU, MOVEMTRS, MOVEMTRL, MOVEMTRI, RMMTRU, RMMTRS, RMMTRL, RMMTRI, MTRCKRDU, MTRCKRDS, MTRCKRDL, MTRCKRDI, MTRTESTU, MTRTESTS, MTRTESTL, MTRTESTI, MTTSTCTU, MTTSTCTS,

Tariff Class	Network Tariff Codes / Product Codes
	MTTSTCTL, MTTSTCTI, OHUU, OHUS, OHUL, OHUI, POASVU, POASVS, POASVL, POASVI, POATVU, POATVS, POATVL, POATVI, REENAHS, REENAH, REENAH, REENAHU RMLDCRLU, RMLDCRLS, RMLDCRLL, RMLDCRLI, MTRREPU, MTRREPS, MTRREPL, MTRREPI, SPMTRRDU, SPMTRRDS, SPMTRRDL, SPMTRRDI, SFRAHU, SFRAHS, SFRAHL, SFRAHI.
ACS - Street Lighting Services – East	East - Major, East – Minor
ACS - Street lighting Services – West	West – Major, West – Minor
ACS - Street lighting Services – Mount Isa	Mount Isa – Major, Mount Isa - Minor

4.1. Assignment and Re-Assignment of Customer to Tariff Classes

The AER requires Ergon Energy to comply with the procedures for assigning or reassigning customers to tariff classes¹ as per the requirements set out in its Final Distribution Determination.

Customers connected to the network prior to 1 July 2010, are deemed to be 'assigned' to the tariff class which Ergon Energy was charging the customer under immediately prior to 1 July 2010. However from 1 July 2010, the AER requires Ergon Energy to notify the customer concerned of the tariff class it will assign the customer to, prior to a new assignment or reassignment occurring.

Assignment or reassignment of customers to Ergon Energy's tariff classes can occur as a result of:

- Customers requesting a new connection to the network;
- Existing customers applying for increased capacity on the network;
- A change in a customer's NMI classification;
- Annual review as part of the process of Ergon Energy's process of developing and submitting a Pricing Proposal for approval by the AER; or
- Requests for a review of the assigned tariff class by either a customer and/or retailer.

4.2. Notification of Tariff Class Assignments and Reassignments

Information regarding a customer's tariff class will be made available to the customer and to the retailer via written notification prior to Ergon Energy assigning or reassigning a customer to a tariff class.

¹ A tariff class is defined under the National Electricity Rules and relates to a group or class of customers who are subject to a particular tariff or tariffs.

The effective date for a Standard Control Services tariff class assignment or reassignment will be the date as advised by Ergon Energy.

It is important to note, that a tariff class reassignment may necessitate a change to a customer's network tariff assigned to a NMI. Details of Ergon Energy's proposed new network tariffs will be included in the written notification provided to both the customer and the retailer on the tariff class reassignment. Subject to any appeal (refer section 4.4 below), the new tariff class and new network tariff codes will take effect from the date advised by Ergon Energy in the written notification.

A customer or retailer may request further information relating to a particular tariff class assignment or reassignment decision by contacting Network Pricing (see section 1.6.)

4.3. Review of a Customer's Assigned Tariff Class

Ergon Energy does not reassign customers to tariff classes without careful review and adequate justification. Reassignment of a customer's tariff class generally only occurs in a situation where a customer alters the underlying characteristics of their connection, in terms of size or nature of usage.

As noted in section 4.1 above, in addition to Ergon Energy's own review of its tariff classes, a customer and/or retailer may request a review of a customer's assigned tariff class at any time during a regulatory year. This request may occur directly through an explicit request to review a tariff class assigned to a customer, or indirectly, through a request to change a network tariff assigned to a NMI.

Ergon Energy has specific criteria for determining reassignment, based on the relevant customer grouping as set out in the table below. Once a customer is identified for reassignment, the connection characteristics and the customer's expected energy consumption are used to determine the appropriate customer group, and hence tariff class, to which the customer should be re-assigned.

Table 2: Tariff Class Reassignment Criteria for Standard Control Services

	Assignment Criteria for new customers	Reassignment criteria for existing customers
SACs	- Annual consumption is expected to be below 4 GWh.	- Annual consumption increases, or is expected to increase, above 4 GWh; and /or - A customer requests an increase in supply capacity requiring augmentation to their connection assets which result in a dedicated supply system which is quite different and separate from the remainder of the supply network.
CACs	- Required capacity above 1,500 kVA; or - Annual consumption is expected to exceed 4 GWh.	Reassigned to Individually Calculated Customers: - Annual consumption increases, or is expected to increase, above 40 GWh; and/or - A customer requests an increase in supply capacity requiring augmentation to their connection assets which result in a dedicated supply system which is quite different and separate from the remainder of the supply network. Reassigned to Standard Asset Customers: - Annual consumption reduces or is expected to reduce below 4 GWh and their dedicated supply system is not considered to be quite different and separate from the remainder of the supply network.
ICCs	- Annual consumption is expected to exceed 40 GWh; or - Their dedicated supply system is considered to be quite different and separate from the remainder of the supply network.	- Annual consumption reduces or is expected to reduce below 40 GWh and their dedicated supply system is considered comparable with Connection Asset Customers at the same voltage level.

The following general requirements apply to the review and amendment of a customer's tariff class assignment for Standard Control Services:

- Any change in an assigned tariff class will only proceed upon the approval by Ergon Energy. Ergon Energy will make its determination having regard to its Standard Control Services Tariff Guide, its Tariff Class Reassignment Criteria (as set out above), the AER's Final Distribution Determination and any applicable law;
- Requests should be made by the customer, and are preferably made to Ergon Energy through the customer's retailer. Requests for review of a tariff class should be emailed to Network Pricing (see section 1.6);
- Subject to a change in the customer's usage or pattern of usage at the customer's premises, a further request to review and change a tariff class should not be made until a period of 12 months has elapsed from the previous request;
- Any change in the tariff class, and associated network tariff(s) will take effect from the date as approved by Ergon Energy (the effective date). Network charges under an existing network tariff within an existing tariff class will continue to be billed by Ergon Energy until the effective date. Backdating of charges prior to the effective date will not be allowed by Ergon Energy.

4.4. Objections to a Tariff Class Assignment or Reassignment

If a customer or a retailer raises an objection to a tariff class assignment or reassignment, Ergon Energy will make every effort to investigate and address the customer's or retailer's concerns when the customer or retailer firsts contacts Ergon Energy.

In the first instance, the customer or retailer should contact Network Pricing via e-mail (see section 1.6) requesting a review of Ergon Energy's proposed tariff class assignment or reassignment. The request should outline:

- The customer's name, NMI and contact details (or retailer's contact details if acting on behalf of the customer);
- What the customer or the retailer is objecting to (noting Ergon Energy's decision is made having regard to Ergon Energy's Standard Control Services Tariff Guide, its Tariff Class Reassignment Criteria, the AER's Final Distribution Determination and any applicable law); and
- What outcome the customer or retailer is seeking.

Ergon Energy will endeavour to inform the customer or the retailer of the outcome of its review, including a reason for its decision within 5 business days of receiving such a request.

If the customer or the retailer is not happy with the outcome from this review, the objection can be escalated to the Manager Regulatory Affairs – Tariff Strategy. The customer or the retailer can request an objection to be escalated by contacting Network Pricing via e-mail (see section 1.6). The Manager Regulatory Affairs – Tariff Strategy will advise the customer or the retailer of the outcome of an escalated objection as soon as practical.

If Ergon Energy is unable to resolve the objection to the customer's satisfaction, the customer can refer the matter to the AER for resolution via the dispute resolution process available under Part 10 of the National Electricity Law.

4.5. Network Tariff Reviews

The customer or the retailer may apply to Ergon Energy for a change to the network tariff assigned to a NMI by sending a request via e-mail to the address provided in section 1.6.

Ergon Energy will inform the customer and/or retailer within 5 business days of receiving such a request, of the decision taken.

If Ergon Energy:

- Agrees that the network tariff proposed by the customer or retailer is applicable to the NMI, Ergon Energy will advise the retailer of the effective date of application; or
- Disagrees that the network tariff proposed by the customer or retailer is applicable to the NMI, Ergon Energy will notify the customer and/or retailer, including a reason for the rejection.

Subject to a change in usage or the pattern of usage at the customer's installation, a further request to change the network tariff code assigned to a NMI should not be made until a period of 12 months has elapsed from the previous request for the NMI.

If a customer objects to a network tariff change, the customer may appeal this decision. Requests to review a decision should be made by the customer, and are preferably made to Ergon Energy through the customer's retailer.

Ergon Energy will review an appeal and the customer's eligibility for a network tariff with regard to its Standard Control Services Tariff Guide, its Tariff Class Reassignment Criteria, the AER's Final Distribution Determination and any applicable law. Ergon Energy will advise the customer and/or the retailer of the outcome of an appeals review as soon as practical.

Any change in a network tariff assigned to a NMI will take effect from the date as approved by Ergon Energy (the effective date). Network charges under the existing network tariff will continue to be billed by Ergon Energy until the effective date. Backdating of charges prior to the effective date will not be allowed by Ergon Energy.

If Ergon Energy agrees with a proposed network tariff and determines that a tariff class reassignment is also required, written notification of the new tariff class and new network tariff codes will also be provided to the customer and to the retailer prior to the tariff class reassignment occurring in accordance with section 4.3.

5. ZONES

5.1. Number of Zones

Three pricing zones have been delineated in the Ergon Energy area of supply, broadly based on Local Government areas of Queensland, with the distribution network electrical connection being the final determinant of which zone applies. Zone pricing impacts Distribution Use of System (DUOS) prices only; Transmission Use of System (TUOS) prices are not impacted by zones.

- a) **East Zone** - includes those areas where the network users are supplied from the distribution system connected to the National Electricity Grid and have a relatively low distribution cost to supply;
- b) **West Zone** - includes those areas outside the East Zone and connected to the National Electricity Grid, which have a significantly higher distribution cost of supply than the East Zone; and
- c) **Mount Isa Zone** - broadly defined as those areas supplied from the isolated Mount Isa system. This zone is not connected to the National Electricity Grid and as such is excluded from the application of the Rules. However, oversight of the network cost to supply the regulated network within the zone is carried out by the AER.

NOTE: those areas supplied from isolated (remote) generation are **NOT** included in any of the above zones.

5.2. Definitions of Zones

- a) The **East Zone** consists of:

The **whole** of the recently reviewed local government areas as follows,

- Regional Councils - Bundaberg, Cassowary Coast, Fraser Coast, Gladstone, Mackay, North Burnett, Rockhampton, South Burnett, Southern Downs, Toowoomba and Whitsunday;
- City Councils – Townsville;

- Shire Councils –
Burdekin, Hinchinbrook, Banana

Part of the recently reviewed local government areas as follows,

- Regional Councils - Gympie (Ergon area only), Cairns (excluding areas north of the Daintree River), Isaac (excluding areas west of Moranbah township), Dalby (Dalby township and Wambo district only), Central Highlands (excluding Emerald and areas west of Emerald), Tablelands (excluding Herberton and Mareeba areas **not** supplied by the “East” distribution system);
- Shire Councils – Banana (including Taroom district)

b) The **West Zone** consists of:

The **whole** of the recently reviewed local government areas as follows,

- Regional Councils - Barcaldine, Blackall-Tambo, Charters Towers, Longreach, Roma;
- Shire Councils – Balonne, Bulloo, Carpentaria, Cook, Croyden, Etheridge, Flinders, McKinlay, Murweh, Paroo, Quilpie, Richmond, Winton;

Part of the recently reviewed local government areas as follows,

- Regional Councils - Cairns (north of the Daintree River only), Isaac (west of Moranbah township only), Dalby (excluding Dalby township and Wambo district), Central Highlands (Emerald and areas west of Emerald only), Tablelands (Herberton and Mareeba areas **not** supplied by the “East” distribution system only);


(c) The **Mount Isa Zone** consists of the regulated network within the following areas:

The **whole** of the recently reviewed local government areas as follows,
Cloncurry Shire Council, Mount Isa City Council, and those **parts** of the Burke and Boulia Shire Councils supplied from the Mount Isa system.

(d) NOTE: those areas supplied from isolated generation are **NOT** included in any of the above zones.

5.3. Zone Map

The following map depicts the East Zone in red, Mount Isa Zone in yellow and the West Zone is the remaining area of the state supplied from the interconnected grid.

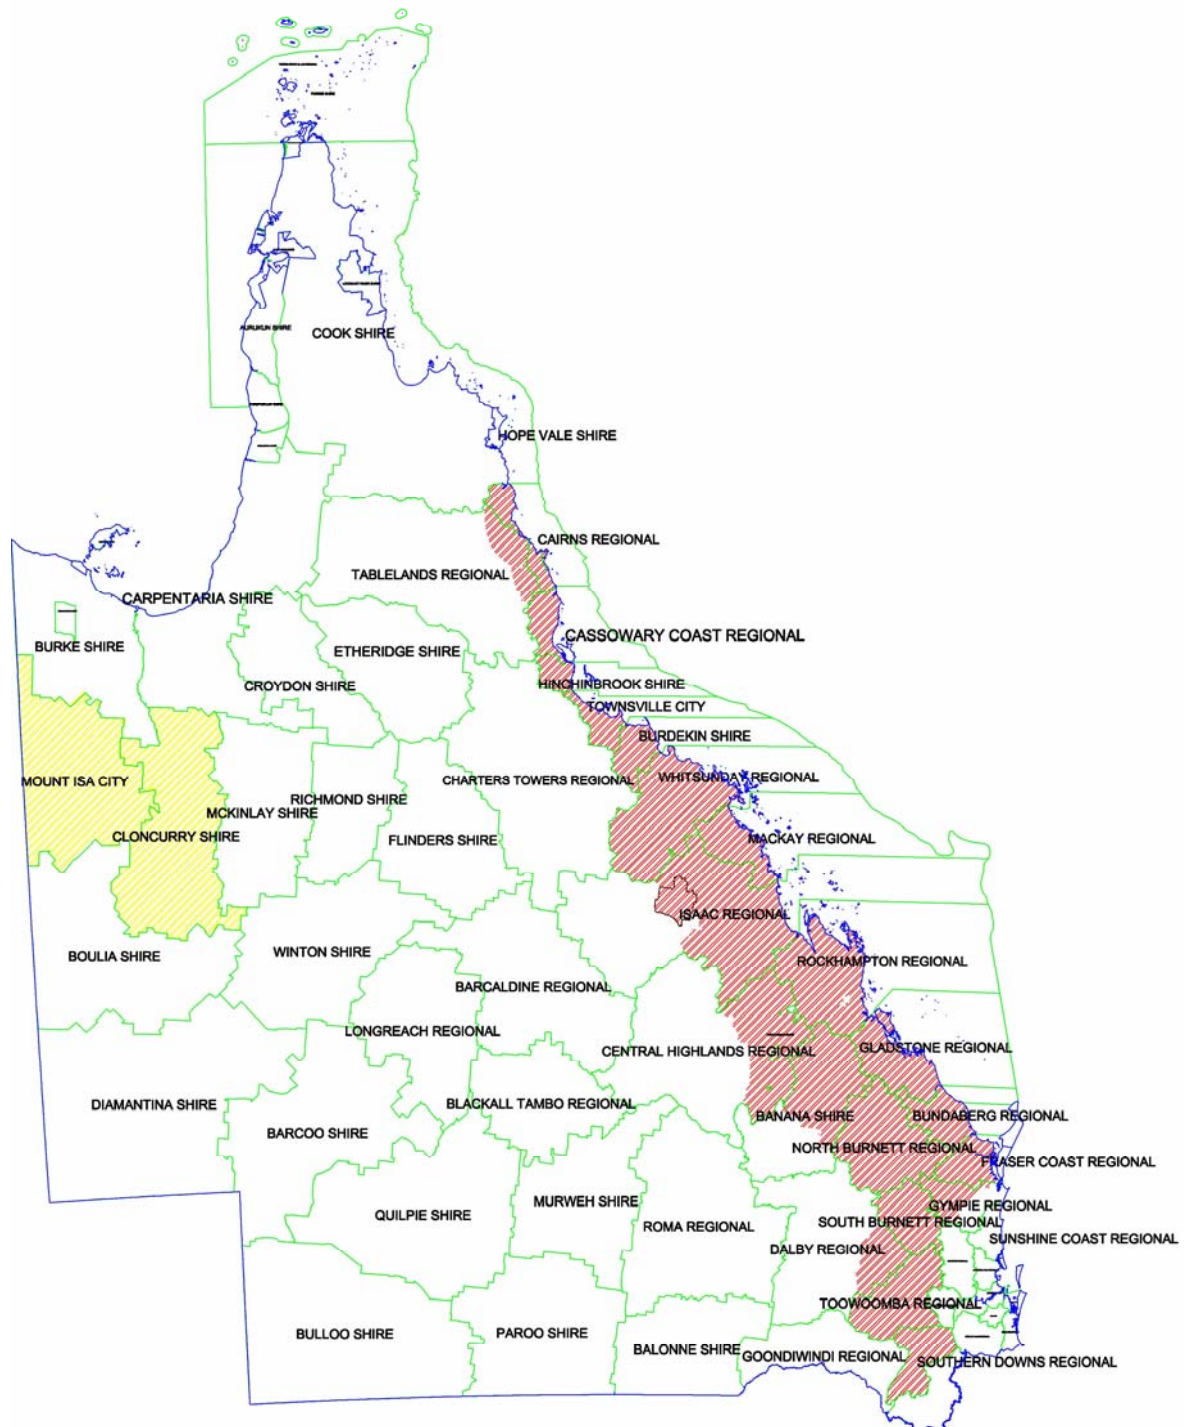

6. DISTRIBUTION LOSS FACTORS (DLFs)

6.1. General Information

- (a) Every NMI has a DLF code which is associated with the location of the metering point. The code's value is re-calculated periodically in line with the Rules.
- (b) The DLF is a multiplier used to convert the actual metered energy into the equivalent energy passing through the appropriate Transmission Network Connection Point by allowing for the distribution network losses that are incurred between the meter and the Transmission Network Connection Point.
- (c) The DLF is applied to the metered consumption for the calculation of TUOS volume charges. DLFs are generally assigned on the basis of the standard metering voltage for the type of connection however a specific loss factor may be applied where there is a unique network supply configuration.
- (d) The 2010-11 DLFs including site-specific DLFs for some larger ICCs, CACs and EGs are published on the AEMO web site:

<http://www.aemo.com.au/electricityops/lossfactors.html>

- (e) Where site-specific DLFs have not been published, the DLFs from Table 3 will apply.
- (f) Detailed information about the purpose and application of DLFs may also be obtained from the AEMO web site.

The following table of DLFs has been approved by the AER and published by AEMO for the 2010-11 year.

Table 3 - Standard Distribution Loss Factors

Ergon Energy 2011-12 Distribution Loss Factors						
Network Level	East Zone		West Zone		Mt Isa Zone	
	Code	DLF	Code	DLF	Code	DLF
Subtransmission Bus	GESB	1.007	GWSB	1.019	GMSB	1.001
Subtransmission Line	GESL	1.018	GWSL	1.072	GMSL	1.007
22/11 kV Bus	GEHB	1.019	GWHB	1.077	GMHB	1.010
22/11 kV Line	GEHL	1.038	GWHL	1.118	GMHL	1.038
LV Bus	GELB	1.070	GWLB	1.157	GMLB	1.057
LV Line	GELL	1.072	GWLL	1.302	GMLL	1.073

6.2. DLF Rules

- (a) The DLFs in this Tariff Guide do NOT apply to NMIs with site specific distribution loss factors.
- (b) DLFs for all NMIs will be included in the Schedule of Network Tariffs issued to the customer and/or their retailer.
- (c) The zonal boundaries are identical to those used for the network tariffs.
- (d) For SACs, the customer or retailer must nominate the DLF appropriate to the connection. The customer or retailer may be required to justify any nominated DLF.
- (e) Where the voltage at the metering point is not listed, or there is doubt about the application of these rules, please request advice from Ergon Energy.

6.3. DLF Categories

- (a) **Sub-transmission Bus** – Applicable to connection points that are High Voltage metered at a Sub-transmission Bus with a voltage greater than 30kV;
- (b) **Sub-transmission Line** – Applicable to connection points that are High Voltage metered at a Sub-transmission Line with a voltage greater than 30kV;
- (c) **22/11kV Bus** - Applicable to connection points that are High Voltage metered at a 22/11kV Bus with a voltage less than 30kV and greater than 1,000 volts;
- (d) **22/11kV Line** – Applicable to connection points that are High Voltage metered at a 22/11kV Line with a voltage less than 30kV and greater than 1,000 volts;
- (e) **Low Voltage Bus** - Applicable to connection points that are Low Voltage metered at a Low Voltage Bus with a voltage less than 1,000 volts; and
- (f) **Low Voltage Line** – Applicable to connection points that are Low Voltage metered at a Low Voltage Line with a voltage less than 1,000 volts.

6.4. DLF Applications

- (a) **Sub-transmission and 22/11kV Bus**

NMIs supplied from a zone substation by dedicated greater than 30kV lines and are metered at or immediately adjacent to the zone substation would be eligible for a Sub-transmission Bus DLF.

Zone substations are defined as substations where the voltage level is stepped down from a voltage greater than 30kV.

- (b) **Sub-transmission Line**

The Sub-transmission Line DLF will apply to all NMIs which are connected to high voltage sub-transmission lines (greater than 30kV) and are metered at the same voltage as the line is energised.

If customers believe that the NMI would qualify for a high voltage Bus DLF rather than a high voltage Line DLF they should submit details justifying their claim to Ergon Energy. As an example, NMIs supplied from a zone substation by dedicated

22/11kV lines and are metered at or immediately adjacent to the zone substation would be eligible for a 22/11kV Bus DLF.

(c) **22/11kV Line**

The 22/11kV Line DLF will apply to all NMIs which are connected to high voltage distribution lines and are metered at the same voltage as the line is energised.

(d) **LV Bus**

NMIs which are supplied from a distribution substation on their site (owned or leased) and are metered at the low voltage level are eligible for a LV Bus DLF.

(e) **LV Line**

All NMIs not covered by any of the above categories. If customers believe that the NMI would qualify for a LV Bus DLF rather than a LV Line DLF they should submit details justifying their claim to Ergon Energy.

7. TRANSMISSION NODE IDENTIFIERS (TNIs)

The TNI identifies the Transmission Network Connection Point from which a customer is supplied. The NMI Discovery process (Stage 2) will provide retailers with the TNI applicable to a NMI.

8. NETWORK USER GROUPS

8.1. INDIVIDUALLY CALCULATED CUSTOMERS (ICCs)

8.1.1. Definition

ICCs are those customers:

- (a) with energy consumption typically greater than 40 GWh per annum; or
- (b) customers with energy consumption lower than 40 GWh per annum where:
 - (i) a customer has a dedicated supply system which is quite different and separate from the remainder of the supply network; or
 - (ii) there are only two or three customers in a supply system making average prices inappropriate; or
 - (iii) a customer is connected at or close to a transmission connection point and the inclusion of the cost of average shared network would increase their network price above stand-alone; or
 - (iv) inequitable treatment of otherwise comparable customers arising from application of the 40 GWh per annum threshold.

8.1.2. DUOS Tariffs

- (a) DUOS tariffs are based on:
 - (i) the actual dedicated connection assets utilised by the customer;
 - (ii) the customer's specifically identified portion of any shared distribution network utilised for the electricity supply;
 - (iii) whether the customer is subject to the pre or post 30 June 2010 arrangements for Large Customer Connections; and
 - (iv) whether the customer is located in the East, West or Mount Isa zone of Ergon Energy's network.
- (b) DUOS tariffs incorporate a Fixed Charge (\$/day), a Capacity Charge (\$/kW of AD/month), an Actual Demand Charge (\$/kW/month) and a Volume Charge (\$/kWh).

Where the actual demand exceeds the authorised demand in any one month the actual demand will be substituted for the authorised demand in the calculation of the capacity charge for that month.

- (c) DUOS tariffs for ICCs are site-specific and are available with the customer's written consent.

8.1.3. TUOS Tariffs

- (a) TUOS charges are calculated and levied for each transmission connection point and are passed through on a reflective basis proportional to the Authorised Demand of the customer and their energy consumption.
- (b) TUOS tariffs incorporate a Fixed Charge (\$/day), a Capacity Charge (\$/kW of AD/month), a Common Service & General Charge (\$/day) and a Volume Charge (\$/kWh)

Where the actual demand exceeds the authorised demand in any one month the actual demand will be substituted for the authorised demand in the calculation of the capacity charge for that month.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

- (c) TUOS tariffs for ICCs are site-specific and are available with the customer's written consent.

8.2. CONNECTION ASSET CUSTOMERS (CACs)

8.2.1. Definition

CACs are those customers:

- (a) With required capacity above 1,500kVA;
- (b) with energy consumption typically greater than 4 GWh per annum; or
- (c) with required capacity below 1,500kVA where:
 - (i) a customer has a dedicated supply system which is quite different and separate from the remainder of the supply network; or
 - (ii) inequitable treatment of otherwise comparable customers arising from application of the 4 GWh per annum threshold

CACs are further subdivided into categories based on voltage levels as follows:

- 66kV – connected to either a 66kV substation or a 66kV line;
- 33kV – connected to either a 33kV substation or a 33kV line;
- 22/11kVBus – connected to either a 22kV or 11kV substation; and
- 22/11kVLine – connected to either a 22kV or 11kV line.

8.2.2. DUOS Tariffs

- (a) DUOS tariffs are based on:
 - (i) the actual dedicated connection assets utilised by the customer;
 - (ii) average charges for use of the shared network;
 - (iii) Whether the customer is subject to the pre or post 30 June 2010 arrangements for Large Customer Connections; and
 - (iv) Whether the customer is located in the East, West or Mount Isa zone of Ergon Energy's network.
- (b) DUOS tariffs incorporate a Fixed Charge (\$/day), a Capacity Charge (\$/kW of AD/month), an Actual Demand Charge (\$/kW/month) and a Volume Charge (\$/kWh).

Where the actual demand exceeds the authorised demand in any one month the actual demand will be substituted for the authorised demand in the calculation of the capacity charge for that month.

- (c) DUOS tariffs for CACs are site-specific and are available with the customer's written consent.

8.2.3. TUOS Tariffs

- (a) TUOS charges are calculated and levied for each transmission connection point and are passed through on a reflective basis proportional to the Authorised Demand of the customer and their energy consumption.
- (b) TUOS tariffs incorporate a Fixed Charge (\$/day), a Capacity Charge (\$/kW of AD/month), a Common Service & General Charge (\$/day) and a Volume Charge (\$/kWh)

Where the actual demand exceeds the authorised demand in any one month the actual demand will be substituted for the authorised demand in the calculation of the capacity charge for that month.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

- (c) TUOS tariffs for CACs are site-specific and are available with the customer's written consent.

8.3. EMBEDDED GENERATORS (EGs)

8.3.1. Definition

EGs can be separated into two categories

- (a) EGs that are connected to and only generate into the distribution system; or
- (b) EGs that are connected to, generate into as well as take load from the distribution system.

8.3.2. DUOS Tariffs

- (a) For those EGs that generate into the distribution system a Fixed Charge (\$/day) applies; and
- (b) For those EGs that generate into as well as take load from the distribution system a Fixed Charge (\$/day) applies; and
 - (i) DUOS tariffs for load taken from the distribution system will be allocated as per the appropriate Network Price category selected from ICCs, CACs or SACs.
 - (ii) DUOS tariffs are based on whether the customer is subject to the pre or post 30 June 2010 arrangements for Large Customer Connections; and
 - (iii) Whether the customer is located in the East, West or Mount Isa zone of Ergon Energy's network.

Tariffs for EGs are site-specific and are available with the customer's written consent.

8.3.3. TUOS Tariffs

- (a) For those EGs that only generate into the distribution system.
 - (i) TUOS tariffs do not apply to generated energy.
- (b) For those EGs that generate into as well as take load from the distribution system
 - (i) TUOS tariffs do not apply to generated energy.
 - (ii) TUOS tariffs for load taken from the distribution system will be allocated as per the appropriate Network Price category selected from ICCs, CACs or SACs.

TUOS tariffs for EGs are site-specific and are available with the customer's written consent.

8.4. STANDARD ASSET CUSTOMERS >100 MWh Per Annum

8.4.1. Definition

SACs >100 MWh are those customers:

- (a) with energy consumption typically greater than 100 MWh per annum; or
- (b) where the network charges are based on the averages of both the shared distribution network charges and connection charges for the network user group in the particular zone.

8.4.2. DUOS Tariffs

- (a) DUOS tariffs are based on:
 - (i) the average of the connection charges;
 - (ii) the average of the shared distribution network charges; and
 - (iii) The locality of the customer – East, West or Mount Isa zone.
- (b) DUOS tariffs incorporate a Fixed Charge (\$/day), an Actual Demand Charge (\$/kW/month) and a Volume Charge (\$/kWh).

The Minimum Chargeable Demand will be applied for each month where the monthly maximum demand fails to exceed this value.

The Minimum Chargeable Demand applicable to each Network Charge Category is:

Network Charge Category	Minimum Chargeable Demand
<i>Demand High Voltage (EDH, WDH or MIDH)</i>	400 kW
<i>Demand Large (EDL,WDL or MIDL)</i>	400 kW
<i>Demand Medium (EDM,WDM or MIDM)</i>	120 kW
<i>Demand Small (EDS,WDS or MIDS)</i>	30 kW

- (c) The Network charge category applicable to a customer will be as nominated by the customer or their retailer from among the following categories:
- (i) **Demand High Voltage (EDH, WDH or MIDH)** is available to customers who have high voltage metering and take supply at high voltage. This category is **NOT** available to customers with non-standard or significant connection arrangements, who have distribution transformer(s) provided by Ergon Energy, or to customers who are metered at other than high voltage.
 - (ii) **Demand Large (EDL, WDL or MIDL), Demand Medium (EDM, WDM or MIDM) and Demand Small (EDS, WDS or MIDS)** are available to all SACs >100 MWh. The network charge categories are self-selecting with customers' load characteristics determining the optimum category.

8.4.3. TUOS Tariffs

- (a) TUOS charges are calculated and levied for each transmission connection point. Ergon Energy combines rates in geographical regions in the East and West pricing zones and passes through TUOS charges to SACs >100 MWh in these zones, thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”.

Regional indicators do not apply to the Mount Isa pricing zone.

- (b) TUOS tariffs incorporate a Fixed Charge (\$/day), Capacity Charge (\$/kW/month) and Volume Charge (\$/kWh).

The Minimum Chargeable Demand will be applied for each month where the monthly maximum demand fails to exceed this value. Details of the Minimum Chargeable Demand for each network charge Category are shown in Section 8.4.2 (b) above.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate for the TNI applicable to the customer.

8.4.4. Network Tariff Codes – Descriptions & Rates

The Network Tariff Codes – Descriptions & Rates that apply for SACs > 100 MWh are:

(a) **Demand High Voltage**

(i) **Network Tariff Code & Descriptions**

EDHT1	East Demand HV (400kW) SAC – TUOS Region 1
EDHT2	East Demand HV (400kW) SAC – TUOS Region 2
EDHT3	East Demand HV (400kW) SAC – TUOS Region 3
WDHT1	West Demand HV (400kW) SAC – TUOS Region 1
WDHT2	West Demand HV (400kW) SAC – TUOS Region 2
WDHT3	West Demand HV (400kW) SAC – TUOS Region 3
MIDH	Mt Isa Demand HV (400kW) SAC

The regional indicator for each TNI is shown in Appendix 1.

(ii) **Network Tariff Code & Rates – GST Exclusive**

STANDARD ASSET CUSTOMERS > 100MWh per annum - DEMAND HIGH VOLTAGE GST Exclusive									
	Minimum Chargeable Demand	Default Distribution Loss Factor		Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)		
				Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)
Network Tariff Code	kilowatts	Value	Code	dollars per day	dollars per kilowatt per month	dollars per kilowatthour	dollars per day	dollars per kilowatt per month	dollars per kilowatthour
EDHT1	400	1.038	GEHL	\$14.989	\$14.537	\$0.00363	\$3.016	\$0.869	\$0.01060
EDHT2	400	1.038	GEHL	\$14.989	\$14.537	\$0.00363	\$3.177	\$1.809	\$0.01319
EDHT3	400	1.038	GEHL	\$14.989	\$14.537	\$0.00363	\$3.271	\$3.768	\$0.01666
WDHT1	400	1.118	GWHL	\$20.624	\$37.491	\$0.00973	\$3.016	\$0.869	\$0.01060
WDHT2	400	1.118	GWHL	\$20.624	\$37.491	\$0.00973	\$3.177	\$1.809	\$0.01319
WDHT3	400	1.118	GWHL	\$20.624	\$37.491	\$0.00973	\$3.271	\$3.768	\$0.01666
MIDH	400	1.038	GEHL	POA	POA	POA	\$2.364	\$0.598	\$0.00057

(iii) **Network Tariff Code & Rates – GST Inclusive**

STANDARD ASSET CUSTOMERS > 100MWh per annum - DEMAND HIGH VOLTAGE GST Inclusive									
	Minimum Chargeable Demand	Default Distribution Loss Factor		Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)		
				Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)
Network Tariff Code	kilowatts	Value	Code	dollars per day	dollars per kilowatt per month	dollars per kilowatthour	dollars per day	dollars per kilowatt per month	dollars per kilowatthour
EDHT1	400	1.038	GEHL	\$16.488	\$15.991	\$0.00399	\$3.318	\$0.956	\$0.01166
EDHT2	400	1.038	GEHL	\$16.488	\$15.991	\$0.00399	\$3.495	\$1.990	\$0.01451
EDHT3	400	1.038	GEHL	\$16.488	\$15.991	\$0.00399	\$3.598	\$4.145	\$0.01833
WDHT1	400	1.118	GWHL	\$22.686	\$41.240	\$0.01070	\$3.318	\$0.956	\$0.01166
WDHT2	400	1.118	GWHL	\$22.686	\$41.240	\$0.01070	\$3.495	\$1.990	\$0.01451
WDHT3	400	1.118	GWHL	\$22.686	\$41.240	\$0.01070	\$3.598	\$4.145	\$0.01833
MIDH	400	1.038	GEHL	POA	POA	POA	\$2.600	\$0.658	\$0.00063

(b) Demand Large

(i) Network Tariff Code & Descriptions

EDLT1	East Demand Large (400kW) SAC – TUOS Region 1
EDLT2	East Demand Large (400kW) SAC – TUOS Region 2
EDLT3	East Demand Large (400kW) SAC – TUOS Region 3
WDLT1	West Demand Large (400kW) SAC – TUOS Region 1
WDLT2	West Demand Large (400kW) SAC – TUOS Region 2
WDLT3	West Demand Large (400kW) SAC – TUOS Region 3
MIDL	Mt Isa Demand Large (400kW) SAC

The regional indicator for each TNI is shown in Appendix 1

(ii) Network Tariff Code & Rates – GST Exclusive

STANDARD ASSET CUSTOMERS > 100MWh per annum - DEMAND LARGE GST Exclusive									
	Minimum Chargeable Demand	Default Distribution Loss Factor		Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)		
				Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)
Network Tariff Code	kilowatts	Value	Code	dollars per day	dollars per kilowatt per month	dollars per kilowatthour	dollars per day	dollars per kilowatt per month	dollars per kilowatthour
EDLT1	400	1.072	GELL	\$25.350	\$18.337	\$0.00364	\$3.016	\$0.869	\$0.01060
EDLT2	400	1.072	GELL	\$25.350	\$18.337	\$0.00364	\$3.177	\$1.809	\$0.01319
EDLT3	400	1.072	GELL	\$25.350	\$18.337	\$0.00364	\$3.271	\$3.768	\$0.01666
WDLT1	400	1.302	GWLL	\$31.998	\$61.469	\$0.00973	\$3.016	\$0.869	\$0.01060
WDLT2	400	1.302	GWLL	\$31.998	\$61.469	\$0.00973	\$3.177	\$1.809	\$0.01319
WDLT3	400	1.302	GWLL	\$31.998	\$61.469	\$0.00973	\$3.271	\$3.768	\$0.01666
MIDL	400	1.073	GMLL	\$21.156	\$11.967	\$0.00344	\$2.364	\$0.598	\$0.00057

(iii) Network Tariff Code & Rates – GST Inclusive

STANDARD ASSET CUSTOMERS > 100MWh per annum - DEMAND LARGE GST Inclusive									
	Minimum Chargeable Demand	Default Distribution Loss Factor		Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)		
				Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)
Network Tariff Code	kilowatts	Value	Code	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour
EDLT1	400	1.072	GELL	\$27.885	\$20.171	\$0.00400	\$3.318	\$0.956	\$0.01166
EDLT2	400	1.072	GELL	\$27.885	\$20.171	\$0.00400	\$3.495	\$1.990	\$0.01451
EDLT3	400	1.072	GELL	\$27.885	\$20.171	\$0.00400	\$3.598	\$4.145	\$0.01833
WDLT1	400	1.302	GWLL	\$35.198	\$67.616	\$0.01070	\$3.318	\$0.956	\$0.01166
WDLT2	400	1.302	GWLL	\$35.198	\$67.616	\$0.01070	\$3.495	\$1.990	\$0.01451
WDLT3	400	1.302	GWLL	\$35.198	\$67.616	\$0.01070	\$3.598	\$4.145	\$0.01833
MIDL	400	1.073	GMLL	\$23.272	\$13.164	\$0.00378	\$2.600	\$0.658	\$0.00063

(c) **Demand Medium**

(i) **Network Tariff Code & Descriptions**

EDMT1	East Demand Medium (120kW) SAC – TUOS Region 1
EDMT2	East Demand Medium (120kW) SAC – TUOS Region 2
EDMT3	East Demand Medium (120kW) SAC – TUOS Region 3
WDMT1	West Demand Medium (120kW) SAC – TUOS Region 1
WDMT2	West Demand Medium (120kW) SAC – TUOS Region 2
WDMT3	West Demand Medium (120kW) SAC – TUOS Region 3
MIDM	Mt Isa Demand Medium (120kW) SAC

The regional indicator for each TNI is shown in Appendix 1.

(ii) **Network Tariff Code Rates – GST Exclusive**

STANDARD ASSET CUSTOMERS > 100MWh per annum - DEMAND MEDIUM GST Exclusive									
	Minimum Chargeable Demand	Default Distribution Loss Factor		Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)		
				Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)
Network Tariff Code	kilowatts	Value	Code	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour
EDMT1	120	1.072	GELL	\$14.438	\$19.167	\$0.00364	\$3.016	\$0.869	\$0.01060
EDMT2	120	1.072	GELL	\$14.438	\$19.167	\$0.00364	\$3.177	\$1.809	\$0.01319
EDMT3	120	1.072	GELL	\$14.438	\$19.167	\$0.00364	\$3.271	\$3.768	\$0.01666
WDMT1	120	1.302	GWLL	\$16.659	\$62.636	\$0.00973	\$3.016	\$0.869	\$0.01060
WDMT2	120	1.302	GWLL	\$16.659	\$62.636	\$0.00973	\$3.177	\$1.809	\$0.01319
WDMT3	120	1.302	GWLL	\$16.659	\$62.636	\$0.00973	\$3.271	\$3.768	\$0.01666
MIDM	120	1.073	GMLL	\$13.375	\$12.558	\$0.00344	\$2.364	\$0.598	\$0.00057

(iii) **Network Tariff Code & Rates – GST Inclusive**

STANDARD ASSET CUSTOMERS > 100MWh per annum - DEMAND MEDIUM GST Inclusive									
	Minimum Chargeable Demand	Default Distribution Loss Factor		Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)		
				Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)
Network Tariff Code	kilowatts	Value	Code	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour
EDMT1	120	1.072	GELL	\$15.882	\$21.084	\$0.00400	\$3.318	\$0.956	\$0.01166
EDMT2	120	1.072	GELL	\$15.882	\$21.084	\$0.00400	\$3.495	\$1.990	\$0.01451
EDMT3	120	1.072	GELL	\$15.882	\$21.084	\$0.00400	\$3.598	\$4.145	\$0.01833
WDMT1	120	1.302	GWLL	\$18.325	\$68.900	\$0.01070	\$3.318	\$0.956	\$0.01166
WDMT2	120	1.302	GWLL	\$18.325	\$68.900	\$0.01070	\$3.495	\$1.990	\$0.01451
WDMT3	120	1.302	GWLL	\$18.325	\$68.900	\$0.01070	\$3.598	\$4.145	\$0.01833
MIDM	120	1.073	GMLL	\$14.713	\$13.814	\$0.00378	\$2.600	\$0.658	\$0.00063

(d) **Demand Small**

(i) **Network Tariff Code Descriptions**

EDST1	East Demand Small (30kW) SAC – TUOS Region 1
EDST2	East Demand Small (30kW) SAC – TUOS Region 2
EDST3	East Demand Small (30kW) SAC – TUOS Region 3
WDST1	West Demand Small (30kW) SAC – TUOS Region 1
WDST2	West Demand Small (30kW) SAC – TUOS Region 2
WDST3	West Demand Small (30kW) SAC – TUOS Region 3
MIDS	Mt Isa Demand Small (30kW) SAC

The regional indicator for each TNI is shown in Appendix 1.

(ii) **Network Tariff Code & Rates – GST Exclusive**

STANDARD ASSET CUSTOMERS > 100MWh per annum - DEMAND SMALL GST Exclusive									
	Minimum Chargeable Demand	Default Distribution Loss Factor		Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)		
				Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)
Network Tariff Code	kilowatts	Value	Code	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour
EDST1	30	1.072	GELL	\$1.616	\$22.422	\$0.00364	\$3.016	\$0.869	\$0.01060
EDST2	30	1.072	GELL	\$1.616	\$22.422	\$0.00364	\$3.177	\$1.809	\$0.01319
EDST3	30	1.072	GELL	\$1.616	\$22.422	\$0.00364	\$3.271	\$3.768	\$0.01666
WDST1	30	1.302	GWLL	\$2.637	\$66.196	\$0.00973	\$3.016	\$0.869	\$0.01060
WDST2	30	1.302	GWLL	\$2.637	\$66.196	\$0.00973	\$3.177	\$1.809	\$0.01319
WDST3	30	1.302	GWLL	\$2.637	\$66.196	\$0.00973	\$3.271	\$3.768	\$0.01666
MIDS	30	1.073	GMLL	\$1.550	\$15.558	\$0.00344	\$2.364	\$0.598	\$0.00057

(iii) **Network Tariff Code & Rates – GST Inclusive**

STANDARD ASSET CUSTOMERS > 100MWh per annum - DEMAND SMALL GST Inclusive									
	Minimum Chargeable Demand	Default Distribution Loss Factor		Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)		
				Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)
Network Tariff Code	kilowatts	Value	Code	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour
EDST1	30	1.072	GELL	\$1.778	\$24.664	\$0.00400	\$3.318	\$0.956	\$0.01166
EDST2	30	1.072	GELL	\$1.778	\$24.664	\$0.00400	\$3.495	\$1.990	\$0.01451
EDST3	30	1.072	GELL	\$1.778	\$24.664	\$0.00400	\$3.598	\$4.145	\$0.01833
WDST1	30	1.302	GWLL	\$2.901	\$72.816	\$0.01070	\$3.318	\$0.956	\$0.01166
WDST2	30	1.302	GWLL	\$2.901	\$72.816	\$0.01070	\$3.495	\$1.990	\$0.01451
WDST3	30	1.302	GWLL	\$2.901	\$72.816	\$0.01070	\$3.598	\$4.145	\$0.01833
MIDS	30	1.073	GMLL	\$1.705	\$17.114	\$0.00378	\$2.600	\$0.658	\$0.00063

8.5. STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – VOLUME LARGE

8.5.1. Definition

SACs < 100 MWh – Volume Large are those customers:

- (a) with energy consumption in the range of 26 MWh to 100 MWh per annum; and
- (b) where the network charges are based on the averages of both the shared distribution network charges and connection charges for the network user group in the particular zone.

8.5.2. DUOS Tariffs

- (a) DUOS tariffs are based on:
 - (i) the average of the connection charges;
 - (ii) the average of the shared distribution network charges;
 - (iii) The locality of the customer – East, West or Mount Isa zone; and
- (b) DUOS tariffs incorporate a Fixed Charge (\$/day) and a Volume Charge (\$/kWh).

8.5.3. TUOS Tariffs

- (a) TUOS charges are calculated and levied for each transmission connection point. Ergon Energy combines rates in geographical regions in the East and West pricing zones and passes through TUOS charges to SACs >100 MWh in these zones, thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”.

Regional indicators do not apply to the Mount Isa pricing zone.

- (b) TUOS tariffs for Volume Large incorporate a Fixed Charge (\$/day) and Volume Charge (\$/kWh).

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

8.5.4. Network Tariff Codes – Descriptions & Rates

The Network Tariff Codes that apply for SACs < 100 MWh – Volume Large are:

- (i) Network Tariff Code & Descriptions

EVLT1	East Energy 26 - 100 MWh SAC – TUOS Region 1
EVLT2	East Energy 26 - 100 MWh SAC – TUOS Region 2
EVLT3	East Energy 26 - 100 MWh SAC – TUOS Region 3
WVLT1	West Energy 26 - 100 MWh SAC – TUOS Region 1
WVLT2	West Energy 26 - 100 MWh SAC – TUOS Region 2
WVLT3	West Energy 26 - 100 MWh SAC – TUOS Region 3
MIVL	Mt Isa Energy 26 - 100 MWh SAC

The regional indicator for each TNI is shown in Appendix 1.

(ii) Network Tariff Codes & Rates – GST Exclusive

STANDARD ASSET CUSTOMERS < 100MWh per annum - VOLUME LARGE GST Exclusive						
	Default Distribution Loss Factor		Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)	
			Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)
Network Tariff Code	Value	Code	dollars per day	dollars per kilowatt hour	dollars per day	dollars per kilowatt hour
EVL1	1.072	GELL	\$1.774	\$0.07971	\$0.844	\$0.01060
EVL2	1.072	GELL	\$1.774	\$0.07971	\$1.375	\$0.01319
EVL3	1.072	GELL	\$1.774	\$0.07971	\$2.365	\$0.01666
WVLT1	1.302	GWLL	\$3.514	\$0.27755	\$0.844	\$0.01060
WVLT2	1.302	GWLL	\$3.514	\$0.27755	\$1.375	\$0.01319
WVLT3	1.302	GWLL	\$3.514	\$0.27755	\$2.365	\$0.01666
MIVL	1.073	GMLL	\$1.483	\$0.06095	\$0.724	\$0.00057

(iii) Network Tariff Codes & Rates – GST Inclusive

STANDARD ASSET CUSTOMERS < 100MWh per annum - VOLUME LARGE GST Inclusive						
	Default Distribution Loss Factor		Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)	
			Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)
Network Tariff Code	Value	Code	dollars per day	dollars per kilowatt hour	dollars per day	dollars per kilowatt hour
EVL1	1.072	GELL	\$1.951	\$0.08768	\$0.928	\$0.01166
EVL2	1.072	GELL	\$1.951	\$0.08768	\$1.513	\$0.01451
EVL3	1.072	GELL	\$1.951	\$0.08768	\$2.602	\$0.01833
WVLT1	1.302	GWLL	\$3.865	\$0.30531	\$0.928	\$0.01166
WVLT2	1.302	GWLL	\$3.865	\$0.30531	\$1.513	\$0.01451
WVLT3	1.302	GWLL	\$3.865	\$0.30531	\$2.602	\$0.01833
MIVL	1.073	GMLL	\$1.631	\$0.06705	\$0.796	\$0.00063

8.6. STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – VOLUME SMALL

8.6.1. Definition

SACs < 100 MWh – Volume Small are those customers:

- (a) with energy consumption in the range of 0 MWh to 26 MWh per annum; and
- (b) where the network charges are based on the averages of both the shared distribution network charges and connection charges for the network user group in the particular zone.

8.6.2. DUOS Tariffs

- (a) DUOS tariffs are based on:
 - (i) the average of the connection charges;
 - (ii) the average of the shared distribution network charges; and
 - (iii) The locality of the customer – East, West or Mount Isa zone.
- (b) DUOS tariffs incorporate a Fixed Charge (\$/day) and a Volume Charge (\$/kWh).

8.6.3. TUOS Tariffs

- (a) TUOS charges are calculated and levied for each transmission connection point. Ergon Energy combines rates in geographical regions in the East and West pricing zones and passes through TUOS charges to SACs >100 MWh in these zones, thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”.

Regional indicators do not apply to the Mount Isa pricing zone.

- (b) TUOS prices for Volume Small incorporate a Fixed Charge (\$/day) and Volume Charge (\$/kWh).

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

8.6.4. Network Tariff Codes – Descriptions & Rates

The Network Tariff Codes that apply for SACs < 100 MWh – Volume Small are:

- (i) Network Tariff Code & Descriptions

EVST1	East Energy 0 - 26 MWh SAC – TUOS Region 1
EVST2	East Energy 0 - 26 MWh SAC – TUOS Region 2
EVST3	East Energy 0 - 26 MWh SAC – TUOS Region 3
WVST1	West Energy 0 - 26 MWh SAC – TUOS Region 1
WVST2	West Energy 0 - 26 MWh SAC – TUOS Region 2
WVST3	West Energy 0 - 26 MWh SAC – TUOS Region 3
MIVS	Mt Isa Energy 0 - 26 MWh SAC

The regional indicator for each TNI is shown in Appendix 1.

(ii) Network Tariff Codes & Rates – GST Exclusive

STANDARD ASSET CUSTOMERS < 100MWh per annum - VOLUME SMALL GST Exclusive						
	Default Distribution Loss Factor		Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)	
			Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)
Network Tariff Code	Value	Code	dollars per day	dollars per kilowatt hour	dollars per day	dollars per kilowatt hour
EVST1	1.072	GELL	\$1.107	\$0.07971	\$0.107	\$0.01060
EVST2	1.072	GELL	\$1.107	\$0.07971	\$0.186	\$0.01319
EVST3	1.072	GELL	\$1.107	\$0.07971	\$0.296	\$0.01666
WVST1	1.302	GWLL	\$1.231	\$0.27755	\$0.107	\$0.01060
WVST2	1.302	GWLL	\$1.231	\$0.27755	\$0.186	\$0.01319
WVST3	1.302	GWLL	\$1.231	\$0.27755	\$0.296	\$0.01666
MIVS	1.073	GMLL	\$0.750	\$0.06095	\$0.130	\$0.00057

(iii) Network Tariff Codes & Rates – GST Inclusive

STANDARD ASSET CUSTOMERS < 100MWh per annum - VOLUME SMALL GST Inclusive						
	Default Distribution Loss Factor		Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)	
			Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)
Network Tariff Code	Value	Code	dollars per day	dollars per kilowatt hour	dollars per day	dollars per kilowatt hour
EVST1	1.072	GELL	\$1.218	\$0.08768	\$0.118	\$0.01166
EVST2	1.072	GELL	\$1.218	\$0.08768	\$0.205	\$0.01451
EVST3	1.072	GELL	\$1.218	\$0.08768	\$0.326	\$0.01833
WVST1	1.302	GWLL	\$1.354	\$0.30531	\$0.118	\$0.01166
WVST2	1.302	GWLL	\$1.354	\$0.30531	\$0.205	\$0.01451
WVST3	1.302	GWLL	\$1.354	\$0.30531	\$0.326	\$0.01833
MIVS	1.073	GMLL	\$0.825	\$0.06705	\$0.143	\$0.00063

8.7. STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – CONTROLLED SUPPLIES

8.7.1. Definition

There are additional network charge categories - Controlled supplies that only apply to SAC < 100 MWh customers whose primary network charge category is Volume Large or Volume Small and where specified permanently connected appliances are controlled by network equipment².

The additional categories that may be nominated by the customer or their retailer are:

- (i) **Volume Night - Controlled (EVN, WVN or MIVN)** applies where specified permanently connected appliances are controlled by network equipment so that supply will be available for a minimum period of 8 hours at the absolute discretion of Ergon Energy but usually between the hours of 10:00pm and 7:00am.
- (ii) **Volume Controlled (EVC, WVC or MIVC)** applies where specified permanently connected appliances are controlled by network equipment so that supply will be available for a minimum period of 18 hours per day during time periods set at the absolute discretion of Ergon Energy.

8.7.2. DUOS Tariffs

- (a) DUOS tariffs are based on:
 - (i) the average of the connection charges;
 - (ii) the average of the shared distribution network charges; and
 - (iii) The locality of the customer – East, West or Mount Isa zone;
- (b) DUOS tariffs incorporate a Fixed Charge (\$/day) and a Volume Charge (\$/kWh).

² A controlled load pricing option only applies where electricity load is permanently connected to appliances, separately metered and controlled at a supply point.

The network charge categories apply to the controlled supplies of both market and non-market customers. For the suitability of appliances and other conditions associated with controlled supply, reference should be made to the regulated retail tariffs for non-market customers (Notified Prices) as reflected in the Queensland Government “Tariff Schedule” (www.dme.qld.gov/Energy/notified_prices.cfm). The conditions contained in the Notified Prices will be applied by Ergon Energy to all customers on controlled supply (i.e. both market and non-market customers).

Switching times will be managed at Ergon Energy’s absolute discretion, in accordance with Ergon Energy’s network requirements.

For non-market customers, Volume Night – Controlled equates to the Retail Tariff 31 and Volume Controlled equates to the Retail Tariff 33 of the Notified Prices.

8.7.3. TUOS Tariffs

- (a) TUOS charges are calculated and levied for each transmission connection point. Ergon Energy combines rates in geographical regions in the East and West pricing zones and passes through TUOS charges to SACs >100 MWh in these zones, thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”.

Regional indicators do not apply to the Mount Isa pricing zone.

- (b) TUOS tariffs for Volume Night-Controlled and Volume Controlled incorporate a Volume Charge (\$/kWh) only.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

8.7.4. Network Tariff Codes – Descriptions & Rates

The Network Tariff Codes – Descriptions & Rates that apply for SACs < 100 MWh – Controlled Supplies are:

- (a) **Volume Night - Controlled**

- (i) Network Tariff Code & Descriptions

EVNT1	East Volume Night Controlled (T31) – TUOS Region 1
EVNT2	East Volume Night Controlled (T31) – TUOS Region 2
EVNT3	East Volume Night Controlled (T31) – TUOS Region 3
WVNT1	West Volume Night Controlled (T31) – TUOS Region 1
WVNT2	West Volume Night Controlled (T31) – TUOS Region 2
WVNT3	West Volume Night Controlled (T31) – TUOS Region 3
MIVN	Mt Isa Volume Night Controlled (T31)

The regional indicator for each TNI is shown in Appendix 1.

- (ii) Network Tariff Codes & Rates – GST Exclusive

STANDARD ASSET CUSTOMERS < 100MWh per annum - VOLUME NIGHT CONTROLLED GST Exclusive						
Network Tariff Code	Default Distribution Loss Factor		Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)	
			Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)
	Value	Code	dollars per day	dollars per kilowatt hour	dollars per day	dollars per kilowatt hour
EVNT1	1.072	GELL	\$0.080	\$0.00248		\$0.01060
EVNT2	1.072	GELL	\$0.080	\$0.00248		\$0.01319
EVNT3	1.072	GELL	\$0.080	\$0.00248		\$0.01666
WVNT1	1.302	GWLL	\$0.093	\$0.00735		\$0.01060
WVNT2	1.302	GWLL	\$0.093	\$0.00735		\$0.01319
WVNT3	1.302	GWLL	\$0.093	\$0.00735		\$0.01666
MIVN	1.073	GMLL	\$0.100	\$0.00236		\$0.00057

(iii) Network Tariff Codes & Rates – GST Inclusive

STANDARD ASSET CUSTOMERS < 100MWh per annum - VOLUME NIGHT CONTROLLED GST Inclusive						
	Default Distribution Loss Factor		Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)	
			Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)
Network Tariff Code	Value	Code	dollars per day	dollars per kilowatt hour	dollars per day	dollars per kilowatt hour
EVNT1	1.072	GELL	\$0.088	\$0.00273		\$0.01166
EVNT2	1.072	GELL	\$0.088	\$0.00273		\$0.01451
EVNT3	1.072	GELL	\$0.088	\$0.00273		\$0.01833
WVNT1	1.302	GWLL	\$0.102	\$0.00809		\$0.01166
WVNT2	1.302	GWLL	\$0.102	\$0.00809		\$0.01451
WVNT3	1.302	GWLL	\$0.102	\$0.00809		\$0.01833
MIVN	1.073	GMLL	\$0.110	\$0.00260		\$0.00063

(b) Volume Controlled

(i) Network Tariff Code & Descriptions

EVCT1	East Volume Controlled (T33) – TUOS Region 1
EVCT2	East Volume Controlled (T33) – TUOS Region 2
EVCT3	East Volume Controlled (T33) – TUOS Region 3
WVCT1	West Volume Controlled (T33) – TUOS Region 1
WVCT2	West Volume Controlled (T33) – TUOS Region 2
WVCT3	West Volume Controlled (T33) – TUOS Region 3
MIVC	Mt Isa Volume Controlled (T33)

The regional indicator for each TNI is shown in Appendix 1.

(ii) Network Tariff Code & Rates – GST Exclusive

STANDARD ASSET CUSTOMERS < 100MWh per annum - VOLUME CONTROLLED GST Exclusive						
	Default Distribution Loss Factor		Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)	
			Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)
Network Tariff Code	Value	Code	dollars per day	dollars per kilowatt hour	dollars per day	dollars per kilowatt hour
EVCT1	1.072	GELL	\$0.080	\$0.02032		\$0.01060
EVCT2	1.072	GELL	\$0.080	\$0.02032		\$0.01319
EVCT3	1.072	GELL	\$0.080	\$0.02032		\$0.01666
WVCT1	1.302	GWLL	\$0.093	\$0.05945		\$0.01060
WVCT2	1.302	GWLL	\$0.093	\$0.05945		\$0.01319
WVCT3	1.302	GWLL	\$0.093	\$0.05945		\$0.01666
MIVC	1.073	GMLL	\$0.100	\$0.00859		\$0.00057

(iii) Network Tariff Code & Rates – GST Inclusive

STANDARD ASSET CUSTOMERS < 100MWh per annum - VOLUME CONTROLLED GST Inclusive						
	Default Distribution Loss Factor		Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)	
			Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)
Network Tariff Code	Value	Code	dollars per day	dollars per kilowatt hour	dollars per day	dollars per kilowatt hour
EVCT1	1.072	GELL	\$0.088	\$0.02235		\$0.01166
EVCT2	1.072	GELL	\$0.088	\$0.02235		\$0.01451
EVCT3	1.072	GELL	\$0.088	\$0.02235		\$0.01833
WVCT1	1.302	GWLL	\$0.102	\$0.06540		\$0.01166
WVCT2	1.302	GWLL	\$0.102	\$0.06540		\$0.01451
WVCT3	1.302	GWLL	\$0.102	\$0.06540		\$0.01833
MIVC	1.073	GMLL	\$0.110	\$0.00945		\$0.00063

8.8. STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – UNMETERED SUPPLIES

8.8.1. Definition

Unmetered supplies should be avoided where possible. However, Ergon Energy may approve an unmetered supply where it meets the requirements set out in Chapter 7 of the Rules.

8.8.2. Street Lighting Services

The supply of energy to a street lighting Connection point is a Standard Control Service and will be subject to DUOS and TUOS charges as applied to unmetered supplies.

Street lighting customers are also subject to a daily street lighting charge to recover costs associated with Ergon Energy's Street Lighting Services that have been classified as Alternative Control Services by the AER.

Ergon Energy has three Street Lighting Services which have been classified as Alternative Control Services:

- Street Lighting Service 1 – Provision of new street lighting assets;
- Street Lighting Service 2 – Operation, repair, replacement and maintenance of street lighting assets; and
- Street Lighting Service 3 – Alteration and relocation of existing street lighting assets.

Further information on Ergon Energy's Street Lighting Services and the applicable rates for the daily street lighting charge are available from the Information Guide and Price List for Alternative Control Services.³

8.8.3. DUOS Tariffs

- (a) DUOS tariffs for unmetered supplies are based on:
- (i) the average of the connection charges;
 - (ii) the average of the shared distribution network charges;
 - (iii) The locality of the customer – East, West or Mount Isa zone;
- (b) DUOS tariffs incorporate a Fixed Charge (\$/day) and a Volume Charge (\$/kWh).
- (c) The Network Charge category applicable to a customer will be as nominated by the customer or their retailer from among the following categories:
- (i) **Unmetered Supply (EVU, WVU or MIVU)** is applicable to unmetered supplies where the customer owns and maintains all assets after the

³ The Information Guide for Alternative Control Services and Price List are available from the Ergon Energy website: www.ergon.com.au/contractors.-suppliers--and--developers/electricity-distribution-pricing-methodologies/network-tariffs

customer's connection point to the network. These include installations such as Traffic Signals, Rate 3 streetlights etc.

- (ii) **Unmetered Supply to Street Lighting Services - minor street light (EVUMI, WVUMI or MIVUMI)** is applicable to unmetered public lighting where Ergon Energy owns and maintains all assets after the customer's connection point to the network.

- Ergon Energy standard minor public lights are 50, 80 and 125 watt Mercury Vapour and 70 watt High Pressure Sodium vapour lights

- (iii) **Unmetered Supply to Street Lighting Services - major street light (EVUMA, WVUMA or MIVUMA)** is applicable to unmetered public lighting where Ergon owns and maintains all assets after the customer's connection point to the network.

- Ergon Energy standard major public lights are 100, 150, 250 and 400 watt High Pressure Sodium vapour lights

- (d) The current approved DUOS rates for Unmetered Supplies are set out in section 8.8.5. The rates applicable to Street Lighting Services are available from the Price List for Alternative Control Services.⁴

8.8.4. TUOS Tariffs for unmetered supplies

- (c) TUOS charges are calculated and levied for each transmission connection point. Ergon Energy combines rates in geographical regions in the East and West pricing zones and passes through TUOS charges to SACs >100 MWh in these zones, thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”.

Regional indicators do not apply to the Mount Isa pricing zone..

- (a) TUOS tariffs incorporate a Volume Charge (\$/kWh) only.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

- (b) The current approved TUOS rates for Unmetered Supplies categories are published below.

8.8.5. Network Tariff Codes

The Network Tariff Codes that apply for SACs < 100 MWh – Unmetered Supplies are:

- (a) **Unmetered Supply (EVU or WVU)**

- (i) Network Tariff Code & Descriptions

EVUT1	East Volume Unmetered – TUOS Region 1
EVUT1MI	East Volume Unmetered – TUOS Region 1 – Minor Streetlight

⁴The Alternative Control Services Information Guide and Price List are available from the Ergon Energy website:
www.ergon.com.au/contractors,-suppliers--and--developers/electricity-distribution-pricing-methodologies/network-tariffs

EVUT1MA	East Volume Unmetered – TUOS Region 1 – Major Streetlight
EVUT2	East Volume Unmetered – TUOS Region 2
EVUT2MI	East Volume Unmetered – TUOS Region 2 – Minor Streetlight
EVUT2MA	East Volume Unmetered – TUOS Region 2 – Major Streetlight
EVUT3	East Volume Unmetered – TUOS Region 3
EVUT3MI	East Volume Unmetered – TUOS Region 3 – Minor Streetlight
EVUT3MA	East Volume Unmetered – TUOS Region 3 – Major Streetlight
WVUT1	West Volume Unmetered – TUOS Region 1
WVUT1MI	West Volume Unmetered – TUOS Region 1 – Minor Streetlight
WVUT1MA	West Volume Unmetered – TUOS Region 1 – Major Streetlight
WVUT2	West Volume Unmetered – TUOS Region 2
WVUT2MI	West Volume Unmetered – TUOS Region 2 – Minor Streetlight
WVUT2MA	West Volume Unmetered – TUOS Region 2 – Major Streetlight
WVUT3	West Volume Unmetered – TUOS Region 3
WVUT3MI	West Volume Unmetered – TUOS Region 3 – Minor Streetlight
WVUT3MA	West Volume Unmetered – TUOS Region 3 – Major Streetlight
MIVU	Mt Isa Volume Unmetered
MIVUMI	Mt Isa Volume Unmetered – Minor Streetlight
MIVUMA	Mt Isa Volume Unmetered – Major Streetlight

The regional indicator for each TNI is shown in Appendix 1.

(ii) Network Tariff Code & Rates – **GST Exclusive**

STANDARD ASSET CUSTOMERS < 100MWh per annum - UNMETERED SUPPLY GST Exclusive						
Network Tariff Code	Default Distribution Loss Factor		Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)	
			Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)
	Value	Code	dollars per day	dollars per kilowatt hour	dollars per day	dollars per kilowatt hour
EVUT1	1.072	GELL	\$0.204	\$0.06923		\$0.01060
EVUT1MI	1.072	GELL	\$0.204	\$0.06923		\$0.01060
EVUT1MA	1.072	GELL	\$0.204	\$0.06923		\$0.01060
EVUT2	1.072	GELL	\$0.204	\$0.06923		\$0.01319
EVUT2MI	1.072	GELL	\$0.204	\$0.06923		\$0.01319
EVUT2MA	1.072	GELL	\$0.204	\$0.06923		\$0.01319
EVUT3	1.072	GELL	\$0.204	\$0.06923		\$0.01666
EVUT3MI	1.072	GELL	\$0.204	\$0.06923		\$0.01666
EVUT3MA	1.072	GELL	\$0.204	\$0.06923		\$0.01666
WVUT1	1.302	GWLL	\$0.216	\$0.19825		\$0.01060
WVUT1MI	1.302	GWLL	\$0.216	\$0.19825		\$0.01060
WVUT1MA	1.302	GWLL	\$0.216	\$0.19825		\$0.01060
WVUT2	1.302	GWLL	\$0.216	\$0.19825		\$0.01319
WVUT2MI	1.302	GWLL	\$0.216	\$0.19825		\$0.01319
WVUT2MA	1.302	GWLL	\$0.216	\$0.19825		\$0.01319
WVUT3	1.302	GWLL	\$0.216	\$0.19825		\$0.01666
WVUT3MI	1.302	GWLL	\$0.216	\$0.19825		\$0.01666
WVUT3MA	1.302	GWLL	\$0.216	\$0.19825		\$0.01666
MIVU	1.073	GMLL	\$0.173	\$0.04269		\$0.00057
MIVUMI	1.073	GMLL	\$0.173	\$0.04269		\$0.00057
MIVUMA	1.073	GMLL	\$0.173	\$0.04269		\$0.00057

(iii) Network Tariff Code & Rates – **GST Inclusive**

STANDARD ASSET CUSTOMERS < 100MWh per annum - UNMETERED SUPPLY GST Inclusive						
	Default Distribution Loss Factor		Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)	
			Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)
Network Tariff Code	Value	Code	dollars per day	dollars per kilowatt hour	dollars per day	dollars per kilowatt hour
EVUT1	1.072	GELL	\$0.224	\$0.07615		\$0.01166
EVUT1MI	1.072	GELL	\$0.224	\$0.07615		\$0.01166
EVUT1MA	1.072	GELL	\$0.224	\$0.07615		\$0.01166
EVUT2	1.072	GELL	\$0.224	\$0.07615		\$0.01451
EVUT2MI	1.072	GELL	\$0.224	\$0.07615		\$0.01451
EVUT2MA	1.072	GELL	\$0.224	\$0.07615		\$0.01451
EVUT3	1.072	GELL	\$0.224	\$0.07615		\$0.01833
EVUT3MI	1.072	GELL	\$0.224	\$0.07615		\$0.01833
EVUT3MA	1.072	GELL	\$0.224	\$0.07615		\$0.01833
WVUT1	1.302	GWLL	\$0.238	\$0.21808		\$0.01166
WVUT1MI	1.302	GWLL	\$0.238	\$0.21808		\$0.01166
WVUT1MA	1.302	GWLL	\$0.238	\$0.21808		\$0.01166
WVUT2	1.302	GWLL	\$0.238	\$0.21808		\$0.01451
WVUT2MI	1.302	GWLL	\$0.238	\$0.21808		\$0.01451
WVUT2MA	1.302	GWLL	\$0.238	\$0.21808		\$0.01451
WVUT3	1.302	GWLL	\$0.238	\$0.21808		\$0.01833
WVUT3MI	1.302	GWLL	\$0.238	\$0.21808		\$0.01833
WVUT3MA	1.302	GWLL	\$0.238	\$0.21808		\$0.01833
MIVU	1.073	GMLL	\$0.190	\$0.04696		\$0.00063
MIVUMI	1.073	GMLL	\$0.190	\$0.04696		\$0.00063
MIVUMA	1.073	GMLL	\$0.190	\$0.04696		\$0.00063

8.9. QUEENSLAND GOVERNMENT SOLAR BONUS SCHEME FOR STANDARD ASSET CUSTOMERS < 100 MWh Per Annum

The Queensland Government Solar Bonus Scheme is a program that pays domestic and other small energy customers for the surplus electricity generated from roof-top solar photovoltaic (PV) systems that is exported to the Queensland grid. For information on the Solar Bonus Scheme please refer to:

www.cleanenergy.qld.gov.au/solar_bonus_scheme.cfm

8.9.1. Network Tariff Codes

(i) Network Tariff Code & Descriptions

NVG0	Net Volume Generation 0
NVG1	Net Volume Generation 1
GVG0	Gross Volume Generation 0

Where NVG0 is applicable to any net metering installation that does not meet the Solar Bonus Scheme requirements, NVG1 applies to any net metering installation that meets the Solar Bonus Scheme requirements, and GVG0 is applicable to any gross metering installation.

(ii) Network Tariff Code & Rates – **GST Inclusive**

QLD GOVT SOLAR BONUS SCHEME FOR STANDARD ASSET CUSTOMERS <100MWh Per Annum GST Inclusive				
Network Tariff Code	Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)	
	Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)
	dollars per day	cents per kilowatt hour	dollars per day	dollars per kilowatt hour
NVG0		0.00		
NVG1		-44.00		
GVG0		0.00		

The 44c/Kwh associated with the Solar PV Bonus Scheme includes GST (if any). As such, no amount will be added to the credit in respect of any GST payable.

APPENDIX 1 – TUOS REGIONAL INDICATORS

SAC > 100MWh & <100 MWh Regional Indicators for 2011-2012		
Transmission Connection Point	TNI	TUOS Region
Alligator Creek	QALC	T2
Louisa Creek	QALH	T2
Alan Sherriff (11)	QASF	T2
Biloela	QBIL	T1
Bowen North	QBNN	T2
Blackwater (132)	QBWH	T1
Blackwater (66)	QBWL	T1
Cardwell	QCDW	T3
Clare	QCLR	T2
Cairns (Cairns City)	QCNS	T3
Collinsville	QCOL	T2
Cairns	QCRN	T3
Dan Gleeson	QDGL	T2
Dysart	QDYS	T1
Egans Hill	QEGN	T1
El Arish	QELA	T3
Edmonton	QEMT	T3
Alan Sherriff (Garbutt)	QGAR	T2
Gladstone North	QGLA	T1
Gin Gin	QGNG	T1
Gladstone South	QGST	T1
Innisfail	QINF	T3
Ingham	QING	T3
Kamerunga	QKAM	T3
Lilyvale (Clermont)	QLCM	T1
Lilyvale	QLIL	T1
Mackay	QMKA	T2
Moura	QMRA	T1
Middle Ridge	QMRG	T1
Moranbah (11)	QMRL	T1
Moranbah (66)	QMRN	T1
Nebo	QNEB	T2
Newlands (Mackay & Northern)	QNLD	T2
Oakey Town	QOKT	T1
Pandoin	QPAL	T1
Pioneer Valley	QPIV	T2
Proserpine (Mackay)	QPRO	T2
Rockhampton	QROC	T1
Ross (Kidston & Millchester)	QROS	T2
Teebar Creek	QTBC	T1
Tangkam	QTKM	T1
Tully	QTLL	T3
Tarong 132	QTRH	T1
Tarong	QTRL	T1
Turkinje (Port Douglas)	QTUH	T3

SAC > 100MWh & <100 MWh Regional Indicators for 2011-2012		
Transmission Connection Point	TNI	TUOS Region
Turkinje	QTUL	T3
Townsville East	QTVE	T2
Townsville South	QTVS	T2
Woollooga	QWLN	T1
Woree	QWRE	T3
Boat Creek	QYAE	T1

APPENDIX 2 – TABLE OF SITE-SPECIFIC NMIs

If the customer's NMI appears in this list, contact Ergon Energy for site-specific prices. (Refer Section 1.6 for contact details)

3031124500	3051464748	QAAAMR0000	QCCC000958	QEEE000020	QGGG000002
3039072291	3051464772	QAAAMR0001	QCCC001003	QEEE000022	QGGG000003
3050224077	3051464781	QAAARG0000	QCCC001004	QEEE000025	QGGG000004
3050401688	3051471311	QAAARG0001	QCCC001012	QEEE000026	QGGG000006
3050802593	3051526841	QAAARG0003	QCCC001024	QEEE000049	QGGG000010
3050880454	3051526859	QAAARG0004	QCCC001035	QEEE000050	QGGG000012
3050918851	3051526867	QAAARG0005	QCCC001036	QEEE000051	QGGG000014
3050918877	3051526875	QAAARG0006	QCCC001041	QEEE000052	QGGG000015
3050918907	3051526883	QAAARG0007	QCCC700040	QEEE000054	QGGG000016
3050918940	3051526891	QAAARG0011	QCCC700300	QEEE0000520	QGGG000017
3050922955	QAAABL0000	QCCC000001	QCQPW00076	QEEE000522	QGGG000020
3050922963	QAAABL0001	QCCC000002	QDDD000002	QEEE000547	QGGG000021
3050974882	QAAABW0000	QCCC000003	QDDD000003	QEEE000570	QGGG000023
3051004241	QAAABW0001	QCCC000004	QDDD000004	QEEEZ00571	QGGG000024
3051006162	QAAABW0002	QCCC000006	QDDD000005	QEMS000001	QGGG000026
3051084589	QAAABW0005	QCCC000010	QDDD000006	QFFF000001	QGGG000028
3051100231	QAAABW0040	QCCC000012	QDDD000010	QFFF000002	QGGG000031
3051119978	QAAABW0041	QCCC000014	QDDD000019	QFFF000003	QGGG000032
3051162717	QAAABW0042	QCCC000018	QDDD000020	QFFF000005	QGGG000033
3051198738	QAAABX0001	QCCC000020	QDDD000026	QFFF000006	QGGG000036
3051313391	QAAABX0002	QCCC000022	QDDD000027	QFFF000008	QGGG000037
3051335719	QAAABX0004	QCCC000028	QDDD000028	QFFF00000B	QGGG000038
3051393689	QAAABX0012	QCCC000029	QDDD003020	QFFF00000C	QGGG000051
3051398036	QAAABX0014	QCCC000030	QDDD003206	QFFF00000D	QGGG000394
3051411750	QAAAEH0000	QCCC000032	QDDD003316	QFFF00000E	QGGG000399
3051437805	QAAAEH0002	QCCC000036	QDDD003317	QFFF00000F	QGGG000418
3051464039	QAAAEH0003	QCCC000038	QDDD003318	QFFF00000G	QGGG000422
3051464055	QAAAEH0004	QCCC000040	QDDD003319	QFFF00000J	QGGG700005
3051464233	QAAAEH0005	QCCC000042	QDDD003336	QFFF00000K	QNGG000103
3051464276	QAAAEH0006	QCCC000044	QDDD003338	QFFF00000M	QMKYW00147
3051464331	QAAAEH0007	QCCC000046	QDDD003340	QFFF00000N	QWAGW00033
3051464403	QAAAEH0015	QCCC000052	QDDD003342	QFFF00000R	QWAGW00066
3051464438	QAAAGS0000	QCCC000056	QDDD003345	QFFF00000S	
3051464454	QAAAGS0001	QCCC000058	QDDD003348	QFFF00000V	
3051464535	QAAAGS0002	QCCC000062	QEEE000003	QFFF00000W	
3051464543	QAAAGS0003	QCCC000066	QEEE000004	QFFF00000X	
3051464551	QAAAGS0006	QCCC000068	QEEE000006	QFFF000011	
3051464560	QAAALV0000	QCCC000114	QEEE000010	QFFF000013	
3051464578	QAAALV0001	QCCC000646	QEEE000011	QFFF00001N	
3051464594	QAAALV0002	QCCC000648	QEEE000012	QFFF0000MS	
3051464608	QAAALV0004	QCCC000678	QEEE000013	QFFF0000NY	
3051464616	QAAALV0005	QCCC000702	QEEE000017	QFFF700017	
3051464632	QAAALV0063	QCCC000936	QEEE000018	QFFF700044	
3051464730	QAAALX0000	QCCC000940	QEEE000019	QGGG000000	

This page left blank intentionally.