


NETWORK TARIFF GUIDE FOR STANDARD CONTROL SERVICES

1 JULY 2012 TO 30 JUNE 2013

Release 2

Date: 9 July 2012

Ergon Energy Corporation Limited ABN 50 087 646 062

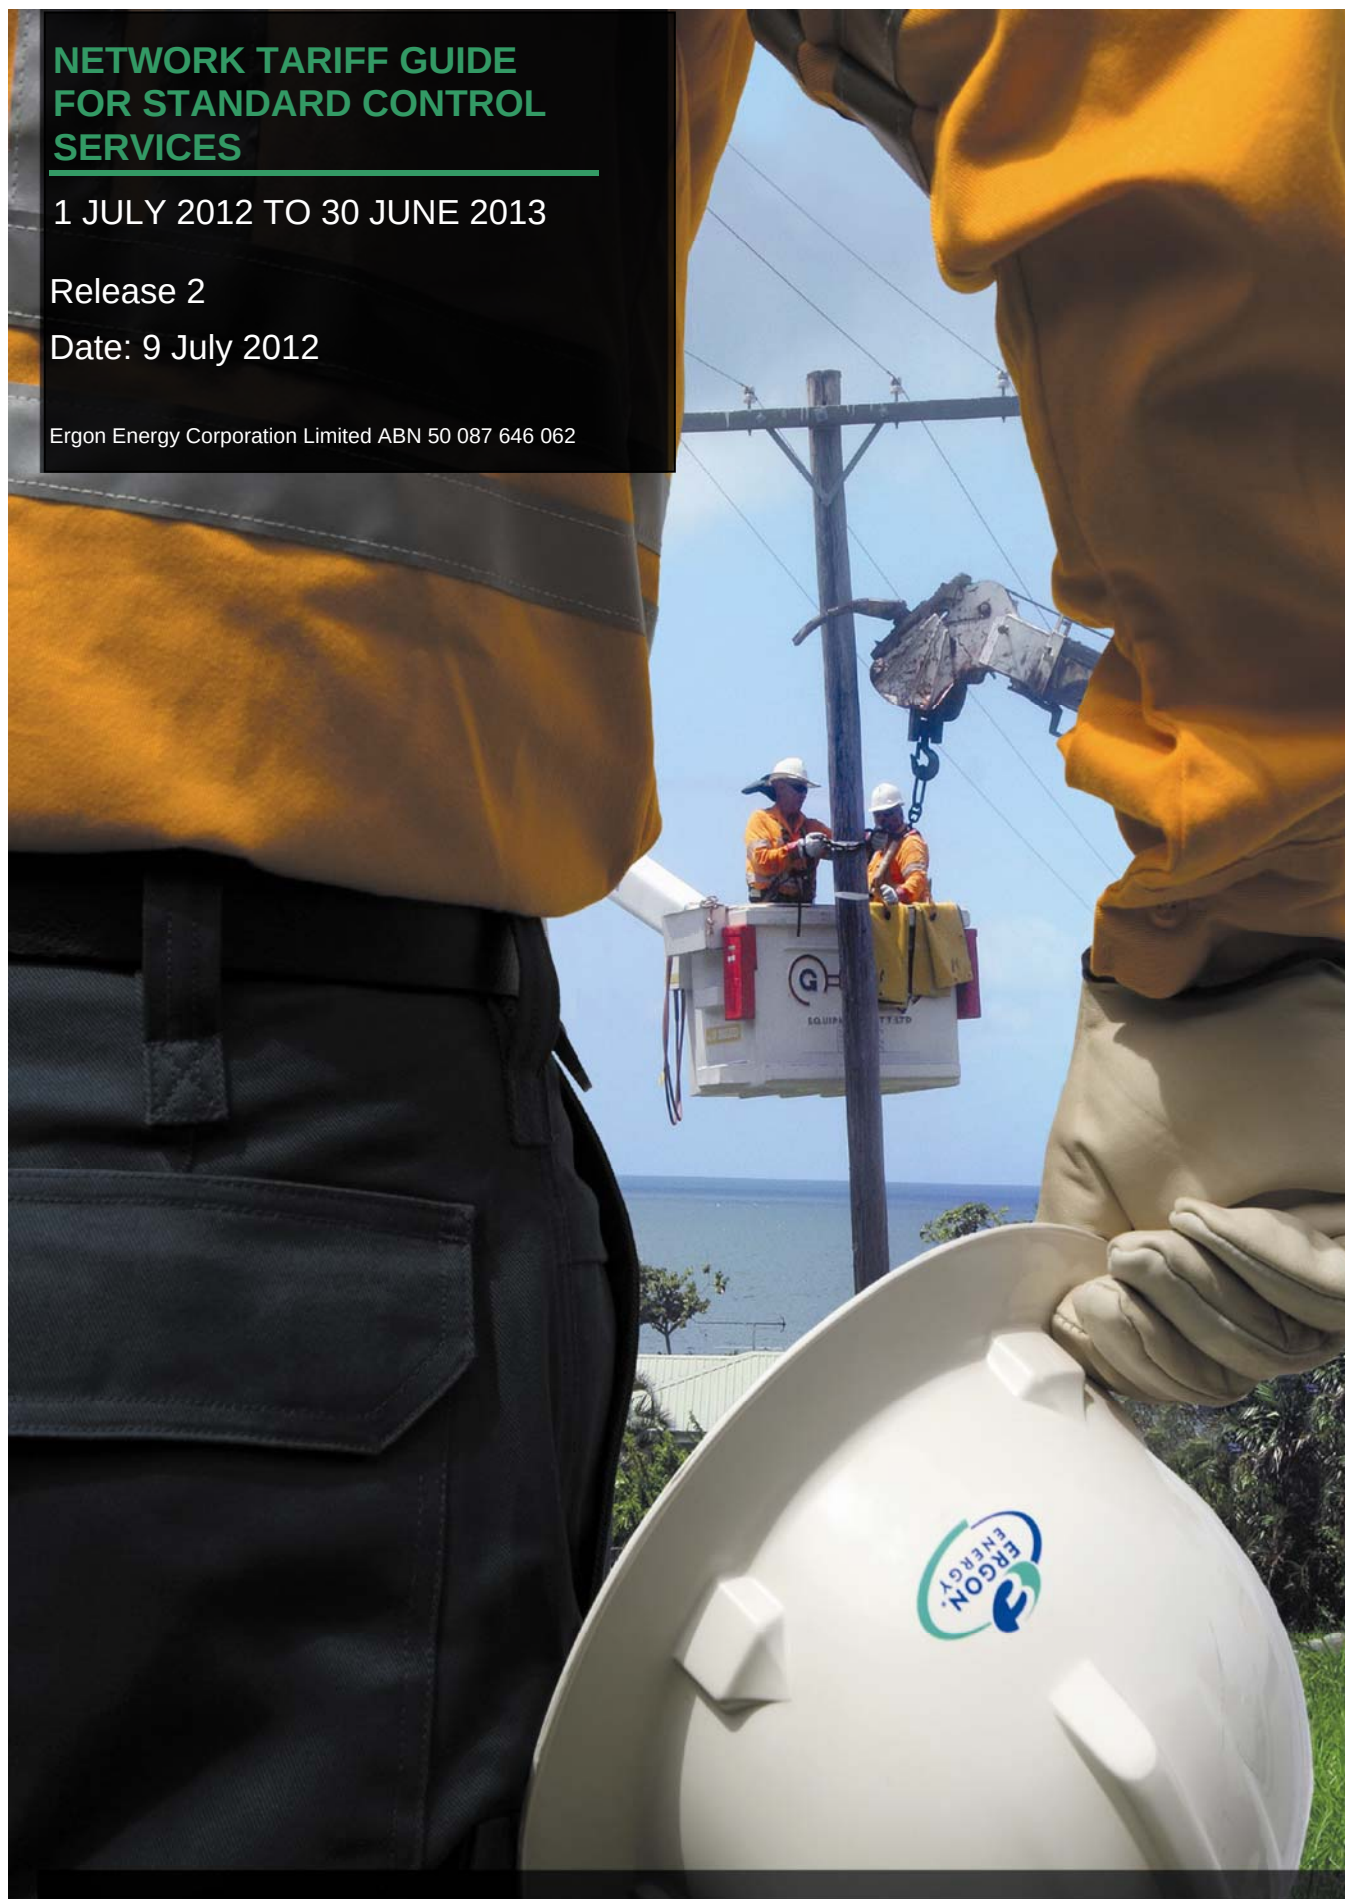

everything in our power



CONTENTS

CONTENTS	2
1. INTRODUCTION	4
1.1. Who this Network Tariff Guide applies to.....	4
1.2. 2012-13 Network Tariff Code Rates	4
1.3. Format of this Tariff Guide	4
1.4. How Network Tariffs are derived for Standard Control Services.....	4
1.5. Where Can More Information Be Obtained?	4
1.6. How To Contact Ergon Energy	5
2. COMMON TERMS	6
3. GENERAL REQUIREMENTS	7
4. TARIFF CLASSES.....	8
4.1. Assignment and Re-Assignment of Customer to Tariff Classes	10
4.2. Notification of Tariff Class Assignments and Reassignments	10
4.3. Review of a Customer's Assigned Tariff Class	10
4.4. Objections to a Tariff Class Assignment or Reassignment	12
4.5. Network Tariff Reviews.....	12
5. ZONES	13
5.1. Number of Zones	13
5.2. Definitions of Zones	14
5.3. Zone Map.....	15
6. DISTRIBUTION LOSS FACTORS (DLFS)	16
6.1. General Information	16
6.2. DLF Rules.....	17
6.3. DLF Categories.....	17
6.4. DLF Applications.....	17

6.5.	Further information	18
7.	TRANSMISSION NODE IDENTIFIERS (TNIS)	18
8.	NETWORK USER GROUPS.....	18
8.1.	INDIVIDUALLY CALCULATED CUSTOMERS (ICCs).....	18
8.2.	CONNECTION ASSET CUSTOMERS (CACs)	20
8.3.	EMBEDDED GENERATORS (EGs)	21
8.4.	STANDARD ASSET CUSTOMERS	22
8.5.	STANDARD ASSET CUSTOMERS >100 MWh Per Annum	22
8.6.	STANDARD ASSET CUSTOMERS <100 MWh Per Annum – VOLUME LARGE	25
8.7.	STANDARD ASSET CUSTOMERS <100 MWh Per Annum – VOLUME SMALL.....	26
8.8.	STANDARD ASSET CUSTOMERS <100 MWh Per Annum – CONTROLLED SUPPLIES	28
8.9.	STANDARD ASSET CUSTOMERS <100 MWh Per Annum – UNMETERED SUPPLIES	30
8.10.	QUEENSLAND GOVERNMENT SOLAR BONUS SCHEME FOR STANDARD ASSET CUSTOMERS <100 MWh Per Annum	33
	APPENDIX 1 – TUOS REGIONAL INDICATORS	34
	APPENDIX 2 – NETWORK TARIFF CODES & RATES	36

Network Tariff Guide for Standard Control Services

1. INTRODUCTION

1.1. Who this Network Tariff Guide applies to

Network tariffs are a charge for the services associated with using the network to transport electricity from Generators to the end-use customer.

This Network Tariff Guide for Standard Control Services (Tariff Guide) sets out Network Tariff Codes and application rules. Rates for each Network Tariff Code are included in this Tariff Guide.

This Tariff Guide has been developed for use by customers, retailers and consultants and applies to network users connected to Ergon Energy Corporation Limited's (Ergon Energy) distribution supply network.

1.2. 2012-13 Network Tariff Code Rates

The rates provided for each Network Tariff Code are shown GST Exclusive and GST Inclusive.

1.3. Format of this Tariff Guide

Each network user category has a separate section within this Tariff Guide. Where applicable, a description of standard Network Tariff Codes and rates are shown within those sections and in Appendix 2.

Information on Network Tariff Codes and rates applying to site-specific tariffs is available on request with the customer's written consent. See section 1.6 for appropriate contact details.

Details on standard Distribution Loss Factors are provided in Section 6.

1.4. How Network Tariffs are derived for Standard Control Services

The Australian Energy Regulator (AER), as the economic regulator, determines the amount of revenue Ergon Energy can earn in providing Standard Control Services under Chapter 6 of the National Electricity Rules (Rules). This revenue amount is termed the Annual Revenue Requirement (ARR) and is recovered from various customer groups through network tariffs. The AER will only approve network tariffs developed by Ergon Energy if they comply with Chapter 6 of the Rules.

1.5. Where Can More Information Be Obtained?

Ergon Energy publishes the following documents relating to network pricing for its Standard Control Services:

- (a) An “Information Guide for Standard Control Services” to assist external parties understand the relationship between the approved ARR and network tariffs, and understand how Ergon Energy calculates network tariffs for all users of Ergon Energy’s distribution network; and
- (b) This “Network Tariff Guide for Standard Control Services” which sets out the application rules and rates applicable for network tariffs for the 2011-12 financial year.

Ergon Energy is also required to submit a Pricing Proposal to the AER each regulatory year as part of the annual pricing approval process. This document provides additional guidance on the compliance requirements of Chapter 6 of the Rules, and how Ergon Energy’s network prices for its Standard Control Services and Alternative Control Services meet the requirements of the Rules.

Copies of the abovementioned documents are available on the Ergon Energy web site at:

www.ergon.com.au/contractors,-suppliers--and--developers/electricity-distribution-pricing-methodologies/network-tariffs

1.6. How To Contact Ergon Energy

Network users and retailers who are uncertain about the network pricing process or their particular circumstances are encouraged to contact us for assistance.

CONTACT DETAILS

Manager Regulatory Affairs – Tariff Strategy

P O Box 1090

Townsville Q 4810

Ph 13 10 46

E-mail: netprice@ergon.com.au

2. COMMON TERMS

The following acronyms are applied throughout this Tariff Guide:

- AD - Authorised Demand in kilowatts
- AEMO – Australian Energy Market Operator
- AER – Australian Energy Regulator
- CAC - Connection Asset Customer
- CPI - Consumer Price Index
- DLF - Distribution Loss Factor
- DNSP - Distribution Network Service Provider
- DUOS - Distribution Use of System.
- EG - Embedded Generator
- ICC - Individually Calculated Customer
- Network Tariffs - consist of rates for DUOS and TUOS
- NTC - Network Tariff Code
- NMI - National Metering Identifier
- Pricing Zones - East, West and Mount Isa zones
- Rules – means the National Electricity Rules
- SAC - Standard Asset Customer
- TNI - Transmission Node Identifier
- TUOS - Transmission Use of System (this includes DPPC – Designated Pricing Proposal Charges)

3. GENERAL REQUIREMENTS

The following general requirements apply to the selection and amendment of network tariffs:

- (a) It is intended that a Network Tariff Code will apply to each meter data stream.
- (b) Network users with multiple network connections will pay network charges for each connection point;

This approach is consistent with the NMI Procedure issued by the Australian Energy Market Operator (AEMO);
- (c) If requested, Ergon Energy will provide the customer or the customer's retailer with reasonable assistance in identifying the network tariffs which may be applicable to the customer's installation;
- (d) Demand and/or volume are to be measured at each individual network connection point;
- (e) Where applicable, demand based charges will be calculated on a pro rata daily basis for initial and final accounts;
- (f) Where Ergon Energy's load control equipment exists (including associated metering), this may not be disconnected without Ergon Energy's prior written consent; and
- (g) Network charges will be billed by Ergon Energy on a monthly basis.

4. TARIFF CLASSES

Ergon Energy's tariffs are currently differentiated at the highest level by:

- Network user groupings – ICC, SAC, CAC and EG;
- Zones – East, West and Mount Isa; and
- Whether the customer has connected under the previous regulatory arrangements where connection assets form part of the network tariff or the new Large Customer Connection arrangements where assets are paid for or contributed by the customer.

A list of Ergon Energy's tariff classes and corresponding Network Tariff Codes for its Standard Control Services are set out in the table below.

Table 1: Tariff Classes and Network Tariff Codes

Tariff Class	Tariff	Network Tariff Codes
Individually Calculated Customer (Pre 30 June 2010) – East	ICC	EICCA1 onwards
Individually Calculated Customer (Pre 30 June 2010) – West	ICC	WICCA1 onwards
Individually Calculated Customer (Pre 30 June 2010) – Mount Isa	ICC	MICCA1 onwards
Individually Calculated Customer (Post 30 June 2010) – East	ICC	EICCB1 onwards
Individually Calculated Customer (Post 30 June 2010) – West	ICC	WICCB1 onwards
Individually Calculated Customer (Post 30 June 2010) – Mount Isa	ICC	MICCB1 onwards
Connection Asset Customers (Pre 30 June 2010) – East	CAC	ECACA1 onwards
Connection Asset Customers (Pre 30 June 2010) – West	CAC	WCACA1 onwards
Connection Asset Customers (Pre 30 June 2010) – Mount Isa	CAC	MCACA1 onwards
Connection Asset Customers (Post 30 June 2010) – East	CAC	ECACB1 onwards
Connection Asset Customers (Post 30 June 2010) – West	CAC	WCACB1 onwards
Connection Asset Customers (Post 30 June 2010) – Mount Isa	CAC	MCACB1 onwards
Embedded Generation (Pre 30 June 2010) – East	EG	EEGA1 onwards
Embedded Generation (Pre 30 June 2010) – West	EG	WEGA01 onwards
Embedded Generation (Pre 30 June 2010) – Mount Isa	EG	MEGA01 onwards
Embedded Generation (Post 30 June 2010) – East	EG	EEGB1 onwards
Embedded Generation (Post 30 June 2010) – West	EG	WEGB01 onwards

Tariff Class	Tariff	Network Tariff Codes
Embedded Generation (Post 30 June 2010) – Mount Isa	EG	MEGB01 onwards
Standard Asset Customer – Large (>100MWH pa) – East	Demand High Voltage	EDHT1, EDHT2, EDHT3
	Demand Large	EDLT1, EDLT2, EDLT3
	Demand Medium	EDMT1, EDMT2, EDMT3
	Demand Small	EDST1, EDST2, EDST3
Standard Asset Customer – Large (>100MWH pa) – West	Demand High Voltage	WDHT1, WDHT2, WDHT3
	Demand Large	WDLT1, WDLT2, WDLT3
	Demand Medium	WDMT1, WDMT2, WDMT3
	Demand Small	WDST1, WDST2, WDST3
Standard Asset Customer – Large (>100MWH pa) – Mount Isa	Demand High Voltage	MIDH
	Demand Large	MIDL
	Demand Medium	MIDM
	Demand Small	MIDS
Standard Asset Customer – Small (<100MWH pa) – East	Volume Large	EVLT1, EVLT2, EVLT3
	Volume Small	EVST1, EVST2, EVST3
	Volume Controlled	EVCT1, EVCT2, EVCT3
	Volume Night Controlled	EVNT1, EVNT2, EVNT3
Standard Asset Customer – Small (<100MWH pa) – West	Volume Large	WVLT1, WVLT2, WVLT3
	Volume Small	WVST1, WVST2, WVST3
	Volume Controlled	WVCT1, WVCT2, WVCT3
	Volume Night Controlled	WVNT1, WVNT2, WVNT3,
Standard Asset Customer – Small (<100MWH pa) – Mount Isa	Volume Large	MIVL
	Volume Small	MIVS
	Volume Controlled	MIVC
	Volume Night Controlled	MIVN
Standard Asset Customer – Unmetered - East	Volume Unmetered	EVUT1, EVUT2, EVUT3 EVUT1MI, EVUT2MI, EVUT3MI EVUT1MA, EVUT2MA, EVUT3MA
Standard Asset Customer – Unmetered - West	Volume Unmetered	WVUT1, WVUT2, WVUT3 WVUT1MI, WVUT2MI, WVUT3MI WVUT1MA, WVUT2MA, WVUT3MA
Standard Asset Customer – Unmetered – Mount Isa	Volume Unmetered	MIVU, MIVUMI, MIVUMA

4.1. Assignment and Re-Assignment of Customer to Tariff Classes

The AER requires Ergon Energy to comply with the procedures for assigning or reassigning customers to tariff classes¹ as per the requirements set out in its Final Distribution Determination.

Customers connected to the network prior to 1 July 2010, are deemed to be 'assigned' to the tariff class which Ergon Energy was charging the customer under immediately prior to 1 July 2010. However from 1 July 2010, the AER requires Ergon Energy to notify the customer concerned of the tariff class it will assign the customer to, prior to a new assignment or reassignment occurring.

Assignment or reassignment of customers to Ergon Energy's tariff classes can occur as a result of:

- Customers requesting a new connection to the network;
- Existing customers applying for increased capacity on the network;
- A change in a customer's NMI classification;
- Annual review as part of the process of Ergon Energy's process of developing and submitting a Pricing Proposal for approval by the AER; or
- Requests for a review of the assigned tariff class by either a customer and/or retailer.

4.2. Notification of Tariff Class Assignments and Reassignments

Information regarding a customer's tariff class will be made available to the customer and to the retailer via written notification prior to Ergon Energy assigning or reassigning a customer to a tariff class.

The effective date for a Standard Control Services tariff class assignment or reassignment will be the date as advised by Ergon Energy.

It is important to note, that a tariff class reassignment may necessitate a change to a customer's network tariff assigned to a NMI. Details of Ergon Energy's proposed new network tariffs will be included in the written notification provided to both the customer and the retailer on the tariff class reassignment. Subject to any appeal (refer section 4.4 below), the new tariff class and new network tariff codes will take effect from the date advised by Ergon Energy in the written notification.

A customer or retailer may request further information relating to a particular tariff class assignment or reassignment decision by contacting Network Pricing (see section 1.6.).

4.3. Review of a Customer's Assigned Tariff Class

Ergon Energy does not reassign customers to tariff classes without careful review and adequate justification. Reassignment of a customer's tariff class generally only occurs in a

¹ A tariff class is defined under the National Electricity Rules and relates to a group or class of customers who are subject to a particular tariff or tariffs.

situation where a customer alters the underlying characteristics of their connection, in terms of size or nature of usage.

As noted in section 4.1 above, in addition to Ergon Energy's own review of its tariff classes, a customer and/or retailer may request a review of a customer's assigned tariff class at any time during a regulatory year. This request may occur directly through an explicit request to review a tariff class assigned to a customer, or indirectly, through a request to change a network tariff assigned to a NMI.

Ergon Energy has specific criteria for determining reassignment, based on the relevant customer grouping as set out in the table below. Once a customer is identified for reassignment, the connection characteristics and the customer's expected energy consumption are used to determine the appropriate customer group, and hence tariff class, to which the customer should be re-assigned.

Table 2: Tariff Class Reassignment Criteria for Standard Control Services

	Assignment Criteria for new customers	Reassignment criteria for existing customers
SACs	- Annual consumption is expected to be below 4 GWh.	- Annual consumption increases, or is expected to increase, above 4 GWh; and /or - A customer requests an increase in supply capacity requiring augmentation to their connection assets which result in a dedicated supply system which is quite different and separate from the remainder of the supply network.
CACs	- Required capacity above 1,500 kVA; or - Annual consumption is expected to exceed 4 GWh.	Reassigned to Individually Calculated Customers: - Annual consumption increases, or is expected to increase, above 40 GWh; and/or - A customer requests an increase in supply capacity requiring augmentation to their connection assets which result in a dedicated supply system which is quite different and separate from the remainder of the supply network. Reassigned to Standard Asset Customers: - Annual consumption reduces or is expected to reduce below 4 GWh and their dedicated supply system is not considered to be quite different and separate from the remainder of the supply network.
ICCs	- Annual consumption is expected to exceed 40 GWh; or - Their dedicated supply system is considered to be quite different and separate from the remainder of the supply network.	- Annual consumption reduces or is expected to reduce below 40 GWh and their dedicated supply system is considered comparable with Connection Asset Customers at the same voltage level.

The following general requirements apply to the review and amendment of a customer's tariff class assignment for Standard Control Services:

- Any change in an assigned tariff class will only proceed upon the approval by Ergon Energy. Ergon Energy will make its determination having regard to its

Standard Control Services Tariff Guide, its Tariff Class Reassignment Criteria (as set out above), the AER's Final Distribution Determination and any applicable law;

- Requests should be made by the customer, and are preferably made to Ergon Energy through the customer's retailer. Requests for review of a tariff class should be emailed to Network Pricing (see section 1.6);
- Subject to a change in the customer's usage or pattern of usage at the customer's premises, a further request to review and change a tariff class should not be made until a period of 12 months has elapsed from the previous request;
- Any change in the tariff class, and associated network tariff(s) will take effect from the date as approved by Ergon Energy (the effective date). Network charges under an existing network tariff within an existing tariff class will continue to be billed by Ergon Energy until the effective date. Backdating of charges prior to the effective date will not be allowed by Ergon Energy.

4.4. Objections to a Tariff Class Assignment or Reassignment

If a customer or a retailer raises an objection to a tariff class assignment or reassignment, Ergon Energy will make every effort to investigate and address the customer's or retailer's concerns when the customer or retailer firsts contacts Ergon Energy.

In the first instance, the customer or retailer should contact Network Pricing via e-mail (see section 1.6) requesting a review of Ergon Energy's proposed tariff class assignment or reassignment. The request should outline:

- The customer's name, NMI and contact details (or retailer's contact details if acting on behalf of the customer);
- What the customer or the retailer is objecting to (noting Ergon Energy's decision is made having regard to Ergon Energy's Network Tariff Guide for Standard Control Services, its Tariff Class Reassignment Criteria, the AER's Final Distribution Determination and any applicable law); and
- What outcome the customer or retailer is seeking.

Ergon Energy will endeavour to inform the customer or the retailer of the outcome of its review, including a reason for its decision within 5 business days of receiving such a request.

If the customer or the retailer is not happy with the outcome from this review, the objection can be escalated to the Manager Regulatory Affairs – Tariff Strategy. The customer or the retailer can request an objection to be escalated by contacting Network Pricing via e-mail (see section 1.6). The Manager Regulatory Affairs – Tariff Strategy will advise the customer or the retailer of the outcome of an escalated objection as soon as practical.

If Ergon Energy is unable to resolve the objection to the customer's satisfaction, the customer can refer the matter to the AER for resolution via the dispute resolution process available under Part 10 of the National Electricity Law.

4.5. Network Tariff Reviews

The customer or the retailer may apply to Ergon Energy for a change to the network tariff assigned to a NMI by sending a request via e-mail to the address provided in section 1.6.

Ergon Energy will inform the customer and/or retailer within 5 business days of receiving such a request, of the decision taken.

If Ergon Energy:

- Agrees that the network tariff proposed by the customer or retailer is applicable to the NMI, Ergon Energy will advise the retailer of the effective date of application; or
- Disagrees that the network tariff proposed by the customer or retailer is applicable to the NMI, Ergon Energy will notify the customer and/or retailer, including a reason for the rejection.

Subject to a change in usage or the pattern of usage at the customer's installation, a further request to change the network tariff code assigned to a NMI should not be made until a period of 12 months has elapsed from the previous request for the NMI.

If a customer objects to a network tariff change, the customer may appeal this decision. Requests to review a decision should be made by the customer, and are preferably made to Ergon Energy through the customer's retailer.

Ergon Energy will review an appeal and the customer's eligibility for a network tariff with regard to its Network Tariff Guide for Standard Control Services, its Tariff Class Reassignment Criteria, the AER's Final Distribution Determination and any applicable law. Ergon Energy will advise the customer and/or the retailer of the outcome of an appeals review as soon as practical.

Any change in a network tariff assigned to a NMI will take effect from the date as approved by Ergon Energy (the effective date). Network charges under the existing network tariff will continue to be billed by Ergon Energy until the effective date. Backdating of charges prior to the effective date will not be allowed by Ergon Energy.

If Ergon Energy agrees with a proposed network tariff and determines that a tariff class reassignment is also required, written notification of the new tariff class and new network tariff codes will also be provided to the customer and to the retailer prior to the tariff class reassignment occurring in accordance with section 4.3.

5. ZONES

5.1. Number of Zones

Three pricing zones have been delineated in the Ergon Energy area of supply, broadly based on Local Government areas of Queensland, with the distribution network electrical connection being the final determinant of which zone applies. Zone pricing impacts Distribution Use of System (DUOS) prices only; Transmission Use of System (TUOS) prices are not impacted by zones.

- (a) **East Zone** - includes those areas where the network users are supplied from the distribution system connected to the National Electricity Grid and have a relatively low distribution cost to supply;
- (b) **West Zone** - includes those areas outside the East Zone and connected to the National Electricity Grid, which have a significantly higher distribution cost of supply than the East Zone; and

- (c) **Mount Isa Zone** - broadly defined as those areas supplied from the isolated Mount Isa system. This zone is not connected to the National Electricity Grid and as such is excluded from the application of the Rules. However, oversight of the network cost to supply the regulated network within the zone is carried out by the AER.

NOTE: those areas supplied from isolated (remote) generation are **NOT** included in any of the above zones.

5.2. Definitions of Zones

- (a) The **East Zone** consists of:

The **whole** of the local government areas as follows:

- Regional Councils – Bundaberg, Cassowary Coast, Fraser Coast, Gladstone, Mackay, North Burnett, Rockhampton, South Burnett, Southern Downs, Toowoomba and Whitsunday;
- City Councils – Townsville; and
- Shire Councils – Banana, Burdekin, Hinchinbrook, Cherbourg Aboriginal, Woorabinda Aboriginal, Yarrabah Aboriginal; and

Part of the local government areas as follows:

- Regional Councils – Gympie (Ergon area only), Cairns (excluding areas north of the Daintree River), Isaac (excluding areas west of Moranbah township), Western Downs (Dalby township and Wambo district only), Central Highlands (excluding Emerald and areas west of Emerald), Tablelands (excluding Herberton and Mareeba areas **not** supplied by the “East” distribution system).

- (b) The **West Zone** consists of:

The **whole** of the local government areas as follows:

- Regional Councils – Barcaldine, Blackall-Tambo, Charters Towers, Longreach, Maranoa;
- Shire Councils – Balonne, Bulloo, Carpentaria, Cook, Croydon, Etheridge, Flinders, Hope Vale Aboriginal, McKinlay, Murweh, Paroo, Quilpie, Richmond, Winton, Wujal Wujal Aboriginal; and

Part of the local government areas as follows:

- Regional Councils - Barcoo (connected to national electricity grid only), Cairns (north of the Daintree River only), Goondiwindi (Ergon Energy supply area), Isaac (west of Moranbah township only), Western Downs (excluding Dalby township and Wambo district), Central Highlands (Emerald and areas west of Emerald only), Tablelands (Herberton and Mareeba areas **not** supplied by the “East” distribution system only);

- (c) The **Mount Isa Zone** consists of the regulated network within the following areas:


The **whole** of the local government areas as follows:

- Cloncurry Shire Council, Mount Isa City Council, and those **parts** of the Burke and Boulia Shire Councils supplied from the Mount Isa system.

NOTE: those areas supplied from isolated generation are **NOT** included in any of the above zones.

5.3. Zone Map

The following map depicts the East Zone in red, Mount Isa Zone in yellow and the West Zone is the remaining area of the state supplied from the interconnected grid.

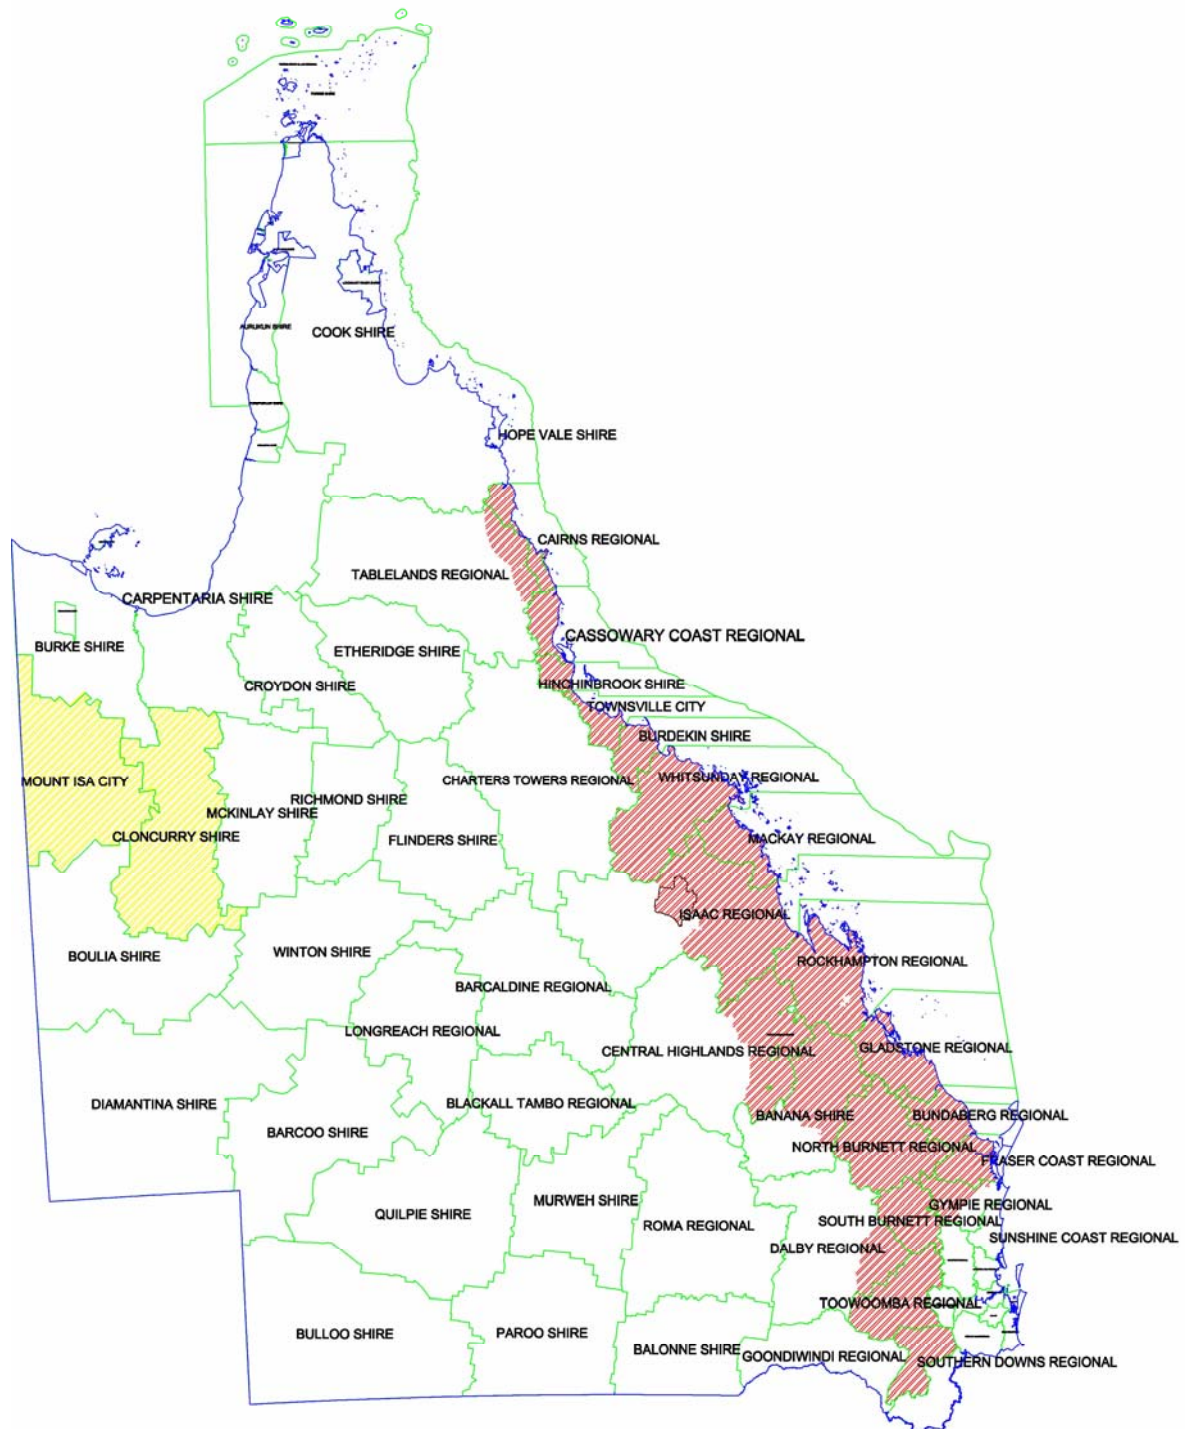

6. DISTRIBUTION LOSS FACTORS (DLFs)

6.1. General Information

- (a) Every NMI has a DLF code which is associated with the location of the metering point. The code's value is re-calculated periodically in line with the Rules.
- (b) The DLF is a multiplier used to convert the actual metered energy into the equivalent energy passing through the appropriate Transmission Network Connection Point by allowing for the distribution network losses that are incurred between the meter and the Transmission Network Connection Point.
- (c) The DLF is applied to the metered consumption for the calculation of TUOS volume charges. DLFs are generally assigned on the basis of the standard metering voltage for the type of connection however a specific loss factor may be applied where there is a unique network supply configuration.
- (d) The 2012-13 DLFs including site-specific DLFs for some larger ICCs, CACs and EGs are published on the AEMO web site:

<http://www.aemo.com.au/electricityops/lossfactors.html>

- (e) Where site-specific DLFs have not been published, the DLFs from Table 3 will apply.
- (f) Detailed information about the purpose and application of DLFs may also be obtained from the AEMO web site.

The following table of DLFs has been approved by the AER and published by AEMO for the 2012-13 year.

Table 3 - Standard Distribution Loss Factors

Ergon Energy 2012-13 Distribution Loss Factors						
Network Level	East Zone		West Zone		Mt Isa Zone	
	Code	DLF	Code	DLF	Code	DLF
Sub-transmission Bus	GESB	1.007	GWSB	1.044	GMSB	1.001
Sub-transmission Line	GESL	1.016	GWSL	1.091	GMSL	1.005
22/11 kV Bus	GEHB	1.018	GWHB	1.097	GMHB	1.008
22/11 kV Line	GEHL	1.038	GWHL	1.133	GMHL	1.036
LV Bus	GELB	1.077	GWLB	1.185	GMLB	1.057
LV Line	GELL	1.078	GWLL	1.357	GMLL	1.079

6.2. DLF Rules

- (a) The DLFs in this Tariff Guide do NOT apply to NMIs with site specific distribution loss factors.
- (b) DLFs for all NMIs will be included in the Schedule of Network Tariffs issued to the customer and/or their retailer.
- (c) The zonal boundaries are identical to those used for the network tariffs.
- (d) For SACs, the customer or retailer must nominate the DLF appropriate to the connection. The customer or retailer may be required to justify any nominated DLF.
- (e) Where the voltage at the metering point is not listed, or there is doubt about the application of these rules, please request advice from Ergon Energy.

6.3. DLF Categories

- (a) **Sub-transmission Bus** – Applicable to connection points that are High Voltage metered at a Sub-transmission Bus with a voltage greater than 30kV;
- (b) **Sub-transmission Line** – Applicable to connection points that are High Voltage metered at a Sub-transmission Line with a voltage greater than 30kV;
- (c) **22/11kV Bus** – Applicable to connection points that are High Voltage metered at a 22/11kV Bus with a voltage less than 30kV and greater than 1,000 volts;
- (d) **22/11kV Line** – Applicable to connection points that are High Voltage metered at a 22/11kV Line with a voltage less than 30kV and greater than 1,000 volts;
- (e) **Low Voltage Bus** – Applicable to connection points that are Low Voltage metered at a Low Voltage Bus with a voltage less than 1,000 volts; and
- (f) **Low Voltage Line** – Applicable to connection points that are Low Voltage metered at a Low Voltage Line with a voltage less than 1,000 volts.

6.4. DLF Applications

- (a) **Sub-transmission and 22/11kV Bus**

NMIs supplied from a zone substation by dedicated greater than 30kV lines and are metered at or immediately adjacent to the zone substation would be eligible for a Sub-transmission Bus DLF.

Zone substations are defined as substations where the voltage level is stepped down from a voltage greater than 30kV.

- (b) **Sub-transmission Line**

The Sub-transmission Line DLF will apply to all NMIs which are connected to high voltage sub-transmission lines (greater than 30kV) and are metered at the same voltage as the line is energised.

If customers believe that the NMI would qualify for a high voltage Bus DLF rather than a high voltage Line DLF they should submit details justifying their claim to Ergon Energy. As an example, NMIs supplied from a zone substation by dedicated 22/11kV lines and are metered at or immediately adjacent to the zone substation would be eligible for a 22/11kV Bus DLF.

(c) **22/11kV Line**

The 22/11kV Line DLF will apply to all NMIs which are connected to high voltage distribution lines and are metered at the same voltage as the line is energised.

(d) **LV Bus**

NMIs which are supplied from a distribution substation on their site (owned or leased) and are metered at the low voltage level are eligible for a LV Bus DLF.

(e) **LV Line**

All NMIs not covered by any of the above categories. If customers believe that the NMI would qualify for a LV Bus DLF rather than a LV Line DLF they should submit details justifying their claim to Ergon Energy.

6.5. Further information

Further information on Ergon Energy's methodology for calculating DLFs is available on Ergon Energy's website:

www.ergon.com.au/about-us/the-electricity-industry/electricity-distribution-pricing-methodologies/distribution-loss-factor-calculation-methodology

7. TRANSMISSION NODE IDENTIFIERS (TNIs)

The TNI identifies the Transmission Network Connection Point from which a customer is supplied. The NMI Discovery process (Stage 2) will provide retailers with the TNI applicable to a NMI.

8. NETWORK USER GROUPS

8.1. INDIVIDUALLY CALCULATED CUSTOMERS (ICCs)

8.1.1. Definition

ICCs are those customers:

- (a) with energy consumption typically greater than 40 GWh per annum; or
- (b) customers with energy consumption lower than 40 GWh per annum where:
 - (i) a customer has a dedicated supply system which is quite different and separate from the remainder of the supply network; or

- (ii) there are only two or three customers in a supply system making average prices inappropriate; or
- (iii) a customer is connected at or close to a transmission connection point and the inclusion of the cost of average shared network would increase their network price above stand-alone; or
- (iv) inequitable treatment of otherwise comparable customers arising from application of the 40 GWh per annum threshold.

8.1.2. DUOS Tariffs

- (a) DUOS tariffs are based on:
 - (i) the actual dedicated connection assets utilised by the customer;
 - (ii) the customer's specifically identified portion of any shared distribution network utilised for the electricity supply;
 - (iii) whether the customer is subject to the pre or post 30 June 2010 arrangements for Large Customer Connections; and
 - (iv) whether the customer is located in the East, West or Mount Isa zone of Ergon Energy's network.
- (b) DUOS tariffs incorporate a Fixed Charge (\$/day), a Capacity Charge (\$/kW of AD/month), an Actual Demand Charge (\$/kW/month) and a Volume Charge (\$/kWh).

Where the actual demand exceeds the authorised demand in any one month the actual demand will be substituted for the authorised demand in the calculation of the capacity charge billed for that month.

- (c) DUOS tariffs for ICCs are site-specific and are available with the customer's written consent.

8.1.3. TUOS Tariffs

- (a) TUOS charges are calculated and levied for each transmission connection point and are passed through on a reflective basis proportional to the Authorised Demand of the customer and their energy consumption.
- (b) TUOS tariffs incorporate a Fixed Charge (\$/day), a Capacity Charge (\$/kW of AD/month), a Common Service & General Charge (\$/day) and a Volume Charge (\$/kWh)

Where the actual demand exceeds the authorised demand in any one month the actual demand will be substituted for the authorised demand in the calculation of the capacity charge billed for that month.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

- (c) TUOS tariffs for ICCs are site-specific and are available with the customer's written consent.

8.2. CONNECTION ASSET CUSTOMERS (CACs)

8.2.1. Definition

CACs are those customers:

- (a) with required capacity above 1,500kVA;
- (b) with energy consumption typically greater than 4 GWh per annum; or
- (c) with required capacity below 1,500kVA where:
 - (i) a customer has a dedicated supply system which is quite different and separate from the remainder of the supply network; or
 - (ii) inequitable treatment of otherwise comparable customers arising from application of the 4 GWh per annum threshold

CACs are further subdivided into categories based on voltage levels as follows:

- 66kV – connected to either a 66kV substation or a 66kV line;
- 33kV – connected to either a 33kV substation or a 33kV line;
- 22/11kVBus – connected to either a 22kV or 11kV substation; and
- 22/11kVLine – connected to either a 22kV or 11kV line.

8.2.2. DUOS Tariffs

- (a) DUOS tariffs are based on:
 - (i) the actual dedicated connection assets utilised by the customer;
 - (ii) average charges for use of the shared network;
 - (iii) whether the customer is subject to the pre or post 30 June 2010 arrangements for Large Customer Connections; and
 - (iv) whether the customer is located in the East, West or Mount Isa zone of Ergon Energy's network.
- (b) DUOS tariffs incorporate a Fixed Charge (\$/day), a Capacity Charge (\$/kW of AD/month), an Actual Demand Charge (\$/kW/month) and a Volume Charge (\$/kWh).

Where the actual demand exceeds the authorised demand in any one month the actual demand will be substituted for the authorised demand in the calculation of the capacity charge billed for that month.

- (c) DUOS tariffs for CACs are site-specific and are available with the customer's written consent.

8.2.3. TUOS Tariffs

- (a) TUOS charges are calculated and levied for each transmission connection point and are passed through on a reflective basis proportional to the Authorised Demand of the customer and their energy consumption.
- (b) TUOS tariffs incorporate a Fixed Charge (\$/day), a Capacity Charge (\$/kW of AD/month), a Common Service & General Charge (\$/day) and a Volume Charge (\$/kWh).

Where the actual demand exceeds the authorised demand in any one month the actual demand will be substituted for the authorised demand in the calculation of the capacity charge billed for that month.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

- (c) TUOS tariffs for CACs are site-specific and are available with the customer's written consent.

8.3. EMBEDDED GENERATORS (EGs)

8.3.1. Definition

Embedded Generators (EGs) are customers that export energy into the distribution system other than customers with micro generation facilities that have been classified as a SAC.

EGs are further separated into two categories:

- (a) EGs that are connected to the distribution system and only generate into the distribution system; or
- (b) EGs that are connected to the distribution system, generate and take load from the system.

8.3.2. DUOS Tariffs

- (a) For those EGs that generate into the distribution system a Fixed Charge (\$/day) applies; and
- (b) For those EGs that generate into as well as take load from the distribution system a Fixed Charge (\$/day) applies; and
 - (i) DUOS tariffs for load taken from the distribution system will be allocated as per the appropriate Network Price category selected from ICCs, CACs or SACs.
 - (ii) DUOS tariffs are based on whether the customer is subject to the pre or post 30 June 2010 arrangements for Large Customer Connections; and
 - (iii) Whether the customer is located in the East, West or Mount Isa zone of Ergon Energy's network.

Tariffs for EGs are site-specific and are available with the customer's written consent.

8.3.3. TUOS Tariffs

- (a) For those EGs that only generate into the distribution system.
 - (i) TUOS tariffs do not apply to generated energy.
- (b) For those EGs that generate into as well as take load from the distribution system
 - (i) TUOS tariffs do not apply to generated energy.
 - (ii) TUOS tariffs for load taken from the distribution system will be allocated as per the appropriate Network Price category selected from ICCs, CACs or SACs.

TUOS tariffs for EGs are site-specific and are available with the customer's written consent.

8.4. STANDARD ASSET CUSTOMERS

8.4.1. Definition

All other load customers are classified as Standard Asset Customers (SACs). This includes customers with micro generation facilities (such as small scale photovoltaic (PV) generators) that have a similar service connection and usage profile as other SACs without such facilities. Customers taking supply at LV with a generator installed with a capacity less than or equal to 1MW, will generally be classified as a SAC unless the connection assets are considered to be quite different from that supplying other SACs.

A further description of the categories and tariffs applying to the SAC Group is set out in the following sections.

8.5. STANDARD ASSET CUSTOMERS >100 MWh Per Annum

8.5.1. Definition

SACs >100 MWh are those customers:

- (a) with energy consumption typically greater than 100 MWh per annum who are not otherwise classified as an ICC, CAC or EG; and
- (b) where the network charges are based on the averages of both the shared distribution network charges and connection charges for the network user group in the particular zone.

8.5.2. DUOS Tariffs

- (a) DUOS tariffs are based on:
 - (i) the average of the connection charges;
 - (ii) the average of the shared distribution network charges; and
 - (iii) the locality of the customer – East, West or Mount Isa zone.

- (b) DUOS tariffs incorporate a Fixed Charge (\$/day), an Actual Demand Charge (\$/kW/month) and a Volume Charge (\$/kWh).

The Minimum Chargeable Demand will be applied for each month where the monthly maximum demand fails to exceed this value.

The Minimum Chargeable Demand applicable to each Network Charge Category is:

Network Charge Category	Minimum Chargeable Demand
<i>Demand High Voltage (EDH, WDH or MIDH)</i>	400 kW
<i>Demand Large (EDL, WDL or MIDL)</i>	400 kW
<i>Demand Medium (EDM, WDM or MIDM)</i>	120 kW
<i>Demand Small (EDS, WDS or MIDS)</i>	30 kW

- (c) The Network charge category applicable to a customer will be as nominated by the customer or their retailer from among the following categories:
- (i) ***Demand High Voltage (EDH, WDH or MIDH)*** is available to customers who have high voltage metering and take supply at high voltage. This category is **NOT** available to customers with non-standard or significant connection arrangements, who have distribution transformer(s) provided by Ergon Energy, or to customers who are metered at other than high voltage.
 - (ii) ***Demand Large (EDL, WDL or MIDL), Demand Medium (EDM, WDM or MIDM) and Demand Small (EDS, WDS or MIDS)*** are available to all SACs >100 MWh. The network charge categories are self-selecting with customers' load characteristics determining the optimum category.

8.5.3. TUOS Tariffs

- (a) TUOS charges are calculated and levied for each transmission connection point. Ergon Energy combines rates in geographical regions in the East and West pricing zones and passes through TUOS charges to SACs >100 MWh in these zones, thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”.

Regional indicators do not apply to the Mount Isa pricing zone.

- (b) TUOS tariffs incorporate a Fixed Charge (\$/day), Capacity Charge (\$/kW/month) and Volume Charge (\$/kWh).

The Minimum Chargeable Demand will be applied for each month where the monthly maximum demand fails to exceed this value. Details of the Minimum Chargeable Demand for each network charge Category are shown in Section 8.5.2 (b) above.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate for the TNI applicable to the customer.

8.5.4. Network Tariff Codes – Descriptions & Rates

The Network Tariff Codes – Descriptions & Rates that apply for SACs >100 MWh are:

(a) Demand High Voltage

(i) Network Tariff Code & Descriptions

EDHT1	East Demand HV (400kW) SAC – TUOS Region 1
EDHT2	East Demand HV (400kW) SAC – TUOS Region 2
EDHT3	East Demand HV (400kW) SAC – TUOS Region 3
WDHT1	West Demand HV (400kW) SAC – TUOS Region 1
WDHT2	West Demand HV (400kW) SAC – TUOS Region 2
WDHT3	West Demand HV (400kW) SAC – TUOS Region 3
MIDH	Mt Isa Demand HV (400kW) SAC

The regional indicator for each TNI is shown in Appendix 1.

(ii) Network Tariff Code & Rates – GST Exclusive and GST Inclusive

Appendix 2 sets out the Network Tariff Code and Rates that apply to SACs >100 MWh – Demand High Voltage.

(b) Demand Large

(i) Network Tariff Code & Descriptions

EDLT1	East Demand Large (400kW) SAC – TUOS Region 1
EDLT2	East Demand Large (400kW) SAC – TUOS Region 2
EDLT3	East Demand Large (400kW) SAC – TUOS Region 3
WDLT1	West Demand Large (400kW) SAC – TUOS Region 1
WDLT2	West Demand Large (400kW) SAC – TUOS Region 2
WDLT3	West Demand Large (400kW) SAC – TUOS Region 3
MIDL	Mt Isa Demand Large (400kW) SAC

The regional indicator for each TNI is shown in Appendix 1

(ii) Network Tariff Code & Rates – GST Exclusive and GST Inclusive

Appendix 2 sets out the Network Tariff Code and Rates that apply to SACs >100 MWh – Demand Large.

(c) Demand Medium

(i) Network Tariff Code & Descriptions

EDMT1	East Demand Medium (120kW) SAC – TUOS Region 1
EDMT2	East Demand Medium (120kW) SAC – TUOS Region 2
EDMT3	East Demand Medium (120kW) SAC – TUOS Region 3
WDMT1	West Demand Medium (120kW) SAC – TUOS Region 1
WDMT2	West Demand Medium (120kW) SAC – TUOS Region 2
WDMT3	West Demand Medium (120kW) SAC – TUOS Region 3
MIDM	Mt Isa Demand Medium (120kW) SAC

The regional indicator for each TNI is shown in Appendix 1.

- (ii) Network Tariff Code Rates – GST Exclusive and GST Inclusive

Appendix 2 sets out the Network Tariff Code and Rates that apply to SACs >100 MWh – Demand Medium

(d) Demand Small

- (i) Network Tariff Code Descriptions

EDST1	East Demand Small (30kW) SAC – TUOS Region 1
EDST2	East Demand Small (30kW) SAC – TUOS Region 2
EDST3	East Demand Small (30kW) SAC – TUOS Region 3
WDST1	West Demand Small (30kW) SAC – TUOS Region 1
WDST2	West Demand Small (30kW) SAC – TUOS Region 2
WDST3	West Demand Small (30kW) SAC – TUOS Region 3
MIDS	Mt Isa Demand Small (30kW) SAC

The regional indicator for each TNI is shown in Appendix 1.

- (ii) Network Tariff Code & Rates – GST Exclusive and GST Inclusive

Appendix 2 sets out the Network Tariff Code and Rates that apply to SACs >100 MWh – Demand Small.

8.6. STANDARD ASSET CUSTOMERS <100 MWh Per Annum – VOLUME LARGE

8.6.1. Definition

SACs <100 MWh – Volume Large are those customers:

- (a) with energy consumption in the range of 26 MWh to 100 MWh per annum; and
- (b) where the network charges are based on the averages of both the shared distribution network charges and connection charges for the network user group in the particular zone.

8.6.2. DUOS Tariffs

- (a) DUOS tariffs are based on:
 - (i) the average of the connection charges;
 - (ii) the average of the shared distribution network charges;
 - (iii) The locality of the customer – East, West or Mount Isa zone; and
- (b) DUOS tariffs incorporate a Fixed Charge (\$/day) and a Volume Charge (\$/kWh).

8.6.3. TUOS Tariffs

- (a) TUOS charges are calculated and levied for each transmission connection point. Ergon Energy combines rates in geographical regions in the East and West pricing zones and passes through TUOS charges to SACs >100 MWh in these zones, thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”.

Regional indicators do not apply to the Mount Isa pricing zone.

- (b) TUOS tariffs for Volume Large incorporate a Fixed Charge (\$/day) and Volume Charge (\$/kWh).

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

8.6.4. Network Tariff Codes – Descriptions & Rates

The Network Tariff Codes that apply for SACs <100 MWh – Volume Large are:

- (i) Network Tariff Code & Descriptions

EVL1	East Energy 26 - 100 MWh SAC – TUOS Region 1
EVL2	East Energy 26 - 100 MWh SAC – TUOS Region 2
EVL3	East Energy 26 - 100 MWh SAC – TUOS Region 3
WVLT1	West Energy 26 - 100 MWh SAC – TUOS Region 1
WVLT2	West Energy 26 - 100 MWh SAC – TUOS Region 2
WVLT3	West Energy 26 - 100 MWh SAC – TUOS Region 3
MIVL	Mt Isa Energy 26 - 100 MWh SAC

The regional indicator for each TNI is shown in Appendix 1.

- (ii) Network Tariff Codes & Rates – GST Exclusive and GST Inclusive

Appendix 2 sets out the Network Tariff Code and Rates that apply to SACs <100 MWh – Volume Large.

8.7. STANDARD ASSET CUSTOMERS <100 MWh Per Annum – VOLUME SMALL

8.7.1. Definition

SACs <100 MWh – Volume Small are those customers:

- (a) with energy consumption in the range of 0 MWh to 26 MWh per annum; and
- (b) where the network charges are based on the averages of both the shared distribution network charges and connection charges for the network user group in the particular zone.

8.7.2. DUOS Tariffs

- (a) DUOS tariffs are based on:
- (i) the average of the connection charges;
 - (ii) the average of the shared distribution network charges; and
 - (iii) The locality of the customer – East, West or Mount Isa zone.
- (b) DUOS tariffs incorporate a Fixed Charge (\$/day) and a Volume Charge (\$/kWh).

8.7.3. TUOS Tariffs

- (a) TUOS charges are calculated and levied for each transmission connection point. Ergon Energy combines rates in geographical regions in the East and West pricing zones and passes through TUOS charges to SACs >100 MWh in these zones, thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”.

Regional indicators do not apply to the Mount Isa pricing zone.

- (b) TUOS prices for Volume Small incorporate a Fixed Charge (\$/day) and Volume Charge (\$/kWh).

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

8.7.4. Network Tariff Codes – Descriptions & Rates

The Network Tariff Codes that apply for SACs <100 MWh – Volume Small are:

- (i) Network Tariff Code & Descriptions

EVST1	East Energy 0 - 26 MWh SAC – TUOS Region 1
EVST2	East Energy 0 - 26 MWh SAC – TUOS Region 2
EVST3	East Energy 0 - 26 MWh SAC – TUOS Region 3
WVST1	West Energy 0 - 26 MWh SAC – TUOS Region 1
WVST2	West Energy 0 - 26 MWh SAC – TUOS Region 2
WVST3	West Energy 0 - 26 MWh SAC – TUOS Region 3
MIVS	Mt Isa Energy 0 - 26 MWh SAC

The regional indicator for each TNI is shown in Appendix 1.

- (ii) Network Tariff Codes & Rates – GST Exclusive and GST Inclusive

Appendix 2 sets out the Network Tariff Code and Rates that apply to SACs <100 MWh – Volume Small.

8.8. STANDARD ASSET CUSTOMERS <100 MWh Per Annum – CONTROLLED SUPPLIES

8.8.1. Definition

There are additional network charge categories - Controlled supplies that only apply to SAC <100 MWh customers whose primary network charge category is Volume Large or Volume Small and where specified permanently connected appliances are controlled by network equipment².

The additional categories that may be nominated by the customer or their retailer are:

- (i) **Volume Night - Controlled (EVN, WVN or MIVN)** applies where specified permanently connected appliances are controlled by network equipment so that supply will be available for a minimum period of 8 hours at the absolute discretion of Ergon Energy but usually between the hours of 10:00pm and 7:00am.
- (ii) **Volume Controlled (EVC, WVC or MIVC)** applies where specified permanently connected appliances are controlled by network equipment so that supply will be available for a minimum period of 18 hours per day during time periods set at the absolute discretion of Ergon Energy.

8.8.2. DUOS Tariffs

- (a) DUOS tariffs are based on:
 - (i) the average of the connection charges;
 - (ii) the average of the shared distribution network charges; and
 - (iii) The locality of the customer – East, West or Mount Isa zone;
- (b) DUOS tariffs incorporate a Fixed Charge (\$/day) and a Volume Charge (\$/kWh).

² A controlled load pricing option only applies where electricity load is permanently connected to appliances, separately metered and controlled at a supply point.

For the suitability of appliances and other conditions associated with controlled supply, reference should be made to the retail electricity prices for customers on a Standard Retail Contract or Standard Large Retail Contract (Notified Prices) as reflected in the Queensland Government “Tariff Schedule” (www.dme.qld.gov/Energy/notified_prices.cfm). The conditions contained in the Notified Prices will be applied by Ergon Energy to all customers on controlled supply (i.e. customers on a market retail contract as well as customers on a Standard Retail Contract or Standard Large Retail Contract).

Switching times will be managed at Ergon Energy’s absolute discretion, in accordance with Ergon Energy’s network requirements.

For customers on a Standard Retail Contract or Standard Large Retail Contract, Volume Night – Controlled equates to the Retail Tariff 31 and Volume Controlled equates to the Retail Tariff 33 of the Notified Prices.

8.8.3. TUOS Tariffs

- (a) TUOS charges are calculated and levied for each transmission connection point. Ergon Energy combines rates in geographical regions in the East and West pricing zones and passes through TUOS charges to SACs >100 MWh in these zones, thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”.

Regional indicators do not apply to the Mount Isa pricing zone.

- (b) TUOS tariffs for Volume Night-Controlled and Volume Controlled incorporate a Volume Charge (\$/kWh) only.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

8.8.4. Network Tariff Codes – Descriptions & Rates

The Network Tariff Codes – Descriptions & Rates that apply for SACs <100 MWh – Controlled Supplies are:

- (a) **Volume Night – Controlled**

- (i) Network Tariff Code & Descriptions

EVNT1	East Volume Night Controlled (T31) – TUOS Region 1
EVNT2	East Volume Night Controlled (T31) – TUOS Region 2
EVNT3	East Volume Night Controlled (T31) – TUOS Region 3
WVNT1	West Volume Night Controlled (T31) – TUOS Region 1
WVNT2	West Volume Night Controlled (T31) – TUOS Region 2
WVNT3	West Volume Night Controlled (T31) – TUOS Region 3
MIVN	Mt Isa Volume Night Controlled (T31)

The regional indicator for each TNI is shown in Appendix 1.

- (ii) Network Tariff Codes & Rates – GST Exclusive and GST Inclusive

Appendix 2 sets out the Network Tariff Code and Rates that apply to SACs <100 MWh – Controlled Supplies.

- (b) **Volume Controlled**

- (i) Network Tariff Code & Descriptions

EVCT1	East Volume Controlled (T33) – TUOS Region 1
EVCT2	East Volume Controlled (T33) – TUOS Region 2
EVCT3	East Volume Controlled (T33) – TUOS Region 3
WVCT1	West Volume Controlled (T33) – TUOS Region 1
WVCT2	West Volume Controlled (T33) – TUOS Region 2
WVCT3	West Volume Controlled (T33) – TUOS Region 3
MIVC	Mt Isa Volume Controlled (T33)

The regional indicator for each TNI is shown in Appendix 1.

(ii) Network Tariff Code & Rates – GST Exclusive and GST Inclusive

Appendix 2 sets out the Network Tariff Code and Rates that apply to SACs <100 MWh – Volume Controlled.

8.9. STANDARD ASSET CUSTOMERS <100 MWh Per Annum – UNMETERED SUPPLIES

8.9.1. Definition

Unmetered supplies should be avoided where possible. However, Ergon Energy may approve an unmetered supply where it meets the requirements set out in Chapter 7 of the Rules.

8.9.2. Street Light Installations

The supply of energy to a street lighting connection point is a Standard Control Service and is subject to the same DUOS and TUOS charges applicable to all other unmetered supplies.

Street lighting customers will also be subject to an additional Alternative Control Service (ACS) daily street lighting charge if Ergon Energy owns and maintains the street lighting assets beyond the customer's connection point (i.e. where Ergon Energy provides ACS – Street Lighting Services). If Ergon Energy does not own and maintain the street lighting assets the ACS daily street lighting charge will not apply.

The ACS daily street lighting charge which applies for the 2012-13 financial year is set out in Appendix 2.

Further information on Ergon Energy's ACS - Street Lighting Services and the daily street lighting charge is available in the Information Guide for Alternative Control Services.³

8.9.3. DUOS Tariffs

- (a) DUOS tariffs for unmetered supplies are based on:
 - (i) the average of the connection charges;
 - (ii) the average of the shared distribution network charges;
 - (iii) The locality of the customer – East, West or Mount Isa zone.
- (b) DUOS tariffs incorporate a Fixed Charge (\$/day) and a Volume Charge (\$/kWh).
- (c) The Network Charge category applicable to a customer will be as nominated by the customer or their retailer from among the following categories:

³ The Information Guide for Alternative Control Services and Price List are available from the Ergon Energy website: www.ergon.com.au/contractors--suppliers--and--developers/electricity-distribution-pricing-methodologies/network-tariffs

- (i) **Unmetered Supply (EVU, WVU or MIVU)** is applicable to small uniform loads approved to be unmetered by Ergon Energy. Includes provision of energy to traffic lights, watchman lights and other types of unmetered public amenities (illuminated signs, phone boxes, barbeques etc). Also applies to street light installations where the customer owns and maintains all assets after the customer's connection point to the network (i.e where Ergon Energy does not provide ACS – Street Lighting Services).
- (ii) **Unmetered Supply with ACS - Street Lighting Services - minor street light (EVUMI, WVUMI or MIVUMI)** is applicable to unmetered street lighting where Ergon Energy owns and maintains all assets after the customer's connection point to the network.
 - Ergon Energy standard minor street lights are 50, 80 and 125 watt Mercury Vapour and 70 watt High Pressure Sodium vapour lights
- (iii) **Unmetered Supply with ACS - Street Lighting Services - major street light (EVUMA, WVUMA or MIVUMA)** is applicable to unmetered street lighting where Ergon Energy owns and maintains all assets after the customer's connection point to the network.
 - Ergon Energy standard major street lights are 100, 150, 250 and 400 watt High Pressure Sodium vapour lights
- (d) The current approved DUOS rates for Unmetered Supplies are set out in section 8.9.5. The rates applicable to daily street lighting services are set out in Appendix 2 and are available from the Price List for Alternative Control Services.⁴

8.9.4. TUOS Tariffs for unmetered supplies

- (a) TUOS charges are calculated and levied for each transmission connection point. Ergon Energy combines rates in geographical regions in the East and West pricing zones and passes through TUOS charges to SACs >100 MWh in these zones, thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”.

Regional indicators do not apply to the Mount Isa pricing zone.

- (b) TUOS tariffs incorporate a Volume Charge (\$/kWh) only.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.
- (c) The current approved TUOS rates for Unmetered Supplies categories are published below.

⁴The Alternative Control Services Information Guide and Price List are available from the Ergon Energy website:
www.ergon.com.au/contractors--suppliers--and--developers/electricity-distribution-pricing-methodologies/network-tariffs

8.9.5. Network Tariff Codes

The Network Tariff Codes that apply for SACs <100 MWh – Unmetered Supplies are:

(a) **Unmetered Supply (EVU or WVU)**

(i) **Network Tariff Code & Descriptions**

EVUT1	East Volume Unmetered – TUOS Region 1
EVUT1MI	East Volume Unmetered – TUOS Region 1 – Minor Streetlight
EVUT1MA	East Volume Unmetered – TUOS Region 1 – Major Streetlight
EVUT2	East Volume Unmetered – TUOS Region 2
EVUT2MI	East Volume Unmetered – TUOS Region 2 – Minor Streetlight
EVUT2MA	East Volume Unmetered – TUOS Region 2 – Major Streetlight
EVUT3	East Volume Unmetered – TUOS Region 3
EVUT3MI	East Volume Unmetered – TUOS Region 3 – Minor Streetlight
EVUT3MA	East Volume Unmetered – TUOS Region 3 – Major Streetlight
WVUT1	West Volume Unmetered – TUOS Region 1
WVUT1MI	West Volume Unmetered – TUOS Region 1 – Minor Streetlight
WVUT1MA	West Volume Unmetered – TUOS Region 1 – Major Streetlight
WVUT2	West Volume Unmetered – TUOS Region 2
WVUT2MI	West Volume Unmetered – TUOS Region 2 – Minor Streetlight
WVUT2MA	West Volume Unmetered – TUOS Region 2 – Major Streetlight
WVUT3	West Volume Unmetered – TUOS Region 3
WVUT3MI	West Volume Unmetered – TUOS Region 3 – Minor Streetlight
WVUT3MA	West Volume Unmetered – TUOS Region 3 – Major Streetlight
MIVU	Mt Isa Volume Unmetered
MIVUMI	Mt Isa Volume Unmetered – Minor Streetlight
MIVUMA	Mt Isa Volume Unmetered – Major Streetlight

The regional indicator for each TNI is shown in Appendix 1.

(ii) **Network Tariff Code & Rates – GST Exclusive and GST Inclusive**

Appendix 2 sets out the Network Tariff Code and Rates that apply to SACs <100 MWh - Unmetered Supplies.

8.10. QUEENSLAND GOVERNMENT SOLAR BONUS SCHEME FOR STANDARD ASSET CUSTOMERS <100 MWh Per Annum

The Queensland Government Solar Bonus Scheme is a program that pays domestic and other small energy customers for the surplus electricity generated from roof-top solar photovoltaic (PV) systems that is exported to the Queensland grid. For information on the Solar Bonus Scheme, including changes effective from 10 July 2012 relating to the feed-in tariff rate, please refer to:

www.cleanenergy.qld.gov.au/solar_bonus_scheme.cfm

8.10.1. Network Tariff Codes

(i) Network Tariff Code & Descriptions

NVG0	Net Volume Generation 0
NVG1	Net Volume Generation 1
NVG2 ⁵	Net Volume Generation 2
GVG0	Gross Volume Generation 0

Where NVG0 is applicable to any net metering installation that does not meet the Solar Bonus Scheme requirements, NVG1 and NVG2 apply to any net metering installation that meets the Solar Bonus Scheme requirements, and GVG0 is applicable to any gross metering installation.

(ii) Network Tariff Code & Rates – GST Inclusive

Appendix 2 sets out the Network Tariff Code and Rates for the Queensland Government Solar Bonus Scheme that apply to SACs <100 MWh per annum.

The 44c/Kwh and 8c/Kwh associated with the Solar Bonus Scheme include GST (if any). As such, no amount will be added to the credit in respect of any GST payable.

⁵ Effective from 10/7/12 – refer to www.cleanenergy.qld.gov.au/solar_bonus_scheme.cfm

APPENDIX 1 – TUOS REGIONAL INDICATORS

SAC >100MWh & <100 MWh Regional Indicators for 2011-2012		
Transmission Connection Point	TNI	TUOS Region
Alligator Creek	QALC	T2
Louisa Creek	QALH	T2
Alan Sherriff (11)	QASF	T2
Biloela	QBIL	T1
Bowen North	QBNN	T2
Blackwater (132)	QBWH	T1
Blackwater (66)	QBWL	T1
Columboola	QCBL	T1
Cardwell	QCDW	T3
Chinchilla	QCHA	T1
Clare	QCLR	T2
Cairns (Cairns City)	QCNS	T3
Collinsville	QCOL	T2
Cairns	QCRN	T3
Dan Gleeson	QDGL	T2
Dysart	QDYS	T1
Egans Hill	QEGN	T1
El Arish	QELA	T3
Edmonton	QEMT	T3
Alan Sherriff (Garbutt)	QGAR	T2
Gladstone North	QGLA	T1
Gin Gin	QGNG	T1
Gladstone South	QGST	T1
Innisfail	QINF	T3
Ingham	QING	T3
Kamerunga	QKAM	T3
Lilyvale (Clermont)	QLCM	T1
Lilyvale	QLIL	T1
Mackay	QMKA	T2
Moura	QMRA	T1
Middle Ridge	QMRG	T1
Moranbah (11)	QMRL	T1
Moranbah (66)	QMRN	T1
Nebo	QNEB	T2
Newlands (Mackay & Northern)	QNLD	T2
Oakey Town	QOKT	T1
Pandoin	QPAL	T1
Pioneer Valley	QPIV	T2
Proserpine (Mackay)	QPRO	T2

SAC >100MWh & <100 MWh Regional Indicators for 2011-2012		
Transmission Connection Point	TNI	TUOS Region
Rockhampton	QROC	T1
Ross (Kidston & Millchester)	QROS	T2
Teebar Creek	QTBC	T1
Tangkam	QTKM	T1
Tully	QTLL	T3
Tarong	QTRL	T1
Turkinje (Port Douglas)	QTUH	T3
Turkinje	QTUL	T3
Townsville East	QTVE	T2
Townsville South	QTVS	T2
Woolooga	QWLN	T1
Woree	QWRE	T3
Boat Creek	QYAE	T1

APPENDIX 2 – NETWORK TARIFF CODES & RATES

GST Exclusive Rates

2012-13 NETWORK TARIFF CODES & RATES – GST EXCLUSIVE											
Tariff Class	Tariff Description	Network Tariff Code	Default Distribution Loss Factor		Minimum Chargeable Demand	Distribution Use of System (DUOS)			Transmission Use of System (TUOS)		
						Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)
			Value	Code	kilowatts	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour
Standard Asset Customer (SAC) >100MWh pa (East, West, Mt Isa)	Demand High Voltage	EDHT1	1.038	GEHL	400	\$16.787	\$17.080	\$0.00423	\$3.608	\$0.855	\$0.01232
		EDHT2	1.038	GEHL	400	\$16.787	\$17.080	\$0.00423	\$3.072	\$1.898	\$0.01413
		EDHT3	1.038	GEHL	400	\$16.787	\$17.080	\$0.00423	\$2.928	\$3.823	\$0.01789
		WDHT1	1.133	GWHL	400	\$22.405	\$44.838	\$0.01144	\$3.608	\$0.855	\$0.01232
		WDHT2	1.133	GWHL	400	\$22.405	\$44.838	\$0.01144	\$3.072	\$1.898	\$0.01413
		WDHT3	1.133	GWHL	400	\$22.405	\$44.838	\$0.01144	\$2.928	\$3.823	\$0.01789
		MIDH	1.036	GMHL	400	POA	POA	POA	\$2.732	\$0.600	\$0.00061
	Demand Large	EDLT1	1.078	GELL	400	\$28.131	\$21.589	\$0.00423	\$3.608	\$0.855	\$0.01232
		EDLT2	1.078	GELL	400	\$28.131	\$21.589	\$0.00423	\$3.072	\$1.898	\$0.01413
		EDLT3	1.078	GELL	400	\$28.131	\$21.589	\$0.00423	\$2.928	\$3.823	\$0.01789
		WDLT1	1.357	GWLL	400	\$34.382	\$71.978	\$0.01144	\$3.608	\$0.855	\$0.01232
		WDLT2	1.357	GWLL	400	\$34.382	\$71.978	\$0.01144	\$3.072	\$1.898	\$0.01413
		WDLT3	1.357	GWLL	400	\$34.382	\$71.978	\$0.01144	\$2.928	\$3.823	\$0.01789
		MIDL	1.079	GMLL	400	\$23.682	\$14.080	\$0.00397	\$2.732	\$0.600	\$0.00061
	Demand Medium	EDMT1	1.078	GELL	120	\$16.074	\$22.506	\$0.00423	\$3.608	\$0.855	\$0.01232
		EDMT2	1.078	GELL	120	\$16.074	\$22.506	\$0.00423	\$3.072	\$1.898	\$0.01413
		EDMT3	1.078	GELL	120	\$16.074	\$22.506	\$0.00423	\$2.928	\$3.823	\$0.01789
		WDMT1	1.357	GWLL	120	\$18.509	\$73.185	\$0.01144	\$3.608	\$0.855	\$0.01232
		WDMT2	1.357	GWLL	120	\$18.509	\$73.185	\$0.01144	\$3.072	\$1.898	\$0.01413
		WDMT3	1.357	GWLL	120	\$18.509	\$73.185	\$0.01144	\$2.928	\$3.823	\$0.01789
		MIDM	1.079	GMLL	120	\$14.959	\$14.743	\$0.00397	\$2.732	\$0.600	\$0.00061
	Demand Small	EDST1	1.078	GELL	30	\$1.731	\$26.147	\$0.00423	\$3.608	\$0.855	\$0.01232
		EDST2	1.078	GELL	30	\$1.731	\$26.147	\$0.00423	\$3.072	\$1.898	\$0.01413
		EDST3	1.078	GELL	30	\$1.731	\$26.147	\$0.00423	\$2.928	\$3.823	\$0.01789
		WDST1	1.357	GWLL	30	\$2.888	\$77.145	\$0.01144	\$3.608	\$0.855	\$0.01232
		WDST2	1.357	GWLL	30	\$2.888	\$77.145	\$0.01144	\$3.072	\$1.898	\$0.01413
		WDST3	1.357	GWLL	30	\$2.888	\$77.145	\$0.01144	\$2.928	\$3.823	\$0.01789
		MIDS	1.079	GMLL	30	\$1.725	\$18.101	\$0.00397	\$2.732	\$0.600	\$0.00061
Standard Asset Customer (SAC) <100MWh pa (East, West, Mt Isa)	Volume Large	EVLT1	1.078	GELL		\$0.858		\$0.11752	\$0.136		\$0.01232
		EVLT2	1.078	GELL		\$0.858		\$0.11752	\$0.229		\$0.01413
		EVLT3	1.078	GELL		\$0.858		\$0.11752	\$0.320		\$0.01789
		WVLT1	1.357	GWLL		\$1.503		\$0.34716	\$0.136		\$0.01232
		WVLT2	1.357	GWLL		\$1.503		\$0.34716	\$0.229		\$0.01413
		WVLT3	1.357	GWLL		\$1.503		\$0.34716	\$0.320		\$0.01789
		MIVL	1.079	GMLL		\$0.869		\$0.07850	\$0.143		\$0.00061
	Volume Small	EVST1	1.078	GELL		\$0.858		\$0.11974	\$0.136		\$0.01232
		EVST2	1.078	GELL		\$0.858		\$0.11974	\$0.229		\$0.01413
		EVST3	1.078	GELL		\$0.858		\$0.11974	\$0.320		\$0.01789
		WVST1	1.357	GWLL		\$1.503		\$0.32018	\$0.136		\$0.01232
		WVST2	1.357	GWLL		\$1.503		\$0.32018	\$0.229		\$0.01413
		WVST3	1.357	GWLL		\$1.503		\$0.32018	\$0.320		\$0.01789

2012-13 NETWORK TARIFF CODES & RATES – GST EXCLUSIVE

Tariff Class	Tariff Description	Network Tariff Code	Default Distribution Loss Factor		Minimum Chargeable Demand	Distribution Use of System (DUOS)			Transmission Use of System (TUOS)		
						Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)
			Value	Code	kilowatts	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour
		MIVS	1.079	GMLL		\$0.868		\$0.07336	\$0.143		\$0.00061
Standard Asset Customer (SAC) <100MWh pa (East, West, Mt Isa) Cont'd	Volume Night Controlled	EVNT1	1.078	GELL		\$0.089		\$0.00284			\$0.01232
		EVNT2	1.078	GELL		\$0.089		\$0.00284			\$0.01413
		EVNT3	1.078	GELL		\$0.089		\$0.00284			\$0.01789
		WVNT1	1.357	GWLL		\$0.107		\$0.00893			\$0.01232
		WVNT2	1.357	GWLL		\$0.107		\$0.00893			\$0.01413
		WVNT3	1.357	GWLL		\$0.107		\$0.00893			\$0.01789
		MIVN	1.079	GMLL		\$0.115		\$0.00271			\$0.00061
	Volume Controlled	EVCT1	1.078	GELL		\$0.089		\$0.02424			\$0.01232
		EVCT2	1.078	GELL		\$0.089		\$0.02424			\$0.01413
		EVCT3	1.078	GELL		\$0.089		\$0.02424			\$0.01789
		WVCT1	1.357	GWLL		\$0.107		\$0.07039			\$0.01232
		WVCT2	1.357	GWLL		\$0.107		\$0.07039			\$0.01413
		WVCT3	1.357	GWLL		\$0.107		\$0.07039			\$0.01789
		MIVC	1.079	GMLL		\$0.115		\$0.01007			\$0.00061
Standard Asset Customer (SAC) - Unmetered (East, West, Mt Isa)	Unmetered Supply	EVUT1	1.078	GELL		\$0.005		\$0.21366			\$0.01232
		EVUT1MI	1.078	GELL		\$0.005		\$0.21366			\$0.01232
		EVUT1MA	1.078	GELL		\$0.005		\$0.21366			\$0.01232
		EVUT2	1.078	GELL		\$0.005		\$0.21366			\$0.01413
		EVUT2MI	1.078	GELL		\$0.005		\$0.21366			\$0.01413
		EVUT2MA	1.078	GELL		\$0.005		\$0.21366			\$0.01413
		EVUT3	1.078	GELL		\$0.005		\$0.21366			\$0.01789
		EVUT3MI	1.078	GELL		\$0.005		\$0.21366			\$0.01789
		EVUT3MA	1.078	GELL		\$0.005		\$0.21366			\$0.01789
		WVUT1	1.357	GWLL		\$0.225		\$0.24465			\$0.01232
		WVUT1MI	1.357	GWLL		\$0.225		\$0.24465			\$0.01232
		WVUT1MA	1.357	GWLL		\$0.225		\$0.24465			\$0.01232
		WVUT2	1.357	GWLL		\$0.225		\$0.24465			\$0.01413
		WVUT2MI	1.357	GWLL		\$0.225		\$0.24465			\$0.01413
		WVUT2MA	1.357	GWLL		\$0.225		\$0.24465			\$0.01413
		WVUT3	1.357	GWLL		\$0.225		\$0.24465			\$0.01789
		WVUT3MI	1.357	GWLL		\$0.225		\$0.24465			\$0.01789
		WVUT3MA	1.357	GWLL		\$0.225		\$0.24465			\$0.01789
		MIVU	1.079	GMLL		\$0.181		\$0.02615			\$0.00061
		MIVUMI	1.079	GMLL		\$0.181		\$0.02615			\$0.00061
		MIVUMA	1.079	GMLL		\$0.181		\$0.02615			\$0.00061

GST Inclusive Rates

2012-13 NETWORK TARIFF CODES & RATES – GST INCLUSIVE											
Tariff Class	Tariff Description	Network Tariff Code	Default Distribution Loss Factor		Minimum Chargeable Demand	Distribution Use of System (DUOS)			Transmission Use of System (TUOS)		
						Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)
			Value	Code	kilowatts	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour
Standard Asset Customer (SAC) >100MWh pa (East, West, Mt Isa)	Demand High Voltage	EDHT1	1.038	GEHL	400	\$18.466	\$18.788	\$0.00465	\$3.969	\$0.941	\$0.01355
		EDHT2	1.038	GEHL	400	\$18.466	\$18.788	\$0.00465	\$3.379	\$2.088	\$0.01555
		EDHT3	1.038	GEHL	400	\$18.466	\$18.788	\$0.00465	\$3.221	\$4.205	\$0.01968
		WDHT1	1.133	GWHL	400	\$24.646	\$49.322	\$0.01258	\$3.969	\$0.941	\$0.01355
		WDHT2	1.133	GWHL	400	\$24.646	\$49.322	\$0.01258	\$3.379	\$2.088	\$0.01555
		WDHT3	1.133	GWHL	400	\$24.646	\$49.322	\$0.01258	\$3.221	\$4.205	\$0.01968
		MIDH	1.036	GMHL	400	POA	POA	POA	\$3.005	\$0.660	\$0.00067
	Demand Large	EDLT1	1.078	GELL	400	\$30.944	\$23.748	\$0.00465	\$3.969	\$0.941	\$0.01355
		EDLT2	1.078	GELL	400	\$30.944	\$23.748	\$0.00465	\$3.379	\$2.088	\$0.01555
		EDLT3	1.078	GELL	400	\$30.944	\$23.748	\$0.00465	\$3.221	\$4.205	\$0.01968
		WDLT1	1.357	GWLL	400	\$37.820	\$79.176	\$0.01258	\$3.969	\$0.941	\$0.01355
		WDLT2	1.357	GWLL	400	\$37.820	\$79.176	\$0.01258	\$3.379	\$2.088	\$0.01555
		WDLT3	1.357	GWLL	400	\$37.820	\$79.176	\$0.01258	\$3.221	\$4.205	\$0.01968
		MIDL	1.079	GMLL	400	\$26.050	\$15.488	\$0.00437	\$3.005	\$0.660	\$0.00067
	Demand Medium	EDMT1	1.078	GELL	120	\$17.681	\$24.757	\$0.00465	\$3.969	\$0.941	\$0.01355
		EDMT2	1.078	GELL	120	\$17.681	\$24.757	\$0.00465	\$3.379	\$2.088	\$0.01555
		EDMT3	1.078	GELL	120	\$17.681	\$24.757	\$0.00465	\$3.221	\$4.205	\$0.01968
		WDMT1	1.357	GWLL	120	\$20.360	\$80.504	\$0.01258	\$3.969	\$0.941	\$0.01355
		WDMT2	1.357	GWLL	120	\$20.360	\$80.504	\$0.01258	\$3.379	\$2.088	\$0.01555
		WDMT3	1.357	GWLL	120	\$20.360	\$80.504	\$0.01258	\$3.221	\$4.205	\$0.01968
		MIDM	1.079	GMLL	120	\$16.455	\$16.217	\$0.00437	\$3.005	\$0.660	\$0.00067
	Demand Small	EDST1	1.078	GELL	30	\$1.904	\$28.762	\$0.00465	\$3.969	\$0.941	\$0.01355
		EDST2	1.078	GELL	30	\$1.904	\$28.762	\$0.00465	\$3.379	\$2.088	\$0.01555
		EDST3	1.078	GELL	30	\$1.904	\$28.762	\$0.00465	\$3.221	\$4.205	\$0.01968
		WDST1	1.357	GWLL	30	\$3.177	\$84.860	\$0.01258	\$3.969	\$0.941	\$0.01355
		WDST2	1.357	GWLL	30	\$3.177	\$84.860	\$0.01258	\$3.379	\$2.088	\$0.01555
		WDST3	1.357	GWLL	30	\$3.177	\$84.860	\$0.01258	\$3.221	\$4.205	\$0.01968
		MIDS	1.079	GMLL	30	\$1.898	\$19.911	\$0.00437	\$3.005	\$0.660	\$0.00067
Standard Asset Customer (SAC) <100MWh pa (East, West, Mt Isa)	Volume Large	EVLT1	1.078	GELL		\$0.944		\$0.12927	\$0.150		\$0.01355
		EVLT2	1.078	GELL		\$0.944		\$0.12927	\$0.252		\$0.01555
		EVLT3	1.078	GELL		\$0.944		\$0.12927	\$0.352		\$0.01968
		WVLT1	1.357	GWLL		\$1.653		\$0.38188	\$0.150		\$0.01355
		WVLT2	1.357	GWLL		\$1.653		\$0.38188	\$0.252		\$0.01555
		WVLT3	1.357	GWLL		\$1.653		\$0.38188	\$0.352		\$0.01968
		MIVL	1.079	GMLL		\$0.956		\$0.08635	\$0.157		\$0.00067
	Volume Small	EVST1	1.078	GELL		\$0.944		\$0.13171	\$0.150		\$0.01355
		EVST2	1.078	GELL		\$0.944		\$0.13171	\$0.252		\$0.01555
		EVST3	1.078	GELL		\$0.944		\$0.13171	\$0.352		\$0.01968
		WVST1	1.357	GWLL		\$1.653		\$0.35220	\$0.150		\$0.01355
		WVST2	1.357	GWLL		\$1.653		\$0.35220	\$0.252		\$0.01555
		WVST3	1.357	GWLL		\$1.653		\$0.35220	\$0.352		\$0.01968
		MIVS	1.079	GMLL		\$0.955		\$0.08070	\$0.157		\$0.00067

2012-13 NETWORK TARIFF CODES & RATES – GST INCLUSIVE

Tariff Class	Tariff Description	Network Tariff Code	Default Distribution Loss Factor		Minimum Chargeable Demand	Distribution Use of System (DUOS)			Transmission Use of System (TUOS)		
						Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)
			Value	Code		kilowatts	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour	dollars per day	dollars per kilowatt per month
Standard Asset Customer (SAC) <100MWh pa (East, West, Mt Isa) Cont'd	Volume Night Controlled	EVNT1	1.078	GELL		\$0.098		\$0.00312			\$0.01355
		EVNT2	1.078	GELL		\$0.098		\$0.00312			\$0.01555
		EVNT3	1.078	GELL		\$0.098		\$0.00312			\$0.01968
		WVNT1	1.357	GWLL		\$0.118		\$0.00982			\$0.01355
		WVNT2	1.357	GWLL		\$0.118		\$0.00982			\$0.01555
		WVNT3	1.357	GWLL		\$0.118		\$0.00982			\$0.01968
		MIVN	1.079	GMLL		\$0.127		\$0.00298			\$0.00067
	Volume Controlled	EVCT1	1.078	GELL		\$0.098		\$0.02666			\$0.01355
		EVCT2	1.078	GELL		\$0.098		\$0.02666			\$0.01555
		EVCT3	1.078	GELL		\$0.098		\$0.02666			\$0.01968
		WVCT1	1.357	GWLL		\$0.118		\$0.07743			\$0.01355
		WVCT2	1.357	GWLL		\$0.118		\$0.07743			\$0.01555
		WVCT3	1.357	GWLL		\$0.118		\$0.07743			\$0.01968
		MIVC	1.079	GMLL		\$0.127		\$0.01108			\$0.00067
Standard Asset Customer (SAC) Unmetered (East, West, Mt Isa)	Unmetered Supply	EVUT1	1.078	GELL		\$0.006		\$0.23503			\$0.01355
		EVUT1MI	1.078	GELL		\$0.006		\$0.23503			\$0.01355
		EVUT1MA	1.078	GELL		\$0.006		\$0.23503			\$0.01355
		EVUT2	1.078	GELL		\$0.006		\$0.23503			\$0.01555
		EVUT2MI	1.078	GELL		\$0.006		\$0.23503			\$0.01555
		EVUT2MA	1.078	GELL		\$0.006		\$0.23503			\$0.01555
		EVUT3	1.078	GELL		\$0.006		\$0.23503			\$0.01968
		EVUT3MI	1.078	GELL		\$0.006		\$0.23503			\$0.01968
		EVUT3MA	1.078	GELL		\$0.006		\$0.23503			\$0.01968
		WVUT1	1.357	GWLL		\$0.248		\$0.26912			\$0.01355
		WVUT1MI	1.357	GWLL		\$0.248		\$0.26912			\$0.01355
		WVUT1MA	1.357	GWLL		\$0.248		\$0.26912			\$0.01355
		WVUT2	1.357	GWLL		\$0.248		\$0.26912			\$0.01555
		WVUT2MI	1.357	GWLL		\$0.248		\$0.26912			\$0.01555
		WVUT2MA	1.357	GWLL		\$0.248		\$0.26912			\$0.01555
		WVUT3	1.357	GWLL		\$0.248		\$0.26912			\$0.01968
		WVUT3MI	1.357	GWLL		\$0.248		\$0.26912			\$0.01968
		WVUT3MA	1.357	GWLL		\$0.248		\$0.26912			\$0.01968
		MIVU	1.079	GMLL		\$0.199		\$0.02877			\$0.00067
		MIVUMI	1.079	GMLL		\$0.199		\$0.02877			\$0.00067
		MIVUMA	1.079	GMLL		\$0.199		\$0.02877			\$0.00067
Standard Asset Customer <100 MWh pa	Queensland Government Solar Bonus Scheme	NVG0						\$0.000			
		NVG1						-\$0.440			
		NVG2 ⁶						-\$0.080			
		GVG0						\$0.000			

⁶ Effective from 10/7/12 – refer to www.cleanenergy.qld.gov.au/solar_bonus_scheme.cfm

Street Lighting Charges – GST Exclusive and GST Inclusive

Street Lighting Charges	2012-13	
	Fixed Charge (\$/day/light)	
	GST – Exclusive	GST - Inclusive
East – Major	\$0.93	\$1.02
East – Minor	\$0.55	\$0.61
West – Major	\$0.93	\$1.02
West – Minor	\$0.55	\$0.61
Mt Isa – Major	\$0.93	\$1.02
Mt Isa – Minor	\$0.55	\$0.61

This page left blank intentionally.