

ENERGEX

Tariff Schedule

for the period 1 July 2010–30 June 2011

Version 5 (Updated 7 September 2010)



positive energy

Version Control

Version	Date	Description
1	4 June 2010	Initial version
2	18 June 2010	Table 5, Appendix 3 – New Schedule 8 prices included
3	30 June 2010	Appendix 6 – Procedure included
4	19 August 2010	Appendix 5 – Product codes updated
5	7 September 2010	Appendix 4,5 – Product codes updated



ENERGEN Limited trading as ENERGEN
ABN 40 078 849 055
150 Charlotte Street
BRISBANE QLD 4000

<http://www.energen.com.au>

Requests and inquiries concerning this document should be addressed to:

Network Pricing Manager
ENERGEN
GPO Box 1461
BRISBANE QLD 4001



Table of Contents

1	INTRODUCTION	1
2	ASSIGNING AND REASSIGNING CUSTOMERS TO TARIFF CLASSES	2
2.1	Standard Control Services	2
2.2	Alternative Control Services	4
3	NETWORK TARIFFS – STANDARD CONTROL SERVICES	5
3.1	2010-11 Tariffs	5
3.2	Terms and Conditions	8
3.3	kVA Adjustment for large customers	9
4	NETWORK TARIFFS – ALTERNATIVE CONTROL SERVICES	10
4.1	Street light services	10
4.2	Fee-based services	10
4.3	Quoted Services	11
5	WATCHMAN LIGHTS	13
6	GLOSSARY	14
7	APPENDICES	17



1 Introduction

The 2010-11 Tariff Schedule outlines the ENERGEX tariffs for both Standard Control Services (SCS) and Alternative Control Services (ACS).

SCS relate primarily to network, connection and metering services. The 2010-11 Tariff Schedule provides the Network Use of System (NUOS) tariffs for non site-specific tariff. These tariffs incorporate both the Distribution Use of System (DUOS) and Transmission Use of System (TUOS) tariff applied by ENERGEX for all customer sites.

In addition, the Tariff Schedule sets out prices for ENERGEX's ACS relating to the provision of street lights and fee-based and quoted services.

The Tariff Schedule provides information on how ENERGEX assigns customers to tariff classes and the internal review process which is undertaken if an objection is raised.

This Tariff Schedule applies from 1 July 2010, or as subsequently revised.

For more information on network pricing please refer to ENERGEX's 2010-11 Pricing Proposal¹.

¹ The ENERGEX Pricing Proposal can be downloaded at http://www.energex.com.au/network/network_prices/network_prices.html



2 Assigning and Reassigning customers to tariff classes

2.1 Standard Control Services

For SCS, the following ENERGEX tariff classes apply:

- Individually Calculated Customer (ICC)
- Connection Asset Customer (CAC) – 33kV
- CAC – 11kV Bus
- CAC – 11kV Line
- Standard Asset Customer (SAC) Demand
- SAC Non-demand

Each customer of SCS is a member of at least one tariff class. ENERGEX's customer assignment to tariff classes is determined based on an assessment of energy consumption and/or demand and the customer's connection voltage.

Assignment of customers to tariffs is reviewed periodically to assess if the tariff assignment is still applicable given potential changes in annual usage and meter type. A change in connection voltage means that the connection is treated as if it was a new connection.


To limit transaction costs and ensure pricing signals are not distorted by constant changes in customer tariff assignment, customers are generally only allowed one tariff change per 12-month period. For customers with demand levels which fluctuate year to year, ENERGEX may apply a tolerance limit of up to 20 per cent around tariff thresholds to mitigate frequent tariff reassignment and subsequently limit customer impact.

A pictorial representation of the process for assignment to tariff class for standard control services is outlined in Figure 1. Further information on tariff assignment and reassignment is provided in ENERGEX's 2010-11 Pricing Proposal.

If a customer objects to a proposed classification or reclassification, ENERGEX will follow the internal procedure for reviewing objections (as outlined in Appendix 6).




Figure 1 Assignment of customers to tariff classes – standard control services

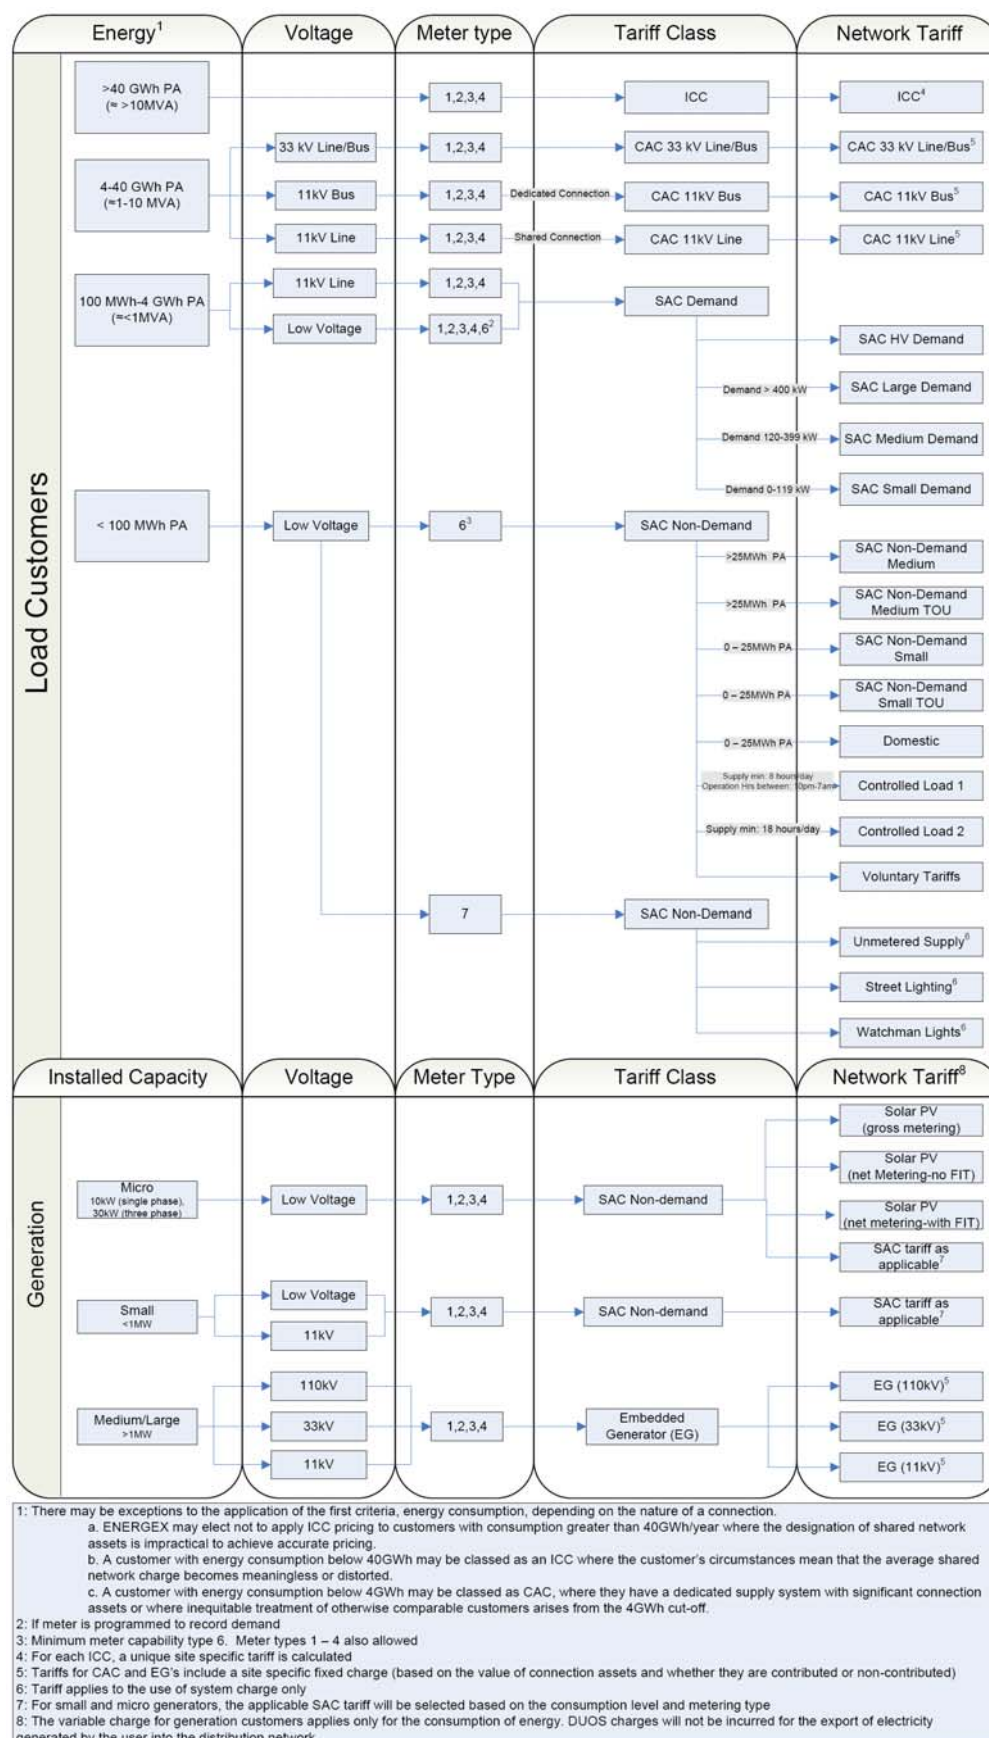

2.2 Alternative Control Services

The assignment of customers to an ACS tariff is based on the type of service required. Figure 2 below outlines the tariff class and service types which are included under ACS.

Figure 2 Assignment of customers to tariff classes – alternative control services

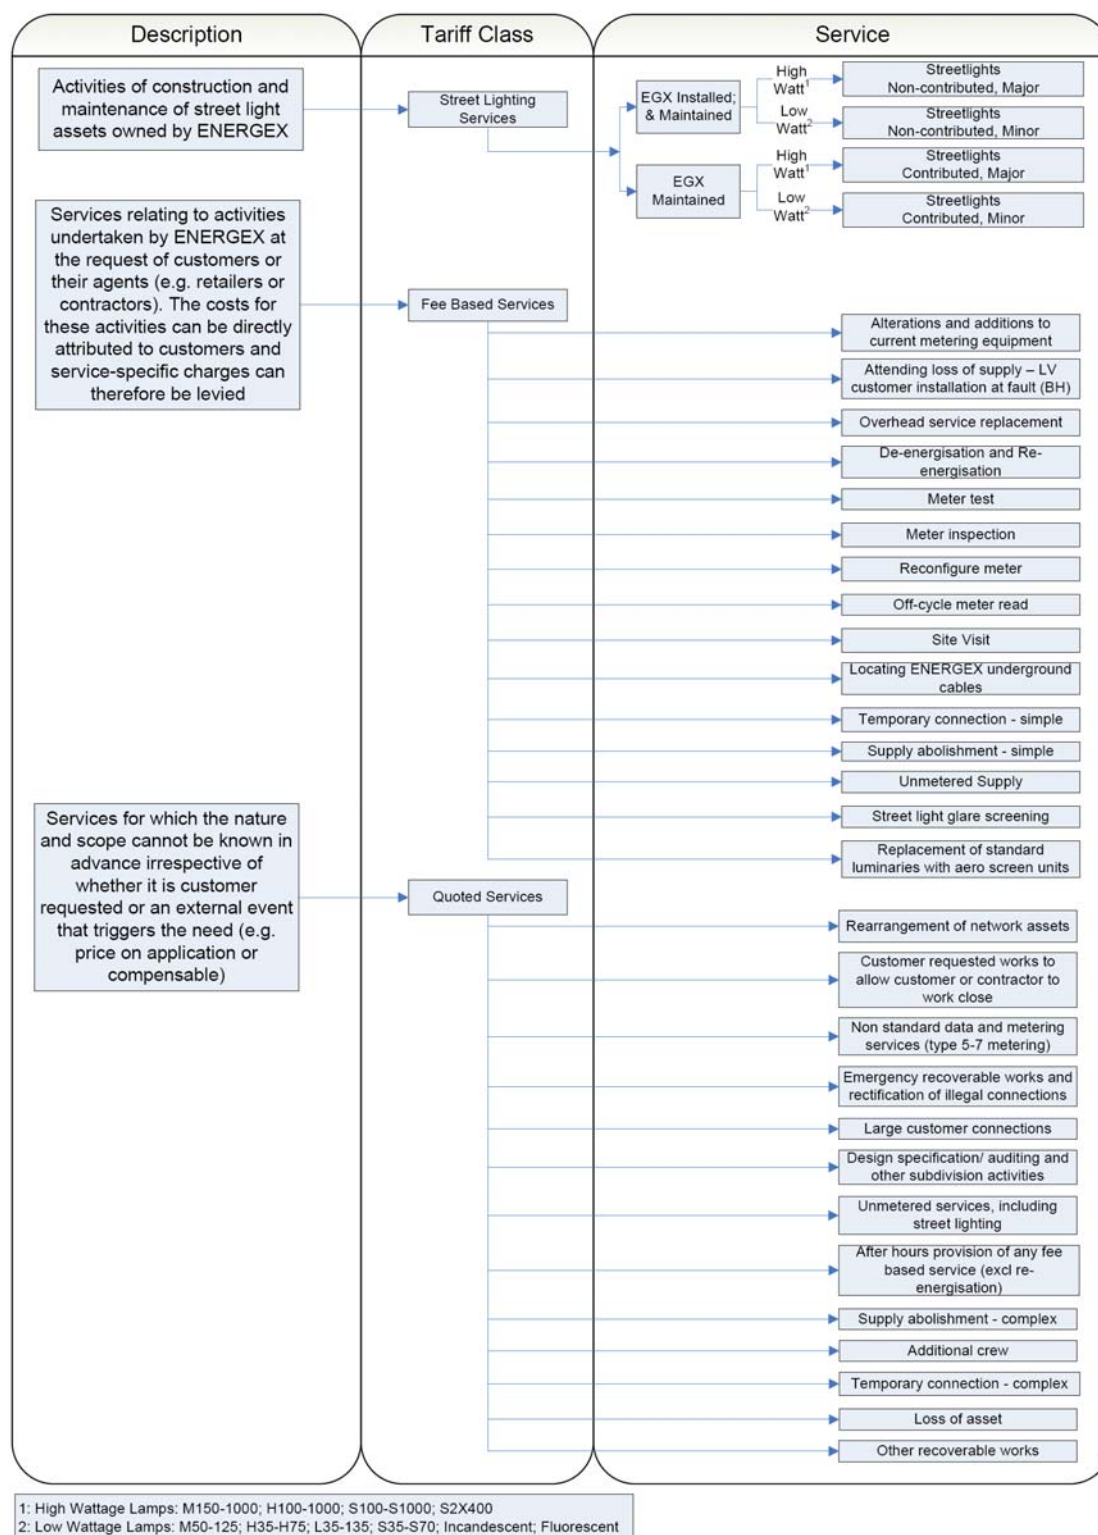

3 Network Tariffs – Standard Control Services

3.1 2010-11 Tariffs

Network tariffs are comprised of both:

- Distribution Use of System (DUOS) tariffs – which relate to the network charges incurred for use of the ENERGEX distribution network; and
- Transmission Use of System (TUOS) tariffs – which relate to the network charges incurred for use of the Powerlink transmission network.

The 2010-11 DUOS and TUOS tariffs for standard control services are provided in Table 1.

The Network Use of System (NUOS) tariff represents the sum of DUOS and TUOS. This is the total network tariff that is represented on a customer's bill. The NUOS tariffs for standard control services are provided in Table 2.



Table 1 2010-11 DUOS and TUOS tariffs for standard control services

Tariff Class	Tariff Description	Network Tariff Code	DUOS Charges ¹						TUOS Charges ¹					
			Fixed (\$/day)	Capacity (\$/kW/ month)	Demand (\$/kW/ month)	Energy (c/kWh)	Peak Energy (c/kWh)	Off- Peak Energy (c/kWh)	Fixed (\$/day)	Capacity (\$/kW/ month)	Demand (\$/kW/ month)	Energy (c/kWh)	Peak Energy (c/kWh)	Off- Peak Energy (c/kWh)
ICC	ICC	1000	Tariffs for ICC customers are confidential. These will be provided directly to the customer and their retailer.											
CAC – 33kV Line/Bus	CAC – 33kV Line/Bus	3500	Site specific	0.55579	1.42214		0.177	0.018	Site specific	0.40515	0.00000		0.663	0.663
CAC – 11kV Bus	CAC – 11kV Bus	4000		1.07489	2.41804		0.226	0.023		0.56136	0.00000		0.618	0.618
CAC – 11kV Line	CAC – 11kV Line	4500		2.04251	4.20031		0.289	0.029		0.54400	0.00000		0.577	0.577
EG	EG - 110kV	2000	Site specific	0.39843	1.12249		0.232	0.023	Site specific	0.20058	0.00000		1.737	1.737
	EG - 33kV	2500		0.55579	1.42214		0.177	0.018		0.40515	0.00000		0.663	0.663
	EG - 11kV	3000		2.04251	4.20031		0.289	0.029		0.54400	0.00000		0.577	0.577
SAC Demand	HV Demand	8000	31.94563		6.80532	0.110			8.18090		1.08302	1.211		
	Large Demand	8100	32.17693		7.65275	0.110			5.85585		1.19036	1.236		
	Medium Demand	8200	12.53219		9.05404	0.112			4.72174		1.25269	1.238		
	Small Demand	8300	1.13298		14.13322	0.323			1.56126		1.40135	0.888		
SAC Non-demand	Medium	8600	0.61949			6.144			0.51356			1.344		
	Medium TOU	8800	0.61949				6.681	4.009	0.51356				1.344	1.344
	Small	8500	0.22063			6.680			0.05409			1.331		
	Small TOU	8700	0.22063				6.814	4.088	0.05409				1.331	1.331
	Solar PV (gross metering) ²	9700	0.00000			0.000			0.00000			0.000		
	Solar PV (net metering) ²	9800	0.00000			0.000			0.00000			0.000		
	Solar PV (net metering with FIT) ²	9900	0.00000			-44.000			0.00000			0.000		
	Domestic	8400	0.22063			6.680			0.05409			1.331		
	Controlled Load 1	9000	0.11139			0.348			0.00220			0.087		
	Controlled Load 2	9100	0.11819			1.256			0.00206			0.102		
	Street Lighting	9400				4.398						1.507		
	Watchman Lights	9500				4.398						1.507		
	Unmetered	9600				4.398						1.507		

Notes:

1. All tariffs are GST exclusive
2. Government mandated tariff - paid to the customer by ENERGEX.



Table 2 2010-11 NUOS tariffs for standard control services

Tariff Class	Tariff Description	Network Tariff Code	NUOS Charges ^{1,2}					
			Fixed (\$/day)	Capacity (\$/kW/month)	Demand (\$/kW/ month)	Energy (c/kWh)	Peak Energy (c/kWh)	Off-Peak Energy (c/kWh)
ICC	ICC	1000	Tariffs for ICC customers are confidential. These will be provided directly to the customer and their retailer.					
CAC – 33kV Line/Bus	CAC – 33kV Line/Bus	3500	Site specific	0.96094	1.42214		0.840	0.681
CAC – 11kV Bus	CAC – 11kV Bus	4000		1.63625	2.41804		0.844	0.641
CAC – 11kV Line	CAC – 11kV Line	4500		2.58651	4.20031		0.866	0.606
EG	EG - 110kV	2000	Site specific	0.59901	1.12249		1.969	1.760
	EG - 33kV	2500		0.96094	1.42214		0.840	0.681
	EG - 11kV	3000		2.58651	4.20031		0.866	0.606
SAC Demand	HV Demand	8000	40.12653		7.88834	1.321		
	Large Demand	8100	38.03278		8.84311	1.346		
	Medium Demand	8200	17.25393		10.30673	1.350		
	Small Demand	8300	2.69424		15.53457	1.211		
SAC Non-demand	Medium	8600	1.13305			7.488		
	Medium TOU	8800	1.13305				8.025	5.353
	Small	8500	0.27472			8.011		
	Small TOU	8700	0.27472				8.145	5.419
	Solar PV (gross metering) ³	9700	0.00000			0.000		
	Solar PV (net metering) ³	9800	0.00000			0.000		
	Solar PV (net metering with FIT) ³	9900	0.00000			-44.000		
	Domestic	8400	0.27472			8.011		
	Controlled Load 1	9000	0.11359			0.435		
	Controlled Load 2	9100	0.12025			1.358		
	Street Lighting	9400				5.905		
	Watchman Lights	9500				5.905		
	Unmetered	9600				5.905		

Notes:

1. NUOS = DUOS + TUOS
2. All tariffs are GST exclusive
3. Government mandated tariff - paid to the customer by ENERGEX.



3.2 Terms and Conditions

The terms and conditions relating to the standard control services tariffs are outlined below.

Table 3 Terms and conditions for standard control service tariffs

Tariff Class	Tariff	Description/Tariff Conditions
ICC	ICC	ICC tariffs typically apply to customers with electricity consumption over 40GW.h per year. ICC tariffs are site specific and will be provided directly to the customer and/or the retailer. - The TUOS usage tariff applies to the volume of energy delivered to the nominated Transmission Connection Point. For ICCs, the metered quantity at the customer's site will be adjusted by the given Distribution Loss Factor (DLF) to calculate the total TUOS charge. - The nominated capacity is either the either contracted demand or the maximum demand in the previous calendar year. - The DUOS demand price applies to the actual maximum demand value recorded per month.
CAC 33kV	CAC 33kV	CAC tariffs typically apply to customers with electricity consumption between 4GW.h and 40GW.h per year. The fixed charges for CACs are site specific and will be provided directly to the customer and/or the retailer. - The nominated capacity is either the either contracted demand or the maximum demand in the previous calendar year. - The DUOS demand price applies to the actual maximum demand value recorded each month.
CAC 11kV Bus	CAC 11kV Bus	
CAC 11kV Line	CAC 11kV Line	
EG	EG 110kV	In line with the Energy Networks Association (ENA) classification, Embedded Generators (EGs) are generally those generators with an installed capacity as follows: - Medium: 1-5 MW (LV or HV) or <1MW (HV) - Large: >5MW Tariffs for connection and access services for Medium and Large EGs will be developed on a similar basis to site-specific customers. This is due to the nature of connections, which are typically non-standard and may require additional embedded generator protection system upgrades.
	EG 33kV	
	EG 11kV	
SAC Demand ¹	HV Demand	This network tariff is available only to customers with consumption below 4GW.h per year, who have high voltage metering and take supply at high voltage. This network tariff is not available to customers who have non-standard or significant connection assets provided by ENERGEX.
	Large Demand	Typically customers with consumption below 4GW.h per year, with a meter capable of reading demand, with a demand greater than 400kW.
	Medium Demand	Typically customers with consumption below 4GW.h per year, with a meter capable of reading demand, with a demand between 120 and 399kW.
	Small Demand	Typically customers with consumption below 4GW.h per year, with a meter capable of reading demand, with a demand between 0 and 119kW.



Tariff Class	Tariff	Description/Tariff Conditions
SAC Non-demand	Medium	Typically business (or domestic) customers with an annual consumption between 25MW.h and 100MW.h.
	Medium TOU	Typically business (or domestic) customers with an annual consumption between 25MW.h and 100MW.h, with a meter installed capable of TOU pricing.
	Small	Typically business customers with an annual consumption less than 25MW.h.
	Small TOU	Typically business (or domestic) customers with an annual consumption less than 25MW.h, with a meter installed capable of TOU pricing.
	Solar PV	The solar bonus scheme applies to SACs who consume less than 100MW.h per annum. The Queensland Government sets the feed-in tariff rate (per kW.h) to be paid for the excess energy generated.
	Domestic	Typically domestic customers with a consumption of up to 25MW.h per annum.
	Controlled Load 1	Specified permanently connected appliances are controlled by network equipment so that supply will be permanently available for a minimum period of 8 hours at the absolute discretion of ENERGEX but usually between the hours of 10:00pm and 7:00am.
	Controlled Load 2	Specified connected appliances are controlled by network equipment so that supply will be available for a minimum period of 18 hours per day during time periods set at the absolute discretion of ENERGEX.
	Street Lighting	Use of system charge (conveyance of electricity) for all street light types.
	Watchman Lights	Use of system charge (conveyance of electricity) for all watchman lights.
	Unmetered	Use of system charge (conveyance of electricity) for all other unmetered supplies (eg. public barbeques, telephones, traffic signals)

Notes:

1. There is no longer a minimum chargeable demand for SAC Demand tariffs

3.3 kVA Adjustment for large customers

ENERGEX has introduced a kV.A tariff adjustment for ICC and CAC customers, which applies from 1 July 2010. Network charges for ICC and CAC customers will be calculated initially using the existing kW based approach. The applicable charges will then be adjusted up or down by a relative amount based on the difference between the customer's measured power factor and the power factor neutral point. The adjustment will be applied to the DUOS demand and capacity charge elements only. The methodology is described further in Appendix 1.



4 Network Tariffs – Alternative Control Services

4.1 Street light services

Street lighting services covered in alternative control relate to the provision, construction and maintenance of street light assets owned by ENERGEX. The alternative control service prices for street light services are included in Table 4.

Table 4 Prices for street light services

Streetlight Service ²	Network Tariff Code	2010–11 Price ¹ (\$ per light per day)
Major non-contributed	9250	0.85
Major contributed	9350	0.23
Minor non-contributed	9200	0.34
Minor contributed	9300	0.09

Notes:

1. All prices are exclusive of GST.
2. Appendix 2 outlines the street light classification for minor and major lamps
3. The use of system charge (conveyance of electricity) is a standard control service (included in Tables 1 and 2).

The applicable terms and conditions for each street light service are based on the following principles:

- the contributed street light tariff only applies where the capital cost of the street light has been paid upfront by the customer or their agent;
- at the conclusion of the street light's standard asset life, the non-contributed tariff will apply;
- where ENERGEX has supplied the street light and the capital cost has been paid upfront by the customer, the contributed street light tariff will apply for the minimum period specified in the tariff's terms and conditions; and
- where the capital cost of the street light has been funded by ENERGEX and no upfront payment made, whether the initial asset construction or replacement of an asset, the non-contributed street light tariff applies.

4.2 Fee-based services

Fee-based services relate to activities undertaken by ENERGEX at the request of customers or their agents (e.g. retailers or contractors). The costs for these activities can be directly attributed to customers and service-specific charges can therefore be levied. The prices for fee-based services are included in Table 5 below.



A description of each service and the product codes which apply are included in Appendix 3.

Table 5 Prices for Fee-based services

Fee based service	2010-11 Price¹ (\$ per service)
Alterations and additions to current metering equipment	89.85
Attending loss of supply – low voltage customer installation at fault – business hours	100.36
Overhead service replacement – single phase	274.76
Overhead service replacement – multiple phase	323.67
De-energisation ²	Nil
Meter test ²	14.45
Meter inspection	80.31
Reconfigure meter	66.58
Off-cycle meter read	7.50
Site visit	57.67
Locating Energex underground cables	122.62
Temporary connection ²	326.14
Re-energisation – business hours ²	36.23
Re-energisation – after hours ²	86.95
Re-energisation (visual) – business hours ²	Nil
Re-energisation (visual) – after hours ²	86.95
Re-energisation non-payment (visual) – business hours ²	36.23
Re-energisation non-payment (visual) – after hours ²	86.95
Supply abolishment	311.19
Unmetered supply	137.34
Street light glare screening	132.73
Replacement of standard luminaries with aero screen units (per street light)	306.85

Notes:

1. All prices are exclusive of GST.

2. Services are subject to Schedule 8 of the Queensland Electricity Regulation 2006, which either caps the price or sets the price to nil.

4.3 Quoted Services

Quoted services are services for which the nature and scope cannot be known in advance irrespective of whether the service is customer requested or an external event triggers the need. A description of each service and the product codes which apply are included in Appendix 4. These services are offered on a Price on Application (POA) basis.



Table 6 Quoted service list

Quoted Service	2010-11 Price (\$ per service)
Rearrangement of network assets	POA
Customer requested works to allow customer or contractor to work close	POA
Non standard data and metering services (type 5-7 metering)	POA
Emergency recoverable works and rectification of illegal connections	POA
Large customer connections	POA
Design specification/auditing and other subdivision activities	POA
Unmetered services, including street lighting	POA
After hours provision of any fee based service (excl re-energisation)	POA
Supply abolishment - complex	POA
Additional crew	POA
Temporary connection - complex	POA
Loss of asset	POA
Other recoverable work	POA



5 Watchman Lights

From 1 July 2010, the provision of watchman lights will be classified as an unregulated service. The price for watchman lights is included in Table 7 below.

Table 7 Prices for watchman lights

Service	Network Tariff Code	2010–11 Price ¹ (\$ per light per day)
Provision of watchman lights	9500	0.34

Notes:

1. All prices are exclusive of GST.
2. This is an unregulated service



6 Glossary

Term	Definition
Alternative Control Services (ACS)	This service class includes the provision, construction and maintenance of street lighting assets, and fee based and quoted services.
Capacity charge	This part of the tariff seeks to reflect the costs associated with providing network capacity required by a customer on a long-term basis. It is levied on the basis of either contracted demand or the maximum demand in the previous calendar year. The charge is applied as a fixed dollar amount per kW per month.
Connection Asset Customer (CAC)	Typically those customers with electricity consumption greater than 4GW.h (but less than 40GW.h) per year at a single connection point; or where a customer has a dedicated supply system with significant connection assets.
Connection Point	The point of electrical coupling between the electricity distribution network and a customer's electrical installation. The meter is installed as close as possible to this location.
Contributed Assets	Contributed assets are customer funded, then gifted to ENERGEX.
Controlled Load 1	Specified permanently connected appliances are controlled by network equipment so that supply will be permanently available for a minimum period of 8 hours at the absolute discretion of ENERGEX but usually between the hours of 10:00pm and 7:00am.
Controlled Load 2	Specified connected appliances are controlled by network equipment so that supply will be available for a minimum period of 18hours per day during time periods set at the absolute discretion of ENERGEX.
Demand	The amount of electricity energy being consumed at a given time measured in either watts (W) or volt amperes (VA). The difference between the two is the power factor.
Demand Metered SAC	The customer's connection point has a meter installed that is capable of measuring energy consumption (kW.h) and demand (kW). This meter records total energy consumption (kW.h) and demand over 30 minute periods. A customer's demand is the average demand (kW) over the 30 minute period.
Demand Metered Tariff	The tariff has been built to include a demand component so that the customer's actual demand is reflected in the price that they pay for their electricity. The highest demand reading for that month is used to calculate the customer's electricity bill.
Demand Charge	This part of the tariff accounts for the actual demand that a customer places on the electricity network. The actual demand levied for billing purposes is the metered monthly maximum demand. The charge is applied as a fixed dollar per kW per month.
Distribution Loss Factor (DLF)	Distribution Loss Factors (DLFs) represent the average electrical energy losses incurred when electricity is transmitted over a distribution network.



Term	Definition
Distribution Use of System (DUOS)	This refers to the network charges for the use of the distribution network.
Embedded Generator	In line with the Energy Networks Association (ENA) classification, Embedded Generators (EGs) are generally those generators with an installed capacity as follows: Medium: 1-5 MW (LV or HV) or <1MW (HV) Large: >5 MW
Energy	The amount of electricity consumed by a customer (or all customers) over a period of time. Energy is measured in terms of watt hours (W.h), kilowatt hours (kW.h), megawatt hours (MW.h) or gigawatt hours (GW.h).
Energy Charge (Off-peak)	This charge is applicable to those customers who are on a Time of Use (TOU) tariff. The energy consumption (kW.h) during Off-peak periods (refer to Off-peak Period for Off-peak Period times), as recorded by the customer's meter, is utilised to calculate this part of the tariff. This charge is applied as a fixed amount (cents) per Kilowatt hour (kW.h).
Energy Charge (Peak)	This charge is applicable to those customers who are on a Time of Use tariff. The energy consumption (kW.h) during Peak periods (refer to Peak Period for Peak Period times), as recorded by the customer's meter, is utilised to calculate this part of the tariff. This charge is applied as a fixed amount (cents) per Kilowatt hour (kW.h).
Energy Charge	This part of the tariff seeks to reflect costs not directly allocated to network drivers and costs that are proportional to the size of the customer. The energy consumption (kW.h) for the period, as recorded by the customer's meter, is utilised to calculate this part of the tariff charge. This charge is applied as a fixed amount (cents) per Kilowatt hour (kW.h).
Fixed Charge	The fixed charge seeks to reflect the costs associated with customer's dedicated connection assets. The charge is applied as a fixed dollar amount per day.
High Voltage	Where a customer takes supply at 11kV or higher.
Individually Calculated Customer (ICC)	Typically those customers with electricity consumption greater than 40GWh per year at a single connection point; or where a customer's circumstances mean that the average shared network charge becomes meaningless or distorted.
Major streetlights	Larger, higher wattage streetlights typically used on major roads and are categorised according to lamp size, as per attachment in Appendix 2.
Maximum Demand	The maximum demand recorded at a customers individual meter within that month.
Minor streetlights	Smaller, lower wattage streetlights typically used on minor roads and are categorised according to lamp size, as per attachment in Appendix 2.



Term	Definition
Network Use of System (NUOS)	The tariff for use of the distribution and transmission networks. It is the sum of both Distribution Use of System and Transmission Use of System.
Non-contributed assets	Non-contributed assets are those funded by ENERGEX.
Non-Demand Metered SAC	The customer's connection point has a meter installed that is capable of measuring the total energy consumption (kW.h).
Non-Demand Metered Tariff	The tariff is based around a fixed daily component and the actual energy (kW.h) used by the customer.
Off-peak Period	All hours which are outside of Peak Period hours.
Peak Period	Meter type 1-4 (ICC, CAC & SAC demand): The hours between 7am and 11pm, Monday to Friday. Meter type 6 (SAC Nondemand): The hours between 7am and 9pm, Monday to Friday.
Queensland Government Solar Bonus Scheme for Standard Asset Customers	A program that pays domestic and other small energy customers for the surplus electricity generated from roof-top solar photovoltaic (PV) systems that is exported to the Queensland grid.
Site Specific Price	A charge which is calculated for a site and is specific to the individual connection point.
Solar Photovoltaic (Solar PV)	A Solar Photovoltaic system uses sunlight to generate electricity. The system provides power for the premises with any excess production feeding into the electricity grid.
Standard Asset Customer (SAC)	Generally those customers with an annual electricity consumption below 4GW.h per year, whose supply arrangements are consistent across the customer group.
Standard Control Services	This service class includes network, connection and metering services.
Time of Use (TOU)	Refers to tariffs that vary according to the time of day at which the electricity is consumed.
Transmission Use of System (TUOS)	Refers to the charges incurred for use of the transmission network.
Unmetered Supply	A customer who takes supply where no meter is installed at the connection point.



7 Appendices

No.	Title
1	kV.A adjustment methodology
2	Street light classification
3	Fee-based services product codes
4	Quoted services product codes
5	Additional Business-2-Business codes
6	Internal procedure for reviewing objections



Appendices

No.	Title
1	kV.A Adjustment Methodology
2	Street light classification
3	Fee-based services product codes
4	Quoted services product codes
5	Additional Business-2-Business codes
6	Internal procedure for reviewing objections

Appendix 1

kV.A Adjustment Methodology

From 1 July 2010, charges for ICC's and CAC's will be adjusted up or down by a relative amount based on the difference between the customers' measured power factor and the power factor neutral point. The adjustment will be applied to the demand and capacity charge elements as outlined below.

1. kV.A Tariff Adjustment Calculation Methodology

a.
$$\text{Actual Power Factor (APF)} = \frac{\text{Maximum monthly kW}}{\text{Maximum monthly kV.A}}$$

where monthly kW and monthly kV.A data is collected from the customer's meter

b.
$$\text{Power Factor Adjustment (PFA)} = \text{Multiplier} \times (\text{TPF} - \text{APF}) \times (1 + \text{TPF} - \text{APF})^{\text{index}}$$

where TPF = Target Power Factor (Power factor neutral point of 0.9 for ICCs, 0.85 for CACs)

Multiplier and index are variables set by ENERGEX (as per table below)

The PFA will be limited to the maximum and minimum bounds defined by ENERGEX as required

c.
$$\text{Demand Adjustment (kW)} = \text{PFA} \times \text{Maximum monthly demand}$$

$$\text{Capacity Adjustment (kW)} = \text{PFA} \times \text{Nominated monthly demand}$$

The adjustments (measured in kW) will be positive or negative depending on the difference between the customers actual power factor (APF) and target power factor (TPF). This will result in an increase or decrease to the monthly charge as shown in the formula below.

d.
$$\text{Monthly charge for DUOS(\$)} = \underbrace{\text{Fixed} + \text{Demand} + \text{Capacity} + \text{Peak Energy} + \text{Off Peak Energy}}_{\text{Existing parameters}} + \underbrace{\text{Demand Adjustment} + \text{Capacity Adjustment}}_{\text{New kV.A adjustments for 2010/11}}$$

where Demand Adjustment (\$) = PFA x Maximum monthly demand (kW) x Demand Charge (\$/kW/month)

Capacity Adjustment (\$) = PFA x Nominated monthly demand (kW) x Capacity Charge (\$/kW/month)

2. kV.A Tariff Adjustment Parameters for 2010-11

Customer Type	Target Power Factor	Index	Multiplier	Maximum Adjustment	Minimum Adjustment
ICC - 110B	0.90	-1.9445	0.50	1%	-10%
ICC - 11B	0.90	-2.9393	0.80	5%	-10%
ICC - 33B	0.90	-2.9393	0.80	5%	-10%
CAC - 11B	0.85	-1.1934	0.75	10%	-10%
CAC - 11L	0.85	1.7131	0.50	10%	-5%
CAC - 33L	0.85	0.5838	0.80	5%	-10%



Appendix 2

Street light classification

Street lights are included in the unmetered street lighting tariffs, according to the nominated Wattage Reference Codes as detailed below.

Table 1 Street lights – minor classification

Streetlight type	Wattage Reference Codes
Mercury Vapour	M50, M70, M80, M100, M125
Mercury Halide	H35, H70, H75
Sodium Vapour	L35, L90, L135, S35, S50, S70
Incandescent	All
Fluorescent	All

Also includes any other non-standard or obsolete public lights that would be replaced with any of the above ENERGEX standard minor public lights in accordance with ENERGEX policy.

Table 2 Street lights – major classification

Streetlight type	Wattage Reference Codes
Mercury Vapour	M150, M175, M250, M400, M500, M700, M1000
Mercury Halide	H100, H150, H250, H400, H1000
Sodium Vapour	S100, S150, SM160, S250, S360, S400, S2X400, S800, S1000

Also includes any other non-standard or obsolete public lights that would be replaced with any of the above ENERGEX standard major public lights in accordance with ENERGEX policy.



Appendix 3

Fee-based services – Product Codes

Category	Service	Price (GST Exclusive)	Price (GST Inclusive)	Product Code	Peace Charge Code	Service Description
Alterations and additions to current metering equipment	Addition &/or alteration to current metering arrangement including exchange &/or move meter	\$89.85	\$98.84	AAEM1M	500	Exchange of one meter for another
				AAEM2M	502	Exchange of one meter for another. This product code will always have an Additional Crew product code applied.
				AAMM1M	512	Meter requires relocation
				AAMM2M	514	Meter requires relocation. This product code will always have an Additional Crew product code applied.
Attending loss of supply – low voltage customer installation at fault – business hours	ENERGEX attends trouble call during business hours and found fault in LV customer's installation	\$100.36	\$110.40	LOS	1500	ENERGEX attended LV customer's trouble call during business hours and found fault in LV customer's installation (includes tripped safety switch, internal fault, customer overload, etc)
Overhead service replacement – single phase	To replace an existing overhead service at customer's request. No material change to load	\$274.76	\$302.24	MSOR1P2	920	To replace an existing overhead service at customer's request. No material change to load
				MSRO1P1	1028	To replace an existing overhead service at customer's request. No material change to load
Overhead service replacement – multiple phase	To replace an existing overhead service at customer's request. No material change to load	\$323.67	\$356.04	MSOR2P1	916	To replace an existing overhead service at customer's request. No material change to load
				MSOR2P2	1006	To replace an existing overhead service at customer's request. No material change to load
				MSOR3P1	918	To replace an existing overhead service at customer's request. No material change to load
				MSOR3P2	924	To replace an existing overhead service at customer's request. No material change to load
De-energisation¹	De-energisation, commenced during business hours	Nil	Nil	DNDS1MB	300	De-en Pole, Pillar, Post - No CT
				DNDS2MB	302	De-en Pole, Pillar, Post - CT

Category	Service	Price (GST Exclusive)	Price (GST Inclusive)	Product Code	Peace Charge Code	Service Description
				DN\$1MB	304	De-en - No Pay, Pole, Pillar, Post - No CT
				DN\$2MB	306	De-en - No Pay, Pole, Pillar, Post - CT
				DNF1MB	308	De-en - Remove Fuse No CT
				DNF2MB	310	De-en - Remove Fuse - CT
				DNF\$1MB	312	De-en - No Pay Remove Fuse No CT
				DNF\$2MB	314	De-en - No Pay Remove Fuse - CT
				DNS	320	De-en Main Switch Sealed
				DNPN+10	318	De-en planned notification >10 cust. Whenever this product is used a 'Site Visit' product code will also be applied
				DNPNU10	322	De-en planned notification < 10 cust. Whenever this product is used a 'Site Visit' product code will also be applied
Meter test¹	Check that metering installation is accurately measuring energy consumed	\$14.45	\$15.90	MIMT1MB	704	Meter Test -NoCT B/H Only
				MIMT2MB	706	Meter Test -CT B/H Only
Meter inspection	Inspection required to check reported or suspected fault and no fault in meter is found	\$80.31	\$88.34	MSINSS	957	Meter Inspection - Simple
Reconfigure meter	Adjustment to meter setting due to change in tariff and/or time of settings	\$66.58	\$73.24	MRCT1M	1204	Tariff change required - No CT
				MRCT2M	1206	Tariff change required - CT Metering. This product code will always have an Additional Crew product code applied.
				MRCTS1M	1208	Change Timeswitch - No CT
				MRCTS2M	1210	Change Timeswitch - CT Metering. This product code will always have an Additional Crew product code applied.
				MRCL1M	1200	Change Control Load - No CT
				MRCL2M	1202	Change Control Load - CT Metering
Off-cycle meter read	Meter read taken off-cycle	\$7.50	\$8.25	RNNR	238	Re-energisation where a physical site visit is requested to provide an actual read for a move in read by the retailer.
				RNRM	240	Retrospective move in read required
				SRCR	400	Check Reading
				SRTR	404	Special read - transfer
Site visit	Where crew attends site & service is unable to be performed (i.e. wasted truck visit), or to provide notification	\$57.67	\$63.44	MSWTV	1044	Wasted truck visit - Business Hours

Category	Service	Price (GST Exclusive)	Price (GST Inclusive)	Product Code	Peace Charge Code	Service Description
Locating Energex underground cables	Customer requested assistance, from a single crew for a period of up to one hour, in locating ENERGEX underground cables	\$122.62	\$134.88	MSAPLC	938	Customer requests assistance, from a single crew for a period of up to one hour, in locating ENERGEX's underground cables
Temporary connection¹	Applies to temporary connections for SACs typically up to 10 kVA where minimum technical standards are required. It excludes complex requirements such as those that require greater capacity, longer distance, and/or difficult terrain. Simple is not applicable to large customer temporary connections.	\$326.14	\$358.75	NCT1MB	120	Temporary connection - No CT. Recovery of the temporary builders supply is inclusive.
				NCT2MB	122	Temporary connection - CT Metering. Recovery of the temporary builders supply is inclusive.
Re-energisation – business hours¹	Re-energisation commenced during business hours, following non-payment, visual inspection not required	\$36.23	\$39.85	RN\$1MB	200	Re-energisation No Pay - No CT
				RN\$2MB	202	Re-energisation No Pay - CT Metering
Re-energisation – after hours¹	Re-energisation commenced after hours, following non-payment, visual inspection not required	\$86.95	\$95.65	RN\$1MA	204	Re-energisation No Pay - No CT
				RN\$2MA	206	Re-energisation No Pay - CT Metering
				RN\$1MT	208	Re-energisation No Pay - No CT where the retailer has requested a service time of AnyTime.
				RN\$2MT	210	Re-energisation No Pay - CT Metering where the retailer has requested a service time of AnyTime.
Re-energisation (visual) – business hours¹	Re-energisation commenced during business hours, visual inspection required	Nil	Nil	RNV1MB	224	Re-energisation - No CT
				RNV2MB	226	Re-energisation - CT Metering
Re-energisation (visual) – after hours¹	Re-energisation commenced after hours, visual inspection required	\$86.95	\$95.65	RNV1MA	228	Re-energisation - No CT
				RNV2MA	230	Re-energisation - CT Metering
				RNV1MT	232	Re-energisation - No CT where the retailer has requested a service time of AnyTime.
				RNV2MT	234	Re-energisation - CT Metering where the retailer has requested a service time of AnyTime.
Re-energisation non-payment (visual) – business hours¹	Re-energisation, following de-energisation for non payment, commenced during business hours, visual inspection required	\$36.23	\$39.85	RN\$V1MB	212	Re-energisation No Pay - No CT. NMI de-energised >30 day - visual inspection required.
				RN\$V2MB	214	Re-energisation No Pay - CT Metering. NMI de-energised >30 day - visual inspection required.



Category	Service	Price (GST Exclusive)	Price (GST Inclusive)	Product Code	Peace Charge Code	Service Description
Re-energisation non-payment (visual) – after hours¹	Re-energisation, following de-energisation for non payment, commenced after hours, visual inspection required	\$86.95	\$95.65	RN\$V1MA	216	Re-energisation No Pay - No CT. NMI de-energised >30 day - visual inspection required.
				RN\$V2MA	218	Re-energisation No Pay - CT Metering. NMI de-energised >30 day - visual inspection required.
				RN\$V1MT	220	Re-energisation No Pay - No CT where the retailer has requested a service time of AnyTime. NMI de-energised >30 day - visual inspection required.
				RN\$V2MT	222	Re-energisation No Pay - CT Metering where the retailer has requested a service time of AnyTime. NMI de-energised >30 day - visual inspection required.
Supply abolishment	Retailer requests the service provider to abolish supply at a given connection point. Applies to LV overhead services from an ENERGEX distribution pole to a house, building or property pole; or underground supply arrangements fed from a distribution pillar with fuses not exceeding 100a/ph.	\$311.19	\$342.31	SA1	800	Supply abolishment - simple
Unmetered supply	Provision of temporary connection and recovery of permanent connection for approved unmetered equipment where an existing LV supply exists	\$137.34	\$151.07	DNUMS	328	Request to de-energise an Unmetered Supply Point
				TUMS	1400	Temporary connection of unmetered equipment to an existing LV supply
Street light glare screening	The supply & installation of glare shields	\$132.73	\$146.00	SLLGAD	602	Adhesive Lumin Glare Screen
				SLLGSDI	604	Standard Lumin Glare Screen - Internal
Replacement of standard luminaries with aero screen units (per street light)	Replacement of existing luminaries with aero screen low glare luminaries	\$306.85	\$337.54	SLAU	600	Replacement of existing streetlight luminaries with aero screen low glare luminaries

Notes:

- Services are subject to Schedule 8 of the Queensland Electricity Regulation 2006, which either caps the price or sets the price to nil.



Appendix 4

Quoted services – Product Codes

Category	Service	Product Code	Peace Charge Code	Ellipse Product Code	Service Description
Rearrangement of network assets	Where ENERGEX assets are rearranged at customer's request.	MSREL	1026	P051	Where ENERGEX assets are moved at customer's request
Customer requested works to allow customer or contractor to work close	Customer requested disconnection & reconnection of supply, coverage of LV mains and/or switching to allow customer/contractor to work close.	MSTT	1038	P011	Coverage of Low Voltage Mains (eg tiger tails) - Charge where customer requests the line close to a construction site be physically covered to prevent risk of electrocution
		MSDNNDDB	902	P011	Temporary LV Service Disconnection - no dismantling – BH
		MSDNNDNA	908	P011	Temporary LV Service Disconnection - no dismantling – AH
		MSDNPDDB	904	P011	Temporary LV Service Disconnection - physical dismantling – BH
		MSDNPDNA	910	P011	Temporary LV Service Disconnection - physical dismantling – AH
		MSDNHVB	906	P011	Temporary HV Service Disconnection – BH
		MSDNHVA	912	P011	Temporary HV Service Disconnection – AH
Non standard data and metering services (type 5-7 metering)	Includes provision of meter data above the minimum & meter inspection to check a reported or suspected fault. Does not include provision of any hardware.	MSOBD	1002	P053	Provision of Metering Data above Minimum Regulatory Requirements
		MSLPD	990	P053	Provision of load profile data where available on request by retailer
		MEMDP	1300	P053	Collection, processing and transfer of higher standard energy data for customers than would otherwise be provided - retailer requested
		MSINS	955	P053	Meter Inspection - Multi dwellings
Emergency recoverable works and rectification of illegal connections	Work carried out by ENERGEX as a result of an emergency or third party action.	MSERW	978	P002	Emergency Recoverable Works - Charges for work carried out by ENERGEX as a result of emergency or third party action
		MSAPIC	930	P059	Rectification of Illegal Connections - Charges for work required as a consequence of illegal connections resulting to damage to the network
Large customer connections	Design & construct of connection assets for large customers.			P060	Large customer connections



Category	Service	Product Code	Peace Charge Code	Ellipse Product Code	Service Description
Design specification/auditing and other subdivision activities	Provision of a detailed estimate/design and/or checking of designs for subdivisions and streetlight services. Also includes other subdivision activities such as pole inspections.	MSDD	958	P006	Provision of Detailed Design Estimate for LV Customer Requested Extension/Connection
		MSSF	1032	P006	Specification Fees - Fee for service when ENERGEX prepares and issues specifications for customer extension works
Unmetered services, including street lighting	Provision of services, other than standard connection, for approved unmetered equipment, including street lights.	SLLGUNI	606	P005	Unique Luminaries Glare Screening - External
				P054	Unmetered services (excl street lighting)
After hours provision of any fee based service (excl re-energisation)	The provision of any fee-based service, excluding re-energisation, after hours.	LOST	1602		ENERGEX attended LV customer's trouble call after hours and found fault in LV customer's installation (includes tripped safety switch, internal fault, customer overload, etc)
		LOSA	1600		ENERGEX attended LV customer's trouble call AnyTime and found fault in LV customer's installation (includes tripped safety switch, internal fault, customer overload, etc)
		MSWTVA	1045		Wasted truck visit - After Hours
		NCT1MA	124		Temporary connection - No CT. Recovery of the temporary builders supply is inclusive.
		NCT2MA	126		Temporary connection - CT Metering. Recovery of the temporary builders supply is inclusive. This product code will always have an Additional Crew product code applied.
		NCT1MT	128		Temporary connection - No CT where the retailer has requested a service time of anytime. Recovery of the temporary builders supply is inclusive.
		NCT2MT	130		Temporary connection - CT Metering where the retailer has requested a service time of anytime. Recovery of the temporary builders supply is inclusive. This product code will always have an Additional Crew product code applied.
		AAEM1MAH	501		Adds & Alts - Exchange meter No CT - After Hours / Anytime
		AAEM2MAH	503		Adds & Alts - Exchange meter CT - After Hours / Anytime
		AAMM1MAH	513		Adds & Alts - Move meter No CT - After Hours / Anytime
		AAMM2MAH	515		Adds & Alts - Move meter CT - After Hours / Anytime
		SA1AH	801		Supply abolishment Simple - After Hours / Anytime

Category	Service	Product Code	Peace Charge Code	Ellipse Product Code	Service Description
Supply abolishment - complex	Retailer requests the service provider to abolish supply at a given connection point. Applies where there are complex arrangements requiring extra resources above that supplied under a simple supply abolishment. Including, underground LV service cables direct jointed to the LV mains cable in the footpath or connected to the LV transformer bushings and terminated on a building wall or other structure inside property; or underground supply arrangements fed from a distribution pillar with fuses exceeding 100a/ph; or HV metered sites.	SA2	802	P056	Supply Abolishment - complex
Additional crew	Where additional crew are required at a service call for health, safety or security reasons.	MSAC	926	P055	Where additional single crew for a period up to one hour is required at a service call for health, safety or security reasons during business hours.
		MSACA	1700	P055	Where additional single crew for a period of up to one hour is required at a service call for health, safety or security reasons after hours.
		MSACT	1702	P055	Where additional single crew for a period of up to one hour is required at a service call for health, safety or security reasons and the retailer has nominated a service time of AnyTime.
		MSAC2	939	P055	Where additional single crew for a period > than one hour < 2 hours is required at a service call for health, safety or security reasons during business hours.
		MSACA2	1701	P055	Where additional single crew for a period of greater than one hour is required at a service call for health, safety or security reasons after hours.
		MSACT2	1703	P055	Where additional single crew for a period of greater than one hour is required at a service call for health, safety or security reasons and the retailer has nominated a service time of AnyTime.
		MSACB	1704	P055	Where additional single crew for a period of greater than two hours is required at a service call for health, safety or security reasons during business hours.



Category	Service	Product Code	Peace Charge Code	Ellipse Product Code	Service Description
Temporary connection - complex	Applies to temporary connections, typically above 10 kVA, where there are complex arrangements requiring extra resources above that supplied under simple temporary supply. Complex arrangements may be due to long distances, a transformer installation and/or difficult terrain.			P057	Temporary connection - complex
Loss of asset	The residual asset value of non-contributed (Rate 1) & contributed (Rate 2) street lights when removed from service before the end of their useful life at the request of the customer.			P052	Loss of asset (eg streetlighting)
Other recoverable work (opex)	Customer requested opex services that would not otherwise have been requested for the efficient management of the network, or covered by another service.	MSORW	945	P061	Other Recoverable Works - Opex
Other recoverable work (capex)	Customer requested services that would not otherwise have been requested for the efficient management of the network, or covered by another service which results in a contributed asset.	MSREAC	1024		Provision of Reactive Power - Charges for the provision or receipt of reactive power and energy to and from a connection point
		MSAPABC	928		Conversion to Aerial Bundled Cables - Bundling of cables which is carried out at the request of another party
		MSOhtoUG	1004		Upgrade from Overhead to Underground Service - Customer requested conversion of existing overhead service to underground service



Appendix 5

Other Business-2-Business services (no charge)

In addition to the Alternative Control Services provided by ENERGEX on a fee for service basis, ENERGEX provides a number of services free of charge. These services are requested through the usual Business-2-Business communication channels. A list of services with full description and product code are provided in the additional product code listing below.

Product Codes	Description	Full Description	Peace Charge Code	Price
New Connections				
NCUP2MB	U/G Perm Supply - CT B/H	New Connection underground with CT during business hours	100	\$ -
NCUP1MB	U/G Perm Supply - No CT B/H	New Connection underground with no CT during business hours	158	\$ -
NCUP2MA	U/G Perm Supply - CT A/H	New Connection underground with CT after hours	106	\$ -
NCUP1MA	U/G Perm Supply - No CT A/H	New Connection underground with no CT after hours	156	\$ -
NCUP2MT	U/G Perm Supply - CT Anytime	New Connection underground with CT anytime	118	\$ -
NCUP1MT	U/G Perm Supply - No CT Anytime	New Connection underground with no CT anytime	116	\$ -
NCOP2MB	O/H Perm Supply - CT B/H	New Connection overhead with CT during business hours	104	\$ -
NCOP1MB	O/H Perm Supply - No CT B/H	New Connection overhead with no CT during business hours	102	\$ -
NCOP2MA	O/H Perm Supply - CT A/H	New Connection overhead with CT after hours	110	\$ -
NCOP1MA	O/H Perm Supply - No CT A/H	New Connection overhead with no CT after hours	108	\$ -
NCOP2MT	O/H Perm Supply - CT Anytime	New Connection overhead with CT anytime	114	\$ -
NCOP1MT	O/H Perm Supply - No CT Anytime	New Connection overhead with no CT anytime	112	\$ -
NCTP2MB	Temp/Perm - CT B/H	New Connection temporary in permanent CT during business hours	150	\$ -
NCTP1MB	Temp/Perm - No CT B/H	New Connection temporary in permanent no CT during business hours	148	\$ -
NCTP2MA	Temp/Perm - CT A/H	New Connection temporary in permanent CT after hours	134	\$ -
NCTP1MA	Temp/Perm - No CT A/H	New Connection temporary in permanent no CT after hours	132	\$ -
NCTP2MT	Temp/Perm - CT Anytime	New Connection temporary in permanent CT anytime	138	\$ -
NCTP1MT	Temp/Perm - No CT Anytime	New Connection temporary in permanent no CT anytime	136	\$ -
Unmetered Supply				
NCUMSC	UMS Connection Point Available	New connection unmetered where connection point is available	152	\$ -
NCUMSCN	UMS Connection Point Not Available	New connection unmetered where connection point is not available	153	\$ -



Product Codes	Description	Full Description	Peace Charge Code	Price
Special Read				
SRFR	Meter Final Read	Special Read - final read	402	\$ -
Additions & Alterations				
AAICL	Install Ctrl Load	Adds & Alts - installed controlled load	516	\$ -
AAIHW	Install Hot Water	Adds & Alts - installed hot water	518	\$ -
AAIM2MB	Install Meter - CT B/H	Adds & Alts - install meter CT during business hours	522	\$ -
AAIM1MB	Install Meter - No CT B/H	Adds & Alts - install meter no CT during business hours	520	\$ -
AAIM2MA	Install Meter - CT A/H	Adds & Alts - install meter CT after hours	506	\$ -
AAIM1MA	Install Meter - No CT A/H	Adds & Alts - install meter no CT after hours	504	\$ -
AAIM2MT	Install Meter - CT Anytime	Adds & Alts - install meter CT anytime	510	\$ -
AAIM1MT	Install Meter - No CT Anytime	Adds & Alts - install meter no CT anytime	508	\$ -
AARM2M	Remove Meter - CT	Adds & Alts - remove meter CT during business hours	526	\$ -
AARM1M	Remove Meter - No CT	Adds & Alts - remove meter no CT during business hours	524	\$ -
Meter Investigation				
MIT2MB	Tamper - CT B/H Only	Meter investigation for tamper CT during business hours	710	\$ -
MIT1MB	Tamper - No CT B/H Only	Meter investigation for tamper no CT during business hours	708	\$ -
Customer Initiated Service Upgrades				
MSOU1P2	OH Single Phase - 2 visit	Overhead Service Upgrade	1008	\$ -
MSOU2P1	OH 2 Phase - 1 visit	Overhead Service Upgrade	1010	\$ -
MSOU2P2	OH 2 Phase - 2 visit	Overhead Service Upgrade	1012	\$ -
MSOU3P1	OH 3 Phase - 1 visit	Overhead Service Upgrade	1014	\$ -
MSOU3P2	OH 3 Phase - 2 visit	Overhead Service Upgrade	1016	\$ -
MSUU2P	U/G Upgrade to 2ph Connection	Underground service upgrade to 2 phase	1040	\$ -
MSUU3P	U/G Upgrade to 3ph Connection	Underground service upgrade to 3 phase	1042	\$ -
Re-energisation				
RNRR	Re-energisation Read Required	Retailer requesting an initial opening read for a new customer	236	\$ -
NoCharge	No Charge	No Charge	9999	\$ -



Appendix 6

Internal procedure for reviewing objections

1.1 Internal procedure for reviewing objections to tariff class assignment

When ENERGEX (Retail Escalation Manager or Network Pricing Manager) receives written notification that a customer has an objection to a proposed tariff classification, the following procedures will be followed.

Where the objection does not involve a site specific price, the review process will be performed by the Retail Escalation Department. This includes tariff reclassifications for SAC Demand to or from SAC Non-demand.

Where the objection involves a customer moving to or from site specific prices, the review process will be performed by the Network Pricing Department. This includes tariff reclassifications to or from CAC and ICC.

1. Objection does not involve a site specific price (Retail Escalation Department)

- a) The customer's written objection will be reviewed and ENERGEX will consider any additional information that the customer has provided.
- b) ENERGEX will determine the energy usage for the customer based on:
 - i. Any information which the customer has provided, or
 - ii. Historical consumption data for existing customers; or
 - iii. Estimated energy for new customers.
- c) ENERGEX will assess the nature of the customer's connection to the network.
- d) ENERGEX will determine the correct tariff classification (using data collected and as outlined in Figure 1).
- e) In all cases, the tariff class assignment will be reconsidered and will be escalated to the Retail Escalation Manager for review. Final review will be undertaken in consultation with the Network Pricing Manager.
- f) The customer (or Retailer) will be notified in writing of the tariff classification review within 7 days.

2. Objection involves a site specific price (Network Pricing Department)

- a) The customer's written objection will be reviewed and ENERGEX will consider any additional information that the customer has provided.



- b) The Retail Escalation Manager will notify the Network Pricing Department that the objection involves moving to or from site specific prices.
- c) ENERGEX will determine the energy usage for the customer based on:
 - i. Any information which the customer has provided, or
 - ii. Historical consumption data for existing customers; or
 - iii. Estimated energy for new customers.
- d) ENERGEX will assess the nature of the customer's connection to the network.
- e) ENERGEX will review the customer's connection agreement to determine if there are any special requirements.
- f) ENERGEX will determine the correct tariff classification (using the data collected above and as outlined in Figure 1). There may be exceptions to the application of the first criteria, energy consumption, depending on the nature of a connection.
- g) In all cases, the tariff class assignment will be reconsidered and will be escalated to the Network Pricing Manager for final review.
- h) The customer (or Retailer) will be notified in writing of the tariff classification review within 7 days.

1.2 Objection not resolved to satisfaction of customer under internal review process

Where an objection to an assignment or reassignment of the customer to a specific tariff class has not been resolved to the satisfaction of that customer applying ENERGEX's internal review process as outlined in Section 1.1 above, then:

- a) To the extent that the resolution of such disputes is within the jurisdiction of the State based energy ombudsman scheme the customer is entitled to escalate the matter to such a body; or
- b) The customer is entitled to seek resolution via the dispute resolution process available under Part 10 of the National Electricity Law (NEL).

