



Ergon Energy Corporation Limited

Network Use of System Tariff Guide

2007-2008

To apply from 1 July 2007

Précis of Changes for 2007-08

- Amendment to clarify application of controlled supply conditions
- Additional NMIs in Appendix 2

Ergon Energy Corporation Limited ABN 50 087 646 062

Release 2

Date: 1 August 2007

CONTENTS

1.	INTRODUCTION	4
1.1	Who this Tariff Guide applies to	4
1.2	2007-08 Network Tariff Rate Listing	4
1.3	Changes from previous years' publications	4
1.4	Format of this Tariff Guide	5
1.5	How Tariffs are derived	5
1.6	Where Can More Information Be Obtained?	5
1.7	How To Contact Ergon Energy	6
2.	COMMON TERMS	7
3.	GENERAL REQUIREMENTS	7
4.	ZONES	8
4.1	Number of Zones	8
4.2	Definitions of Zones	8
4.3	Zone Map	10
5.	DISTRIBUTION LOSS FACTORS (DLFs)	11
5.1	General Information	11
5.2	Table A - Standard Distribution Loss Factors	11
5.3	DLF Rules	11
5.4	DLF Categories	12
5.5	DLF Applications	12
6.	TRANSMISSION NODE IDENTIFIERS (TNIs)	13
7.	SIDE CONSTRAINTS	13
8.	INDIVIDUALLY CALCULATED CUSTOMERS (ICCs)	14
8.1	Definition	14
8.2	DUOS Tariffs	14
8.3	TUOS Tariffs	14
9.	CONNECTION ASSET CUSTOMERS (CACs)	16
9.1	Definition	16
9.2	DUOS Tariffs	16
9.3	TUOS Tariffs	16
10.	EMBEDDED GENERATORS (EGs)	17
10.1	Definition	17
10.2	DUOS Tariffs	17
10.3	TUOS Tariffs	17

11.	STANDARD ASSET CUSTOMERS >100 MWh Per Annum	18
11.1	Definition	18
11.2	DUOS Tariffs	18
11.3	TUOS Tariffs	18
11.4	Network Tariff Codes	19
11.5	Mt Isa	20
12.	STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – VOLUME LARGE	21
12.1	Definition	21
12.2	DUOS Tariffs	21
12.3	TUOS Tariffs	21
12.4	Network Tariff Codes	21
12.5	Mt Isa	21
13.	STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – VOLUME SMALL	22
13.1	Definition	22
13.2	DUOS Tariffs	22
13.3	TUOS Tariffs	22
13.4	Network Tariff Codes	22
13.5	Mt Isa	23
14.	STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – CONTROLLED SUPPLIES	24
14.1	Definition	24
14.2	DUOS Tariffs	24
14.3	TUOS Tariffs	25
14.4	Network Tariff Codes	25
14.5	Mt Isa	25
15.	STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – UNMETERED SUPPLIES	26
15.1	Definition	26
15.2	DUOS Tariffs	26
15.3	TUOS Tariffs	27
15.4	Network Tariff Codes	27
15.5	Mt Isa	28
	APPENDIX 1 – TUOS REGIONAL INDICATORS	29
	APPENDIX 2 – TABLE OF SITE-SPECIFIC NMIs	30

Network Tariff Guide

1. INTRODUCTION

Ergon Energy Corporation Limited (Ergon Energy) has previously published an annual Network Price Book that provided guidelines and rates for Network Prices.

For the 2007-08 year the Network Price Book has been replaced by 2 publications:

- this Network Tariff Guide; and
- the Network Tariff Rate Listing

1.1 Who this Tariff Guide applies to

Network Tariffs are a charge for the services associated with using the network to transport electricity from Generators to the end-use customer.

This Network Tariff Guide sets out Network Tariff Codes and application rules. Rates for each Network Tariff are not included in this Tariff Guide but are published separately on the Ergon Energy website in the Network Tariff Rate Listing (refer section 1.2).

This Tariff Guide has been developed for use by Customers, Retailers and Consultants and applies to Network Users connected to Ergon Energy Corporation Limited's distribution supply network (excluding the Mt Isa Zone).

Network Tariffs for Mt Isa customers are not explained in this Guide. Distribution customers with metered consumption above 100MWh can contact Ergon Energy for further information.

1.2 2007-08 Network Tariff Rate Listing

Rates for each Network Tariff Code are available from the 2007-08 Network Tariff Rate Listing. The rates provided in the 2007-08 Network Tariff Rate Listing are GST Exclusive. Any GST payable will be added to the charges. Currently, the GST payable is an additional 10% of the listed prices.

The 2007-08 Network Tariff Rate Listing can be found at:

www.ergon.com.au/network_info/price_guide.asp

The Network tariffs shown in the 2007-08 Network Tariff Rate Listing for customers currently ineligible to enter the market are for information only and are NOT charged to any individual customer.

1.3 Changes from previous years' publications

- change of name from Network Price to Network Tariff
- allocation of Network Tariff Code (NTC) to each Network Tariff

- each Network Tariff has a number of tariff components and the descriptions for these have been standardised across all customer categories
- all Network Tariff rates are expressed as GST Exclusive NOT Inclusive
- DLF code is provided for each DLF value (refer section 5)
- For Standard Asset Customers a regional indicator has been assigned to each TNI which determines the Network Tariff Code to apply (Refer Appendix 1).
- Fixed tariff components for both DUOS and TUOS are quoted on a \$ per day basis (not monthly)
- Volume tariff components for both DUOS and TUOS are quoted on a \$ per kWh basis (not cents)

1.4 Format of this Tariff Guide

Each Network customer category has a separate section within this Tariff Guide. Details on standard Distribution Loss Factors are provided in Section 5.

NMIs for customers with site-specific prices are listed in Appendix 2. This table of NMIs should be checked prior to determining applicable network rates for customers.

Site-specific prices are issued by Ergon Energy Network Pricing and are available with the customer's written consent. See section 1.7 for appropriate contact details.

1.5 How Tariffs are derived

The Queensland Competition Authority (QCA), as the Jurisdictional Regulator under the National Electricity Rules, has released its Final Determination "Regulation of Electricity Distribution", April 2005.

The Final Determination sets out the process for the development of network charges to be applied for the new regulatory period 1 July 2005 to 30 June 2010, and requires that Network Tariffs be published annually.

Ergon Energy has a "Network Pricing Principles Statement" (PPS) approved by the Queensland Competition Authority in February 2007, which sets out the steps for price development.

1.6 Where Can More Information Be Obtained?

In accordance with the QCA's requirements, Ergon Energy publishes 4 documents relating to distribution network pricing:

- (a) A "Network Pricing Principles Statement" which sets out the approach to be adopted during the regulatory control period 2005-06 to 2009-10.
- (b) This "Network Tariff Guide" which is applicable to the 2007-08 financial year.
- (c) The "Network Tariff Rate Listing" which sets out the rates applying to each Network Tariff Code.

- (d) A "Guide to Transmission Network Connection Point by Postcode & Pricing Zone" that can be used to assist with the process of referencing the customers to a Transmission Network Connection Point.

These documents are available on the Ergon Energy web site at:

www.ergon.com.au/network_info/price_guide.asp

1.7 How To Contact Ergon Energy

Network users and Retailers who are uncertain about the network pricing process or their particular circumstances are encouraged to contact us for assistance.

CONTACT DETAILS

**Network Pricing Manager
P O Box 1090
TOWNSVILLE Q 4810**

Ph (07) 4727 6684

FAX: (07) 4727 6849

E-mail: netprice@ergon.com.au

2. COMMON TERMS

The following acronyms are applied throughout this Tariff Guide:

- AD - Authorised Demand in kilowatts
- CAC - Connection Asset Customer
- CPI - Consumer Price Index
- DLF - Distribution Loss Factor
- DNSP - Distribution Network Service Provider
- DUOS - Distribution Use of System.
- EG - Embedded Generator
- ICC - Individually Calculated Customer
- NEMMCO - National Electricity Market Management Company
- Network Tariffs - consist of rates for DUOS and TUOS
- NTC - Network Tariff Code
- NMI - National Metering Identifier
- Pricing Zones - East, West and Mt Isa zones
- SAC - Standard Asset Customer
- TNI - Transmission Node Identifier
- TUOS - Transmission Use of System.

3. GENERAL REQUIREMENTS

The following general requirements apply to the selection and amendment of network tariffs:

- (a) It is intended that a Network Tariff Code will apply to each connection point. Accordingly, Network Users with multiple network connections will pay Network Charges for each connection point.

This approach is consistent with the NEMMCO issued NMI Procedure.

- (b) Ergon Energy may determine that the network tariff assigned to a NMI should be changed, other than as a result of a request (for example, in response to advice received from a customer regarding a change in usage). In such circumstances, Ergon Energy will advise the customer's Retailer of the decision taken.
- (c) Ergon Energy will not actively or periodically assess the appropriateness of the network tariffs applied to the customer's installation or to the customer's circumstances or usage. Ergon Energy will provide the customer or the

customer's Retailer with reasonable assistance in identifying the network tariffs applicable to the customer's installation, if requested.

- (d) A request may be made for a change to the network tariff assigned to a NMI:
 - (i) Any change in network tariff will only proceed upon approval by Ergon Energy.
 - (ii) The request should be made by the customer, through their Retailer.
 - (iii) Subject to a change in usage or the pattern of usage at the customer's installation, a further request to change the network tariff should not be made until a period of 12 months has elapsed from the previous request for the NMI.
- (e) Demand and/or volume are to be measured at each individual network connection point.
- (f) Where Ergon Energy's load control equipment exists (including associated metering), this may not be disconnected without Ergon Energy's prior written consent.
- (g) Network charges will be billed by Ergon Energy on a monthly basis.
- (h) Any change of network tariff will take effect from the date as approved by Ergon Energy.
- (i) Where applicable, demand based charges will be calculated on a pro rata daily basis for initial and final accounts.

4. ZONES

4.1 Number of Zones

Three pricing zones have been delineated in the Ergon Energy area of supply, broadly based on Local Government areas of Queensland and apply to DUOS prices only. TUOS prices are not impacted by zones.

- (a) **East Zone** - includes those Local Government areas where the Network Users are supplied from the distribution system connected to the National Grid and have a relatively low distribution cost to supply.
- (b) **West Zone** - includes those Local Government areas outside the East Zone and connected to the National Grid, which have a significantly higher distribution cost of supply than the East Zone.
- (c) **Mt Isa Zone** - broadly defined as those Local Government areas supplied from the isolated Mount Isa system. This zone is not connected to the National Grid and as such is excluded from the application of the National Electricity Rules. However, oversight of the network cost to supply the regulated network within the zone is carried out by the Jurisdictional Regulator.

4.2 Definitions of Zones

- (a) The **East Zone** consists of:

The Cities of Bundaberg, Cairns, Gladstone, Hervey Bay, Mackay, Maryborough, Rockhampton, Thuringowa, Toowoomba and Townsville;

The Town of Dalby;

The whole of the Shires of Atherton, Banana, Biggenden, Bowen, Broadsound, Burdekin, Burnett, Calliope, Cambooya, Cardwell, Clifton, Duaringa, Eacham, Eidsvold, Fitzroy, Gayndah, Hinchinbrook, Isis, Johnstone, Jondaryan, Kingaroy, Kolan, Livingstone, Milmerran, Mirani, Miriam Vale, Monto, Mt Morgan, Munduberra, Murgon, Nanango, Nebo, Perry, Pittsworth, Rosalie, Sarina, Wambo, Warwick, Whitsunday, Wondai, and Woocoo;

Parts of the Shires of Belyando, Boonah, Cooloola, Crows Nest, Esk, Douglas, Gatton, Herberton, Inglewood, Kilkivan, Mareeba, Peak Downs, Stanthorpe, and Tiaro.

Specific Parts of these shires are:

- (a) Belyando - Moranbah township;
- (b) Boonah, Cooloola, Crows Nest, Esk, Gatton, Inglewood, Kilkivan, Stanthorpe and Tiaro - Ergon Energy supply area only;
- (c) Douglas - area south of the Daintree River
- (d) Herberton and Mareeba - Atherton Tableland area supplied from the "East" distribution system;
- (e) Peak Downs - Tieri township.

- (b) The **West Zone** consists of:

The City of Charters Towers;

The Town of Roma;

The whole of the Shires of Aramac, Barcaldine, Bauhinia, Bendemere, Blackall, Booringa, Bulloo, Bungil, Carpentaria, Chinchilla, Cook, Croydon, Dalrymple, Emerald, Etheridge, Flinders, Ilfracombe, Isisford, Jericho, Longreach, McKinlay, Murilla, Murweh, Paroo, Quilpie, Richmond, Tambo, Taroom, Warroo, and Winton;

Parts of the Shires of Balonne, Belyando, Douglas, Herberton, Mareeba, Peak Downs, Tara and Waggamba.

Specific Parts of these shires are:

- (a) Balonne, Tara and Waggamba - Ergon Energy supply area only ;
- (b) Belyando - other than Moranbah township;
- (c) Douglas - North of the Daintree River not excluded by the Distribution Authority;
- (d) Herberton and Mareeba - other than the Atherton Tableland area.
- (e) Peak Downs - other than Tieri township.

- (c) The **Mt Isa Zone** consists of the regulated network within the following areas:

The City of Mt Isa


The whole Shire of Cloncurry

Those parts of the Shires of Burke and Boulia which are supplied from the Mt Isa system

- (d) NOTE: those areas supplied from isolated generation are **NOT** included in any of the above zones.

4.3 Zone Map

The following map depicts the East, West and Mount Isa Zones.

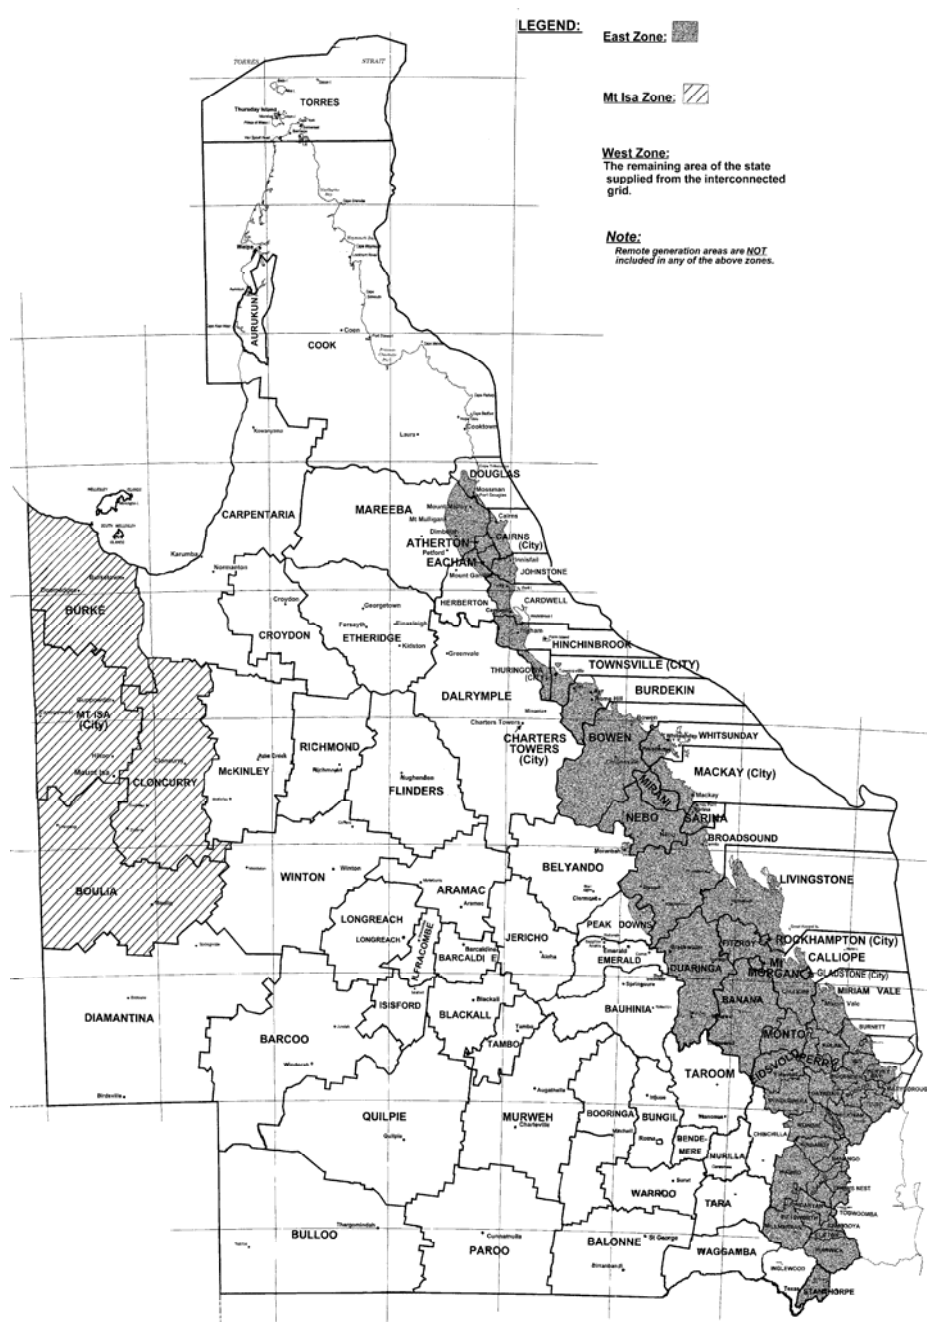

5. DISTRIBUTION LOSS FACTORS (DLFs)

5.1 General Information

- (a) Every NMI has a DLF code which is associated with the location of the metering point. The code's value is re-calculated periodically in line with the National Electricity Rules.
- (b) The DLF is a multiplier used to convert the actual metered energy into the equivalent energy passing through the appropriate Transmission Network Connection Point by allowing for the distribution network losses that are incurred between the meter and the Transmission Network Connection Point.
- (c) The DLF is applied to the metered consumption for the calculation of TUOS volume charges. DLFs are generally assigned on the basis of the standard metering voltage for the type of connection however a specific loss factor may be applied where there is a unique network supply configuration.
- (d) The 2007-08 DLFs including site-specific DLFs for some larger ICCs, CACs and EGs are published on the NEMMCO web site:

http://nemmco.com.au/transmission_distribution/171-0014.htm

- (e) Where site-specific DLFs have not been published, the DLFs from Table A (see section 5.2) will apply.
- (f) Detailed information about the purpose and application of DLFs may also be obtained from the NEMMCO web site.

5.2 Table A - Standard Distribution Loss Factors

The following table of DLFs has been approved by the QCA and published by NEMMCO for the 2007-08 year.

Ergon Energy 2007/08 Distribution Loss Factors				
Network Level	East Zone		West Zone	
	Code	DLF	Code	DLF
Subtransmission Bus	GESB	1.018	GWSB	1.105
Subtransmission Line	GESL	1.029	GWSL	1.124
22/11 kV Bus	GEHB	1.026	GWHB	1.130
22/11 kV Line	GEHL	1.046	GWHL	1.173
LV Bus	GELB	1.077	GWLB	1.210
LV Line	GELL	1.109	GWLL	1.292

5.3 DLF Rules

- (a) The DLFs in this Tariff Guide do NOT apply to NMIs with site specific distribution loss factors.
- (b) DLFs for all NMIs will be included in the Schedule of Network Tariffs issued to the customer and/or their Retailer.
- (c) The zonal boundaries are identical to those used for the Network Tariffs.

- (d) For SACs, the customer or Retailer must nominate the DLF appropriate to the connection. The customer or Retailer may be required to justify any nominated DLF.
- (e) Where the voltage at the metering point is not listed, or there is doubt about the application of these rules, please request advice from Ergon Energy.

5.4 DLF Categories

- (a) **Subtransmission Bus** – Applicable to connection points that are High Voltage metered at a Subtransmission Bus with a voltage greater than 30kV.
- (b) **Subtransmission Line** – Applicable to connection points that are High Voltage metered at a Subtransmission Line with a voltage greater than 30kV.
- (c) **22/11kV Bus** - Applicable to connection points that are High Voltage metered at a 22/11kV Bus with a voltage less than 30kV and greater than 1,000 volts.
- (d) **22/11kV Line** – Applicable to connection points that are High Voltage metered at a 22/11kV Line with a voltage less than 30kV and greater than 1,000 volts.
- (e) **Low Voltage Bus** - Applicable to connection points that are Low Voltage metered at a Low Voltage Bus with a voltage less than 1,000 volts.
- (f) **Low Voltage Line** – Applicable to connection points that are Low Voltage metered at a Low Voltage Line with a voltage less than 1,000 volts.

5.5 DLF Applications

(a) Subtransmission and 22/11kV Bus

If customers believe that the NMI would qualify for a high voltage Bus DLF rather than a high voltage Line DLF they should submit details justifying their claim to Ergon Energy. As an example, NMIs supplied from a zone substation by dedicated 22/11kV lines and are metered at or immediately adjacent to the zone substation would be eligible for a 22/11kV Bus DLF.

Furthermore, NMIs supplied from a zone substation by dedicated greater than 30kV lines and are metered at or immediately adjacent to the zone substation would be eligible for a Subtransmission Bus DLF.

Zone substations are defined as substations where the voltage level is stepped down from a voltage greater than 30kV.

(b) Subtransmission Line

The Subtransmission Line DLF will apply to all NMIs which are connected to high voltage subtransmission lines (greater than 30kV) and are metered at the same voltage as the line is energised.

(c) 22/11kV Line

The 22/11kV Line DLF will apply to all NMIs which are connected to high voltage distribution lines and are metered at the same voltage as the line is energised.

(d) **LV Bus**

NMIs which are supplied from a distribution substation on their site (owned or leased) and are metered at the low voltage level are eligible for a LV Bus DLF.

(e) **LV Line**

All NMIs not covered by any of the above categories

6. TRANSMISSION NODE IDENTIFIERS (TNIs)

The TNI identifies the Transmission Network Connection Point from which a customer is supplied. The NMI Discovery process (Stage 2) will provide Retailers with the TNI applicable to a NMI.

7. SIDE CONSTRAINTS

(a) **DUOS**

It is a requirement of QCA that a customer's individual annual network distribution charge increase must not exceed CPI plus 5% unless price paths apply (refer below). Where a customer's increase exceeds this amount, Ergon Energy has produced a site-specific or side-constrained tariff.

(b) **TUOS**

A number of customers have side constraints applied to their annual TUOS charge and accordingly, Ergon Energy has produced a site-specific or side-constrained TUOS tariff.

(c) **PRICE PATHS**

For those customers with a network charge less than cost (i.e. receiving side-constrained tariffs) the QCA required that Ergon Energy propose a price path that would move these customers to cost reflective pricing by the end of the next regulatory period (i.e. by the end of the 2014-15 financial year.)

These price paths have resulted in a small number of customers receiving increases above CPI plus 5% for the 2007-08 year.

(d) NMIs for customers with site-specific tariffs are listed in Appendix 2.

8. INDIVIDUALLY CALCULATED CUSTOMERS (ICCs)

8.1 Definition

ICCs are those customers:

- (a) with energy consumption typically greater than 40 GWh per annum; or
- (b) customers with energy consumption lower than 40 GWh per annum where:
 - (i) a customer has a dedicated supply system which is quite different and separate from the remainder of the supply network; or
 - (ii) there are only two or three customers in a supply system making average prices inappropriate; or
 - (iii) a customer is connected at or close to a transmission connection point and the inclusion of the cost of average shared network would increase their network price above stand-alone; or
 - (iv) inequitable treatment of otherwise comparable customers arising from application of the 40 GWh per annum threshold.

8.2 DUOS Tariffs

- (a) DUOS Tariffs are based on:
 - (i) the actual dedicated connection assets utilised by the customer; and;
 - (ii) the customer's specifically identified portion of any shared distribution network utilised for the electricity supply.
- (b) DUOS Tariffs incorporate a Fixed Charge (\$/day), a Capacity Charge (\$/kW of AD/month), an Actual Demand Charge (\$/kW/month) and a Volume Charge (\$/kWh).

Where the actual demand exceeds the authorised demand in any one month the actual demand will be substituted for the authorised demand in the calculation of the capacity charge for that month.

- (c) DUOS Tariffs for ICCs are site-specific and are available with the customer's written consent.

8.3 TUOS Tariffs

- (a) TUOS charges are calculated and levied by Powerlink for each transmission connection point and are passed through on a reflective basis proportional to the Authorised Demand of the customer and their energy consumption.
- (b) TUOS Tariffs incorporate a Fixed Charge (\$/day), a Capacity Charge (\$/kW of AD/month), a Common Service & General Charge (\$/day) and a Volume Charge (\$/kWh)

Where the actual demand exceeds the authorised demand in any one month the actual demand will be substituted for the authorised demand in the calculation of the capacity charge for that month.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

- (c) TUOS Tariffs for ICCs are site-specific and are available with the customer's written consent.

9. CONNECTION ASSET CUSTOMERS (CACs)

9.1 Definition

CACs are those customers:

- (a) with energy consumption typically greater than 4 GWh per annum; or
- (b) with energy consumption lower than 4 GWh per annum where:
 - (i) a customer has a dedicated supply system which is quite different and separate from the remainder of the supply network; or
 - (ii) inequitable treatment of otherwise comparable customers arising from application of the 4 GWh per annum threshold

9.2 DUOS Tariffs

- (a) DUOS Tariffs are based on:
 - (i) the actual dedicated connection assets utilised by the customer; plus
 - (ii) average charges for use of the shared network
- (b) DUOS Tariffs incorporate a Fixed Charge (\$/day), a Capacity Charge (\$/kW of AD/month), an Actual Demand Charge (\$/kW/month) and a Volume Charge (\$/kWh).

Where the actual demand exceeds the authorised demand in any one month the actual demand will be substituted for the authorised demand in the calculation of the capacity charge for that month.

- (c) DUOS Tariffs for CACs are site-specific and are available with the customer's written consent.

9.3 TUOS Tariffs

- (a) TUOS charges are calculated and levied by Powerlink for each transmission connection point and are passed through on a reflective basis proportional to the Authorised Demand of the customer and their energy consumption.
- (b) TUOS Tariffs incorporate a Fixed Charge (\$/day), a Capacity Charge (\$/kW of AD/month), a Common Service & General Charge (\$/day) and a Volume Charge (\$/kWh)

Where the actual demand exceeds the authorised demand in any one month the actual demand will be substituted for the authorised demand in the calculation of the capacity charge for that month.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

- (c) TUOS Tariffs for CACs are site-specific and are available with the customer's written consent.

10. EMBEDDED GENERATORS (EGs)

10.1 Definition

EGs can be separated into two categories

- (a) EGs that are connected to and only generate into the distribution system; or
- (b) EGs that are connected to, generate into as well as take load from the distribution system.

10.2 DUOS Tariffs

- (a) For those EGs that only generate into the distribution system
 - (i) DUOS Tariff consist of a Fixed Charge (\$/day).
- (b) For those EGs that generate into as well as take load from the distribution system
 - (i) DUOS Tariff for generated energy consist of a Fixed Charge (\$/day) and
 - (ii) DUOS Tariffs for load taken from the distribution system will be allocated as per the appropriate Network Price category selected from ICCs, CACs or SACs.

DUOS Tariffs for EGs are site-specific and are available with the customer's written consent.

10.3 TUOS Tariffs

- (a) For those EGs that only generate into the distribution system.
 - (i) TUOS Tariffs do not apply to generated energy.
- (b) For those EGs that generate into as well as take load from the distribution system
 - (i) TUOS Tariffs do not apply to generated energy.
 - (ii) TUOS Tariffs for load taken from the distribution system will be allocated as per the appropriate Network Price category selected from ICCs, CACs or SACs.

TUOS Tariffs for EGs are site-specific and are available with the customer's written consent.

11. STANDARD ASSET CUSTOMERS >100 MWh Per Annum

11.1 Definition

SACs >100 MWh are those customers:

- (a) with energy consumption typically greater than 100 MWh per annum; or
- (b) where the network prices are based on the averages of both the shared distribution network charges and connection charges.

11.2 DUOS Tariffs

- (a) DUOS Tariffs are based on:
 - (i) the average of the connection charges and
 - (ii) the average of the shared distribution network charges.
- (b) DUOS Tariffs incorporate a Fixed Charge (\$/day), an Actual Demand Charge (\$/kW/month) and a Volume Charge (\$/kWh).

The Minimum Chargeable Demand will be applied for each month where the monthly maximum demand fails to exceed this value.

- (c) The Network Charge category applicable to a customer will be as nominated by the customer or their Retailer from among the following categories:
 - (i) **Demand High Voltage (EDH or WDH)** is available to customers who have high voltage metering and take supply at high voltage. This category is **NOT** available to customers with non-standard or significant connection arrangements, who have distribution transformer(s) provided by Ergon Energy, or to customers who are metered at other than high voltage.
 - (ii) **Demand Large (EDL or WDL), Demand Medium (EDM or WDM) and Demand Small (EDS or WDS)** are available to all SACs > 100 MWh. The network charge categories are self-selecting with customers' load characteristics determining the optimum category.
- (d) A small number of customers have site specific tariffs as a result of side constraints being applied. Refer section 7. DUOS Tariffs for these customers are site-specific and are available with the customer's written consent.

11.3 TUOS Tariffs

- (a) TUOS charges are calculated and levied by Powerlink for each transmission connection point. Ergon Energy will combine rates in geographical regions and pass through TUOS charges to SACs >100 MWh thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”

- (b) TUOS Tariffs incorporate a Fixed Charge (\$/day), Capacity Charge (\$/kW/month) and Volume Charge (\$/kWh).

The Minimum Chargeable Demand will be applied for each month where the monthly maximum demand fails to exceed this value.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate for the TNI applicable to the customer.

- (c) A small number of customers have site specific tariffs as a result of side constraints being applied. Refer section 7. TUOS Tariffs for these customers are site-specific and are available with the customer's written consent.

11.4 Network Tariff Codes

The Network Tariff Codes that apply for SACs > 100 MWh are:

- (a) Demand High Voltage (EDH or WDH)

EDHT1	East Demand HV (400kW) SAC - TUOS Region 1
EDHT2	East Demand HV (400kW) SAC - TUOS Region 2
EDHT3	East Demand HV (400kW) SAC - TUOS Region 3
WDHT1	West Demand HV (400kW) SAC - TUOS Region 1
WDHT2	West Demand HV (400kW) SAC - TUOS Region 2
WDHT3	West Demand HV (400kW) SAC - TUOS Region 3

The regional indicator for each TNI is shown in Appendix 1.

- (b) Demand Large (EDL or WDL)

EDLT1	East Demand Large (400kW) SAC - TUOS Region 1
EDLT2	East Demand Large (400kW) SAC - TUOS Region 2
EDLT3	East Demand Large (400kW) SAC - TUOS Region 3
WDLT1	West Demand Large (400kW) SAC - TUOS Region 1
WDLT2	West Demand Large (400kW) SAC - TUOS Region 2
WDLT3	West Demand Large (400kW) SAC - TUOS Region 3

The regional indicator for each TNI is shown in Appendix 1.

- (c) Demand Medium (EDM or WDM)

EDMT1	East Demand Medium (120kW) SAC - TUOS Region 1
EDMT2	East Demand Medium (120kW) SAC - TUOS Region 2
EDMT3	East Demand Medium (120kW) SAC - TUOS Region 3
WDMT1	West Demand Medium (120kW) SAC - TUOS Region 1
WDMT2	West Demand Medium (120kW) SAC - TUOS Region 2
WDMT3	West Demand Medium (120kW) SAC - TUOS Region 3

The regional indicator for each TNI is shown in Appendix 1.

- (d) Demand Small (EDS or WDS)

EDST1	East Demand Small (30kW) SAC - TUOS Region 1
EDST2	East Demand Small (30kW) SAC - TUOS Region 2
EDST3	East Demand Small (30kW) SAC - TUOS Region 3

WDST1	West Demand Small (30kW) SAC - TUOS Region 1
WDST2	West Demand Small (30kW) SAC - TUOS Region 2
WDST3	West Demand Small (30kW) SAC - TUOS Region 3

The regional indicator for each TNI is shown in Appendix 1.

11.5 Mt Isa

Network Tariffs for Mt Isa customers are not explained in this Guide. Distribution customers with metered consumption above 100MWh can contact Ergon Energy for further information.

12. STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – VOLUME LARGE

12.1 Definition

SACs < 100 MWh – Volume Large are those customers:

- (a) with energy consumption in the range of 26 MWh to 100 MWh per annum; and
- (b) where the network charges are based on the averages of both the shared distribution network charges and connection charges for the Network User Group in the particular zone.

12.2 DUOS Tariffs

- (a) DUOS Tariffs are based on:
 - (i) the average of the connection charges and
 - (ii) the average of the shared distribution network charges.
- (b) DUOS Tariffs incorporate a Fixed Charge (\$/day) and a Volume Charge (\$/kWh).

12.3 TUOS Tariffs

- (a) TUOS charges are calculated and levied by Powerlink for each transmission connection point. Ergon Energy will combine rates in geographical regions and pass through TUOS charges to SACs < 100 MWh thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”

- (b) TUOS Tariffs for Volume Large incorporate a Fixed Charge (\$/day) and Volume Charge (\$/kWh).

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

12.4 Network Tariff Codes

The Network Tariff Codes that apply for SACs < 100 MWh – Volume Large are:

EVLT1	East Energy 26 - 100 MWh SAC - TUOS Region 1
EVLT2	East Energy 26 - 100 MWh SAC - TUOS Region 2
EVLT3	East Energy 26 - 100 MWh SAC - TUOS Region 3
WVLT1	West Energy 26 - 100 MWh SAC - TUOS Region 1
WVLT2	West Energy 26 - 100 MWh SAC - TUOS Region 2
WVLT3	West Energy 26 - 100 MWh SAC - TUOS Region 3

The regional indicator for each TNI is shown in Appendix 1.

12.5 Mt Isa

Network Tariffs for Mt Isa customers will not be published as customers consuming <100MWH per annum in the Mt Isa zone do not have choice of retailer.

13. STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – VOLUME SMALL

13.1 Definition

SACs < 100 MWh – Volume Small are those customers:

- (a) with energy consumption in the range of 0 MWh to 26 MWh per annum; and
- (b) where the network charges are based on the averages of both the shared distribution network charges and connection charges for the Network User Group in the particular zone.

13.2 DUOS Tariffs

- (a) DUOS Tariffs are based on:
 - (i) the average of the connection charges and
 - (ii) the average of the shared distribution network charges.
- (b) DUOS Tariffs incorporate a Fixed Charge (\$/day) and a Volume Charge (\$/kWh).

13.3 TUOS Tariffs

- (a) TUOS charges are calculated and levied by Powerlink for each transmission connection point. Ergon Energy will combine rates in geographical regions and pass through TUOS charges to SACs < 100 MWh thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”

- (b) TUOS prices for Volume Small incorporate a Fixed Charge (\$/day) and Volume Charge (\$/kWh).

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

13.4 Network Tariff Codes

The Network Tariff Codes that apply for SACs < 100 MWh – Volume Small are:

EVST1	East Energy 0 - 26 MWh SAC - TUOS Region 1
EVST2	East Energy 0 - 26 MWh SAC - TUOS Region 2
EVST3	East Energy 0 - 26 MWh SAC - TUOS Region 3

WVST1	West Energy 0 - 26 MWh SAC - TUOS Region 1
WVST2	West Energy 0 - 26 MWh SAC - TUOS Region 2
WVST3	West Energy 0 - 26 MWh SAC - TUOS Region 3

The regional indicator for each TNI is shown in Appendix 1.

13.5 Mt Isa

Network Tariffs for Mt Isa customers will not be published as customers consuming <100MWH per annum in the Mt Isa zone do not have choice of retailer.

14. STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – CONTROLLED SUPPLIES

14.1 Definition

There are additional Network charge categories - Controlled Supplies that only apply to SAC < 100 MWh customers whose primary Network charge category is Volume Large or Volume Small and where specified permanently connected appliances are controlled by network equipment¹.

The additional categories that may be nominated by the customer or their Retailer are:

- (i) **Volume Night - Controlled (EVN or WVN)** applies where specified permanently connected appliances are controlled by network equipment so that supply will be available for a minimum period of 8 hours at the absolute discretion of Ergon Energy but usually between the hours of 10:00pm and 7:00am.
- (ii) **Volume Controlled (EVC or WVC)** applies where specified permanently connected appliances are controlled by network equipment so that supply will be available for a minimum period of 18 hours per day during time periods set at the absolute discretion of Ergon Energy.

14.2 DUOS Tariffs

- (a) DUOS Tariffs are based on:
 - (i) the average of the connection charges and
 - (ii) the average of the shared distribution network charges.
- (b) DUOS Tariffs incorporate a Fixed Charge (\$/day) and a Volume Charge (\$/kWh).

¹ A controlled load pricing option only applies where electricity load is permanently connected to appliances, separately metered and controlled at a supply point.

The network charge categories apply to the controlled supplies of both market and non-market customers. For the suitability of appliances and other conditions associated with controlled supply, reference should be made to the Notified Prices as reflected in the Queensland Government "Tariff Schedule" (http://www.energy.qld.gov.au/electricity_retail_prices.cfm). The conditions contained in the Notified Prices will be applied by Ergon Energy to all customers on controlled supply (i.e. both market and non-market customers).

Switching times will be managed at Ergon Energy's absolute discretion, in accordance with Ergon Energy's network requirements.

For non-market customers, Volume Night – Controlled equates to the Retail Tariff 31 and Volume Controlled equates to the Retail Tariff 33 of the Notified Prices as reflected in the Queensland Government "Tariff Schedule".

14.3 TUOS Tariffs

- (a) TUOS charges are calculated and levied by Powerlink for each transmission connection point. Ergon Energy will combine rates in geographical regions and pass through TUOS charges to SACs < 100 MWh – Controlled Supplies thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”

- (b) TUOS Tariffs for Volume Night-Controlled and Volume Controlled incorporate a Volume Charge (\$/kWh) only.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

14.4 Network Tariff Codes

The Network Tariff Codes that apply for SACs < 100 MWh – Controlled Supplies are:

- (a) Volume Night - Controlled (EVN or WVN)

EVNT1	East Volume Night Controlled (T31) TUOS Region 1
EVNT2	East Volume Night Controlled (T31) TUOS Region 2
EVNT3	East Volume Night Controlled (T31) TUOS Region 3
WVNT1	West Volume Night Controlled (T31) TUOS Region 1
WVNT2	West Volume Night Controlled (T31) TUOS Region 2
WVNT3	West Volume Night Controlled (T31) TUOS Region 3

The regional indicator for each TNI is shown in Appendix 1.

- (b) Volume Controlled (EVC or WVC)

EVCT1	East Volume Controlled (T33) TUOS Region 1
EVCT2	East Volume Controlled (T33) TUOS Region 2
EVCT3	East Volume Controlled (T33) TUOS Region 3
WVCT1	West Volume Controlled (T33) TUOS Region 1
WVCT2	West Volume Controlled (T33) TUOS Region 2
WVCT3	West Volume Controlled (T33) TUOS Region 3

The regional indicator for each TNI is shown in Appendix 1.

14.5 Mt Isa

Network Tariffs for Mt Isa customers will not be published as customers consuming <100MWH per annum in the Mt Isa zone do not have choice of retailer.

15. STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – UNMETERED SUPPLIES

15.1 Definition

Unmetered supplies should be avoided where possible; however, approval may be given at certain installations due to remoteness and/or excessive metering costs.

SACs – Unmetered Supplies are available to small uniform steady loads as approved by Ergon Energy:

- (a) where it is considered impractical to read or maintain a meter or where metering equipment would be susceptible to damage and includes, for example, public lamps, traffic signals or watchman lighting;
- (b) currently ineligible to enter the contestable market

15.2 DUOS Tariffs

- (a) DUOS Tariffs are based on:
 - (i) the average of the connection charges and
 - (ii) the average of the shared distribution network charges.
- (b) DUOS Tariffs incorporate a Fixed Charge (\$/day) and a Volume Charge (\$/kWh).
- (c) The Network Charge category applicable to a customer will be as nominated by the customer or their Retailer from among the following categories:
 - (i) **Unmetered Supply (EVU or WVU)** is applicable to unmetered supplies where the customer owns and maintains all assets after the customer's connection point to the network. These include installations such as Traffic Signals, Rate 3 streetlights etc.
 - (ii) **Lighting - minor (EL1 or WL1)** is applicable to unmetered public lighting where Ergon Energy owns and maintains all assets after the customers connection point to the network.
 - Ergon Energy standard minor public lights are 50, 80 and 125 watt Mercury Vapour and 70 watt High Pressure Sodium vapour lights
 - Also includes any other non standard or obsolete public lights that would be replaced with any of the above Ergon standard minor public lights in accordance with Ergon Energy policy.
 - (iii) **Lighting - major (EL2 or WL2)** is applicable to unmetered public lighting where Ergon owns and maintains all assets after the customers connection point to the network.
 - Ergon Energy standard major public lights are 100, 150, 250 and 400 watt High Pressure Sodium vapour lights

- Also includes any other non standard or obsolete public lights that would be replaced with any of the above Ergon Energy standard major public lights in accordance with Ergon Energy policy.
- (d) The current approved DUOS rates for Unmetered Supplies for the East and West zones are published.

Note that these Network Tariffs are shown for information only.

15.3 TUOS Tariffs

- (a) TUOS charges are calculated and levied by Powerlink for each transmission connection point. Ergon Energy will combine rates in geographical regions and pass through TUOS charges to SACs < 100 MWh - Unmetered Supplies thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”

- (b) TUOS Tariffs incorporate a Volume Charge (\$/kWh) only.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

- (c) The current approved TUOS rates for Unmetered Supplies (EVU or WVU, EL1 or WL1, EL2 or WL2) categories are published.

Note that these Network Tariffs are shown for information only.

15.4 Network Tariff Codes

The Network Tariff Codes that apply for SACs < 100 MWh – Unmetered Supplies are:

- (a) Unmetered Supply (EVU or WVU)

EVUT1	East Volume Unmetered Supply TUOS Region 1
EVUT2	East Volume Unmetered Supply TUOS Region 2
EVUT3	East Volume Unmetered Supply TUOS Region 3
WVUT1	West Volume Unmetered Supply TUOS Region 1
WVUT2	West Volume Unmetered Supply TUOS Region 2
WVUT3	West Volume Unmetered Supply TUOS Region 3

The regional indicator for each TNI is shown in Appendix 1.

- (b) Lighting - minor (EL1 or WL1)

EL1T1	East Lighting - minor TUOS Region 1
EL1T2	East Lighting - minor TUOS Region 2
EL1T3	East Lighting - minor TUOS Region 3
WL1T1	West Lighting - minor TUOS Region 1
WL1T2	West Lighting - minor TUOS Region 2
WL1T3	West Lighting - minor TUOS Region 3

The regional indicator for each TNI is shown in Appendix 1.

(c) Lighting - major (EL2 or WL2)

EL2T1	East Lighting - major TUOS Region 1
EL2T2	East Lighting - major TUOS Region 2
EL2T3	East Lighting - major TUOS Region 3

WL2T1	West Lighting - major TUOS Region 1
WL2T2	West Lighting - major TUOS Region 2
WL2T3	West Lighting - major TUOS Region 3

The regional indicator for each TNI is shown in Appendix 1.

15.5 Mt Isa

Network Tariffs for Mt Isa customers will not be published as customers consuming <100MWH per annum in the Mt Isa zone do not have choice of retailer.

APPENDIX 1 – TUOS REGIONAL INDICATORS

SAC > 100MWh & <100 MWh Regional Indicators for 2007-08		
Transmission Connection Point	TNI	TUOS Region
Alligator Creek	QALC	T2
Alan Sherriff (11)	QASF	T2
Biloela	QBIL	T1
Blackwater (132)	QBWH	T1
Blackwater (66)	QBWL	T1
Cardwell	QCDW	T3
Clare	QCLR	T2
Cairns (Cairns City)	QCNS	T3
Collinsville	QCOL	T2
Cairns	QCRN	T3
Dan Gleeson	QDGL	T2
Dysart	QDYS	T1
Egans Hill	QEGN	T1
Edmonton	QEMT	T3
Alan Sherriff (Garbutt)	QGAR	T2
Gladstone (Boat Creek)	QGLA	T1
Gin Gin	QGNG	T1
Gladstone South	QGST	T1
Innisfail	QINF	T3
Ingham	QING	T3
Kamerunga	QKAM	T3
Lilyvale (Clermont)	QLCM	T1
Lilyvale	QLIL	T1
Mackay	QMKA	T2
Moura	QMRA	T1
Middle Ridge	QMRG	T1
Moranbah (11)	QMRL	T1
Nebo	QNEB	T2
Newlands (Mackay & Northern)	QNLD	T2
Pioneer Valley	QPIV	T2
Proserpine (Mackay & Northern)	QPRO	T2
Rockhampton	QROC	T1
Ross (Kidston & Millchester)	QROS	T2
Tangkam	QTKM	T1
Tully	QTLL	T3
Tarong 132	QTRH	T1
Tarong	QTRL	T1
Turkinje (Port Douglas)	QTUH	T3
Turkinje	QTUL	T3
Townsville South	QTVS	T2
Woolooga	QWLN	T1

APPENDIX 2 – TABLE OF SITE-SPECIFIC NMIs

If the customer's NMI appears in this list, contact Ergon Energy for site-specific prices. (Refer Section 1.7 for contact details)

3030060966	3041317751	3050082744	QAAABX0004	QAAAGS0008
3030063361	3041318412	3050802593	QAAABX0006	QAAAGS0009
3030093805	3041320751	3050918851	QAAABX0012	QAAAGS0010
3030574145	3041321936	3050918877	QAAABX0014	QAAAGS0011
3031055249	3041323017	3050107682	QAAADY0000	QAAAGS0012
3031124046	3041326768	3050126491	QAAADY0002	QAAAGS0014
3031124500	3041417411	3050135961	QAAAEH0000	QAAAGS0015
3033183902	3041467451	3050147081	QAAAEH0001	QAAAGS0017
3033185662	3041469003	3050152203	QAAAEH0002	QAAAGS0018
3033697281	3041469097	3050164040	QAAAEH0003	QAAAGS0019
3034190121	3041597613	3050213792	QAAAEH0004	QAAAGS0023
3036000248	3041599837	3050332422	QAAAEH0005	QAAAGS0026
3036089001	3041603800	3050336991	QAAAEH0006	QAAAGS0027
3036095664	3041781317	3050537024	QAAAEH0007	QAAAGS0029
3036098159	3041782852	QAAA0000NX	QAAAEH0008	QAAAGS0031
3036098876	3041786211	QAAA700010	QAAAEH0010	QAAAGS0032
3036390925	3041824032	QAAA700022	QAAAEH0011	QAAAGS0034
3036392413	3041825331	QAAA700032	QAAAEH0014	QAAAGS0037
3036523160	3041896289	QAAA700039	QAAAEH0015	QAAAGS0039
3036618705	3041948459	QAAA700041	QAAAEH0016	QAAAGS0041
3038071606	3042036771	QAAA700050	QAAAEH0019	QAAAGS0045
3038096366	3042063531	QAAA700051	QAAAEH0020	QAAAGS0047
3038100495	3042065305	QAAA700066	QAAAEH0021	QAAAGS0049
3038104806	3042066166	QAAA700072	QAAAEH0028	QAAAGS0052
3038105411	3042073308	QAAA700073	QAAAEH0029	QAAAGS0053
3038109697	3042101409	QAAA700090	QAAAEH0030	QAAAGS0058
3038158116	3042103258	QAAA700095	QAAAEH0035	QAAAGS0059
3038255278	3042117585	QAAA700147	QAAAEH0036	QAAAGS0063
3038308029	3042117739	QAAA700167	QAAAEH0039	QAAAGS0068
3038331365	3042118590	QAAA700170	QAAAEH0040	QAAAGS0072
3038336987	3042120381	QAAA700171	QAAAEH0047	QAAAGS0078
3038337037	3042124654	QAAA700175	QAAAEH0051	QAAAGS0079
3038368501	3044087543	QAAA700190	QAAAEH0053	QAAAGS0090
3038444836	3044426305	QAAA700192	QAAAEH0067	QAAAGS0093
3038474557	3044427671	QAAABL0000	QAAAEH0075	QAAAGS0098
3038495601	3044428839	QAAABL0001	QAAAEH0077	QAAAGS0099
3038582341	3044430361	QAAABL0003	QAAAEH0080	QAAAGS0100
3038623242	3044430604	QAAABL0013	QAAAEH0083	QAAALV0000
3038667959	3044496991	QAAABL0015	QAAAEH0085	QAAALV0001
3038720825	3044703490	QAAABW0000	QAAAEH0108	QAAALV0002
3038742896	3044791178	QAAABW0001	QAAAEH0113	QAAALV0003
3038878321	3044917724	QAAABW0002	QAAAEH0115	QAAALV0004
3038932016	3044951591	QAAABW0005	QAAAEH0116	QAAALV0005
3039014771	3044983778	QAAABW0007	QAAAEH7001	QAAALV0032
3039054250	3045045381	QAAABW0008	QAAAGS0000	QAAALV0063
3039070611	3045087431	QAAABW0038	QAAAGS0001	QAAALX0000
3041051271	3045089604	QAAABW0040	QAAAGS0002	QAAAMR0000
3041119916	3045116351	QAAABW0041	QAAAGS0003	QAAAMR0001
3041279727	3050036831	QAAABW0042	QAAAGS0005	QAAAMR0005
3041280547	3050075527	QAAABX0001	QAAAGS0006	QAAARG0000
3041301846	3050082272	QAAABX0002	QAAAGS0007	QAAARG0001

QAAARG0002	QCCC000032	QDDD000002	QDDD000335	QEEE700030
QAAARG0003	QCCC000036	QDDD000003	QDDD000336	QEEE700117
QAAARG0004	QCCC000038	QDDD000004	QDDD000338	QEEE700133
QAAARG0005	QCCC000040	QDDD000005	QDDD000340	QEEE700191
QAAARG0006	QCCC000042	QDDD000006	QDDD000342	QEEE700257
QAAARG0007	QCCC000044	QDDD000008	QDDD000345	QEEE700262
QAAARG0008	QCCC000046	QDDD000009	QDDD000348	QEEEZ00571
QAAARG0010	QCCC000048	QDDD000010	QDDD700001	QEMS000001
QAAARG0011	QCCC000052	QDDD000011	QDDD700055	QFFF000000
QAAARG0014	QCCC000056	QDDD000012	QDDD700074	QFFF000001
QAAARG0016	QCCC000058	QDDD000019	QDDD700079	QFFF000002
QAAARG0018	QCCC000062	QDDD000020	QEEE000001	QFFF000003
QAAARG0019	QCCC000066	QDDD000026	QEEE000002	QFFF000005
QAAARG0020	QCCC000068	QDDD000027	QEEE000003	QFFF000006
QAAARG0021	QCCC000072	QDDD000017	QEEE000004	QFFF000007
QAAARG0023	QCCC000086	QDDD0003020	QEEE000005	QFFF000008
QAAARG0024	QCCC000088	QDDD0003025	QEEE000006	QFFF00000B
QAAARG0032	QCCC000104	QDDD0003033	QEEE000007	QFFF00000C
QAAARG0033	QCCC000132	QDDD0003056	QEEE000010	QFFF00000D
QAAARG0034	QCCC000146	QDDD0003059	QEEE000011	QFFF00000E
QAAARG0035	QCCC000212	QDDD0003082	QEEE000012	QFFF00000F
QAAARG0037	QCCC000226	QDDD0003090	QEEE000013	QFFF00000G
QAAARG0038	QCCC000336	QDDD0003093	QEEE000014	QFFF00000H
QAAARG0041	QCCC000356	QDDD0003097	QEEE000015	QFFF00000J
QAAARG0043	QCCC000414	QDDD0003110	QEEE000016	QFFF00000K
QAAARG0052	QCCC000426	QDDD0003125	QEEE000017	QFFF00000L
QAAARG0053	QCCC000490	QDDD0003129	QEEE000018	QFFF00000M
QAAARG0054	QCCC000570	QDDD0003136	QEEE000019	QFFF00000N
QAAARG0060	QCCC000646	QDDD0003143	QEEE000020	QFFF00000R
QAAARG0062	QCCC000648	QDDD0003148	QEEE000022	QFFF00000S
QAAARG0063	QCCC000650	QDDD0003149	QEEE000023	QFFF00000U
QAAARG0065	QCCC000678	QDDD0003157	QEEE000026	QFFF00000V
QAAARG0077	QCCC000702	QDDD0003164	QEEE000032	QFFF00000W
QAAARG0081	QCCC000762	QDDD0003165	QEEE000047	QFFF00000X
QAAARG0083	QCCC000793	QDDD0003166	QEEE000049	QFFF00000Y
QAAARG0096	QCCC000874	QDDD0003173	QEEE000050	QFFF000011
QAAARG0100	QCCC000924	QDDD0003174	QEEE000051	QFFF000014
QAAARG0104	QCCC000936	QDDD0003194	QEEE000052	QFFF000016
QAAARG0105	QCCC000940	QDDD0003196	QEEE000054	QFFF000019
QAAARG0108	QCCC000958	QDDD0003203	QEEE000191	QFFF00001A
QAAARG0110	QCCC001003	QDDD0003204	QEEE000210	QFFF00001B
QAAARG0113	QCCC001004	QDDD0003205	QEEE000252	QFFF00001C
QCCC000001	QCCC001012	QDDD0003254	QEEE000273	QFFF00001E
QCCC000002	QCCC001024	QDDD0003275	QEEE000288	QFFF00001F
QCCC000003	QCCC001035	QDDD0003276	QEEE000382	QFFF00001G
QCCC000004	QCCC001036	QDDD0003282	QEEE000404	QFFF00001H
QCCC000006	QCCC001041	QDDD0003295	QEEE000439	QFFF00001L
QCCC000010	QCCC700040	QDDD0003296	QEEE000498	QFFF00001M
QCCC000012	QCCC700063	QDDD0003309	QEEE000520	QFFF00001N
QCCC000014	QCCC700072	QDDD0003310	QEEE000522	QFFF00001Q
QCCC000018	QCCC700076	QDDD0003315	QEEE000528	QFFF00001R
QCCC000020	QCCC700143	QDDD0003316	QEEE000530	QFFF00001S
QCCC000022	QCCC700273	QDDD0003317	QEEE000531	QFFF00001V
QCCC000028	QCCC700300	QDDD0003318	QEEE000540	QFFF00001W
QCCC000029	QCQPW00076	QDDD0003319	QEEE000547	QFFF00001Y
QCCC000030	QDDD000001	QDDD0003333	QEEE000570	QFFF000020

QFFF000022	QFFF00006N	QFFF0000JX	QGGG000032	QGGG000115
QFFF000023	QFFF00006S	QFFF0000KK	QGGG000033	QGGG000117
QFFF000024	QFFF000070	QFFF0000KT	QGGG000035	QGGG000121
QFFF000027	QFFF000072	QFFF0000KX	QGGG000036	QGGG000126
QFFF00002A	QFFF000076	QFFF0000MF	QGGG000037	QGGG000127
QFFF00002B	QFFF000077	QFFF0000MK	QGGG000038	QGGG000128
QFFF00002D	QFFF000079	QFFF0000ML	QGGG000039	QGGG000130
QFFF00002G	QFFF00007F	QFFF0000MS	QGGG000040	QGGG000131
QFFF00002J	QFFF00007K	QFFF0000MW	QGGG000042	QGGG000132
QFFF00002K	QFFF00007Q	QFFF0000N9	QGGG000043	QGGG000133
QFFF00002M	QFFF00007W	QFFF0000NB	QGGG000044	QGGG000134
QFFF00002N	QFFF00007Z	QFFF0000NH	QGGG000045	QGGG000135
QFFF00002T	QFFF000082	QFFF0000NJ	QGGG000046	QGGG000140
QFFF00002Y	QFFF000085	QFFF0000NM	QGGG000048	QGGG000141
QFFF00002Z	QFFF00008D	QFFF0000NN	QGGG000049	QGGG000142
QFFF000030	QFFF00008H	QFFF0000NW	QGGG000050	QGGG000144
QFFF000032	QFFF00008Q	QFFF0000NY	QGGG000051	QGGG000145
QFFF000036	QFFF00008R	QFFF700010	QGGG000052	QGGG000146
QFFF000038	QFFF00008Z	QFFF700011	QGGG000053	QGGG000148
QFFF00003A	QFFF000097	QFFF700017	QGGG000054	QGGG000149
QFFF00003B	QFFF000099	QFFF700030	QGGG000055	QGGG000150
QFFF00003C	QFFF00009A	QFFF700031	QGGG000056	QGGG000153
QFFF00003D	QFFF00009K	QFFF700044	QGGG000057	QGGG000157
QFFF00003K	QFFF00009L	QFFF700051	QGGG000058	QGGG000165
QFFF00003L	QFFF0000A0	QFFF700063	QGGG000059	QGGG000169
QFFF00003N	QFFF0000A4	QFFF700071	QGGG000060	QGGG000171
QFFF00003P	QFFF0000AC	QFFF700073	QGGG000063	QGGG000173
QFFF00003Y	QFFF0000AL	QFFF700078	QGGG000064	QGGG000175
QFFF000042	QFFF0000AZ	QGGG000000	QGGG000065	QGGG000179
QFFF000046	QFFF0000B2	QGGG000001	QGGG000067	QGGG000180
QFFF00004A	QFFF0000B6	QGGG000002	QGGG000068	QGGG000181
QFFF00004B	QFFF0000BJ	QGGG000003	QGGG000070	QGGG000184
QFFF00004C	QFFF0000BM	QGGG000004	QGGG000071	QGGG000185
QFFF00004D	QFFF0000BQ	QGGG000006	QGGG000072	QGGG000189
QFFF00004E	QFFF0000BU	QGGG000008	QGGG000078	QGGG000191
QFFF00004R	QFFF0000BY	QGGG000009	QGGG000079	QGGG000192
QFFF00004T	QFFF0000C7	QGGG000010	QGGG000081	QGGG000193
QFFF00004V	QFFF0000CD	QGGG000012	QGGG000083	QGGG000197
QFFF00004W	QFFF0000CH	QGGG000013	QGGG000084	QGGG000199
QFFF00004X	QFFF0000CL	QGGG000014	QGGG000086	QGGG000201
QFFF000051	QFFF0000D4	QGGG000015	QGGG000087	QGGG000204
QFFF000052	QFFF0000DD	QGGG000016	QGGG000088	QGGG000211
QFFF000053	QFFF0000DU	QGGG000017	QGGG000089	QGGG000212
QFFF000056	QFFF0000DZ	QGGG000018	QGGG000090	QGGG000221
QFFF000059	QFFF0000EJ	QGGG000019	QGGG000091	QGGG000232
QFFF00005A	QFFF0000EM	QGGG000020	QGGG000094	QGGG000243
QFFF00005D	QFFF0000EN	QGGG000021	QGGG000095	QGGG000249
QFFF00005E	QFFF0000ET	QGGG000022	QGGG000096	QGGG000254
QFFF00005M	QFFF0000EZ	QGGG000023	QGGG000098	QGGG000255
QFFF00005N	QFFF0000FF	QGGG000024	QGGG000099	QGGG000257
QFFF000062	QFFF0000FH	QGGG000025	QGGG0000NZ	QGGG000260
QFFF00006C	QFFF0000FL	QGGG000026	QGGG000102	QGGG000265
QFFF00006D	QFFF0000G8	QGGG000027	QGGG000104	QGGG000268
QFFF00006J	QFFF0000J5	QGGG000028	QGGG000108	QGGG000269
QFFF00006K	QFFF0000JD	QGGG000029	QGGG000109	QGGG000271
QFFF00006L	QFFF0000JQ	QGGG000031	QGGG000114	QGGG000277

QGGG000279	QGGG000330	QGGG000388	QGGG000418	QGGG700045
QGGG000289	QGGG000331	QGGG000390	QGGG000422	QGGG700064
QGGG000291	QGGG000333	QGGG000391	QGGG700005	QGGG700078
QGGG000294	QGGG000341	QGGG000392	QGGG700006	QGGG700090
QGGG000297	QGGG000342	QGGG000393	QGGG700007	QGGG700102
QGGG000301	QGGG000348	QGGG000394	QGGG700009	QGGG700114
QGGG000308	QGGG000349	QGGG000395	QGGG700014	QGGG700117
QGGG000309	QGGG000360	QGGG000398	QGGG700019	QGGG700118
QGGG000311	QGGG000363	QGGG000399	QGGG700021	QNGG000103
QGGG000317	QGGG000383	QGGG000400	QGGG700025	QMKYW00147
QGGG000322	QGGG000385	QGGG000405	QGGG700032	QNGYW00172
QGGG000328	QGGG000386	QGGG000406	QGGG700035	QWAGW00033
QGGG000329	QGGG000387	QGGG000417	QGGG700043	QWAGW00066