


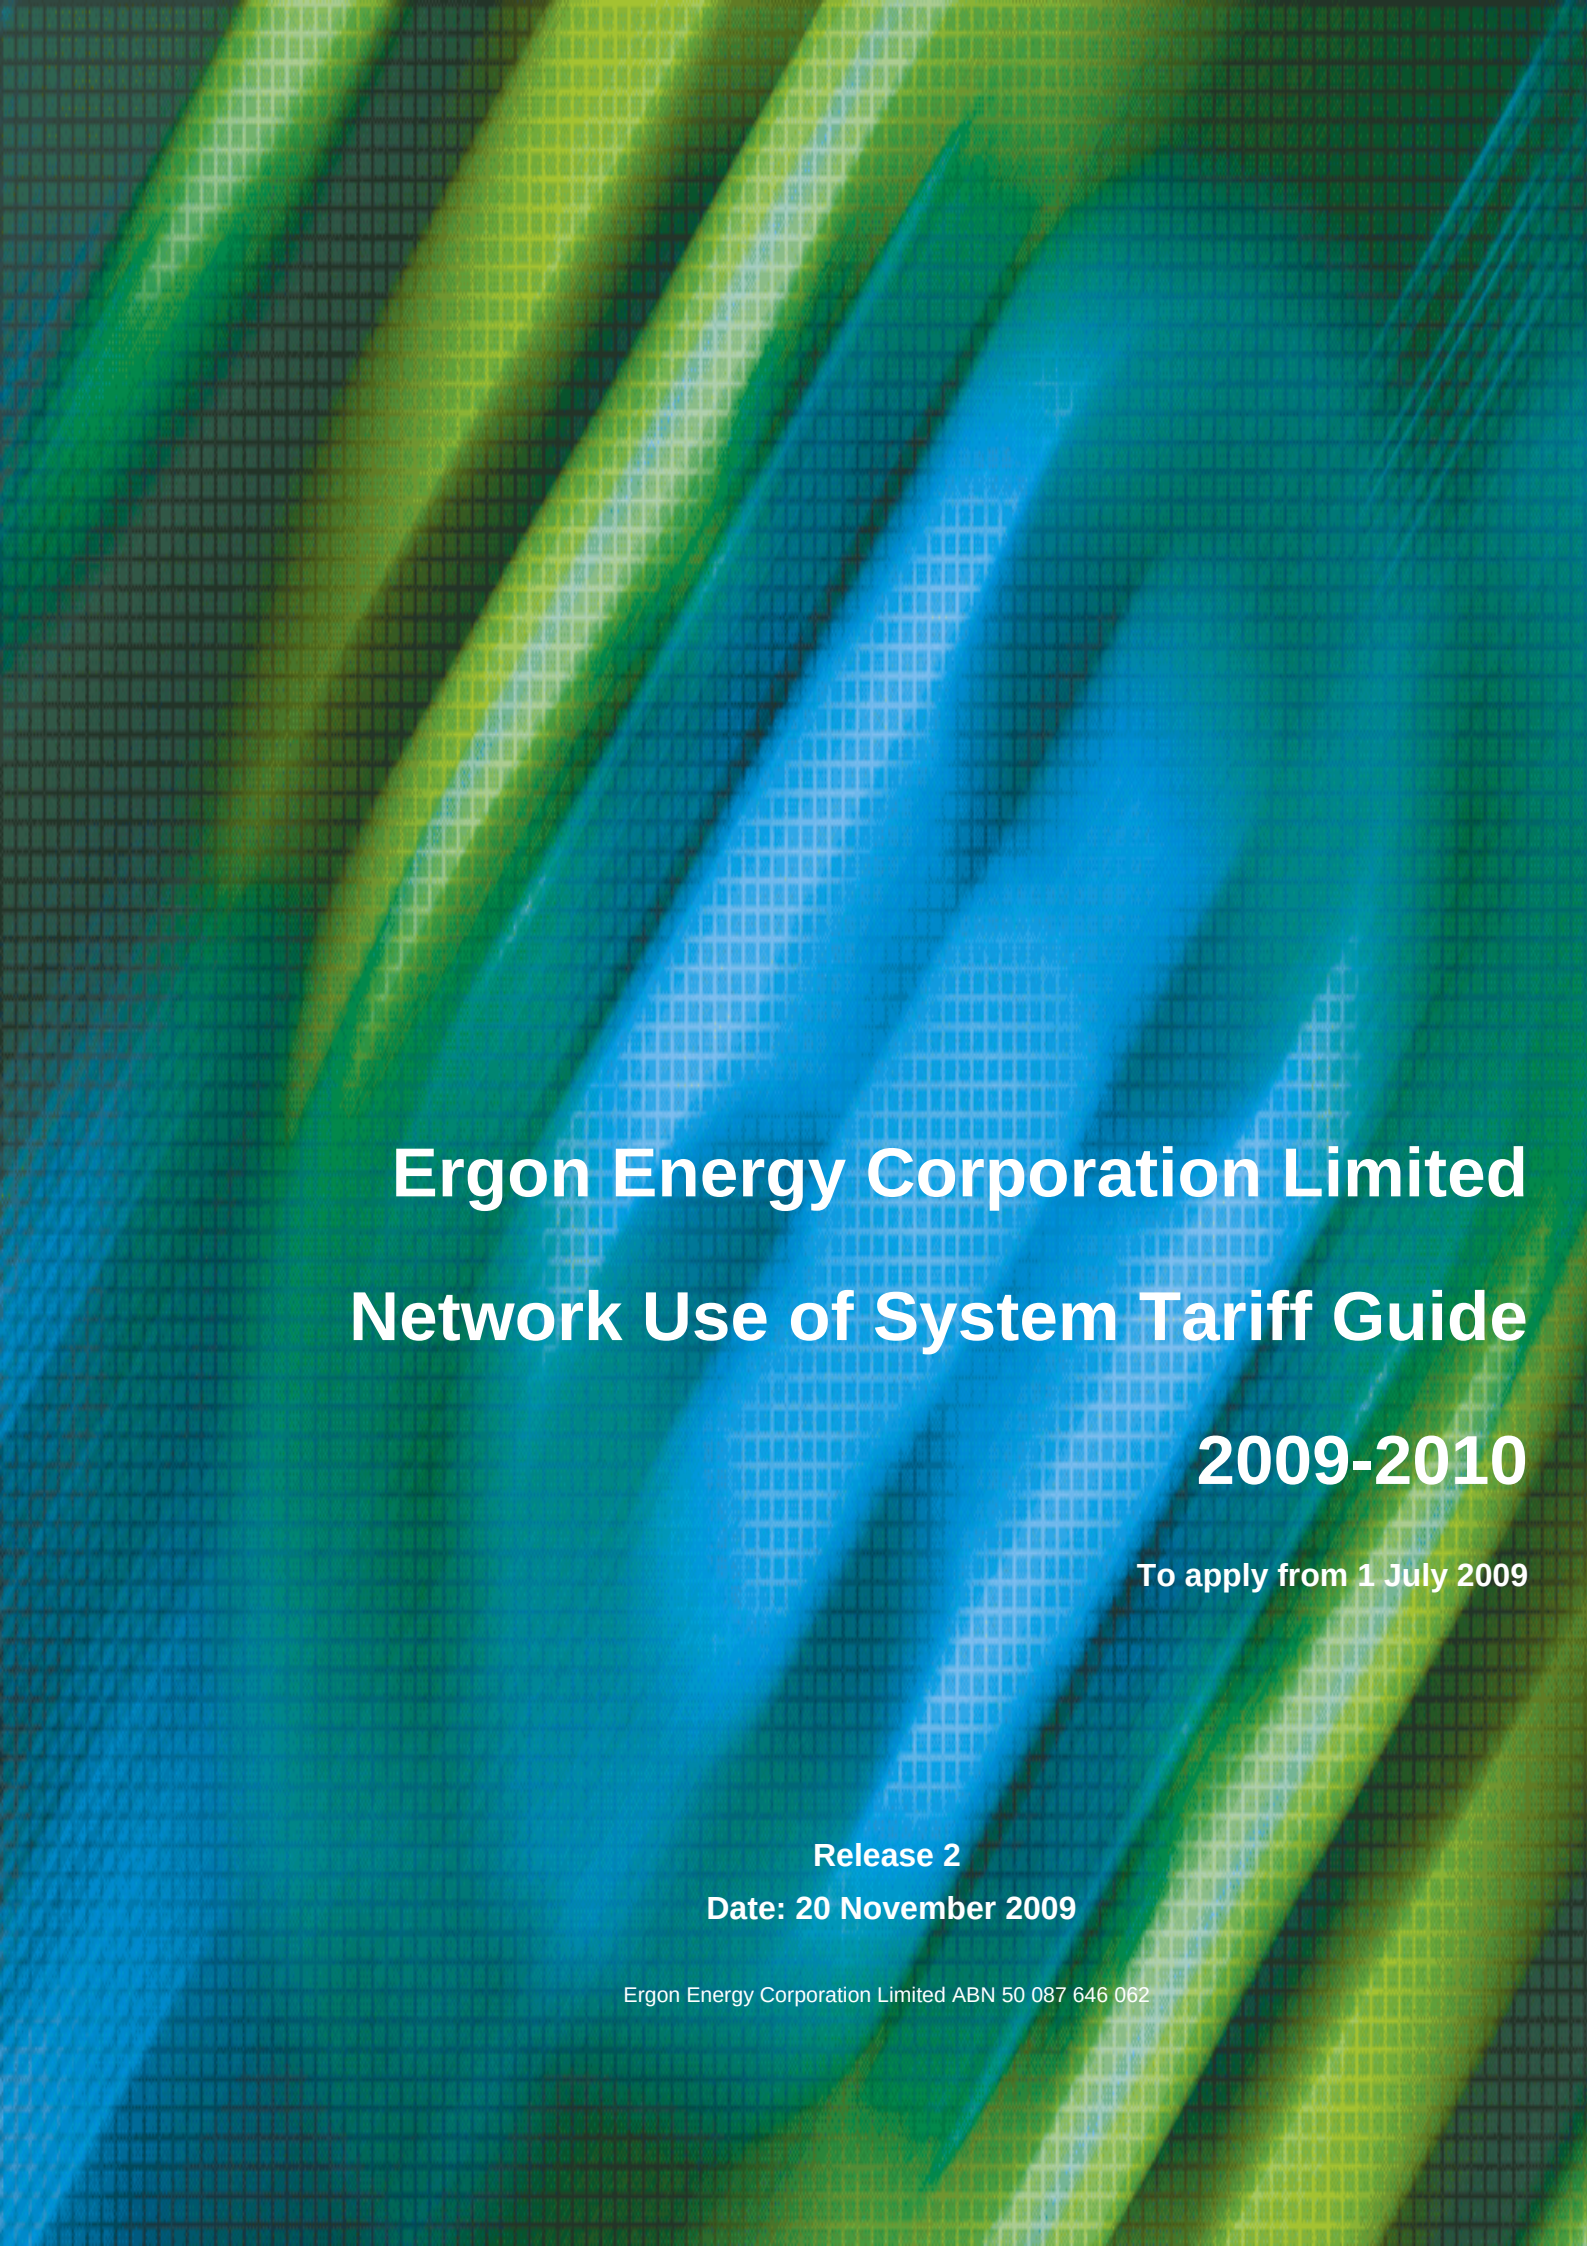

Ergon Energy Corporation Limited

Network Use of System Tariff Guide

2009-2010

To apply from 1 July 2009

Release 2

Date: 20 November 2009

Ergon Energy Corporation Limited ABN 50 087 646 062

CONTENTS

1.	INTRODUCTION	4
1.1	Who this Tariff Guide applies to	4
1.2	2009-10 Network Tariff Code Rates	4
1.3	Format of this Tariff Guide	4
1.4	Changes from Release 1 of the 2009-10 Network Tariff Guide	4
1.5	How Tariffs are derived	4
1.6	Where Can More Information Be Obtained?	5
1.7	How To Contact Ergon Energy	5
2.	COMMON TERMS	6
3.	GENERAL REQUIREMENTS	6
4.	ZONES	7
4.1	Number of Zones	7
4.2	Definitions of Zones	8
4.3	Zone Map	9
5.	DISTRIBUTION LOSS FACTORS (DLFs)	10
5.1	General Information	10
5.2	Table A - Standard Distribution Loss Factors	10
5.3	DLF Rules	10
5.4	DLF Categories	11
5.5	DLF Applications	11
6.	TRANSMISSION NODE IDENTIFIERS (TNIs)	12
7.	SIDE CONSTRAINTS	12
8.	INDIVIDUALLY CALCULATED CUSTOMERS (ICCs)	13
8.1	Definition	13
8.2	DUOS Tariffs	13
8.3	TUOS Tariffs	13
9.	CONNECTION ASSET CUSTOMERS (CACs)	15
9.1	Definition	15
9.2	DUOS Tariffs	15
9.3	TUOS Tariffs	15
10.	EMBEDDED GENERATORS (EGs)	16
10.1	Definition	16
10.2	DUOS Tariffs	16
10.3	TUOS Tariffs	16

11.	STANDARD ASSET CUSTOMERS >100 MWh Per Annum	17
11.1	Definition	17
11.2	DUOS Tariffs	17
11.3	TUOS Tariffs	18
11.4	Network Tariff Codes – Descriptions & Rates	18
11.5	Mt Isa	22
12.	STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – VOLUME LARGE	23
12.1	Definition	23
12.2	DUOS Tariffs	23
12.3	TUOS Tariffs	23
12.4	Network Tariff Codes – Descriptions & Rates	23
12.5	Mt Isa	24
13.	STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – VOLUME SMALL	24
13.1	Definition	24
13.2	DUOS Tariffs	24
13.3	TUOS Tariffs	25
13.4	Network Tariff Codes – Descriptions & Rates	25
13.5	Mt Isa	26
14.	STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – CONTROLLED SUPPLIES	27
14.1	Definition	27
14.2	DUOS Tariffs	27
14.3	TUOS Tariffs	28
14.4	Network Tariff Codes – Descriptions & Rates	28
14.5	Mt Isa	30
15.	STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – UNMETERED SUPPLIES	31
15.1	Definition	31
15.2	DUOS Tariffs	31
15.3	TUOS Tariffs	32
15.4	Network Tariff Codes	32
15.5	Mt Isa	34
16.	QUEENSLAND GOVERNMENT SOLAR BONUS SCHEME FOR STANDARD ASSET CUSTOMERS < 100 MWh Per Annum	35
16.1	Definition	35
16.2	Network Tariff Codes	35
	APPENDIX 1 – TUOS REGIONAL INDICATORS	36
	APPENDIX 2 – TABLE OF SITE-SPECIFIC NMIs	37

Network Tariff Guide

1. INTRODUCTION

- Ergon Energy Corporation Limited (Ergon Energy) publishes an annual Network Tariff Guide which provides guidelines for Network Tariffs and rates for each Network Tariff Code.

1.1 Who this Tariff Guide applies to

Network Tariffs are a charge for the services associated with using the network to transport electricity from Generators to the end-use customer.

This Network Tariff Guide sets out Network Tariff Codes and application rules. Rates for each Network Tariff Code are included in this Tariff Guide.

This Tariff Guide has been developed for use by Customers, Retailers and Consultants and applies to Network Users connected to Ergon Energy Corporation Limited's distribution supply network (excluding the Mt Isa Zone).

Network Tariffs for Mt Isa customers are not explained in this Guide. Customers with metered consumption equal to or greater than 100MWh per annum can contact Ergon Energy for further information.

1.2 2009-10 Network Tariff Code Rates

The rates provided for each Network Tariff Code are shown GST Exclusive and GST Inclusive.

1.3 Format of this Tariff Guide

Each Network customer category has a separate section within this Tariff Guide. Where applicable standard Network Tariff Codes – Descriptions and Rates are shown within those sections.

Details on standard Distribution Loss Factors are provided in Section 5.

NMIs for customers with site-specific prices are listed in Appendix 2. This table of NMIs should be checked prior to determining applicable network rates for customers.

Site-specific prices are issued by Ergon Energy Network Pricing and are available with the customer's written consent. See section 1.7 for appropriate contact details.

1.4 Changes from Release 1 of the 2009-10 Network Tariff Guide

GST Inclusive rates and minimum monthly charges if no usage recorded have been added to rate tables.

1.5 How Tariffs are derived

The Queensland Competition Authority (QCA), as the Jurisdictional Regulator under the National Electricity Rules, has released its Final Determination "Regulation of Electricity Distribution", April 2005.

The Final Determination sets out the process for the development of network charges to be applied for the new regulatory period 1 July 2005 to 30 June 2010, and requires that Network Tariffs be published annually.

Ergon Energy has a "Network Pricing Principles Statement" (PPS) approved by the Queensland Competition Authority in April 2009, which sets out the steps for price development.

1.6 Where Can More Information Be Obtained?

In accordance with the QCA's requirements, Ergon Energy publishes 2 documents relating to distribution network pricing:

- (a) A "Network Pricing Principles Statement" which sets out the approach to be adopted during the regulatory control period 2005-06 to 2009-10.
- (b) This "Network Tariff Guide" which is applicable to the 2009-10 financial year.

These documents are available on the Ergon Energy web site at:

www.ergon.com.au/network_info/price_guide.asp

1.7 How To Contact Ergon Energy

Network users and Retailers who are uncertain about the network pricing process or their particular circumstances are encouraged to contact us for assistance.

CONTACT DETAILS

Manager Regulatory Affairs – Tariff Strategy

P O Box 1090

TOWNSVILLE Q 4810

Ph 13 10 46

E-mail: netprice@ergon.com.au

2. COMMON TERMS

The following acronyms are applied throughout this Tariff Guide:

- AD - Authorised Demand in kilowatts
- AEMO – Australian Energy Market Operator
- CAC - Connection Asset Customer
- CPI - Consumer Price Index
- DLF - Distribution Loss Factor
- DNSP - Distribution Network Service Provider
- DUOS - Distribution Use of System.
- EG - Embedded Generator
- ICC - Individually Calculated Customer
- Network Tariffs - consist of rates for DUOS and TUOS
- NTC - Network Tariff Code
- NMI - National Metering Identifier
- Pricing Zones - East, West and Mt Isa zones
- SAC - Standard Asset Customer
- TNI - Transmission Node Identifier
- TUOS - Transmission Use of System.

3. GENERAL REQUIREMENTS

The following general requirements apply to the selection and amendment of network tariffs:

- (a) It is intended that a Network Tariff Code will apply to each meter data stream. Network Users with multiple network connections will pay Network Charges for each connection point.

This approach is consistent with the AEMO issued NMI Procedure.

- (b) If requested, Ergon Energy will provide the customer or the customer's Retailer with reasonable assistance in identifying the network tariffs which may be applicable to the customer's installation. Ergon Energy does not actively or periodically assess a customer's circumstances or usage against the network tariffs applied to the customer's installation.
- (c) A request may be made for a change to the network tariff assigned to a NMI:

- (i) Any change in network tariff will only proceed upon approval by Ergon Energy.
- (ii) The request should be made by the customer, through their Retailer.
- (iii) Subject to a change in usage or the pattern of usage at the customer's installation, a further request to change the network tariff should not be made until a period of 12 months has elapsed from the previous request.
- (d) Any change of network tariff will take effect from the date as approved by Ergon Energy (the effective date). Network charges under the existing network tariff will continue to be billed by Ergon Energy until the effective date. Backdating of charges prior to the effective date will not be allowed by Ergon Energy.
- (e) Ergon Energy may determine that a network tariff assigned to a NMI is no longer appropriate and should be changed, other than as a result of a request (for example, in response to advice from a customer regarding a change in usage). In such circumstances, Ergon Energy will notify the customer's Retailer of the decision, and provide advice of the new network tariff to be assigned to the NMI. If a customer objects to the change, the customer may appeal this decision through their Retailer. Ergon Energy will review an appeal and the customer's eligibility for a network tariff with regard to this Tariff Guide and Ergon Energy's Network Pricing Principles Statement. Ergon Energy will advise the Retailer of the outcome of an appeals review as soon as practical. Subject to any appeal, the new network tariff will proceed and take effect from the date as advised by Ergon Energy.
- (f) Demand and/or volume are to be measured at each individual network connection point.
- (g) Where applicable, demand based charges will be calculated on a pro rata daily basis for initial and final accounts
- (h) Where Ergon Energy's load control equipment exists (including associated metering), this may not be disconnected without Ergon Energy's prior written consent.
- (i) Network charges will be billed by Ergon Energy on a monthly basis.

4. ZONES

4.1 Number of Zones

Three pricing zones have been delineated in the Ergon Energy area of supply, broadly based on Local Government areas of Queensland, with the distribution network electrical connection being the final determinant of which zone applies. Zone pricing impacts DUOS prices only; TUOS prices are not impacted by zones.

- a) **East Zone** - includes those areas where the Network Users are supplied from the distribution system connected to the National Grid and have a relatively low distribution cost to supply.
- b) **West Zone** - includes those areas outside the East Zone and connected to the National Grid, which have a significantly higher distribution cost of supply than the East Zone.

- c) **Mt Isa Zone** - broadly defined as those areas supplied from the isolated Mount Isa system. This zone is not connected to the National Grid and as such is excluded from the application of the National Electricity Rules. However, oversight of the network cost to supply the regulated network within the zone is carried out by the Jurisdictional Regulator.

NOTE: those areas supplied from isolated (remote) generation are **NOT** included in any of the above zones.

4.2 Definitions of Zones

- a) The **East Zone** consists of:

The **whole** of the recently reviewed local government areas as follows,

- Regional Councils - Bundaberg, Cassowary Coast, Fraser Coast, Gladstone, Mackay, North Burnett, Rockhampton, South Burnett, Southern Downs, Toowoomba and Whitsunday;
- City Councils – Townsville;
- Shire Councils – Burdekin, Hinchinbrook;

Part of the recently reviewed local government areas as follows,

- Regional Councils - Gympie (Ergon area only), Cairns (excluding areas north of the Daintree River), Isaac (excluding areas west of Moranbah township), Dalby (Dalby township and Wambo district only), Central Highlands (excluding Emerald and areas west of Emerald), Tablelands (excluding Herberton and Mareeba areas **not** supplied by the “East” distribution system);
- Shire Councils – Banana (excluding Taroom district).

- b) The **West Zone** consists of:

The **whole** of the recently reviewed local government areas as follows,

- Regional Councils - Barcaldine, Blackall-Tambo, Charters Towers, Longreach, Roma;
- Shire Councils – Balonne, Bulloo, Carpentaria, Cook, Croyden, Etheridge, Flinders, McKinlay, Murweh, Paroo, Quilpie, Richmond, Winton;

Part of the recently reviewed local government areas as follows,

- Regional Councils - Cairns (north of the Daintree River only), Isaac (west of Moranbah township only), Dalby (excluding Dalby township and Wambo district), Central Highlands (Emerald and areas west of Emerald only), Tablelands (Herberton and Mareeba areas **not** supplied by the “East” distribution system only);
- Shire Councils – Banana (Taroom district only).


- (c) The **Mt Isa Zone** consists of the regulated network within the following areas:

The **whole** of the recently reviewed local government areas as follows, Cloncurry Shire Council, Mount Isa City Council, and those **parts** of the Burke and Boulia Shire Councils supplied from the Mt Isa system.

- (d) NOTE: those areas supplied from isolated generation are **NOT** included in any of the above zones.

4.3 Zone Map

The following map depicts the East Zone in red, Mount Isa Zone in yellow and the West Zone is the remaining area of the state supplied from the interconnected grid.

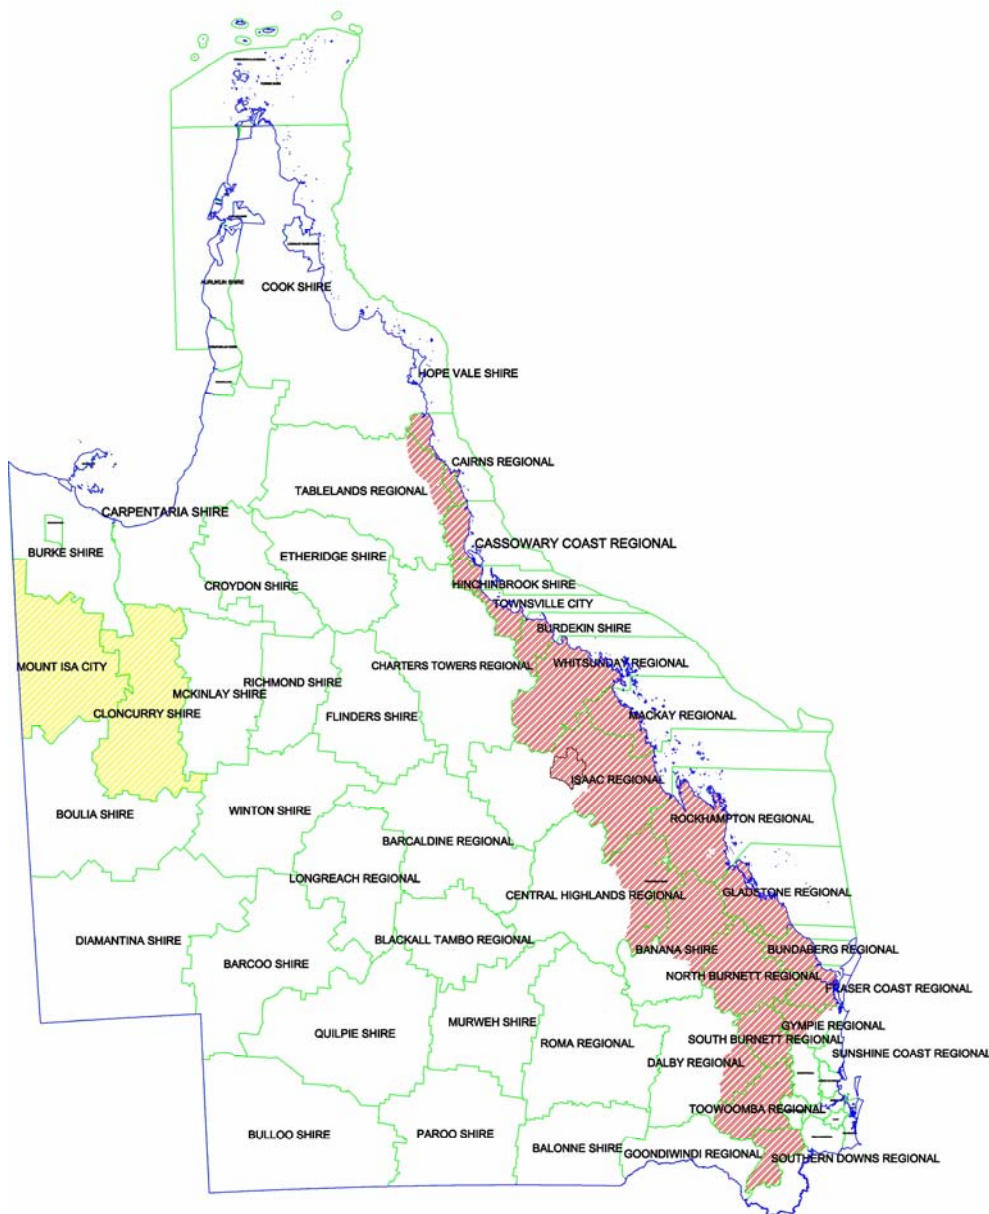

5. DISTRIBUTION LOSS FACTORS (DLFs)

5.1 General Information

- (a) Every NMI has a DLF code which is associated with the location of the metering point. The code's value is re-calculated periodically in line with the National Electricity Rules.
- (b) The DLF is a multiplier used to convert the actual metered energy into the equivalent energy passing through the appropriate Transmission Network Connection Point by allowing for the distribution network losses that are incurred between the meter and the Transmission Network Connection Point.
- (c) The DLF is applied to the metered consumption for the calculation of TUOS volume charges. DLFs are generally assigned on the basis of the standard metering voltage for the type of connection however a specific loss factor may be applied where there is a unique network supply configuration.
- (d) The 2009-10 DLFs including site-specific DLFs for some larger ICCs, CACs and EGs are published on the AEMO web site:

<http://www.aemo.com.au/electricityops/lossfactors.html>

- (e) Where site-specific DLFs have not been published, the DLFs from Table A (see section 5.2) will apply.
- (f) Detailed information about the purpose and application of DLFs may also be obtained from the AEMO web site.

5.2 Table A - Standard Distribution Loss Factors

The following table of DLFs has been approved by the AER and published by AEMO for the 2009-10 year.

Ergon Energy 2009/10 Distribution Loss Factors				
Network Level	East Zone		West Zone	
	Code	DLF	Code	DLF
Subtransmission Bus	GESB	1.009	GWSB	1.012
Subtransmission Line	GESL	1.021	GWSL	1.068
22/11 kV Bus	GEHB	1.022	GWHB	1.077
22/11 kV Line	GEHL	1.042	GWHL	1.119
LV Bus	GELB	1.075	GWLB	1.162
LV Line	GELL	1.084	GWLL	1.262

5.3 DLF Rules

- (a) The DLFs in this Tariff Guide do NOT apply to NMIs with site specific distribution loss factors.
- (b) DLFs for all NMIs will be included in the Schedule of Network Tariffs issued to the customer and/or their Retailer.
- (c) The zonal boundaries are identical to those used for the Network Tariffs.

- (d) For SACs, the customer or Retailer must nominate the DLF appropriate to the connection. The customer or Retailer may be required to justify any nominated DLF.
- (e) Where the voltage at the metering point is not listed, or there is doubt about the application of these rules, please request advice from Ergon Energy.

5.4 DLF Categories

- (a) **Subtransmission Bus** – Applicable to connection points that are High Voltage metered at a Subtransmission Bus with a voltage greater than 30kV.
- (b) **Subtransmission Line** – Applicable to connection points that are High Voltage metered at a Subtransmission Line with a voltage greater than 30kV.
- (c) **22/11kV Bus** - Applicable to connection points that are High Voltage metered at a 22/11kV Bus with a voltage less than 30kV and greater than 1,000 volts.
- (d) **22/11kV Line** – Applicable to connection points that are High Voltage metered at a 22/11kV Line with a voltage less than 30kV and greater than 1,000 volts.
- (e) **Low Voltage Bus** - Applicable to connection points that are Low Voltage metered at a Low Voltage Bus with a voltage less than 1,000 volts.
- (f) **Low Voltage Line** – Applicable to connection points that are Low Voltage metered at a Low Voltage Line with a voltage less than 1,000 volts.

5.5 DLF Applications

(a) Subtransmission and 22/11kV Bus

NMIs supplied from a zone substation by dedicated greater than 30kV lines and are metered at or immediately adjacent to the zone substation would be eligible for a Subtransmission Bus DLF.

Zone substations are defined as substations where the voltage level is stepped down from a voltage greater than 30kV.

(b) Subtransmission Line

The Subtransmission Line DLF will apply to all NMIs which are connected to high voltage subtransmission lines (greater than 30kV) and are metered at the same voltage as the line is energised.

If customers believe that the NMI would qualify for a high voltage Bus DLF rather than a high voltage Line DLF they should submit details justifying their claim to Ergon Energy. As an example, NMIs supplied from a zone substation by dedicated 22/11kV lines and are metered at or immediately adjacent to the zone substation would be eligible for a 22/11kV Bus DLF.

(c) 22/11kV Line

The 22/11kV Line DLF will apply to all NMIs which are connected to high voltage distribution lines and are metered at the same voltage as the line is energised.

(d) **LV Bus**

NMIs which are supplied from a distribution substation on their site (owned or leased) and are metered at the low voltage level are eligible for a LV Bus DLF.

(e) **LV Line**

All NMIs not covered by any of the above categories. If customers believe that the NMI would qualify for a LV Bus DLF rather than a LV Line DLF they should submit details justifying their claim to Ergon Energy.

6. TRANSMISSION NODE IDENTIFIERS (TNIs)

The TNI identifies the Transmission Network Connection Point from which a customer is supplied. The NMI Discovery process (Stage 2) will provide Retailers with the TNI applicable to a NMI.

7. SIDE CONSTRAINTS

(a) **DUOS**

It is a requirement of the QCA that a customer's individual annual network distribution charge increase must not exceed CPI plus 5% unless price paths apply (refer below). Where a customer's increase exceeds this amount, Ergon Energy has produced a site-specific or side-constrained tariff.

(b) **TUOS**

A number of customers have side constraints applied to their annual TUOS charge and accordingly, Ergon Energy has produced a site-specific or side-constrained TUOS tariff.

(c) **PRICE PATHS**

For those customers with a network charge less than cost (i.e. receiving side-constrained tariffs) the QCA required that Ergon Energy propose a price path that would move these customers to cost reflective pricing by the end of the next regulatory period (i.e. by the end of the 2014-15 financial year.)

These price paths have resulted in a small number of customers receiving increases above CPI plus 5% for the 2009-10 year.

(d) NMIs for customers with site-specific tariffs are listed in Appendix 2.

8. INDIVIDUALLY CALCULATED CUSTOMERS (ICCs)

8.1 Definition

ICCs are those customers:

- (a) with energy consumption typically greater than 40 GWh per annum; or
- (b) customers with energy consumption lower than 40 GWh per annum where:
 - (i) a customer has a dedicated supply system which is quite different and separate from the remainder of the supply network; or
 - (ii) there are only two or three customers in a supply system making average prices inappropriate; or
 - (iii) a customer is connected at or close to a transmission connection point and the inclusion of the cost of average shared network would increase their network price above stand-alone; or
 - (iv) inequitable treatment of otherwise comparable customers arising from application of the 40 GWh per annum threshold.

8.2 DUOS Tariffs

- (a) DUOS Tariffs are based on:
 - (i) the actual dedicated connection assets utilised by the customer; and;
 - (ii) the customer's specifically identified portion of any shared distribution network utilised for the electricity supply.
- (b) DUOS Tariffs incorporate a Fixed Charge (\$/day), a Capacity Charge (\$/kW of AD/month), an Actual Demand Charge (\$/kW/month) and a Volume Charge (\$/kWh).

Where the actual demand exceeds the authorised demand in any one month the actual demand will be substituted for the authorised demand in the calculation of the capacity charge for that month.

- (c) DUOS Tariffs for ICCs are site-specific and are available with the customer's written consent.

8.3 TUOS Tariffs

- (a) TUOS charges are calculated and levied by Powerlink for each transmission connection point and are passed through on a reflective basis proportional to the Authorised Demand of the customer and their energy consumption.
- (b) TUOS Tariffs incorporate a Fixed Charge (\$/day), a Capacity Charge (\$/kW of AD/month), a Common Service & General Charge (\$/day) and a Volume Charge (\$/kWh)

Where the actual demand exceeds the authorised demand in any one month the actual demand will be substituted for the authorised demand in the calculation of the capacity charge for that month.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

- (c) TUOS Tariffs for ICCs are site-specific and are available with the customer's written consent.

9. CONNECTION ASSET CUSTOMERS (CACs)

9.1 Definition

CACs are those customers:

- (a) with energy consumption typically greater than 4 GWh per annum; or
- (b) with energy consumption lower than 4 GWh per annum where:
 - (i) a customer has a dedicated supply system which is quite different and separate from the remainder of the supply network; or
 - (ii) inequitable treatment of otherwise comparable customers arising from application of the 4 GWh per annum threshold

9.2 DUOS Tariffs

- (a) DUOS Tariffs are based on:
 - (i) the actual dedicated connection assets utilised by the customer; plus
 - (ii) average charges for use of the shared network
- (b) DUOS Tariffs incorporate a Fixed Charge (\$/day), a Capacity Charge (\$/kW of AD/month), an Actual Demand Charge (\$/kW/month) and a Volume Charge (\$/kWh).

Where the actual demand exceeds the authorised demand in any one month the actual demand will be substituted for the authorised demand in the calculation of the capacity charge for that month.

- (c) DUOS Tariffs for CACs are site-specific and are available with the customer's written consent.

9.3 TUOS Tariffs

- (a) TUOS charges are calculated and levied by Powerlink for each transmission connection point and are passed through on a reflective basis proportional to the Authorised Demand of the customer and their energy consumption.
- (b) TUOS Tariffs incorporate a Fixed Charge (\$/day), a Capacity Charge (\$/kW of AD/month), a Common Service & General Charge (\$/day) and a Volume Charge (\$/kWh)

Where the actual demand exceeds the authorised demand in any one month the actual demand will be substituted for the authorised demand in the calculation of the capacity charge for that month.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

- (c) TUOS Tariffs for CACs are site-specific and are available with the customer's written consent.

10. EMBEDDED GENERATORS (EGs)

10.1 Definition

EGs can be separated into two categories

- (a) EGs that are connected to and only generate into the distribution system; or
- (b) EGs that are connected to, generate into as well as take load from the distribution system.

10.2 DUOS Tariffs

- (a) For those EGs that generate into the distribution system a Fixed Charge (\$/day) applies; and
- (b) For those EGs that generate into as well as take load from the distribution system a Fixed Charge (\$/day) applies; and
 - (i) DUOS Tariffs for load taken from the distribution system will be allocated as per the appropriate Network Price category selected from ICCs, CACs or SACs.

Tariffs for EGs are site-specific and are available with the customer's written consent.

10.3 TUOS Tariffs

- (a) For those EGs that only generate into the distribution system.
 - (i) TUOS Tariffs do not apply to generated energy.
- (b) For those EGs that generate into as well as take load from the distribution system
 - (i) TUOS Tariffs do not apply to generated energy.
 - (ii) TUOS Tariffs for load taken from the distribution system will be allocated as per the appropriate Network Price category selected from ICCs, CACs or SACs.

TUOS Tariffs for EGs are site-specific and are available with the customer's written consent.

11. STANDARD ASSET CUSTOMERS >100 MWh Per Annum

11.1 Definition

SACs >100 MWh are those customers:

- (a) with energy consumption typically greater than 100 MWh per annum; or
- (b) where the network charges are based on the averages of both the shared distribution network charges and connection charges for the Network User Group in the particular zone.

11.2 DUOS Tariffs

- (a) DUOS Tariffs are based on:
 - (i) the average of the connection charges and
 - (ii) the average of the shared distribution network charges.
- (b) DUOS Tariffs incorporate a Fixed Charge (\$/day), an Actual Demand Charge (\$/kW/month) and a Volume Charge (\$/kWh).

The Minimum Chargeable Demand will be applied for each month where the monthly maximum demand fails to exceed this value.

The Minimum Chargeable Demand applicable to each Network Charge Category is:

Network Charge Category	Minimum Chargeable Demand
<i>Demand High Voltage (EDH or WDH)</i>	400 kW
<i>Demand Large (EDL or WDL)</i>	400 kW
<i>Demand Medium (EDM or WDM)</i>	120 kW
<i>Demand Small (EDS or WDS)</i>	30 kW

- (c) The Network Charge category applicable to a customer will be as nominated by the customer or their Retailer from among the following categories:
 - (i) ***Demand High Voltage (EDH or WDH)*** is available to customers who have high voltage metering and take supply at high voltage. This category is **NOT** available to customers with non-standard or significant connection arrangements, who have distribution transformer(s) provided by Ergon Energy, or to customers who are metered at other than high voltage.
 - (ii) ***Demand Large (EDL or WDL), Demand Medium (EDM or WDM) and Demand Small (EDS or WDS)*** are available to all SACs > 100 MWh. The network charge categories are self-selecting with customers' load characteristics determining the optimum category.
- (d) A small number of customers have site specific tariffs as a result of side constraints being applied. Refer section 7. DUOS Tariffs for these customers are site-specific and are available with the customer's written consent.

11.3 TUOS Tariffs

- (a) TUOS charges are calculated and levied by Powerlink for each transmission connection point. Ergon Energy combines rates in geographical regions and passes through TUOS charges to SACs >100 MWh thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”.

- (b) TUOS Tariffs incorporate a Fixed Charge (\$/day), Capacity Charge (\$/kW/month) and Volume Charge (\$/kWh).

The Minimum Chargeable Demand will be applied for each month where the monthly maximum demand fails to exceed this value. Details of the Minimum Chargeable Demand for each Network Charge Category are shown in Section 11.2 (b) above.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate for the TNI applicable to the customer.

- (c) A small number of customers have site specific tariffs as a result of side constraints being applied. Refer section 7. TUOS Tariffs for these customers are site-specific and are available with the customer's written consent.

11.4 Network Tariff Codes – Descriptions & Rates

The Network Tariff Codes – Descriptions & Rates that apply for SACs > 100 MWh are:

(a) Demand High Voltage (EDH or WDH)

- (i) Network Tariff Code & Descriptions

EDHT1	East Demand HV (400kW) SAC - TUOS Region 1
EDHT2	East Demand HV (400kW) SAC - TUOS Region 2
EDHT3	East Demand HV (400kW) SAC - TUOS Region 3
WDHT1	West Demand HV (400kW) SAC - TUOS Region 1
WDHT2	West Demand HV (400kW) SAC - TUOS Region 2
WDHT3	West Demand HV (400kW) SAC - TUOS Region 3

The regional indicator for each TNI is shown in Appendix 1.

(ii) Network Tariff Code & Rates – **GST Exclusive**

STANDARD ASSET CUSTOMERS > 100MWh per annum - DEMAND HIGH VOLTAGE GST Exclusive								
Network Tariff Code	Minimum Chargeable Demand	Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)			Minimum monthly charge if no usage recorded. (based on 30 days in month)
		Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)	
	kilowatts	dollars per day	dollars per kilowatt per month	dollars per kilowatthour	dollars per day	dollars per kilowatt per month	dollars per kilowatthour	
EDHT1	400	\$14.950	\$10.013	\$0.00247	\$2.127	\$0.755	\$0.00775	\$4,819.51
EDHT2	400	\$14.950	\$10.013	\$0.00247	\$2.559	\$1.652	\$0.00964	\$5,191.27
EDHT3	400	\$14.950	\$10.013	\$0.00247	\$3.081	\$3.473	\$0.01270	\$5,935.33
WDHT1	400	\$18.757	\$28.699	\$0.00475	\$2.127	\$0.755	\$0.00775	\$12,408.12
WDHT2	400	\$18.757	\$28.699	\$0.00475	\$2.559	\$1.652	\$0.00964	\$12,779.88
WDHT3	400	\$18.757	\$28.699	\$0.00475	\$3.081	\$3.473	\$0.01270	\$13,523.94

(iii) Network Tariff Code & Rates – **GST Inclusive**

STANDARD ASSET CUSTOMERS > 100MWh per annum - DEMAND HIGH VOLTAGE GST Inclusive								
Network Tariff Code	Minimum Chargeable Demand	Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)			Minimum monthly charge if no usage recorded. (based on 30 days in month)
		Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)	
	kilowatts	dollars per day	dollars per kilowatt per month	dollars per kilowatthour	dollars per day	dollars per kilowatt per month	dollars per kilowatthour	
EDHT1	400	\$16.445	\$11.014	\$0.00272	\$2.340	\$0.831	\$0.00853	\$5,301.46
EDHT2	400	\$16.445	\$11.014	\$0.00272	\$2.815	\$1.817	\$0.01060	\$5,710.40
EDHT3	400	\$16.445	\$11.014	\$0.00272	\$3.389	\$3.820	\$0.01397	\$6,528.86
WDHT1	400	\$20.633	\$31.569	\$0.00523	\$2.340	\$0.831	\$0.00853	\$13,648.93
WDHT2	400	\$20.633	\$31.569	\$0.00523	\$2.815	\$1.817	\$0.01060	\$14,057.87
WDHT3	400	\$20.633	\$31.569	\$0.00523	\$3.389	\$3.820	\$0.01397	\$14,876.33

(b) Demand Large (EDL or WDL)

(i) Network Tariff Code & Descriptions

EDLT1	East Demand Large (400kW) SAC - TUOS Region 1
EDLT2	East Demand Large (400kW) SAC - TUOS Region 2
EDLT3	East Demand Large (400kW) SAC - TUOS Region 3
WDLT1	West Demand Large (400kW) SAC - TUOS Region 1
WDLT2	West Demand Large (400kW) SAC - TUOS Region 2
WDLT3	West Demand Large (400kW) SAC - TUOS Region 3

The regional indicator for each TNI is shown in Appendix 1.

(ii) Network Tariff Code & Rates – **GST Exclusive**

STANDARD ASSET CUSTOMERS > 100MWh per annum - DEMAND LARGE GST Exclusive								
Network Tariff Code	Minimum Chargeable Demand	Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)			Minimum monthly charge if no usage recorded. (based on 30 days in month)
		Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)	
	kilowatts	dollars per day	dollars per kilowatt per month	dollars per kilowatthour	dollars per day	dollars per kilowatt per month	dollars per kilowatthour	
EDLT1	400	\$33.519	\$11.452	\$0.00247	\$2.127	\$0.755	\$0.00775	\$5,952.18
EDLT2	400	\$33.519	\$11.452	\$0.00247	\$2.559	\$1.652	\$0.00964	\$6,323.94
EDLT3	400	\$33.519	\$11.452	\$0.00247	\$3.081	\$3.473	\$0.01270	\$7,068.00
WDLT1	400	\$37.137	\$44.974	\$0.00475	\$2.127	\$0.755	\$0.00775	\$19,469.52
WDLT2	400	\$37.137	\$44.974	\$0.00475	\$2.559	\$1.652	\$0.00964	\$19,841.28
WDLT3	400	\$37.137	\$44.974	\$0.00475	\$3.081	\$3.473	\$0.01270	\$20,585.34

(iii) Network Tariff Code & Rates – **GST Inclusive**

STANDARD ASSET CUSTOMERS > 100MWh per annum - DEMAND LARGE GST Inclusive								
Network Tariff Code	Minimum Chargeable Demand	Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)			Minimum monthly charge if no usage recorded. (based on 30 days in month)
		Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)	
	kilowatts	dollars per day	dollars per kilowatt per month	dollars per kilowatthour	dollars per day	dollars per kilowatt per month	dollars per kilowatthour	
EDLT1	400	\$36.871	\$12.597	\$0.00272	\$2.340	\$0.831	\$0.00853	\$6,547.40
EDLT2	400	\$36.871	\$12.597	\$0.00272	\$2.815	\$1.817	\$0.01060	\$6,956.33
EDLT3	400	\$36.871	\$12.597	\$0.00272	\$3.389	\$3.820	\$0.01397	\$7,774.80
WDLT1	400	\$40.851	\$49.471	\$0.00523	\$2.340	\$0.831	\$0.00853	\$21,416.47
WDLT2	400	\$40.851	\$49.471	\$0.00523	\$2.815	\$1.817	\$0.01060	\$21,825.41
WDLT3	400	\$40.851	\$49.471	\$0.00523	\$3.389	\$3.820	\$0.01397	\$22,643.87

(c) Demand Medium (EDM or WDM)

(i) Network Tariff Code & Descriptions

EDMT1	East Demand Medium (120kW) SAC - TUOS Region 1
EDMT2	East Demand Medium (120kW) SAC - TUOS Region 2
EDMT3	East Demand Medium (120kW) SAC - TUOS Region 3
WDMT1	West Demand Medium (120kW) SAC - TUOS Region 1
WDMT2	West Demand Medium (120kW) SAC - TUOS Region 2
WDMT3	West Demand Medium (120kW) SAC - TUOS Region 3

The regional indicator for each TNI is shown in Appendix 1.

(ii) Network Tariff Code Rates – **GST Exclusive**

STANDARD ASSET CUSTOMERS > 100MWh per annum - DEMAND MEDIUM GST Exclusive								
Network Tariff Code	Minimum Chargeable Demand	Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)			Minimum monthly charge if no usage recorded. (based on 30 days in month)
		Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)	
	kilowatts	dollars per day	dollars per kilowatt per month	dollars per kilowatthour	dollars per day	dollars per kilowatt per month	dollars per kilowatthour	
EDMT1	120	\$11.853	\$13.100	\$0.00247	\$2.127	\$0.755	\$0.00775	\$2,082.00
EDMT2	120	\$11.853	\$13.100	\$0.00247	\$2.559	\$1.652	\$0.00964	\$2,202.60
EDMT3	120	\$11.853	\$13.100	\$0.00247	\$3.081	\$3.473	\$0.01270	\$2,436.78
WDMT1	120	\$13.223	\$46.793	\$0.00475	\$2.127	\$0.755	\$0.00775	\$6,166.26
WDMT2	120	\$13.223	\$46.793	\$0.00475	\$2.559	\$1.652	\$0.00964	\$6,286.86
WDMT3	120	\$13.223	\$46.793	\$0.00475	\$3.081	\$3.473	\$0.01270	\$6,521.04

(iii) Network Tariff Code & Rates – **GST Inclusive**

STANDARD ASSET CUSTOMERS > 100MWh per annum - DEMAND MEDIUM GST Inclusive								
Network Tariff Code	Minimum Chargeable Demand	Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)			Minimum monthly charge if no usage recorded. (based on 30 days in month)
		Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)	
	kilowatts	dollars per day	dollars per kilowatt per month	dollars per kilowatthour	dollars per day	dollars per kilowatt per month	dollars per kilowatthour	
EDMT1	120	\$13.038	\$14.410	\$0.00272	\$2.340	\$0.831	\$0.00853	\$2,290.20
EDMT2	120	\$13.038	\$14.410	\$0.00272	\$2.815	\$1.817	\$0.01060	\$2,422.86
EDMT3	120	\$13.038	\$14.410	\$0.00272	\$3.389	\$3.820	\$0.01397	\$2,680.46
WDMT1	120	\$14.545	\$51.472	\$0.00523	\$2.340	\$0.831	\$0.00853	\$6,782.89
WDMT2	120	\$14.545	\$51.472	\$0.00523	\$2.815	\$1.817	\$0.01060	\$6,915.55
WDMT3	120	\$14.545	\$51.472	\$0.00523	\$3.389	\$3.820	\$0.01397	\$7,173.14

(d) Demand Small (EDS or WDS)

(i) Network Tariff Code Descriptions

EDST1	East Demand Small (30kW) SAC - TUOS Region 1
EDST2	East Demand Small (30kW) SAC - TUOS Region 2
EDST3	East Demand Small (30kW) SAC - TUOS Region 3
WDST1	West Demand Small (30kW) SAC - TUOS Region 1
WDST2	West Demand Small (30kW) SAC - TUOS Region 2
WDST3	West Demand Small (30kW) SAC - TUOS Region 3

The regional indicator for each TNI is shown in Appendix 1.

(ii) Network Tariff Code & Rates – **GST Exclusive**

STANDARD ASSET CUSTOMERS > 100MWh per annum - DEMAND SMALL GST Exclusive								
Network Tariff Code	Minimum Chargeable Demand	Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)			Minimum monthly charge if no usage recorded. (based on 30 days in month)
		Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)	
	kilowatts	dollars per day	dollars per kilowatt per month	dollars per kilowatthour	dollars per day	dollars per kilowatt per month	dollars per kilowatthour	
EDST1	30	\$1.474	\$15.732	\$0.00247	\$2.127	\$0.755	\$0.00775	\$602.64
EDST2	30	\$1.474	\$15.732	\$0.00247	\$2.559	\$1.652	\$0.00964	\$642.51
EDST3	30	\$1.474	\$15.732	\$0.00247	\$3.081	\$3.473	\$0.01270	\$712.80
WDST1	30	\$2.061	\$49.626	\$0.00475	\$2.127	\$0.755	\$0.00775	\$1,637.07
WDST2	30	\$2.061	\$49.626	\$0.00475	\$2.559	\$1.652	\$0.00964	\$1,676.94
WDST3	30	\$2.061	\$49.626	\$0.00475	\$3.081	\$3.473	\$0.01270	\$1,747.23

(iii) Network Tariff Code & Rates – **GST Inclusive**

STANDARD ASSET CUSTOMERS > 100MWh per annum - DEMAND SMALL GST Inclusive								
Network Tariff Code	Minimum Chargeable Demand	Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)			Minimum monthly charge if no usage recorded. (based on 30 days in month)
		Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)	
	kilowatts	dollars per day	dollars per kilowatt per month	dollars per kilowatthour	dollars per day	dollars per kilowatt per month	dollars per kilowatthour	
EDST1	30	\$1.621	\$17.305	\$0.00272	\$2.340	\$0.831	\$0.00853	\$662.90
EDST2	30	\$1.621	\$17.305	\$0.00272	\$2.815	\$1.817	\$0.01060	\$706.76
EDST3	30	\$1.621	\$17.305	\$0.00272	\$3.389	\$3.820	\$0.01397	\$784.08
WDST1	30	\$2.267	\$54.589	\$0.00523	\$2.340	\$0.831	\$0.00853	\$1,800.78
WDST2	30	\$2.267	\$54.589	\$0.00523	\$2.815	\$1.817	\$0.01060	\$1,844.63
WDST3	30	\$2.267	\$54.589	\$0.00523	\$3.389	\$3.820	\$0.01397	\$1,921.95

11.5 Mt Isa

Network Tariffs for Mt Isa customers are not explained in this Guide. Customers with metered consumption greater than or equal to 100MWh per annum can contact Ergon Energy for further information.

12. STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – VOLUME LARGE

12.1 Definition

SACs < 100 MWh – Volume Large are those customers:

- (a) with energy consumption in the range of 26 MWh to 100 MWh per annum; and
- (b) where the network charges are based on the averages of both the shared distribution network charges and connection charges for the Network User Group in the particular zone.

12.2 DUOS Tariffs

- (a) DUOS Tariffs are based on:
 - (i) the average of the connection charges and
 - (ii) the average of the shared distribution network charges.
- (b) DUOS Tariffs incorporate a Fixed Charge (\$/day) and a Volume Charge (\$/kWh).

12.3 TUOS Tariffs

- (a) TUOS charges are calculated and levied by Powerlink for each transmission connection point. Ergon Energy combines rates in geographical regions and passes through TUOS charges to SACs < 100 MWh thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”.

- (b) TUOS Tariffs for Volume Large incorporate a Fixed Charge (\$/day) and Volume Charge (\$/kWh).

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

12.4 Network Tariff Codes – Descriptions & Rates

The Network Tariff Codes that apply for SACs < 100 MWh – Volume Large are:

- (a) Network Tariff Code Descriptions

EVLT1	East Energy 26 - 100 MWh SAC - TUOS Region 1
EVLT2	East Energy 26 - 100 MWh SAC - TUOS Region 2
EVLT3	East Energy 26 - 100 MWh SAC - TUOS Region 3
WVLT1	West Energy 26 - 100 MWh SAC - TUOS Region 1
WVLT2	West Energy 26 - 100 MWh SAC - TUOS Region 2
WVLT3	West Energy 26 - 100 MWh SAC - TUOS Region 3

The regional indicator for each TNI is shown in Appendix 1.

(b) Network Tariff Code & Rates – **GST Exclusive**

STANDARD ASSET CUSTOMERS < 100MWh per annum - VOLUME LARGE GST Exclusive					
	Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)		Minimum monthly charge if no usage recorded. (based on 30 days in month)
	Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)	
Network Tariff Code	dollars per day	dollars per kilowatthour	dollars per day	dollars per kilowatthour	
EVL1	\$1.319	\$0.05949	\$0.729	\$0.00775	\$61.44
EVL2	\$1.319	\$0.05949	\$1.234	\$0.00964	\$76.59
EVL3	\$1.319	\$0.05949	\$2.196	\$0.01270	\$105.45
WVLT1	\$2.746	\$0.20984	\$0.729	\$0.00775	\$104.25
WVLT2	\$2.746	\$0.20984	\$1.234	\$0.00964	\$119.40
WVLT3	\$2.746	\$0.20984	\$2.196	\$0.01270	\$148.26

(c) Network Tariff Code & Rates – **GST Inclusive**

STANDARD ASSET CUSTOMERS < 100MWh per annum - VOLUME LARGE GST Inclusive					
	Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)		Minimum monthly charge if no usage recorded. (based on 30 days in month)
	Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)	
Network Tariff Code	dollars per day	dollars per kilowatthour	dollars per day	dollars per kilowatthour	
EVL1	\$1.451	\$0.06544	\$0.802	\$0.00853	\$67.58
EVL2	\$1.451	\$0.06544	\$1.357	\$0.01060	\$84.25
EVL3	\$1.451	\$0.06544	\$2.416	\$0.01397	\$116.00
WVLT1	\$3.021	\$0.23082	\$0.802	\$0.00853	\$114.68
WVLT2	\$3.021	\$0.23082	\$1.357	\$0.01060	\$131.34
WVLT3	\$3.021	\$0.23082	\$2.416	\$0.01397	\$163.09

12.5 Mt Isa

Network Tariffs for Mt Isa customers will not be published as customers consuming <100MWh per annum in the Mt Isa zone do not have choice of retailer.

13. STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – VOLUME SMALL

13.1 Definition

SACs < 100 MWh – Volume Small are those customers:

- (a) with energy consumption in the range of 0 MWh to 26 MWh per annum; and
- (b) where the network charges are based on the averages of both the shared distribution network charges and connection charges for the Network User Group in the particular zone.

13.2 DUOS Tariffs

- (a) DUOS Tariffs are based on:
 - (i) the average of the connection charges and
 - (ii) the average of the shared distribution network charges.
- (b) DUOS Tariffs incorporate a Fixed Charge (\$/day) and a Volume Charge (\$/kWh).

13.3 TUOS Tariffs

- (a) TUOS charges are calculated and levied by Powerlink for each transmission connection point. Ergon Energy combines rates in geographical regions and passes through TUOS charges to SACs < 100 MWh thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”.

- (b) TUOS prices for Volume Small incorporate a Fixed Charge (\$/day) and Volume Charge (\$/kWh).

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

13.4 Network Tariff Codes – Descriptions & Rates

The Network Tariff Codes that apply for SACs < 100 MWh – Volume Small are:

- (a) Network Tariff Code & Descriptions

EVST1	East Energy 0 - 26 MWh SAC - TUOS Region 1
EVST2	East Energy 0 - 26 MWh SAC - TUOS Region 2
EVST3	East Energy 0 - 26 MWh SAC - TUOS Region 3
WVST1	West Energy 0 - 26 MWh SAC - TUOS Region 1
WVST2	West Energy 0 - 26 MWh SAC - TUOS Region 2
WVST3	West Energy 0 - 26 MWh SAC - TUOS Region 3

The regional indicator for each TNI is shown in Appendix 1.

- (b) Network Tariff Code & Rates – **GST Exclusive**

STANDARD ASSET CUSTOMERS < 100MWh per annum - VOLUME SMALL GST Exclusive					
Network Tariff Code	Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)		Minimum monthly charge if no usage recorded. (based on 30 days in month)
	Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)	
	dollars per day	dollars per kilowatthour	dollars per day	dollars per kilowatthour	
EVST1	\$0.782	\$0.05949	\$0.109	\$0.00775	\$26.73
EVST2	\$0.782	\$0.05949	\$0.170	\$0.00964	\$28.56
EVST3	\$0.782	\$0.05949	\$0.269	\$0.01270	\$31.53
WVST1	\$0.865	\$0.20984	\$0.109	\$0.00775	\$29.22
WVST2	\$0.865	\$0.20984	\$0.170	\$0.00964	\$31.05
WVST3	\$0.865	\$0.20984	\$0.269	\$0.01270	\$34.02

- (c) Network Tariff Code & Rates – **GST Inclusive**

STANDARD ASSET CUSTOMERS < 100MWh per annum - VOLUME SMALL GST Inclusive					
Network Tariff Code	Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)		Minimum monthly charge if no usage recorded. (based on 30 days in month)
	Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)	
	dollars per day	dollars per kilowatthour	dollars per day	dollars per kilowatthour	
EVST1	\$0.860	\$0.06544	\$0.120	\$0.00853	\$29.40
EVST2	\$0.860	\$0.06544	\$0.187	\$0.01060	\$31.42
EVST3	\$0.860	\$0.06544	\$0.296	\$0.01397	\$34.68
WVST1	\$0.952	\$0.23082	\$0.120	\$0.00853	\$32.14
WVST2	\$0.952	\$0.23082	\$0.187	\$0.01060	\$34.16
WVST3	\$0.952	\$0.23082	\$0.296	\$0.01397	\$37.42

13.5 Mt Isa

Network Tariffs for Mt Isa customers will not be published as customers consuming <100MWH per annum in the Mt Isa zone do not have choice of retailer.

14. STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – CONTROLLED SUPPLIES

14.1 Definition

There are additional Network charge categories - Controlled Supplies that only apply to SAC < 100 MWh customers whose primary Network charge category is Volume Large or Volume Small and where specified permanently connected appliances are controlled by network equipment¹.

The additional categories that may be nominated by the customer or their Retailer are:

- (i) **Volume Night - Controlled (EVN or WVN)** applies where specified permanently connected appliances are controlled by network equipment so that supply will be available for a minimum period of 8 hours at the absolute discretion of Ergon Energy but usually between the hours of 10:00pm and 7:00am.
- (ii) **Volume Controlled (EVC or WVC)** applies where specified permanently connected appliances are controlled by network equipment so that supply will be available for a minimum period of 18 hours per day during time periods set at the absolute discretion of Ergon Energy.

14.2 DUOS Tariffs

- (a) DUOS Tariffs are based on:
 - (i) the average of the connection charges and
 - (ii) the average of the shared distribution network charges.
- (b) DUOS Tariffs incorporate a Fixed Charge (\$/day) and a Volume Charge (\$/kWh).

¹ A controlled load pricing option only applies where electricity load is permanently connected to appliances, separately metered and controlled at a supply point.

The network charge categories apply to the controlled supplies of both market and non-market customers. For the suitability of appliances and other conditions associated with controlled supply, reference should be made to the Regulated Electricity Retail Tariff for Non-market Customers (Notified prices) as reflected in the Queensland Government "Tariff Schedule" (www.dme.qld.gov/Energy/notified_prices.cfm). The conditions contained in the Regulated Electricity Retail Prices for Non-market Customers will be applied by Ergon Energy to all customers on controlled supply (i.e. both market and non-market customers).

Switching times will be managed at Ergon Energy's absolute discretion, in accordance with Ergon Energy's network requirements.

For non-market customers, Volume Night – Controlled equates to the Retail Tariff 31 and Volume Controlled equates to the Retail Tariff 33 of the Notified Prices as reflected in the Queensland Government Regulated Electricity Retail Prices for Non-market Customers.

14.3 TUOS Tariffs

- (a) TUOS charges are calculated and levied by Powerlink for each transmission connection point. Ergon Energy combines rates in geographical regions and passes through TUOS charges to SACs < 100 MWh – Controlled Supplies thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”.

- (b) TUOS Tariffs for Volume Night-Controlled and Volume Controlled incorporate a Volume Charge (\$/kWh) only.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

14.4 Network Tariff Codes – Descriptions & Rates

The Network Tariff Codes – Descriptions & Rates that apply for SACs < 100 MWh – Controlled Supplies are:

- (a) **Volume Night - Controlled (EVN or WVN)**

- (i) Network Tariff Code & Descriptions

EVNT1	East Volume Night Controlled (T31) TUOS Region 1
EVNT2	East Volume Night Controlled (T31) TUOS Region 2
EVNT3	East Volume Night Controlled (T31) TUOS Region 3
WVNT1	West Volume Night Controlled (T31) TUOS Region 1
WVNT2	West Volume Night Controlled (T31) TUOS Region 2
WVNT3	West Volume Night Controlled (T31) TUOS Region 3

The regional indicator for each TNI is shown in Appendix 1.

- (ii) Network Tariff Code & Rates – **GST Exclusive**

STANDARD ASSET CUSTOMERS < 100MWh per annum - VOLUME NIGHT CONTROLLED GST Exclusive					
Network Tariff Code	Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)		Minimum monthly charge if no usage recorded. (based on 30 days in month)
	Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)	
	dollars per day	dollars per kilowatthour	dollars per day	dollars per kilowatthour	
EVNT1	\$0.089	\$0.00135		\$0.00775	\$2.67
EVNT2	\$0.089	\$0.00135		\$0.00964	\$2.67
EVNT3	\$0.089	\$0.00135		\$0.01270	\$2.67
WVNT1	\$0.116	\$0.00301		\$0.00775	\$3.48
WVNT2	\$0.116	\$0.00301		\$0.00964	\$3.48
WVNT3	\$0.116	\$0.00301		\$0.01270	\$3.48

(iii) Network Tariff Code & Rates – **GST Inclusive**

STANDARD ASSET CUSTOMERS < 100MWh per annum - VOLUME NIGHT CONTROLLED GST Inclusive					
	Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)		Minimum monthly charge if no usage recorded. (based on 30 days in month)
	Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)	
Network Tariff Code	dollars per day	dollars per kilowatthour	dollars per day	dollars per kilowatthour	
EVNT1	\$0.098	\$0.00149		\$0.00853	\$2.94
EVNT2	\$0.098	\$0.00149		\$0.01060	\$2.94
EVNT3	\$0.098	\$0.00149		\$0.01397	\$2.94
WVNT1	\$0.128	\$0.00331		\$0.00853	\$3.83
WVNT2	\$0.128	\$0.00331		\$0.01060	\$3.83
WVNT3	\$0.128	\$0.00331		\$0.01397	\$3.83

(b) **Volume Controlled (EVC or WVC)**

(i) Network Tariff Code & Descriptions

EVCT1	East Volume Controlled (T33) TUOS Region 1
EVCT2	East Volume Controlled (T33) TUOS Region 2
EVCT3	East Volume Controlled (T33) TUOS Region 3
WVCT1	West Volume Controlled (T33) TUOS Region 1
WVCT2	West Volume Controlled (T33) TUOS Region 2
WVCT3	West Volume Controlled (T33) TUOS Region 3

The regional indicator for each TNI is shown in Appendix 1.

(ii) Network Tariff Code & Rates – **GST Exclusive**

STANDARD ASSET CUSTOMERS < 100MWh per annum - VOLUME CONTROLLED GST Exclusive					
	Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)		Minimum monthly charge if no usage recorded. (based on 30 days in month)
	Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)	
Network Tariff Code	dollars per day	dollars per kilowatthour	dollars per day	dollars per kilowatthour	
EVCT1	\$0.089	\$0.01343		\$0.00775	\$2.67
EVCT2	\$0.089	\$0.01343		\$0.00964	\$2.67
EVCT3	\$0.089	\$0.01343		\$0.01270	\$2.67
WVCT1	\$0.116	\$0.04143		\$0.00775	\$3.48
WVCT2	\$0.116	\$0.04143		\$0.00964	\$3.48
WVCT3	\$0.116	\$0.04143		\$0.01270	\$3.48

(iii) Network Tariff Code & Rates – **GST Inclusive**

STANDARD ASSET CUSTOMERS < 100MWh per annum - VOLUME CONTROLLED GST Inclusive					
	Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)		Minimum monthly charge if no usage recorded. (based on 30 days in month)
	Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)	
Network Tariff Code	dollars per day	dollars per kilowatthour	dollars per day	dollars per kilowatthour	
EVCT1	\$0.098	\$0.01477		\$0.00853	\$2.94
EVCT2	\$0.098	\$0.01477		\$0.01060	\$2.94
EVCT3	\$0.098	\$0.01477		\$0.01397	\$2.94
WVCT1	\$0.128	\$0.04557		\$0.00853	\$3.83
WVCT2	\$0.128	\$0.04557		\$0.01060	\$3.83
WVCT3	\$0.128	\$0.04557		\$0.01397	\$3.83

14.5 Mt Isa

Network Tariffs for Mt Isa customers will not be published as customers consuming <100MWH per annum in the Mt Isa zone do not have choice of retailer.

15. STANDARD ASSET CUSTOMERS < 100 MWh Per Annum – UNMETERED SUPPLIES

15.1 Definition

Unmetered supplies should be avoided where possible. However, Ergon Energy may approve an unmetered supply where it meets the requirements set out in Chapter 7 of the National Electricity Rules.

15.2 DUOS Tariffs

- (a) DUOS Tariffs are based on:
 - (i) the average of the connection charges and
 - (ii) the average of the shared distribution network charges.
- (b) DUOS Tariffs incorporate a Fixed Charge (\$/day) and a Volume Charge (\$/kWh).
- (c) The Network Charge category applicable to a customer will be as nominated by the customer or their Retailer from among the following categories:
 - (i) **Unmetered Supply (EVU or WVU)** is applicable to unmetered supplies where the customer owns and maintains all assets after the customer's connection point to the network. These include installations such as Traffic Signals, Rate 3 streetlights etc.
 - (ii) **Lighting - minor (EL1 or WL1)** is applicable to unmetered public lighting where Ergon Energy owns and maintains all assets after the customers connection point to the network.
 - Ergon Energy standard minor public lights are 50, 80 and 125 watt Mercury Vapour and 70 watt High Pressure Sodium vapour lights
 - Also includes any other non standard or obsolete public lights that would be replaced with any of the above Ergon standard minor public lights in accordance with Ergon Energy policy.
 - (iii) **Lighting - major (EL2 or WL2)** is applicable to unmetered public lighting where Ergon owns and maintains all assets after the customers connection point to the network.
 - Ergon Energy standard major public lights are 100, 150, 250 and 400 watt High Pressure Sodium vapour lights
 - Also includes any other non standard or obsolete public lights that would be replaced with any of the above Ergon Energy standard major public lights in accordance with Ergon Energy policy.
- (d) The current approved DUOS rates for Unmetered Supplies for the East and West zones are published.

15.3 TUOS Tariffs

- (a) TUOS charges are calculated and levied by Powerlink for each transmission connection point. Ergon Energy combines rates in geographical regions and passes through TUOS charges to SACs < 100 MWh - Unmetered Supplies thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”.

- (b) TUOS Tariffs incorporate a Volume Charge (\$/kWh) only.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

- (c) The current approved TUOS rates for Unmetered Supplies (EVU or WVU, EL1 or WL1, EL2 or WL2) categories are published.

15.4 Network Tariff Codes

The Network Tariff Codes that apply for SACs < 100 MWh – Unmetered Supplies are:

- (a) **Unmetered Supply (EVU or WVU)**

- (i) Network Tariff Code & Descriptions

EVUT1	East Volume Unmetered Supply TUOS Region 1
EVUT2	East Volume Unmetered Supply TUOS Region 2
EVUT3	East Volume Unmetered Supply TUOS Region 3
WVUT1	West Volume Unmetered Supply TUOS Region 1
WVUT2	West Volume Unmetered Supply TUOS Region 2
WVUT3	West Volume Unmetered Supply TUOS Region 3

The regional indicator for each TNI is shown in Appendix 1.

- (ii) Network Tariff Code & Rates – **GST Exclusive**

STANDARD ASSET CUSTOMERS < 100MWh per annum - UNMETERED SUPPLY GST Exclusive					
Network Tariff Code	Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)		Minimum monthly charge if no usage recorded. (based on 30 days in month)
	Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)	
	dollars per day	dollars per kilowatthour	dollars per day	dollars per kilowatthour	
EVUT1	\$0.184	\$0.04933		\$0.00775	\$5.52
EVUT2	\$0.184	\$0.04933		\$0.00964	\$5.52
EVUT3	\$0.184	\$0.04933		\$0.01270	\$5.52
WVUT1	\$0.257	\$0.15300		\$0.00775	\$7.71
WVUT2	\$0.257	\$0.15300		\$0.00964	\$7.71
WVUT3	\$0.257	\$0.15300		\$0.01270	\$7.71

(iii) Network Tariff Code & Rates – **GST Inclusive**

STANDARD ASSET CUSTOMERS < 100MWh per annum - UNMETERED SUPPLY GST Inclusive					
Network Tariff Code	Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)		Minimum monthly charge if no usage recorded. (based on 30 days in month)
	Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)	
	dollars per day	dollars per kilowatthour	dollars per day	dollars per kilowatthour	
EVUT1	\$0.202	\$0.05426		\$0.00853	\$6.07
EVUT2	\$0.202	\$0.05426		\$0.01060	\$6.07
EVUT3	\$0.202	\$0.05426		\$0.01397	\$6.07
WVUT1	\$0.283	\$0.16830		\$0.00853	\$8.48
WVUT2	\$0.283	\$0.16830		\$0.01060	\$8.48
WVUT3	\$0.283	\$0.16830		\$0.01397	\$8.48

(b) Lighting - minor (EL1 or WL1)

(i) Network Tariff Code & Descriptions

EL1T1	East Lighting - minor TUOS Region 1
EL1T2	East Lighting - minor TUOS Region 2
EL1T3	East Lighting - minor TUOS Region 3
WL1T1	West Lighting - minor TUOS Region 1
WL1T2	West Lighting - minor TUOS Region 2
WL1T3	West Lighting - minor TUOS Region 3

The regional indicator for each TNI is shown in Appendix 1.

(ii) Network Tariff Code & Rates – **GST Exclusive**

STANDARD ASSET CUSTOMERS < 100MWh per annum - LIGHTING MINOR GST Exclusive					
Network Tariff Code	Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)		Minimum monthly charge if no usage recorded. (based on 30 days in month)
	Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)	
	dollars per day	dollars per kilowatthour	dollars per day	dollars per kilowatthour	
EL1T1	\$0.218	\$0.04933		\$0.00775	\$6.54
EL1T2	\$0.218	\$0.04933		\$0.00964	\$6.54
EL1T3	\$0.218	\$0.04933		\$0.01270	\$6.54
WL1T1	\$0.276	\$0.15300		\$0.00775	\$8.28
WL1T2	\$0.276	\$0.15300		\$0.00964	\$8.28
WL1T3	\$0.276	\$0.15300		\$0.01270	\$8.28

(iii) Network Tariff Code & Rates – **GST Inclusive**

STANDARD ASSET CUSTOMERS < 100MWh per annum - LIGHTING MINOR GST Inclusive					
Network Tariff Code	Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)		Minimum monthly charge if no usage recorded. (based on 30 days in month)
	Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)	
	dollars per day	dollars per kilowatthour	dollars per day	dollars per kilowatthour	
EL1T1	\$0.240	\$0.05426		\$0.00853	\$7.19
EL1T2	\$0.240	\$0.05426		\$0.01060	\$7.19
EL1T3	\$0.240	\$0.05426		\$0.01397	\$7.19
WL1T1	\$0.304	\$0.16830		\$0.00853	\$9.11
WL1T2	\$0.304	\$0.16830		\$0.01060	\$9.11
WL1T3	\$0.304	\$0.16830		\$0.01397	\$9.11

(c) Lighting - major (EL2 or WL2)

(i) Network Tariff Code & Descriptions

EL2T1	East Lighting - major TUOS Region 1
EL2T2	East Lighting - major TUOS Region 2
EL2T3	East Lighting - major TUOS Region 3
WL2T1	West Lighting - major TUOS Region 1
WL2T2	West Lighting - major TUOS Region 2
WL2T3	West Lighting - major TUOS Region 3

The regional indicator for each TNI is shown in Appendix 1.

(ii) Network Tariff Code & Rates – **GST Exclusive**

STANDARD ASSET CUSTOMERS < 100MWh per annum - LIGHTING MAJOR GST Exclusive					
Network Tariff Code	Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)		Minimum monthly charge if no usage recorded. (based on 30 days in month)
	Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)	
	dollars per day	dollars per kilowatthour	dollars per day	dollars per kilowatthour	
EL2T1	\$0.369	\$0.04933		\$0.00775	\$11.07
EL2T2	\$0.369	\$0.04933		\$0.00964	\$11.07
EL2T3	\$0.369	\$0.04933		\$0.01270	\$11.07
WL2T1	\$0.479	\$0.15300		\$0.00775	\$14.37
WL2T2	\$0.479	\$0.15300		\$0.00964	\$14.37
WL2T3	\$0.479	\$0.15300		\$0.01270	\$14.37

(iii) Network Tariff Code & Rates – **GST Inclusive**

STANDARD ASSET CUSTOMERS < 100MWh per annum - LIGHTING MAJOR GST Inclusive					
Network Tariff Code	Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)		Minimum monthly charge if no usage recorded. (based on 30 days in month)
	Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)	
	dollars per day	dollars per kilowatthour	dollars per day	dollars per kilowatthour	
EL2T1	\$0.406	\$0.05426		\$0.00853	\$12.18
EL2T2	\$0.406	\$0.05426		\$0.01060	\$12.18
EL2T3	\$0.406	\$0.05426		\$0.01397	\$12.18
WL2T1	\$0.527	\$0.16830		\$0.00853	\$15.81
WL2T2	\$0.527	\$0.16830		\$0.01060	\$15.81
WL2T3	\$0.527	\$0.16830		\$0.01397	\$15.81

15.5 Mt Isa

Network Tariffs for Mt Isa customers will not be published as customers consuming <100MWH per annum in the Mt Isa zone do not have choice of retailer.

16. QUEENSLAND GOVERNMENT SOLAR BONUS SCHEME FOR STANDARD ASSET CUSTOMERS < 100 MWh Per Annum

16.1 Definition

The Queensland Government Solar Bonus Scheme is a program that pays domestic and other small energy customers for the surplus electricity generated from roof-top solar photovoltaic (PV) systems that is exported to the Queensland grid. For information on the Solar Bonus Scheme please refer to:

www.cleanenergy.qld.gov.au/solar_bonus_scheme.cfm

16.2 Network Tariff Codes

(i) Network Tariff Code & Descriptions

NVG0	Net Volume Generation 0
NVG1	Net Volume Generation 1
GVG0	Gross Volume Generation 0

Where NVG0 is applicable to any net metering installation that does not meet the Solar Bonus Scheme requirements, NVG1 applies to any net metering installation that meets the Solar Bonus Scheme requirements, and GVG0 is applicable to any gross metering installation.

(ii) Network Tariff Code & Rates – **GST Inclusive**

QLD GOVT SOLAR BONUS SCHEME FOR STANDARD ASSET CUSTOMERS <100MWh Per Annum GST Inclusive				
	Distribution Use Of System (DUOS)		Transmission Use Of System (TUOS)	
	Fixed Charge (NDFC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Volume Charge (NTVC)
Network Tariff Code	dollars per day	CENTS per kilowatthour	dollars per day	dollars per kilowatthour
NVG0		0.00		
NVG1		-44.00		
GVG0		0.00		

The 44c/kwh associated with the Solar PV Bonus Scheme includes GST (if any). As such, no amount will be added to the credit in respect of any GST payable.

APPENDIX 1 – TUOS REGIONAL INDICATORS

SAC > 100MWh & <100 MWh Regional Indicators for 2009-2010		
Transmission Connection Point	TNI	TUOS Region
Alligator Creek	QALC	T2
Alan Sherriff (11)	QASF	T2
Biloela	QBIL	T1
Blackwater (132)	QBWH	T1
Blackwater (66)	QBWL	T1
Cardwell	QCDW	T3
Clare	QCLR	T2
Cairns (Cairns City)	QCNS	T3
Collinsville	QCOL	T2
Cairns	QCRN	T3
Dan Gleeson	QDGL	T2
Dysart	QDYS	T1
Egans Hill	QEGN	T1
El Arish	QELA	T3
Edmonton	QEMT	T3
Alan Sherriff (Garbutt)	QGAR	T2
Gladstone North	QGLA	T1
Gin Gin	QGNG	T1
Gladstone South	QGST	T1
Innisfail	QINF	T3
Ingham	QING	T3
Kamerunga	QKAM	T3
Lilyvale (Clermont)	QLCM	T1
Lilyvale	QLIL	T1
Mackay	QMKA	T2
Moura	QMRA	T1
Middle Ridge	QMRG	T1
Moranbah (11)	QMRL	T1
Moranbah (66)	QMRN	T1
Nebo	QNEB	T2
Newlands (Mackay & Northern)	QNLD	T2
Oakey	QOKT	T1
Pioneer Valley	QPIV	T2
Proserpine (Mackay)	QPRO	T2
Rockhampton	QROC	T1
Ross (Kidston & Millchester)	QROS	T2
Teebar Creek	QTBC	T1
Tangkam	QTKM	T1
Tully	QTLL	T3
Tarong 132	QTRH	T1
Tarong	QTRL	T1
Turkinje (Port Douglas)	QTUH	T3
Turkinje	QTUL	T3
Townsville East	QTVE	T2
Townsville South	QTVS	T2
Woolooga	QWLN	T1
Woree	QWRE	T3
Boat Creek	QYAE	T1

APPENDIX 2 – TABLE OF SITE-SPECIFIC NMIs

If the customer's NMI appears in this list, contact Ergon Energy for site-specific prices. (Refer Section 1.7 for contact details)

3030060966	3041317751	3050152203	QAAABW0007	QAAAGS0001
3030063361	3041320751	3050164040	QAAABW0008	QAAAGS0002
3030093805	3041321936	3050213792	QAAABW0038	QAAAGS0003
3030574145	3041323017	3050332422	QAAABW0040	QAAAGS0005
3031055249	3041326768	3050336991	QAAABW0041	QAAAGS0006
3031124046	3041417411	3050401688	QAAABW0042	QAAAGS0007
3031124500	3041467451	3050537024	QAAABX0001	QAAAGS0008
3033185662	3041469003	3050802593	QAAABX0002	QAAAGS0009
3033697281	3041597613	3050880454	QAAABX0004	QAAAGS0010
3034190121	3041599837	3050918851	QAAABX0012	QAAAGS0011
3036000248	3041603800	3050918877	QAAABX0014	QAAAGS0012
3036089001	3041782852	3050918907	QAAADY0000	QAAAGS0014
3036095664	3041786211	3050918940	QAAADY0002	QAAAGS0015
3036098159	3041824032	3050922955	QAAAEH0000	QAAAGS0017
3036098876	3041825331	3050922963	QAAAEH0001	QAAAGS0018
3036390925	3041896289	3050974882	QAAAEH0002	QAAAGS0019
3036392413	3041948459	3051004241	QAAAEH0003	QAAAGS0023
3036523160	3042063531	3051006162	QAAAEH0004	QAAAGS0026
3036618705	3042065305	3051084589	QAAAEH0005	QAAAGS0027
3038071606	3042066166	3051100231	QAAAEH0006	QAAAGS0029
3038096366	3042073308	3051162717	QAAAEH0007	QAAAGS0031
3038100495	3042101409	3051175967	QAAAEH0008	QAAAGS0032
3038104806	3042103258	3051198738	QAAAEH0010	QAAAGS0034
3038105411	3042117585	3051313391	QAAAEH0011	QAAAGS0037
3038109697	3042117739	3051335077	QAAAEH0014	QAAAGS0039
3038158116	3042118590	3051437805	QAAAEH0015	QAAAGS0045
3038255278	3042120381	QAAA0000NX	QAAAEH0016	QAAAGS0047
3038308029	3042124654	QAAA700010	QAAAEH0019	QAAAGS0049
3038331365	3044087543	QAAA700022	QAAAEH0020	QAAAGS0052
3038336987	3044426305	QAAA700032	QAAAEH0021	QAAAGS0058
3038337037	3044427671	QAAA700039	QAAAEH0028	QAAAGS0059
3038368501	3044428839	QAAA700041	QAAAEH0029	QAAAGS0063
3038444836	3044430361	QAAA700050	QAAAEH0030	QAAAGS0068
3038474557	3044430604	QAAA700051	QAAAEH0035	QAAAGS0072
3038495601	3044496991	QAAA700072	QAAAEH0036	QAAAGS0078
3038582341	3044703490	QAAA700073	QAAAEH0039	QAAAGS0079
3038623242	3044791178	QAAA700095	QAAAEH0040	QAAAGS0090
3038667959	3044917724	QAAA700147	QAAAEH0047	QAAAGS0093
3038720825	3044951591	QAAA700167	QAAAEH0051	QAAAGS0098
3038742896	3044983778	QAAA700170	QAAAEH0053	QAAAGS0099
3038878321	3045045381	QAAA700171	QAAAEH0067	QAAAGS0100
3038932016	3045087431	QAAA700175	QAAAEH0075	QAAALV0000
3039014771	3045089604	QAAA700190	QAAAEH0077	QAAALV0001
3039054250	3045116351	QAAA700192	QAAAEH0080	QAAALV0002
3039070611	3050036831	QAAABL0000	QAAAEH0083	QAAALV0003
3039072291	3050075527	QAAABL0001	QAAAEH0085	QAAALV0004
3041051271	3050082272	QAAABL0013	QAAAEH0108	QAAALV0005
3041119916	3050082744	QAAABL0015	QAAAEH0113	QAAALV0032
3041280547	3050107682	QAAABW0000	QAAAEH0115	QAAALV0063
3041301846	3050126491	QAAABW0001	QAAAEH0116	QAAALX0000
3041307542	3050135961	QAAABW0002	QAAAEH7001	QAAAMR0000
3041310829	3050147081	QAAABW0005	QAAAGS0000	QAAAMR0001

QAAAMR0005	QCCC000029	QCCC700273	QDDD003318	QEEE000547
QAAARG0000	QCCC000030	QCCC700300	QDDD003319	QEEE000570
QAAARG0001	QCCC000032	QCQPW00076	QDDD003333	QEEE700030
QAAARG0002	QCCC000036	QDDD000001	QDDD003335	QEEE700117
QAAARG0003	QCCC000038	QDDD000002	QDDD003336	QEEE700133
QAAARG0004	QCCC000040	QDDD000003	QDDD003338	QEEE700191
QAAARG0005	QCCC000042	QDDD000004	QDDD003340	QEEE700257
QAAARG0006	QCCC000044	QDDD000005	QDDD003342	QEEE700262
QAAARG0007	QCCC000046	QDDD000006	QDDD003345	QEEEZ00571
QAAARG0010	QCCC000048	QDDD000009	QDDD003348	QEMS000001
QAAARG0011	QCCC000052	QDDD000010	QDDD700001	QFFF000000
QAAARG0014	QCCC000056	QDDD000011	QDDD700055	QFFF000001
QAAARG0016	QCCC000058	QDDD000012	QDDD700074	QFFF000002
QAAARG0018	QCCC000062	QDDD000019	QDDD700079	QFFF000003
QAAARG0019	QCCC000066	QDDD000020	QEEE000001	QFFF000005
QAAARG0020	QCCC000068	QDDD000026	QEEE000002	QFFF000006
QAAARG0021	QCCC000072	QDDD000027	QEEE000003	QFFF000007
QAAARG0023	QCCC000086	QDDD000028	QEEE000004	QFFF000008
QAAARG0024	QCCC000088	QDDD003017	QEEE000005	QFFF00000B
QAAARG0032	QCCC000104	QDDD003020	QEEE000006	QFFF00000C
QAAARG0033	QCCC000114	QDDD003025	QEEE000007	QFFF00000D
QAAARG0034	QCCC000132	QDDD003033	QEEE000010	QFFF00000E
QAAARG0035	QCCC000146	QDDD003056	QEEE000011	QFFF00000F
QAAARG0037	QCCC000212	QDDD003059	QEEE000012	QFFF00000G
QAAARG0038	QCCC000226	QDDD003090	QEEE000013	QFFF00000H
QAAARG0041	QCCC000336	QDDD003093	QEEE000014	QFFF00000J
QAAARG0043	QCCC000356	QDDD003097	QEEE000015	QFFF00000K
QAAARG0052	QCCC000414	QDDD003110	QEEE000016	QFFF00000L
QAAARG0053	QCCC000426	QDDD003125	QEEE000017	QFFF00000M
QAAARG0054	QCCC000490	QDDD003129	QEEE000018	QFFF00000N
QAAARG0060	QCCC000554	QDDD003136	QEEE000019	QFFF00000R
QAAARG0062	QCCC000570	QDDD003143	QEEE000020	QFFF00000S
QAAARG0063	QCCC000646	QDDD003148	QEEE000022	QFFF00000U
QAAARG0065	QCCC000648	QDDD003149	QEEE000023	QFFF00000V
QAAARG0077	QCCC000650	QDDD003157	QEEE000025	QFFF00000W
QAAARG0081	QCCC000678	QDDD003164	QEEE000026	QFFF00000X
QAAARG0083	QCCC000702	QDDD003165	QEEE000032	QFFF00000Y
QAAARG0096	QCCC000762	QDDD003166	QEEE000049	QFFF000011
QAAARG0100	QCCC000793	QDDD003173	QEEE000050	QFFF000013
QAAARG0104	QCCC000874	QDDD003174	QEEE000051	QFFF000014
QAAARG0105	QCCC000924	QDDD003194	QEEE000052	QFFF000016
QAAARG0108	QCCC000936	QDDD003196	QEEE000054	QFFF000019
QAAARG0110	QCCC000940	QDDD003203	QEEE000191	QFFF00001A
QAAARG0113	QCCC000958	QDDD003204	QEEE000210	QFFF00001B
QCCC000001	QCCC001003	QDDD003205	QEEE000252	QFFF00001C
QCCC000002	QCCC001004	QDDD003206	QEEE000273	QFFF00001E
QCCC000003	QCCC001012	QDDD003254	QEEE000288	QFFF00001F
QCCC000004	QCCC001024	QDDD003275	QEEE000382	QFFF00001G
QCCC000006	QCCC001035	QDDD003276	QEEE000404	QFFF00001H
QCCC000010	QCCC001036	QDDD003282	QEEE000439	QFFF00001L
QCCC000012	QCCC001041	QDDD003295	QEEE000498	QFFF00001M
QCCC000014	QCCC700040	QDDD003296	QEEE000520	QFFF00001N
QCCC000018	QCCC700063	QDDD003309	QEEE000522	QFFF00001R
QCCC000020	QCCC700072	QDDD003310	QEEE000528	QFFF00001S
QCCC000022	QCCC700076	QDDD003316	QEEE000531	QFFF00001V
QCCC000028	QCCC700143	QDDD003317	QEEE000540	QFFF00001W

QFFF00001Y	QFFF00006K	QFFF0000JX	QGGG000035	QGGG000121
QFFF000020	QFFF00006L	QFFF0000KK	QGGG000036	QGGG000126
QFFF000022	QFFF00006N	QFFF0000KT	QGGG000037	QGGG000127
QFFF000023	QFFF00006S	QFFF0000KX	QGGG000038	QGGG000128
QFFF000024	QFFF000070	QFFF0000MK	QGGG000039	QGGG000131
QFFF000027	QFFF000072	QFFF0000ML	QGGG000040	QGGG000132
QFFF00002A	QFFF000076	QFFF0000MS	QGGG000042	QGGG000133
QFFF00002B	QFFF000077	QFFF0000MW	QGGG000043	QGGG000134
QFFF00002D	QFFF000079	QFFF0000N9	QGGG000044	QGGG000135
QFFF00002G	QFFF00007F	QFFF0000NB	QGGG000045	QGGG000140
QFFF00002J	QFFF00007K	QFFF0000NH	QGGG000046	QGGG000141
QFFF00002K	QFFF00007Q	QFFF0000NJ	QGGG000048	QGGG000142
QFFF00002M	QFFF00007W	QFFF0000NM	QGGG000049	QGGG000144
QFFF00002N	QFFF00007Z	QFFF0000NN	QGGG000050	QGGG000145
QFFF00002T	QFFF000082	QFFF0000NW	QGGG000051	QGGG000146
QFFF00002Y	QFFF000085	QFFF0000NY	QGGG000052	QGGG000148
QFFF00002Z	QFFF00008D	QFFF700010	QGGG000053	QGGG000149
QFFF000030	QFFF00008H	QFFF700011	QGGG000054	QGGG000150
QFFF000032	QFFF00008Q	QFFF700017	QGGG000055	QGGG000153
QFFF000036	QFFF00008R	QFFF700030	QGGG000056	QGGG000157
QFFF000038	QFFF00008Z	QFFF700031	QGGG000057	QGGG000165
QFFF00003A	QFFF000097	QFFF700044	QGGG000058	QGGG000169
QFFF00003B	QFFF000099	QFFF700051	QGGG000059	QGGG000171
QFFF00003C	QFFF00009A	QFFF700063	QGGG000060	QGGG000173
QFFF00003D	QFFF00009K	QFFF700071	QGGG000063	QGGG000175
QFFF00003K	QFFF00009L	QFFF700073	QGGG000064	QGGG000179
QFFF00003L	QFFF0000A0	QFFF700078	QGGG000065	QGGG000180
QFFF00003N	QFFF0000A4	QGGG000000	QGGG000067	QGGG000181
QFFF00003P	QFFF0000AC	QGGG000001	QGGG000068	QGGG000184
QFFF00003Y	QFFF0000AL	QGGG000002	QGGG000070	QGGG000185
QFFF000042	QFFF0000AZ	QGGG000003	QGGG000071	QGGG000189
QFFF000046	QFFF0000B2	QGGG000004	QGGG000072	QGGG000191
QFFF00004A	QFFF0000B6	QGGG000006	QGGG000078	QGGG000192
QFFF00004B	QFFF0000BJ	QGGG000008	QGGG000079	QGGG000193
QFFF00004C	QFFF0000BM	QGGG000009	QGGG000081	QGGG000197
QFFF00004D	QFFF0000BQ	QGGG000010	QGGG000083	QGGG000199
QFFF00004E	QFFF0000BU	QGGG000012	QGGG000084	QGGG000201
QFFF00004R	QFFF0000BY	QGGG000013	QGGG000086	QGGG000204
QFFF00004T	QFFF0000C7	QGGG000014	QGGG000087	QGGG000211
QFFF00004V	QFFF0000CD	QGGG000015	QGGG000088	QGGG000212
QFFF00004W	QFFF0000CH	QGGG000016	QGGG000089	QGGG000221
QFFF00004X	QFFF0000CL	QGGG000017	QGGG000090	QGGG000232
QFFF000051	QFFF0000D4	QGGG000018	QGGG000091	QGGG000243
QFFF000052	QFFF0000DD	QGGG000019	QGGG000094	QGGG000249
QFFF000053	QFFF0000DU	QGGG000020	QGGG000095	QGGG000254
QFFF000056	QFFF0000DZ	QGGG000021	QGGG000096	QGGG000255
QFFF000059	QFFF0000EJ	QGGG000022	QGGG000098	QGGG000257
QFFF00005A	QFFF0000ET	QGGG000023	QGGG000099	QGGG000260
QFFF00005D	QFFF0000EZ	QGGG000024	QGGG0000NZ	QGGG000265
QFFF00005E	QFFF0000FF	QGGG000026	QGGG000102	QGGG000268
QFFF00005M	QFFF0000FH	QGGG000027	QGGG000104	QGGG000269
QFFF00005N	QFFF0000FL	QGGG000028	QGGG000108	QGGG000279
QFFF000062	QFFF0000G8	QGGG000029	QGGG000109	QGGG000289
QFFF00006C	QFFF0000J5	QGGG000031	QGGG000114	QGGG000291
QFFF00006D	QFFF0000JD	QGGG000032	QGGG000115	QGGG000294
QFFF00006J	QFFF0000JQ	QGGG000033	QGGG000117	QGGG000297

QGGG000301	QGGG000342	QGGG000392	QGGG700005	QGGG700064
QGGG000308	QGGG000348	QGGG000393	QGGG700006	QGGG700078
QGGG000309	QGGG000349	QGGG000394	QGGG700007	QGGG700090
QGGG000311	QGGG000360	QGGG000395	QGGG700009	QGGG700114
QGGG000317	QGGG000363	QGGG000398	QGGG700014	QGGG700117
QGGG000322	QGGG000383	QGGG000399	QGGG700019	QGGG700118
QGGG000328	QGGG000385	QGGG000400	QGGG700021	QNGG000103
QGGG000329	QGGG000386	QGGG000405	QGGG700025	QMKYW00147
QGGG000330	QGGG000387	QGGG000406	QGGG700032	QNGYW00172
QGGG000331	QGGG000388	QGGG000417	QGGG700035	QWAGW00033
QGGG000333	QGGG000390	QGGG000418	QGGG700043	QWAGW00066
QGGG000341	QGGG000391	QGGG000422	QGGG700045	

This page left blank intentionally.