



NETWORK TARIFF GUIDE FOR STANDARD CONTROL SERVICES

1 JULY 2013 TO 30 JUNE 2014

RELEASE 1.0

DATE: 7 JUNE 2013

Ergon Energy Corporation Limited ABN 50 087 646 062



CONTENTS

1	Introduction	3
1.1	Background	3
1.2	Regulatory Framework	3
1.3	Purpose and Structure.....	4
1.4	Supporting Network Pricing Documents.....	4
1.5	Further Information	5
2	General Requirements	6
3	Tariff Classes.....	7
3.1	Assignment and Reassignment of Customers to Tariff Classes	9
3.2	Notification of a Tariff Class Assignment and Reassignment	9
3.3	Review of a Customer's Assigned Tariff Class.....	9
3.4	Objections to a Tariff Class Assignment or Reassignment.....	11
3.5	Network Tariff Reviews	12
4	Zones	13
4.1	Number of Zones	13
4.2	Zone Coverage.....	13
4.3	Zone Map	15
5	Distribution Loss Factors	16
5.1	Overview	16
5.2	DLF Categories and Applications.....	16
5.3	DLFs to Apply in 2013–14	17
5.4	Further Information	18
6	Transmission Node Identifiers	19
7	Network User Groups	20
7.1	Individually Calculated Customers	22
7.2	Connection Asset Customers	23
7.3	Embedded Generators	24
7.4	Standard Asset Customers >100 MWh Per Annum	25
7.5	Standard Asset Customers <100 MWh Per Annum	28
7.6	Standard Asset Customers – Unmetered Supplies	31
7.7	Queensland Government Solar Bonus Scheme for Standard Asset Customers <100 MWh Per Annum	34
Appendix 1:	TUOS Regional Indicators.....	35
Appendix 2:	2013–14 Network Tariff Codes and Rates	37
GLOSSARY		45

1 Introduction

1.1 Background

Ergon Energy Corporation Limited (Ergon Energy) is a Distribution Network Service Provider (DNSP) that provides distribution services to over 700,000 customers in regional Queensland. Our service area covers around 97 per cent of Queensland and has approximately 150,000 kilometres of power lines and one million power poles. Around 70 per cent of the network's power lines are considered rural, with a very low customer density and largely radial profile.

1.2 Regulatory Framework

As a DNSP, Ergon Energy is subject to economic regulation by the Australian Energy Regulator (AER) under the National Electricity Law (the Law) and the National Electricity Rules (the Rules). Under the Law and Rules, the AER is responsible for regulating the revenues Ergon Energy can earn, and the prices that Ergon Energy can charge for certain services provided by means of, or in connection with, our distribution system.

In order to regulate the prices that Ergon Energy can charge for our services, the AER has classified our regulated distribution services into Standard Control Services and Alternative Control Services.

Standard Control Services are core network, connection and metering services associated with the access and supply of electricity to customers (e.g. conveying electricity, network maintenance, installation of standard meters and load control equipment etc.). Ergon Energy recovers our costs in providing Standard Control Services through network tariffs which are billed to retailers.

Alternative Control Services are comprised of:

- *Fee Based Services* – regulated distribution activities which Ergon Energy undertakes at the request of an identifiable customer, retailer or appropriate third party which are in addition to our main network, connection and metering services and are levied as a separate charge. Fee Based Services have a 'fixed fee' as the costs of providing the service (and therefore price) can be assessed in advance of the service being requested by a customer or retailer (e.g. de-energisations, re-energisations, and supply abolishment etc.);
- *Quoted Services* – similar to Fee Based Services, but they are 'priced on application' as the nature and scope of these services are variable and the costs (and therefore price) are specific to the individual retailer's or customer's needs (e.g. Large Customer Connections, and emergency recoverable works etc.); and
- *ACS – Street Lighting Services* – relate to the installation, operation and maintenance of street lighting assets owned by Ergon Energy. Ergon Energy recovers our costs in providing ACS – Street Lighting Services through a daily street lighting charge which we bill to retailers.

This classification of services occurs through the AER's Distribution Determination, which occurs every five years. The classification of services is based on a number of factors and requirements set out in the Rules, including the potential for the development of competition for those services, and the extent to which costs are able to be directly attributable to the

customer using the service. This classification is critical because it determines the regulatory status and form of price control which applies to specific distribution services, and how associated charges are able to be levied on customers and retailers by Ergon Energy.

1.3 Purpose and Structure

This Tariff Guide sets out the Network Tariff Codes and standard rates that apply in 2013–14 for Standard Control Services, as well as the application rules. It is structured as follows:

- Section 2 sets out general requirements that apply to the selection and amendment of network tariffs;
- Section 3 outlines the tariff classes and Network Tariff Codes, as well as the procedures for assigning and reassigning customers to tariff classes and network tariffs;
- Section 4 describes and depicts the three pricing zones used by Ergon Energy when setting network tariffs;
- Section 5 details the standard 2013–14 Distribution Loss Factors (DLFs);
- Section 6 provides information on the Transmission Node Identifier (TNI); and
- Section 7 describes the four network user groups, and the Distribution Use of System (DUOS) and Transmission Use of System (TUOS) tariffs applying to each group. This section also includes information on the Queensland Government Solar Bonus Scheme.

Appendix 2 sets out the standard rates that apply in 2013–14. Information on Network Tariff Codes and rates applying to site-specific tariffs are available on request by contacting Network Pricing (see Section 1.5). Ergon Energy will only release this information in the following circumstances:


- The requestor is the customer, or an authorised person who is able to sign on behalf of the customer (e.g. Company Manager);
- The requestor is the current Financially Responsible Market Participant and the request relates to a period of time for which they are responsible for the site; or
- The customer's written consent has been provided using the "Authority to Release Information to Third Parties Form" available on Ergon Energy's website (see Section 1.4).

1.4 Supporting Network Pricing Documents

In addition to this Tariff Guide, Ergon Energy has a number of network pricing documents to assist customers, retailers and interested parties understand how network tariffs and connection charges are developed and applied. These documents are outlined in Figure 1.1 below and available on Ergon Energy's website at:

www.ergon.com.au/networktariffs.

Figure 1.1: Supporting Network Pricing Documentation

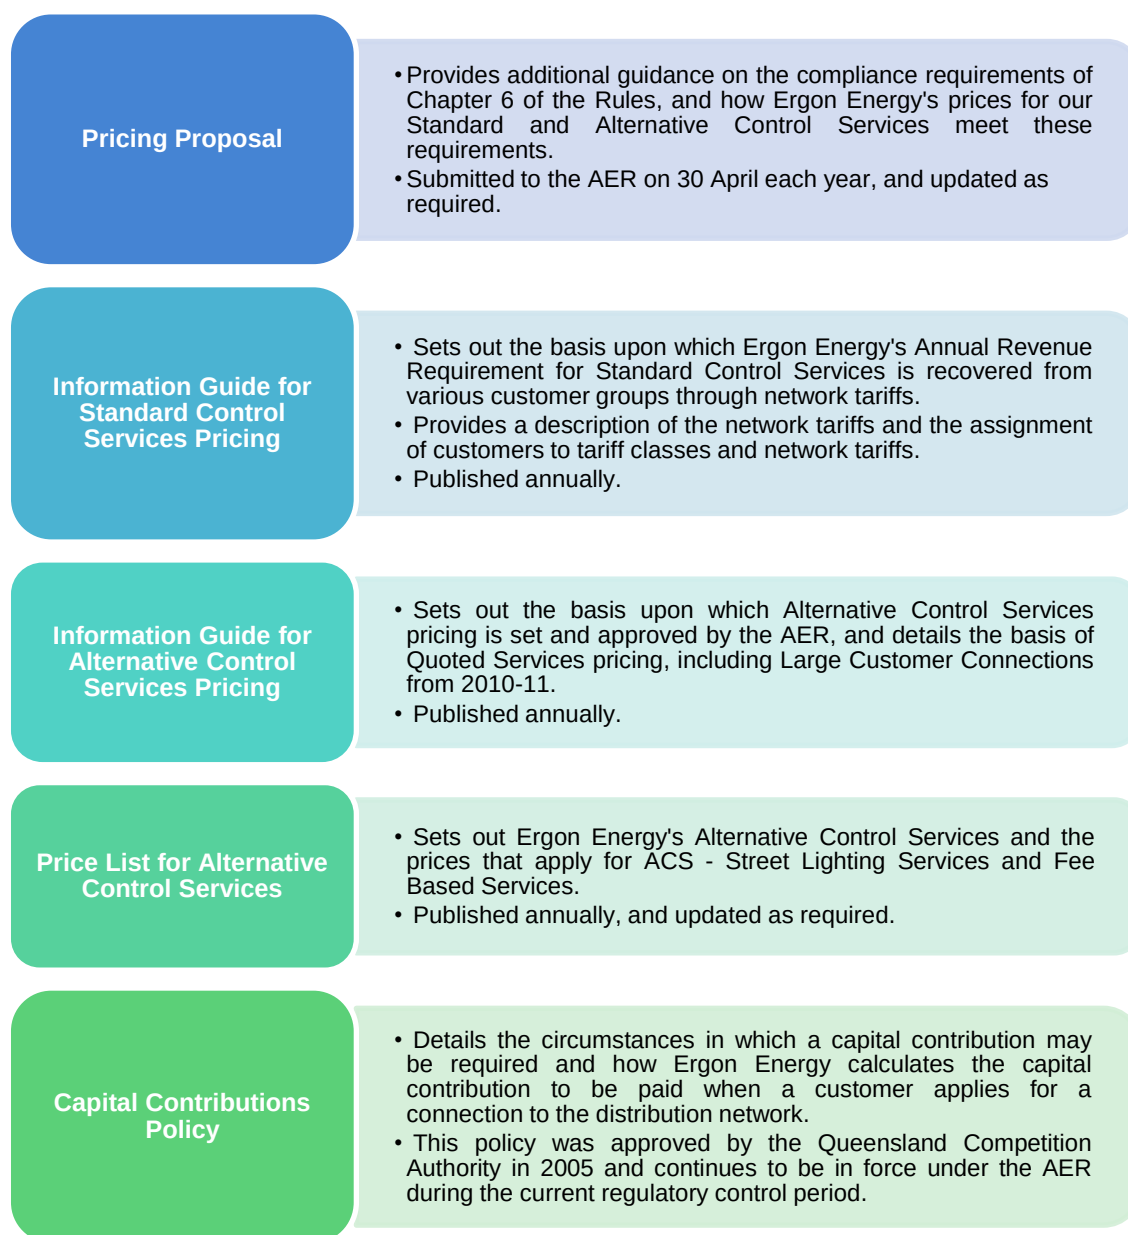

1.5 Further Information

Network users and retailers who are uncertain about the network pricing process or their particular circumstances are encouraged to contact us for assistance:

Manager Regulatory Determination and Pricing
 PO Box 264
 FORTITUDE VALLEY QLD 4006
 Phone: 13 10 46
 E-mail: netprice@ergon.com.au.

2 General Requirements

The following general requirements apply to the selection and amendment of network tariffs:

- It is intended that a Network Tariff Code will apply to each meter data stream;
- Network users with multiple network connections will pay network charges for each connection point. This approach is consistent with the National Metering Identifier (NMI) Procedure issued by the Australian Energy Market Operator (AEMO);
- If requested, Ergon Energy will provide the customer or the customer's retailer with reasonable assistance in identifying the network tariffs which may be applicable to the customer's installation;
- Demand and/or volume are to be measured at each individual network connection point;
- Where applicable, demand based charges will be calculated on a pro rata daily basis for initial and final accounts;
- Where Ergon Energy's load control equipment exists (including associated metering), this may not be disconnected without Ergon Energy's prior written consent; and
- Network charges will be billed by Ergon Energy on a monthly basis.

3 Tariff Classes

Ergon Energy's tariffs are currently differentiated at the highest level by:

- Network user groups:
 - Individually Calculated Customers (ICCs);
 - Connection Asset Customers (CACs);
 - Standard Asset Customers (SACs); and
 - Embedded Generators (EGs);
- Zones – being East, West and Mount Isa; and
- Whether the customer has connected under the previous regulatory arrangements where connection assets form part of the network tariff or the new Large Customer Connection arrangements where new or augmented connection assets are paid for or contributed by the customer.

A list of Ergon Energy's tariff classes and corresponding Network Tariff Codes for our Standard Control Services are set out in Table 3.1 below.

Table 3.1: Tariff Classes and Network Tariff Codes

Tariff Class	Tariff	Network Tariff Codes
Individually Calculated Customer (Pre 30 June 2010) – East	ICC	EICCA1 onwards
Individually Calculated Customer (Pre 30 June 2010) – West	ICC	WICCA1 onwards
Individually Calculated Customer (Pre 30 June 2010) – Mount Isa	ICC	MICCA1 onwards
Individually Calculated Customer (Post 30 June 2010) – East	ICC	EICCB1 onwards
Individually Calculated Customer (Post 30 June 2010) – West	ICC	WICCB1 onwards
Individually Calculated Customer (Post 30 June 2010) – Mount Isa	ICC	MICCB1 onwards
Connection Asset Customers (Pre 30 June 2010) – East	CAC	ECACA1 onwards
Connection Asset Customers (Pre 30 June 2010) – West	CAC	WCACA1 onwards
Connection Asset Customers (Pre 30 June 2010) – Mount Isa	CAC	MCACA1 onwards
Connection Asset Customers (Post 30 June 2010) – East	CAC	ECACB1 onwards
Connection Asset Customers (Post 30 June 2010) – West	CAC	WCACB1 onwards
Connection Asset Customers (Post 30 June 2010) – Mount Isa	CAC	MCACB1 onwards
Embedded Generation (Pre 30 June 2010) – East	EG	EEGA1 onwards
Embedded Generation (Pre 30 June 2010) – West	EG	WEGA01 onwards

Tariff Class	Tariff	Network Tariff Codes
Embedded Generation (Pre 30 June 2010) – Mount Isa	EG	MEGA01 onwards
Embedded Generation (Post 30 June 2010) – East	EG	EEGB1 onwards
Embedded Generation (Post 30 June 2010) – West	EG	WEGB01 onwards
Embedded Generation (Post 30 June 2010) – Mount Isa	EG	MEGB01 onwards
Standard Asset Customer – Large (>100 MWh p.a.) – East	Demand High Voltage	EDHT1, EDHT2, EDHT3
	Demand Large	EDLT1, EDLT2, EDLT3
	Demand Medium	EDMT1, EDMT2, EDMT3
	Demand Small	EDST1, EDST2, EDST3
Standard Asset Customer – Large (>100 MWh p.a.) – West	Demand High Voltage	WDHT1, WDHT2, WDHT3
	Demand Large	WDLT1, WDLT2, WDLT3
	Demand Medium	WDMT1, WDMT2, WDMT3
	Demand Small	WDST1, WDST2, WDST3
Standard Asset Customer – Large (>100 MWh p.a.) – Mount Isa	Demand High Voltage	MIDH
	Demand Large	MIDL
	Demand Medium	MIDM
	Demand Small	MIDS
Standard Asset Customer – Small (<100 MWh p.a.) – East	Volume Large	EVL1, EVLT2, EVLT3
	Volume Small	EVST1, EVST2, EVST3
	Volume Controlled	EVCT1, EVCT2, EVCT3
	Volume Night Controlled	EVNT1, EVNT2, EVNT3
Standard Asset Customer – Small (<100 MWh p.a.) – West	Volume Large	WVLT1, WVLT2, WVLT3
	Volume Small	WVST1, WVST2, WVST3
	Volume Controlled	WVCT1, WVCT2, WVCT3
	Volume Night Controlled	WVNT1, WVNT2, WVNT3
Standard Asset Customer – Small (<100 MWh p.a.) – Mount Isa	Volume Large	MIVL
	Volume Small	MIVS
	Volume Controlled	MIVC
	Volume Night Controlled	MIVN
Standard Asset Customer – Unmetered – East	Volume Unmetered	EVUT1, EVUT2, EVUT3 EVUT1MI, EVUT2MI, EVUT3MI EVUT1MA, EVUT2MA, EVUT3MA
Standard Asset Customer – Unmetered – West	Volume Unmetered	WVUT1, WVUT2, WVUT3 WVUT1MI, WVUT2MI, WVUT3MI WVUT1MA, WVUT2MA, WVUT3MA
Standard Asset Customer – Unmetered – Mount Isa	Volume Unmetered	MIVU, MIVUMI, MIVUMA

3.1 Assignment and Reassignment of Customers to Tariff Classes

The AER requires Ergon Energy to comply with the procedures for assigning or reassigning customers to tariff classes¹ as per the requirements set out in its Final Distribution Determination.

Assignment or reassignment of customers to Ergon Energy's tariff classes can occur as a result of:

- Customers requesting a new connection to the network;
- Existing customers applying for increased capacity on the network;
- A change in a customer's NMI classification;
- Annual review as part of Ergon Energy's process of developing and submitting a Pricing Proposal for approval by the AER; or
- Requests for a review of the assigned tariff class by either a customer and/or retailer.

3.2 Notification of a Tariff Class Assignment and Reassignment

From 1 July 2010, the AER requires Ergon Energy to notify the customer concerned of the tariff class we will assign the customer to, prior to a new assignment or reassignment occurring.² This information will be made available to the customer and retailer via a written notification.

The effective date for a Standard Control Services tariff class assignment or reassignment will be the date as advised by Ergon Energy.

It is important to note that a tariff class reassignment may necessitate a change to a customer's network tariff assigned to a NMI. Details of Ergon Energy's proposed new network tariffs will be included in the written notification mentioned above. Subject to any appeal, the new tariff class and new Network Tariff Code will take effect from the date advised by Ergon Energy in the written notification.

A customer or retailer may request further information relating to a particular tariff class assignment or reassignment decision by contacting Network Pricing (see Section 1.5).

3.3 Review of a Customer's Assigned Tariff Class

Ergon Energy does not reassign customers to tariff classes without careful review and adequate justification. Reassignment of a customer's tariff class generally only occurs in a situation where a customer alters the underlying characteristics of their connection, in terms of size or nature of usage.

In addition to Ergon Energy's own review of tariff classes applying to customers, a customer and/or retailer may request a review of a customer's assigned tariff class at any time during a regulatory year. This request may occur directly through an explicit request to review a tariff

¹ A tariff class is defined under the Rules and relates to a group or class of customers who are subject to a particular tariff or tariffs.

² Customers connected to our network prior to 1 July 2010 are deemed to be 'assigned' to the tariff class which we were charging the customer immediately prior to 1 July 2010.

class assigned to a customer, or indirectly through a request to change a network tariff assigned to a NMI.

Ergon Energy relies on a range of information (e.g. historical consumption data) and has specific criteria for assessing the reassignment of customers to tariff classes. The criteria, by network user group, are set out in Table 3.2 below. Once a customer is identified for reassignment, the connection characteristics and the customer's expected energy consumption are used to determine the appropriate customer group, and hence tariff class, to which the customer should be reassigned.

Table 3.2: Tariff Class Reassignment Criteria for Standard Control Services

Network User Group	Typical Characteristics of Customers Assigned	Criteria for Reassigning Customers to a Different Tariff Class
SACs	Annual consumption is expected to be below 4 GWh p.a.	- Annual consumption increases, or is expected to increase, above 4 GWh p.a.; and/or - A customer requests an increase in supply capacity requiring augmentation to connection assets which results in a dedicated supply system which is quite different and separate from the remainder of the supply network.
CACs	- Required capacity above 1,500 kVA; or - Annual consumption is expected to exceed 4 GWh p.a.	Reassigned to ICCs: - Annual consumption increases, or is expected to increase, above 40 GWh p.a.; and/or - A customer requests an increase in supply capacity requiring augmentation to their connection assets which results in a dedicated supply system which is quite different and separate from the remainder of the supply network. Reassigned to SACs: - Annual consumption reduces or is expected to reduce below 4 GWh p.a. and their dedicated supply system is not considered to be quite different and separate from the remainder of the supply network; and/or - Required capacity falls below 1,500 kVA.³
ICCs	- Annual consumption is expected to exceed 40 GWh p.a.; or - Their dedicated supply system is considered to be quite different and separate from the remainder of the supply network.	Annual consumption reduces or is expected to reduce below 40 GWh p.a. and their dedicated supply system is considered comparable with CACs at the same voltage level.

³ With the exception of those customers who have a dedicated supply system which is quite different and separate from the remainder of the supply network or where inequitable treatment of otherwise comparable customers will arise from the application of the 4 GWh threshold.

The following general requirements apply to the review and amendment of a customer's tariff class assignment for Standard Control Services:

- Any change in an assigned tariff class will only proceed upon approval by Ergon Energy. Ergon Energy will make our determination having regard to this Tariff Guide, our Tariff Class Reassignment Criteria (as set out above), the AER's Final Distribution Determination and any applicable law;
- Requests should be made by the customer, and are preferably made to Ergon Energy through the customer's retailer. Requests for review of a tariff class should be emailed to Network Pricing;
- Subject to a change in the customer's usage or pattern of usage at the customer's premises, a further request to review and change a tariff class should not be made until a period of 12 months has elapsed from the previous request; and
- Any change in the tariff class, and associated network tariff(s) will take effect from the date as approved by Ergon Energy (the effective date). Network charges under an existing network tariff within an existing tariff class will continue to be billed by Ergon Energy until the effective date. Backdating of charges prior to the effective date will not be allowed by Ergon Energy.

3.4 Objections to a Tariff Class Assignment or Reassignment

If a customer or a retailer raises an objection to a tariff class assignment or reassignment, Ergon Energy will make every effort to investigate and address the customer's or retailer's concerns when the customer or retailer firsts contacts Ergon Energy.

In the first instance, the customer or retailer should contact Network Pricing via e-mail requesting a review of Ergon Energy's proposed tariff class assignment or reassignment. The request should outline:

- The customer's name, NMI and contact details (or retailer's contact details if acting on behalf of the customer);
- What the customer or the retailer is objecting to (noting Ergon Energy's decision is made having regard to this Tariff Guide, our Tariff Class Reassignment Criteria, the AER's Final Distribution Determination and any applicable law); and
- What outcome the customer or retailer is seeking.

Ergon Energy will endeavour to inform the customer or the retailer of the outcome of our review, including a reason for our decision within five business days of receiving such a request.

If the customer or the retailer is not satisfied with the outcome of this review, the objection can be escalated to the Manager Regulatory Determination and Pricing. The customer or the retailer can request an objection to be escalated by contacting Network Pricing via e-mail. The Manager Regulatory Determination and Pricing will advise the customer or the retailer of the outcome of an escalated objection as soon as practical.

If Ergon Energy is unable to resolve the objection to the customer's satisfaction, the customer can refer the matter to the AER for resolution via the dispute resolution process available under Part 10 of the Law.

3.5 Network Tariff Reviews

The customer or the retailer may apply to Ergon Energy for a change to the network tariff assigned to a NMI by sending a request to Network Pricing via e-mail.

Ergon Energy will inform the customer and/or retailer within five business days of receiving such a request, of the decision taken.

If Ergon Energy:

- Agrees that the network tariff proposed by the customer or retailer is applicable to the NMI, Ergon Energy will advise the retailer of the effective date of application; or
- Disagrees that the network tariff proposed by the customer or retailer is applicable to the NMI, Ergon Energy will notify the customer and/or retailer, including a reason for the rejection.

Subject to a change in usage or the pattern of usage at the customer's installation, a further request to change the Network Tariff Code assigned to a NMI should not be made until a period of 12 months has elapsed from the previous request for the NMI.

If a customer objects to a network tariff change, the customer may appeal this decision. Requests to review a decision should be made by the customer, and are preferably made to Ergon Energy through the customer's retailer.

Ergon Energy will review an appeal and the customer's eligibility for a network tariff with regard to this Tariff Guide, our Tariff Class Reassignment Criteria, the AER's Final Distribution Determination and any applicable law. Ergon Energy will advise the customer and/or the retailer of the outcome of an appeals review as soon as practical.

Any change in a network tariff assigned to a NMI will take effect from the date as approved by Ergon Energy (the effective date). Network charges under the existing network tariff will continue to be billed by Ergon Energy until the effective date. Backdating of charges prior to the effective date will not be allowed by Ergon Energy.

If Ergon Energy agrees with a proposed network tariff and determines that a tariff class reassignment is also required, written notification of the new tariff class and new Network Tariff Code will also be provided to the customer and to the retailer prior to the tariff class reassignment occurring in accordance with Section 3.3.

4 Zones

4.1 Number of Zones

Three pricing zones have been delineated in the Ergon Energy area of supply, broadly based on Queensland's Local Government Areas (LGAs), with the distribution network electrical connection being the final determinant of which zone applies. Zone pricing impacts DUOS prices only; TUOS prices are not impacted by zones.

The three pricing zones are:


- **East Zone** – those areas where the network users are supplied from the distribution system connected to the national grid and have a relatively low distribution cost to supply;
- **West Zone** – those areas outside the East Zone and connected to the national grid, which have a significantly higher distribution cost of supply than the East Zone; and
- **Mount Isa Zone** – broadly defined as those areas supplied from the isolated Mount Isa system. This zone is not connected to the national grid and as such would normally be excluded from the application of the Rules. However, under the *Electricity – National Scheme (Queensland) Act 1997* the Queensland Government has transferred responsibility for the economic regulation of the Mount Isa–Cloncurry supply network to the AER.

Note – areas supplied from isolated (remote) generation are not included in any of the above zones.

4.2 Zone Coverage

The LGAs covered by each zone are shown in Figure 4.1 below.


Figure 4.1: Zone coverage

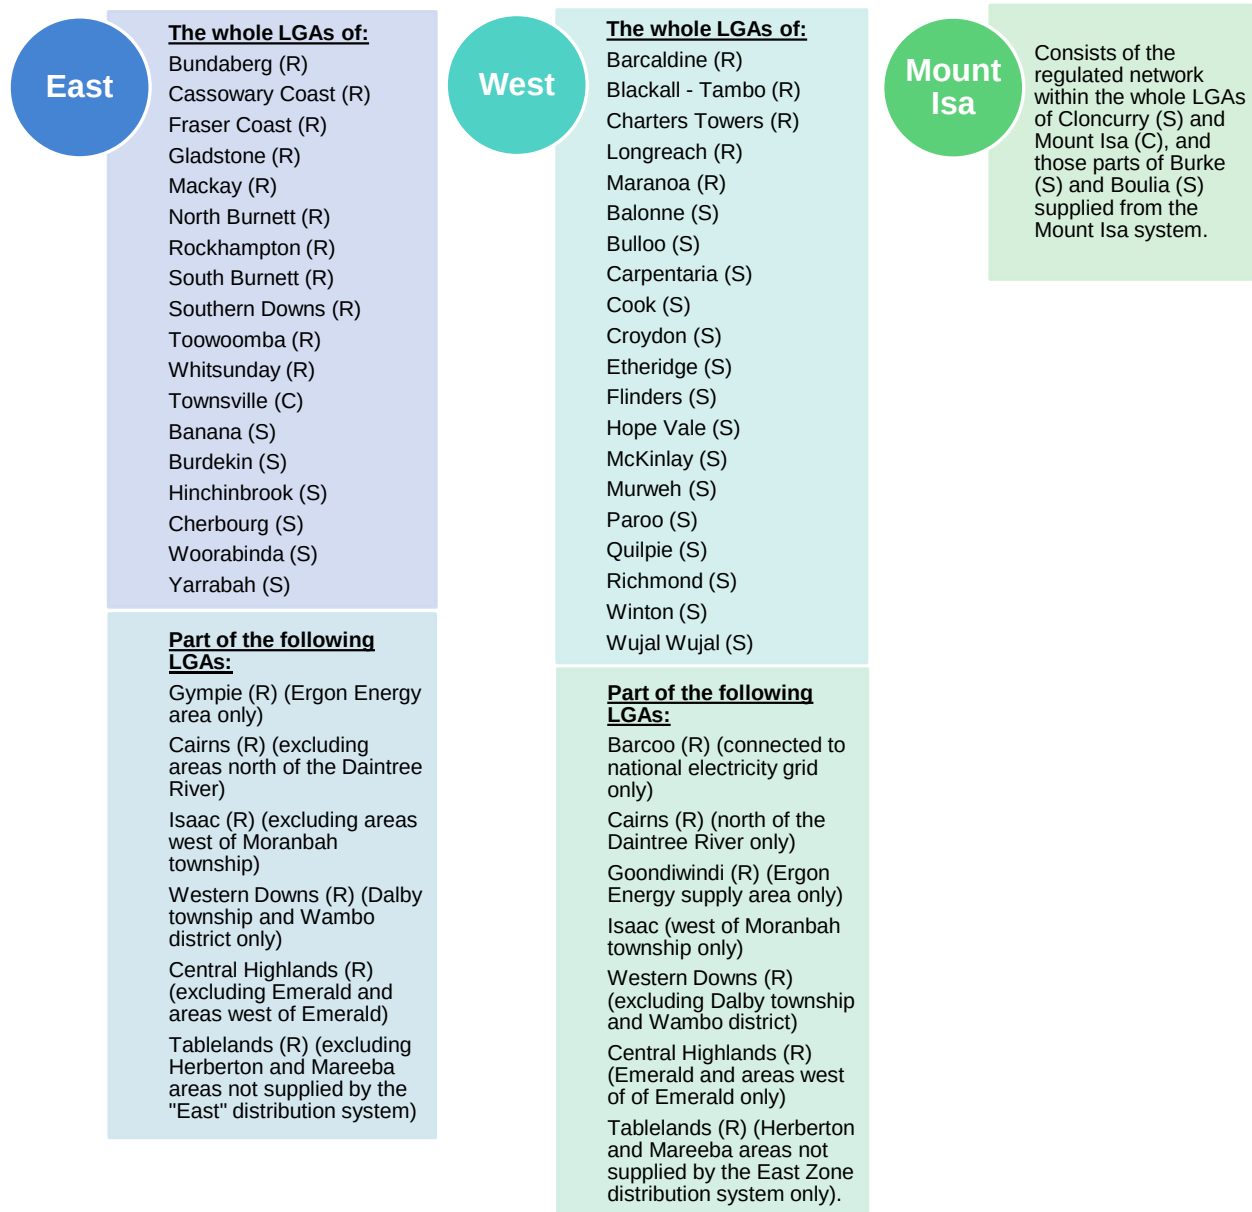

Note: (R) = Regional Council; (S) = Shire Council and (C) = City Council.

4.3 Zone Map

The following map depicts the East Zone (red), the Mount Isa Zone (yellow) and the West Zone (the remaining area of the state supplied from the interconnected grid).

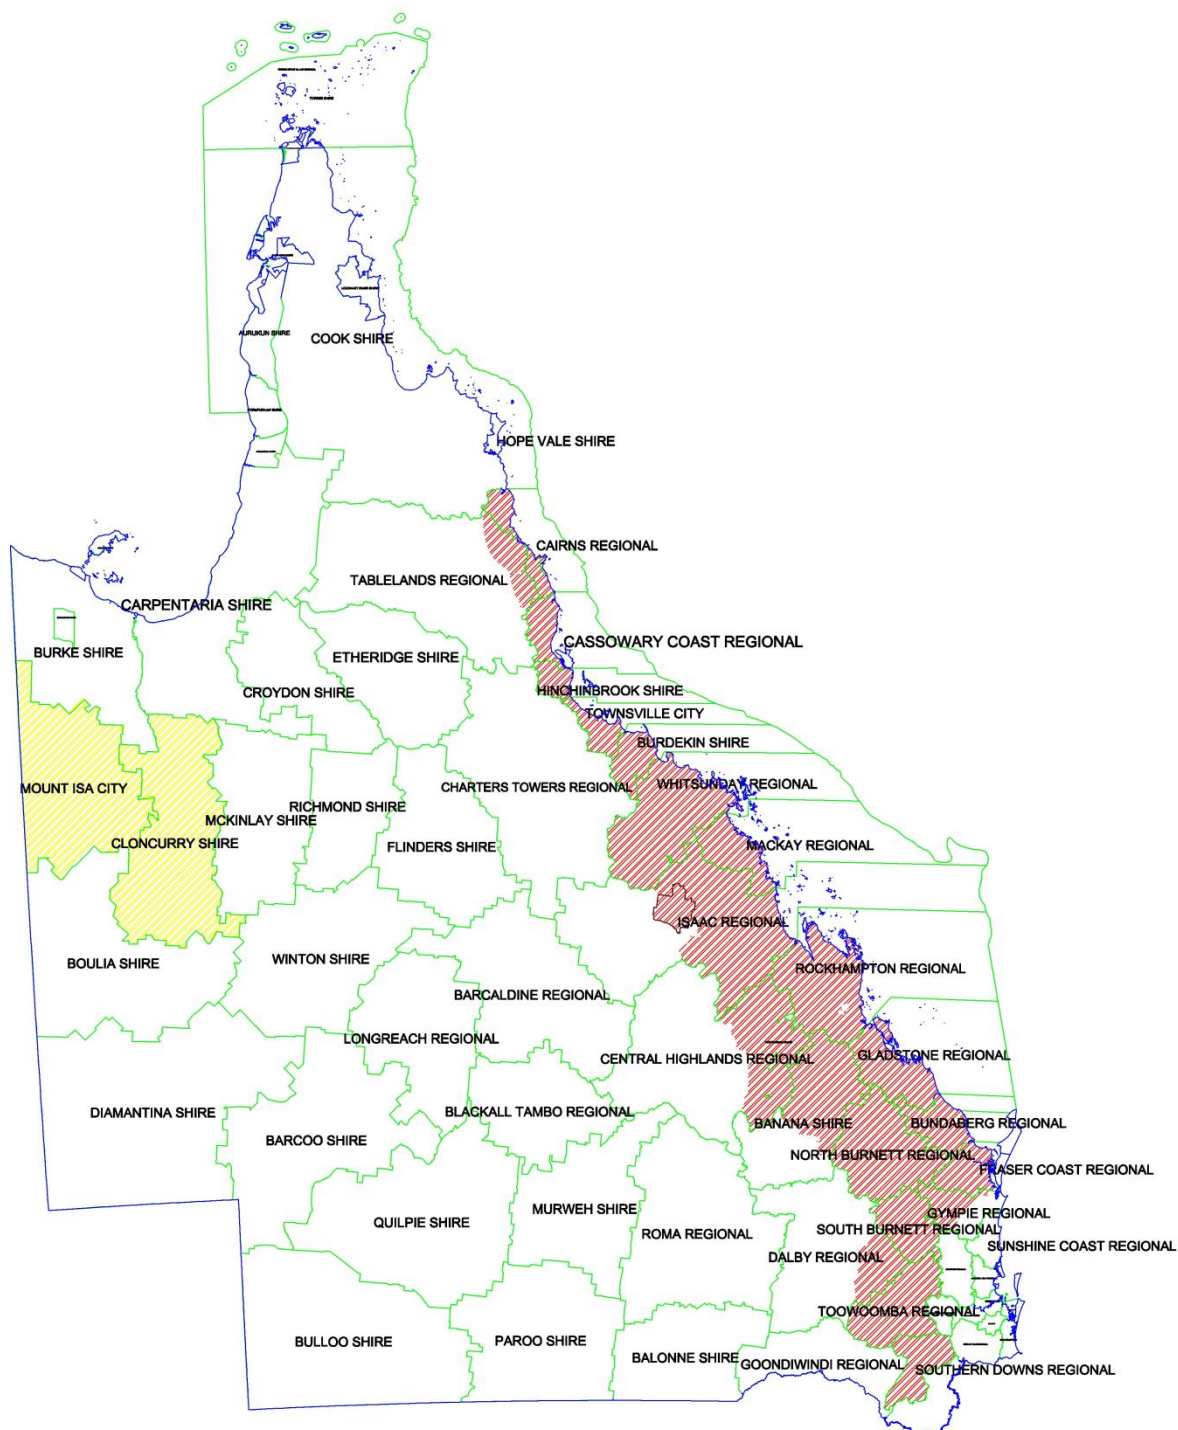

5 Distribution Loss Factors

5.1 Overview

DLFs are calculated annually by Ergon Energy in accordance with requirements of the Rules in order to determine the amount of energy dispatched to supply customers. They are approved by the AER and published by AEMO on their website.

Every NMI has a DLF code which is associated with the location of the metering point.

The DLF is a multiplier used to convert the actual metered energy into the equivalent energy passing through the appropriate Transmission Network Connection Point by allowing for the distribution network losses that are incurred between the meter and the Transmission Network Connection Point.

The DLF is applied to the metered consumption for the calculation of TUOS volume charges. DLFs are generally assigned on the basis of the standard metering voltage for the type of connection. However, a specific loss factor may be applied where there is a unique network supply configuration.

5.2 DLF Categories and Applications

Table 5.1 outlines the DLF categories used by Ergon Energy and their applications.

Table 5.1: DLF Categories and Applications

Category	Description	Application
Sub-transmission Bus	Applicable to connection points that are High Voltage metered at a Sub-transmission Bus with a voltage greater than 30kV.	NMIs supplied from a zone substation by dedicated, greater than 30kV lines and are metered at or immediately adjacent to the zone substation would be eligible for a Sub-transmission Bus DLF. Zone substations are defined as substations where the voltage level is stepped down from a voltage greater than 30kV.
Sub-transmission Line	Applicable to connection points that are High Voltage metered at a Sub-transmission Line with a voltage greater than 30kV.	The Sub-transmission Line DLF will apply to all NMIs which are connected to high voltage sub-transmission lines (greater than 30kV) and are metered at the same voltage as the line is energised. If customers believe that the NMI would qualify for a high voltage Bus DLF rather than a high voltage Line DLF they should submit details justifying their claim to Ergon Energy. As an example, NMIs supplied from a zone substation by dedicated 22/11kV lines and are metered at or immediately adjacent to the zone substation would be eligible for a 22/11kV Bus DLF.
22/11kV Bus	Applicable to connection points that are High Voltage metered at a 22/11kV Bus with a voltage less than 30kV and greater than 1,000 volts.	As per "Sub-transmission Bus" application above.

Category	Description	Application
22/11kV Line	Applicable to connection points that are High Voltage metered at a 22/11kV Line with a voltage less than 30kV and greater than 1,000 volts.	The 22/11kV Line DLF will apply to all NMIs which are connected to high voltage distribution lines and are metered at the same voltage as the line is energised.
Low Voltage (LV) Bus	Applicable to connection points that are Low Voltage metered at a Low Voltage Bus with a voltage less than 1,000 volts.	NMIs which are supplied from a distribution substation on their site (owned or leased) and are metered at the low voltage level are eligible for a LV Bus DLF.
Low Voltage (LV) Line	Applicable to connection points that are Low Voltage metered at a Low Voltage Line with a voltage less than 1,000 volts.	All NMIs not covered by any of the above categories. If customers believe that the NMI would qualify for a LV Bus DLF rather than a LV Line DLF they should submit details justifying their claim to Ergon Energy.

5.3 DLFs to Apply in 2013–14

The standard DLFs that apply in 2013–14 are detailed in Table 5.2 below.

Table 5.2: Ergon Energy's 2013–14 Standard Distribution Loss Factors

Network Level	East Zone*		West Zone		Mount Isa Zone	
	Code	DLF	Code	DLF	Code	DLF
Sub-transmission Bus	GESB	1.007	GWSB	1.060	GMSB	1.002
Sub-transmission Line	GESL	1.012	GWSL	1.091	GMSL	1.005
22/11 kV Bus	GEHB	1.014	GWHB	1.098	GMHB	1.008
22/11 kV Line	GEHL	1.033	GWHL	1.132	GMHL	1.036
LV Bus	GELB	1.073	GWLB	1.173	GMLB	1.057
LV Line	GELL	1.078	GWLL	1.184	GMLL	1.087

* The zonal boundaries are identical to those used for network tariffs.

Some larger ICCs, CACs and EGs have site-specific DLFs for 2013–14. This means the DLFs shown in Table 5.2 do not apply to these customers.

The site-specific DLFs, as well as the standard DLFs, are published on AEMO's website:

<http://www.aemo.com.au/electricityops/lossfactors.html>.

DLFs for all NMIs will be included in the Schedule of Network Tariffs issued to the customer and/or their retailer. For SACs, the customer or retailer must nominate the DLF appropriate to the connection. The customer or retailer may be required to justify any nominated DLF.

Where the voltage at the metering point is not listed, or there is doubt about the application of these rules, please contact Ergon Energy.

5.4 Further Information

Further information on Ergon Energy's methodology for calculating DLFs is available on Ergon Energy's website:

www.ergon.com.au/about-us/the-electricity-industry/electricity-distribution-pricing-methodologies/distribution-loss-factor-calculation-methodology.

Detailed information about the purpose and application of DLFs may also be obtained from the AEMO website mentioned in Section 5.3 above.



6 Transmission Node Identifiers

The TNI identifies the Transmission Network Connection Point from which a customer is supplied. The NMI Discovery process (Stage 2) will provide retailers with the TNI applicable to a NMI.

7 Network User Groups

As noted above, Ergon Energy has four network user groups (with multiple tariff classes within these groups). These are:

- ICCs;
- CACs;
- SACs; and
- EGs.

A description of the four network user groups is provided in Table 7.1 below. The DUOS and TUOS tariffs applying to each group are set out in the following sections, with the rates (GST exclusive and GST inclusive) available in Appendix 2.

Table 7.1: Ergon Energy's Network User Groups

Network User Group	Description
ICC	Those customers: • With energy consumption typically greater than 40 GWh per annum (p.a.); or • With energy consumption lower than 40 GWh p.a. where: ○ A customer has a dedicated supply system which is quite different and separate from the remainder of the supply network; ○ There are only two or three customers in a supply system making average prices inappropriate; ○ A customer is connected at or close to a Transmission Connection Point; or ○ Inequitable treatment of otherwise comparable customers will arise from the application of the 40 GWh p.a. threshold.
CAC	Those customers: • With required capacity above 1,500kVA; • With energy consumption typically greater than 4 GWh p.a.; or • With required capacity below 1,500kVA where: ○ A customer has a dedicated supply system which is quite different and separate from the remainder of the supply network; or ○ Inequitable treatment of otherwise comparable customers will arise from the application of the 4 GWh p.a. threshold. The CAC group is further subdivided into categories based on voltage levels as follows: • 66kV – connected to either a 66kV substation or a 66kV line; • 33kV – connected to either a 33kV substation or a 33kV line; • 22/11kV Bus – connected to either a 22kV or 11kV substation; and • 22/11kV Line – connected to either a 22kV or 11kV line.
SAC	All other load customers. This includes customers with micro generation facilities (such as small scale photovoltaic (PV) generators) that have a similar service connection and usage profile as other SACs without such facilities. Customers taking supply at LV with a generator installed with a capacity less than or equal to 1MW, will generally be classified as a SAC unless the connection assets are considered to be quite different from that supplying other SACs. The SAC group is further subdivided into network tariff categories based on whether: • The customer's connection is metered or unmetered; • The customer is taking supply at high voltage or low voltage; • The customer's consumption is above or below 100 MWh p.a.; • The customer has a meter installed capable of recording demand; and • The customer's supply is capable of being controlled by Ergon Energy.

Network User Group	Description
EG	Those customers that export energy into the distribution system. EGs do not include customers with micro generation facilities that have been classified as a SAC. EGs are separated into two categories: • EGs that are connected to the distribution system and only generate into the distribution system; or • EGs that are connected to the distribution system, generate and take load from the system.



7.1 Individually Calculated Customers

7.1.1 DUOS Tariffs

DUOS tariffs for ICCs are based on:

- The actual dedicated connection assets utilised by the customer;
- The customer's specifically identified portion of any shared distribution network utilised for the electricity supply;
- Whether the customer is subject to the pre or post 30 June 2010 arrangements for Large Customer Connections; and
- Whether the customer is located in the East, West or Mount Isa Zone of Ergon Energy's network.

DUOS tariffs incorporate a Fixed Charge (\$/day), a Capacity Charge (\$/kW of AD/month), an Actual Demand Charge (\$/kW/month) and a Volume Charge (\$/kWh).

Where the actual demand exceeds the authorised demand in any one month, the actual demand will be substituted for the authorised demand in the calculation of the capacity charge billed for that month.

DUOS tariffs for ICCs are site-specific and are available upon request (see Section 1.3 for conditions).

7.1.2 TUOS Tariffs

TUOS charges are calculated and levied for each Transmission Connection Point and are passed through on a reflective basis proportional to the authorised demand of the customer and their energy consumption.

TUOS tariffs incorporate a Fixed Charge (\$/day), a Capacity Charge (\$/kW of AD/month), a Common Service & General Charge (\$/day) and a Volume Charge (\$/kWh).

Where the actual demand exceeds the authorised demand in any one month, the actual demand will be substituted for the authorised demand in the calculation of the capacity charge billed for that month.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

TUOS tariffs for ICCs are site-specific and are available upon request (see Section 1.3 for conditions).

7.2 Connection Asset Customers

7.2.1 DUOS Tariffs

DUOS tariffs for CACs are based on:

- The actual dedicated connection assets utilised by the customer;
- Average charges for use of the shared network;
- Whether the customer is subject to the pre or post 30 June 2010 arrangements for Large Customer Connections; and
- Whether the customer is located in the East, West or Mount Isa Zone of Ergon Energy's network.

DUOS tariffs incorporate a Fixed Charge (\$/day), a Capacity Charge (\$/kW of AD/month), an Actual Demand Charge (\$/kW/month) and a Volume Charge (\$/kWh).

Where the actual demand exceeds the authorised demand in any one month, the actual demand will be substituted for the authorised demand in the calculation of the capacity charge billed for that month.

DUOS tariffs for CACs are site-specific and are available upon request (see Section 1.3 for conditions).

7.2.2 TUOS Tariffs

TUOS charges are calculated and levied for each Transmission Connection Point and are passed through on a reflective basis proportional to the authorised demand of the customer and their energy consumption.

TUOS tariffs incorporate a Fixed Charge (\$/day), a Capacity Charge (\$/kW of AD/month), a Common Service & General Charge (\$/day) and a Volume Charge (\$/kWh).

Where the actual demand exceeds the authorised demand in any one month, the actual demand will be substituted for the authorised demand in the calculation of the capacity charge billed for that month.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

TUOS tariffs for CACs are site-specific and are available upon request (see Section 1.3 for conditions).

7.3 Embedded Generators

7.3.1 DUOS Tariffs

For those EGs that generate into the distribution system a Fixed Charge (\$/day) applies.

For those EGs that generate into, as well as take load from the distribution system, a Fixed Charge (\$/day) applies, and DUOS tariffs for load taken from the distribution system will be allocated as per the appropriate network charge category selected from ICCs, CACs or SACs.

All EG DUOS tariffs are based on:

- Whether the customer is subject to the pre or post 30 June 2010 arrangements for Large Customer Connections; and
- Whether the customer is located in the East, West or Mount Isa Zone of Ergon Energy's network.

Tariffs for EGs are site-specific and are available upon request (see Section 1.3 for conditions).

7.3.2 TUOS Tariffs

For those EGs that only generate into the distribution system, TUOS tariffs do not apply to generated energy.

For those EGs that generate into, as well as take load from the distribution system:

- TUOS tariffs do not apply to generated energy; and
- TUOS tariffs for load taken from the distribution system will be allocated as per the appropriate network charge category selected from ICCs, CACs or SACs.

TUOS tariffs for EGs are site-specific and are available upon request (see Section 1.3 for conditions).

7.4 Standard Asset Customers >100 MWh Per Annum

7.4.1 Definition

SACs >100 MWh p.a. are those customers with energy consumption typically greater than 100 MWh p.a. who are not otherwise classified as an ICC, CAC or EG.

7.4.2 Network Charge Categories

There are four network charge categories applicable to SACs >100 MWh p.a.:

- **Demand High Voltage** (EDH, WDH or MIDH);
- **Demand Large** (EDL, WDL or MIDL);
- **Demand Medium** (EDM, WDM or MIDM); and
- **Demand Small** (EDS, WDS or MIDS).

The network charge category applicable to a customer will be as nominated by the customer or their retailer. Demand Large, Demand Medium and Demand Small are available to all SACs >100 MWh p.a. These categories are self-selecting, with customers' load characteristics determining the optimum category.

Demand High Voltage is available to customers who have high voltage metering and take supply at high voltage. This category is not available to customers with non-standard or significant connection arrangements, who have distribution transformer(s) provided by Ergon Energy, or to customers who are not metered at high voltage.

7.4.3 DUOS Tariffs

DUOS tariffs for all SACs >100 MWh p.a. are based on:

- The average of the connection charges;
- The average of the shared distribution network charges; and
- Whether the customer is located in the East, West or Mount Isa Zone of Ergon Energy's network.

DUOS tariffs incorporate a Fixed Charge (\$/day), an Actual Demand Charge (\$/kW/month) and a Volume Charge (\$/kWh).

A Minimum Chargeable Demand will be applied for each month where the monthly maximum demand fails to exceed this value. The Minimum Chargeable Demand applicable to each Network Charge Category is shown in Table 7.2.

Table 7.2: Minimum Chargeable Demand, by Network Charge Category

Network Charge Category	Minimum Chargeable Demand
Demand High Voltage (EDH, WDH or MIDH)	400 kW
Demand Large (EDL, WDL or MIDL)	400 kW
Demand Medium (EDM, WDM or MIDM)	120 kW
Demand Small (EDS, WDS or MIDS)	30 kW

7.4.4 TUOS Tariffs

TUOS charges are calculated and levied for each Transmission Connection Point. Ergon Energy combines rates in geographical regions in the East and West Zones and passes through TUOS charges to SACs >100 MWh p.a. in these zones, thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”. Regional indicators do not apply to the Mount Isa Zone.

TUOS tariffs incorporate a Fixed Charge (\$/day), Capacity Charge (\$/kW/month) and Volume Charge (\$/kWh).

The Minimum Chargeable Demand will be applied for each month where the monthly maximum demand fails to exceed this value. Details of the Minimum Chargeable Demand for each network charge category are shown in Section 7.4.3 above.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate for the TNI applicable to the customer.

7.4.5 Network Tariff Codes

The Network Tariff Codes that apply to SACs >100 MWh p.a. are provided in Table 7.3.

Table 7.3: Network Tariff Codes, by Network Charge Category for SACs >100 MWh p.a.

Network Charge Category	Network Tariff Code	Description
Demand High Voltage	EDHT1	East Demand HV (400kW) SAC – TUOS Region 1
	EDHT2	East Demand HV (400kW) SAC – TUOS Region 2
	EDHT3	East Demand HV (400kW) SAC – TUOS Region 3
	WDHT1	West Demand HV (400kW) SAC – TUOS Region 1
	WDHT2	West Demand HV (400kW) SAC – TUOS Region 2
	WDHT3	West Demand HV (400kW) SAC – TUOS Region 3
	MIDH	Mount Isa Demand HV (400kW) SAC
Demand Large	EDLT1	East Demand Large (400kW) SAC – TUOS Region 1
	EDLT2	East Demand Large (400kW) SAC – TUOS Region 2
	EDLT3	East Demand Large (400kW) SAC – TUOS Region 3
	WDLT1	West Demand Large (400kW) SAC – TUOS Region 1
	WDLT2	West Demand Large (400kW) SAC – TUOS Region 2
	WDLT3	West Demand Large (400kW) SAC – TUOS Region 3
	MIDL	Mount Isa Demand Large (400kW) SAC
Demand Medium	EDMT1	East Demand Medium (120kW) SAC – TUOS Region 1
	EDMT2	East Demand Medium (120kW) SAC – TUOS Region 2
	EDMT3	East Demand Medium (120kW) SAC – TUOS Region 3

Network Charge Category	Network Tariff Code	Description
	WDMT1	West Demand Medium (120kW) SAC – TUOS Region 1
	WDMT2	West Demand Medium (120kW) SAC – TUOS Region 2
	WDMT3	West Demand Medium (120kW) SAC – TUOS Region 3
	MIDM	Mount Isa Demand Medium (120kW) SAC
Demand Small	EDST1	East Demand Small (30kW) SAC – TUOS Region 1
	EDST2	East Demand Small (30kW) SAC – TUOS Region 2
	EDST3	East Demand Small (30kW) SAC – TUOS Region 3
	WDST1	West Demand Small (30kW) SAC – TUOS Region 1
	WDST2	West Demand Small (30kW) SAC – TUOS Region 2
	WDST3	West Demand Small (30kW) SAC – TUOS Region 3
	MIDS	Mount Isa Demand Small (30kW) SAC

7.5 Standard Asset Customers <100 MWh Per Annum

7.5.1 Definition

SACs <100 MWh p.a. are those customers with energy consumption typically less than 100 MWh p.a.

7.5.2 Network Charge Categories

There are two primary network charge categories applicable to SACs <100 MWh p.a.:

- **Volume Large** (EVL, WVL or MIVL) – those customers with energy consumption in the range of 26 MWh to 100 MWh p.a.; and
- **Volume Small** (EVS, WVS or MIVS) – those customers with energy consumption in the range of 0 MWh to 26 MWh p.a.

In addition to these, Ergon Energy has two network charge categories that only apply to SAC <100 MWh p.a. customers whose primary network charge category is Volume Large or Volume Small and where specified permanently connected appliances are controlled by network equipment.⁴

The additional categories that may be nominated by the customer or their retailer are:

- **Volume Night Controlled** (EVN, WVN or MIVN) – applies where specified permanently connected appliances are controlled by network equipment so that supply will be available for a minimum period of eight hours at the absolute discretion of Ergon Energy but usually between the hours of 10:00pm and 7:00am; and
- **Volume Controlled** (EVC, WVC or MIVC) – applies where specified permanently connected appliances are controlled by network equipment so that supply will be available for a minimum period of 18 hours per day during time periods set at the absolute discretion of Ergon Energy.

7.5.3 DUOS Tariffs

DUOS tariffs for SACs <100 MWh p.a. are based on:

- The average of the connection charges;
- The average of the shared distribution network charges; and
- Whether the customer is located in the East, West or Mount Isa Zone of Ergon Energy's network.

DUOS tariffs incorporate a Fixed Charge (\$/day) and a Volume Charge (\$/kWh).

⁴ A controlled load pricing option only applies where electricity load is permanently connected to appliances, separately metered and controlled at a supply point.

For information on the suitability of appliances and other conditions associated with controlled supply, customers should reference the Queensland Government's "Tariff Schedule" for regulated retail electricity prices (or Notified Prices) available at <http://www.energy.qld.gov.au/energy/regional-subsidy.htm>. The conditions contained in the Notified Prices will be applied by Ergon Energy to all customers on controlled supply (i.e. customers on a market retail contract as well as customers on a Standard Retail Contract or Standard Large Non-Market Customer Retail Contract).

Switching times will be managed at Ergon Energy's absolute discretion, in accordance with our network requirements.

For customers on a Standard Retail Contract or Standard Large Non-Market Customer Retail Contract, Volume Night Controlled equates to retail Tariff 31 and Volume Controlled equates to retail Tariff 33 in the Notified Prices.

7.5.4 TUOS Tariffs

TUOS charges are calculated and levied for each Transmission Connection Point. Ergon Energy combines rates in geographical regions in the East and West Zones and passes through TUOS charges to SACs <100 MWh p.a. in these zones, thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”. Regional indicators do not apply to the Mount Isa Zone.

TUOS tariffs for Volume Large and Volume Small incorporate a Fixed Charge (\$/day) and Volume Charge (\$/kWh). TUOS tariffs for Volume Night Controlled and Volume Controlled incorporate a Volume Charge (\$/kWh) only.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

7.5.5 Network Tariff Codes

The Network Tariff Codes that apply to SACs <100 MWh p.a. are provided in Table 7.4.

Table 7.4: Network Tariff Codes, by Network Charge Category for SACs <100 MWh p.a.

Network Charge Category	Network Tariff Code	Description
Volume Large	EVLT1	East Energy 26 - 100 MWh SAC – TUOS Region 1
	EVLT2	East Energy 26 - 100 MWh SAC – TUOS Region 2
	EVLT3	East Energy 26 - 100 MWh SAC – TUOS Region 3
	WVLT1	West Energy 26 - 100 MWh SAC – TUOS Region 1
	WVLT2	West Energy 26 - 100 MWh SAC – TUOS Region 2
	WVLT3	West Energy 26 - 100 MWh SAC – TUOS Region 3
	MIVL	Mount Isa Energy 26 - 100 MWh SAC
Volume Small	EVST1	East Energy 0 - 26 MWh SAC – TUOS Region 1
	EVST2	East Energy 0 - 26 MWh SAC – TUOS Region 2
	EVST3	East Energy 0 - 26 MWh SAC – TUOS Region 3
	WVST1	West Energy 0 - 26 MWh SAC – TUOS Region 1
	WVST2	West Energy 0 - 26 MWh SAC – TUOS Region 2
	WVST3	West Energy 0 - 26 MWh SAC – TUOS Region 3
	MIVS	Mount Isa Energy 0 - 26 MWh SAC
Volume Night Controlled	EVNT1	East Volume Night Controlled (T31) – TUOS Region 1
	EVNT2	East Volume Night Controlled (T31) – TUOS Region 2
	EVNT3	East Volume Night Controlled (T31) – TUOS Region 3
	WVNT1	West Volume Night Controlled (T31) – TUOS Region 1
	WVNT2	West Volume Night Controlled (T31) – TUOS Region 2
	WVNT3	West Volume Night Controlled (T31) – TUOS Region 3

Network Charge Category	Network Tariff Code	Description
	MIVN	Mount Isa Volume Night Controlled (T31)
Volume Controlled	EVCT1	East Volume Controlled (T33) – TUOS Region 1
	EVCT2	East Volume Controlled (T33) – TUOS Region 2
	EVCT3	East Volume Controlled (T33) – TUOS Region 3
	WVCT1	West Volume Controlled (T33) – TUOS Region 1
	WVCT2	West Volume Controlled (T33) – TUOS Region 2
	WVCT3	West Volume Controlled (T33) – TUOS Region 3
	MIVC	Mount Isa Volume Controlled (T33)

7.6 Standard Asset Customers – Unmetered Supplies

7.6.1 Definition

Unmetered supplies should be avoided where possible. However, Ergon Energy may approve an unmetered supply where it meets the requirements set out in Chapter 7 of the Rules.

7.6.2 Street Light Installations

The supply of energy to a street lighting connection point is a Standard Control Service and is subject to the same DUOS and TUOS charges applicable to all other unmetered supplies.

Street lighting customers will also be subject to an additional Alternative Control Service daily street lighting charge if Ergon Energy owns and maintains the street lighting assets beyond the customer's connection point (i.e. where Ergon Energy provides ACS – Street Lighting Services). If Ergon Energy does not own and maintain the street lighting assets the Alternative Control Service daily street lighting charge will not apply.

The Alternative Control Service daily street lighting charge which applies in 2013–14 is set out in the "Price List for Alternative Control Services". Further information on Ergon Energy's ACS – Street Lighting Services is available in the "Information Guide for Alternative Control Services Pricing".

7.6.3 Network Charge Categories

There are three network charge categories applicable to unmetered supplies:

- **Unmetered Supply (EVU, WVU or MIVU)** – applies to small uniform loads approved to be unmetered by Ergon Energy. Includes provision of energy to traffic lights, watchman lights and other types of unmetered public amenities (e.g. illuminated signs, phone boxes and barbeques etc.). Also applies to street light installations where the customer owns and maintains all assets after the customer's connection point to the network (i.e. where Ergon Energy does not provide ACS – Street Lighting Services);
- **Unmetered Supply with ACS – Street Lighting Services – Minor Street Light (EVUMI, WVUMI or MIVUMI)** – applies to unmetered street lighting where Ergon Energy owns and maintains all assets after the customer's connection point to the network.

Ergon Energy's standard minor street lights are 50, 80 and 125 watt Mercury Vapour and 70 watt High Pressure Sodium vapour lights, and compact fluorescent lights of similar luminescence and include any other non-standard or obsolete street lights that would be replaced with any of the above Ergon Energy standard minor street lights in accordance with Ergon Energy policy; and

- **Unmetered Supply with ACS – Street Lighting Services – Major Street Light (EVUMA, WVUMA or MIVUMA)** – applies to unmetered street lighting where Ergon Energy owns and maintains all assets after the customer's connection point to the network.

Ergon Energy's standard major street lights are 100, 150, 250 and 400 watt High Pressure Sodium vapour lights and include any other non-standard or obsolete street lights that would be replaced with any of the above Ergon Energy standard major street lights in accordance with Ergon Energy policy.

The network charge category applicable to a customer will be as nominated by the customer or their retailer.

7.6.4 DUOS Tariffs

DUOS tariffs for unmetered supplies are based on:

- The average of the connection charges;
- The average of the shared distribution network charges; and
- Whether the customer is located in the East, West or Mount Isa Zone of Ergon Energy's network.

DUOS tariffs incorporate a Fixed Charge (\$/day) and a Volume Charge (\$/kWh).

7.6.5 TUOS Tariffs

TUOS charges are calculated and levied for each Transmission Connection Point. Ergon Energy combines rates in geographical regions in the East and West Zones and passes through TUOS charges to SACs in these zones, thus providing an appropriate locational signal in each region.

The regional indicator for each TNI is shown in Appendix 1. The indicator aligns with each Network Tariff Code – refer to the suffix of “T”. Regional indicators do not apply to the Mount Isa Zone.

TUOS tariffs incorporate a Volume Charge (\$/kWh) only.

To determine the total TUOS volume charge, the metered consumption must be multiplied by the customer DLF and then applied to the TUOS \$/kWh rate.

7.6.6 Network Tariff Codes

The Network Tariff Codes that apply to Unmetered Supplies are shown in Table 7.5 below.

Table 7.5: Network Tariff Codes for Unmetered Supplies

Network Charge Category	Network Tariff Code	Description
Unmetered Supply	EVUT1	East Volume Unmetered – TUOS Region 1
	EVUT1MI	East Volume Unmetered – TUOS Region 1 – Minor Streetlight
	EVUT1MA	East Volume Unmetered – TUOS Region 1 – Major Streetlight
	EVUT2	East Volume Unmetered – TUOS Region 2
	EVUT2MI	East Volume Unmetered – TUOS Region 2 – Minor Streetlight
	EVUT2MA	East Volume Unmetered – TUOS Region 2 – Major Streetlight
	EVUT3	East Volume Unmetered – TUOS Region 3
	EVUT3MI	East Volume Unmetered – TUOS Region 3 – Minor Streetlight
	EVUT3MA	East Volume Unmetered – TUOS Region 3 – Major Streetlight
	WVUT1	West Volume Unmetered – TUOS Region 1
	WVUT1MI	West Volume Unmetered – TUOS Region 1 – Minor Streetlight

Network Charge Category	Network Tariff Code	Description
	WVUT1MA	West Volume Unmetered – TUOS Region 1 – Major Streetlight
	WVUT2	West Volume Unmetered – TUOS Region 2
	WVUT2MI	West Volume Unmetered – TUOS Region 2 – Minor Streetlight
	WVUT2MA	West Volume Unmetered – TUOS Region 2 – Major Streetlight
	WVUT3	West Volume Unmetered – TUOS Region 3
	WVUT3MI	West Volume Unmetered – TUOS Region 3 – Minor Streetlight
	WVUT3MA	West Volume Unmetered – TUOS Region 3 – Major Streetlight
	MIVU	Mount Isa Volume Unmetered
	MIVUMI	Mount Isa Volume Unmetered – Minor Streetlight
	MIVUMA	Mount Isa Volume Unmetered – Major Streetlight



7.7 Queensland Government Solar Bonus Scheme for Standard Asset Customers <100 MWh Per Annum

The Queensland Government Solar Bonus Scheme is a program that pays domestic and other small energy customers for the surplus electricity generated from roof-top solar photovoltaic (PV) systems that is exported to the Queensland grid. For information on the Solar Bonus Scheme, including changes effective from 10 July 2012 relating to the feed-in tariff rate, please refer to:

www.cleanenergy.qld.gov.au/solar_bonus_scheme.cfm.

7.7.1 Network Tariff Codes

The Network Tariff Codes that apply to the Queensland Government Solar Bonus Scheme are detailed in Table 7.6 below.

Table 7.6: Network Tariff Codes for the Solar Bonus Scheme

Network Tariff Code	Description
NVG0	Net Volume Generation 0
NVG1	Net Volume Generation 1
NGV2	Net Volume Generation 2
GVG0	Gross Volume Generation 0

Where:

- NVG0 is applicable to any net metering installation that does not meet the Solar Bonus Scheme requirements;
- NVG1 applies to any net metering installation that meets the Solar Bonus Scheme requirements for the 44 c/kWh feed-in tariff rate;
- NVG2 applies to any net metering installation that meets the Solar Bonus Scheme requirements for the 8 c/kWh feed-in tariff rate; and
- GVG0 is applicable to any gross metering installation.

Appendix 1: TUOS Regional Indicators

TUOS Regional Indicators for 2013–2014 Standard Asset Customers		
Transmission Connection Point	TNI	TUOS Region
Alligator Creek	QALC	T2
Louisa Creek	QALH	T2
Alan Sherriff (11)	QASF	T2
Biloela	QBIL	T1
Bowen North	QBNN	T2
Blackwater (132)	QBWH	T1
Blackwater (66)	QBWL	T1
Columboola	QCBL	T1
Cardwell	QCDW	T3
Chinchilla	QCHA	T1
Clare	QCLR	T2
Cairns (Cairns City)	QCNS	T3
Collinsville	QCOL	T2
Cairns	QCRN	T3
Dan Gleeson	QDGL	T2
Dysart	QDYS	T1
Egans Hill	QEGN	T1
El Arish	QELA	T3
Edmonton	QEMT	T3
Alan Sherriff (Garbutt)	QGAR	T2
Gladstone North	QGLA	T1
Gin Gin	QGNG	T1
Gladstone South	QGST	T1
Innisfail	QINF	T3
Ingham	QING	T3
Kamerunga	QKAM	T3
Lilyvale (Clermont)	QLCM	T1
Lilyvale	QLIL	T1
Mackay	QMKA	T2
Moura	QMRA	T1
Middle Ridge	QMRG	T1
Broadlea	QMRH	T1
Moranbah (11)	QMRL	T1

TUOS Regional Indicators for 2013–2014 Standard Asset Customers		
Transmission Connection Point	TNI	TUOS Region
Moranbah (66)	QMRN	T1
Nebo	QNEB	T2
Newlands (Mackay & Northern)	QNLD	T2
Oakey Town	QOKT	T1
Pandoin	QPAL	T1
Pioneer Valley	QPIV	T2
Proserpine (Mackay)	QPRO	T2
Rockhampton	QROC	T1
Ross (Kidston & Millchester)	QROS	T2
Teebar Creek	QTBC	T1
Tangkam	QTKM	T1
Tully	QTLL	T3
Tarong	QTRL	T1
Turkinje (Port Douglas)	QTUH	T3
Turkinje	QTUL	T3
Townsville East	QTVE	T2
Townsville South	QTVS	T2
Woolooga	QWLN	T1
Woree	QWRE	T3
Boat Creek	QYAE	T1

Appendix 2: 2013–14 Network Tariff Codes and Rates

GST Exclusive Rates

TARIFFS APPLYING TO STANDARD ASSET CUSTOMERS – LARGE (>100 MWh per annum)										
GST Exclusive										
Tariff Description	Network Tariff Code	Minimum Chargeable Demand	Default Distribution Loss Factor		Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)		
					Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)
		kilowatts	Value	Code	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour
Demand High Voltage	EDHT1	400	1.033	GEHL	\$19.210	\$20.136	\$0.00485	\$3.852	\$0.973	\$0.01324
	EDHT2	400	1.033	GEHL	\$19.210	\$20.136	\$0.00485	\$3.185	\$2.063	\$0.01534
	EDHT3	400	1.033	GEHL	\$19.210	\$20.136	\$0.00485	\$3.128	\$4.498	\$0.01927
	WDHT1	400	1.132	GWHL	\$27.448	\$52.036	\$0.01302	\$3.852	\$0.973	\$0.01324
	WDHT2	400	1.132	GWHL	\$27.448	\$52.036	\$0.01302	\$3.185	\$2.063	\$0.01534
	WDHT3	400	1.132	GWHL	\$27.448	\$52.036	\$0.01302	\$3.128	\$4.498	\$0.01927
	MIDH	400	1.036	GMHL	POA	POA	POA	\$2.414	\$0.477	\$0.00046
Demand Large	EDLT1	400	1.078	GELL	\$32.575	\$25.443	\$0.00485	\$3.852	\$0.973	\$0.01324
	EDLT2	400	1.078	GELL	\$32.575	\$25.443	\$0.00485	\$3.185	\$2.063	\$0.01534
	EDLT3	400	1.078	GELL	\$32.575	\$25.443	\$0.00485	\$3.128	\$4.498	\$0.01927
	WDLT1	400	1.184	GWLL	\$42.812	\$83.046	\$0.01302	\$3.852	\$0.973	\$0.01324
	WDLT2	400	1.184	GWLL	\$42.812	\$83.046	\$0.01302	\$3.185	\$2.063	\$0.01534
	WDLT3	400	1.184	GWLL	\$42.812	\$83.046	\$0.01302	\$3.128	\$4.498	\$0.01927
	MIDL	400	1.087	GMLL	\$27.670	\$15.925	\$0.00436	\$2.414	\$0.477	\$0.00046
Demand Medium	EDMT1	120	1.078	GELL	\$18.502	\$26.513	\$0.00485	\$3.852	\$0.973	\$0.01324
	EDMT2	120	1.078	GELL	\$18.502	\$26.513	\$0.00485	\$3.185	\$2.063	\$0.01534
	EDMT3	120	1.078	GELL	\$18.502	\$26.513	\$0.00485	\$3.128	\$4.498	\$0.01927
	WDMT1	120	1.184	GWLL	\$22.114	\$84.620	\$0.01302	\$3.852	\$0.973	\$0.01324
	WDMT2	120	1.184	GWLL	\$22.114	\$84.620	\$0.01302	\$3.185	\$2.063	\$0.01534
	WDMT3	120	1.184	GWLL	\$22.114	\$84.620	\$0.01302	\$3.128	\$4.498	\$0.01927
	MIDM	120	1.087	GMLL	\$17.357	\$16.709	\$0.00436	\$2.414	\$0.477	\$0.00046
Demand Small	EDST1	30	1.078	GELL	\$1.974	\$30.709	\$0.00485	\$3.852	\$0.973	\$0.01324
	EDST2	30	1.078	GELL	\$1.974	\$30.709	\$0.00485	\$3.185	\$2.063	\$0.01534
	EDST3	30	1.078	GELL	\$1.974	\$30.709	\$0.00485	\$3.128	\$4.498	\$0.01927
	WDST1	30	1.184	GWLL	\$3.540	\$89.329	\$0.01302	\$3.852	\$0.973	\$0.01324
	WDST2	30	1.184	GWLL	\$3.540	\$89.329	\$0.01302	\$3.185	\$2.063	\$0.01534
	WDST3	30	1.184	GWLL	\$3.540	\$89.329	\$0.01302	\$3.128	\$4.498	\$0.01927
	MIDS	30	1.087	GMLL	\$2.007	\$20.604	\$0.00436	\$2.414	\$0.477	\$0.00046

GST Exclusive Rates

TARIFFS APPLYING TO STANDARD ASSET CUSTOMERS – SMALL (<100 MWh per annum)										
GST Exclusive										
Tariff Description	Network Tariff Code	Minimum Chargeable Demand	Default Distribution Loss Factor		Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)		
					Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)
		kilowatts	Value	Code	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour
Volume Large	EVL1T1		1.078	GELL	\$0.983		\$0.13381	\$0.137		\$0.01324
	EVL1T2		1.078	GELL	\$0.983		\$0.13381	\$0.222		\$0.01534
	EVL1T3		1.078	GELL	\$0.983		\$0.13381	\$0.339		\$0.01927
	WVLT1		1.184	GWLL	\$1.677		\$0.37639	\$0.137		\$0.01324
	WVLT2		1.184	GWLL	\$1.677		\$0.37639	\$0.222		\$0.01534
	WVLT3		1.184	GWLL	\$1.677		\$0.37639	\$0.339		\$0.01927
	MIVL		1.087	GMLL	\$0.984		\$0.07959	\$0.113		\$0.00046
Volume Small	EVST1		1.078	GELL	\$0.983		\$0.13462	\$0.137		\$0.01324
	EVST2		1.078	GELL	\$0.983		\$0.13462	\$0.222		\$0.01534
	EVST3		1.078	GELL	\$0.983		\$0.13462	\$0.339		\$0.01927
	WVST1		1.184	GWLL	\$1.677		\$0.37831	\$0.137		\$0.01324
	WVST2		1.184	GWLL	\$1.677		\$0.37831	\$0.222		\$0.01534
	WVST3		1.184	GWLL	\$1.677		\$0.37831	\$0.339		\$0.01927
	MIVS		1.087	GMLL	\$0.984		\$0.08217	\$0.113		\$0.00046
Volume Night Controlled	EVNT1		1.078	GELL	\$0.102		\$0.00323			\$0.01324
	EVNT2		1.078	GELL	\$0.102		\$0.00323			\$0.01534
	EVNT3		1.078	GELL	\$0.102		\$0.00323			\$0.01927
	WVNT1		1.184	GWLL	\$0.120		\$0.00980			\$0.01324
	WVNT2		1.184	GWLL	\$0.120		\$0.00980			\$0.01534
	WVNT3		1.184	GWLL	\$0.120		\$0.00980			\$0.01927
	MIVN		1.087	GMLL	\$0.130		\$0.00300			\$0.00046
Volume Controlled	EVCT1		1.078	GELL	\$0.102		\$0.02862			\$0.01324
	EVCT2		1.078	GELL	\$0.102		\$0.02862			\$0.01534
	EVCT3		1.078	GELL	\$0.102		\$0.02862			\$0.01927
	WVCT1		1.184	GWLL	\$0.120		\$0.08203			\$0.01324
	WVCT2		1.184	GWLL	\$0.120		\$0.08203			\$0.01534
	WVCT3		1.184	GWLL	\$0.120		\$0.08203			\$0.01927
	MIVC		1.087	GMLL	\$0.130		\$0.01139			\$0.00046

GST Exclusive Rates

TARIFFS APPLYING TO STANDARD ASSET CUSTOMERS – UNMETERED GST Exclusive										
Tariff Description	Network Tariff Code	Minimum Chargeable Demand	Default Distribution Loss Factor		Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)		
					Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)
		kilowatts	Value	Code	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour
Unmetered Supply	EVUT1		1.078	GELL	\$0.006		\$0.22007			\$0.01324
	EVUT1MI		1.078	GELL	\$0.006		\$0.22007			\$0.01324
	EVUT1MA		1.078	GELL	\$0.006		\$0.22007			\$0.01324
	EVUT2		1.078	GELL	\$0.006		\$0.22007			\$0.01534
	EVUT2MI		1.078	GELL	\$0.006		\$0.22007			\$0.01534
	EVUT2MA		1.078	GELL	\$0.006		\$0.22007			\$0.01534
	EVUT3		1.078	GELL	\$0.006		\$0.22007			\$0.01927
	EVUT3MI		1.078	GELL	\$0.006		\$0.22007			\$0.01927
	EVUT3MA		1.078	GELL	\$0.006		\$0.22007			\$0.01927
	WVUT1		1.184	GWLL	\$0.247		\$0.25730			\$0.01324
	WVUT1MI		1.184	GWLL	\$0.247		\$0.25730			\$0.01324
	WVUT1MA		1.184	GWLL	\$0.247		\$0.25730			\$0.01324
	WVUT2		1.184	GWLL	\$0.247		\$0.25730			\$0.01534
	WVUT2MI		1.184	GWLL	\$0.247		\$0.25730			\$0.01534
	WVUT2MA		1.184	GWLL	\$0.247		\$0.25730			\$0.01534
	WVUT3		1.184	GWLL	\$0.247		\$0.25730			\$0.01927
	WVUT3MI		1.184	GWLL	\$0.247		\$0.25730			\$0.01927
	WVUT3MA		1.184	GWLL	\$0.247		\$0.25730			\$0.01927
	MIVU		1.087	GMLL	\$0.208		\$0.03004			\$0.00046
	MIVUMI		1.087	GMLL	\$0.208		\$0.03004			\$0.00046
	MIVUMA		1.087	GMLL	\$0.208		\$0.03004			\$0.00046

GST Inclusive Rates

TARIFFS APPLYING TO STANDARD ASSET CUSTOMERS – LARGE (>100 MWh per annum)										
GST Inclusive										
Tariff Description	Network Tariff Code	Minimum Chargeable Demand	Default Distribution Loss Factor		Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)		
					Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)
		kilowatts	Value	Code	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour
Demand High Voltage	EDHT1	400	1.033	GEHL	\$21.131	\$22.150	\$0.00534	\$4.237	\$1.070	\$0.01457
	EDHT2	400	1.033	GEHL	\$21.131	\$22.150	\$0.00534	\$3.504	\$2.269	\$0.01687
	EDHT3	400	1.033	GEHL	\$21.131	\$22.150	\$0.00534	\$3.441	\$4.948	\$0.02120
	WDHT1	400	1.132	GWHL	\$30.193	\$57.240	\$0.01432	\$4.237	\$1.070	\$0.01457
	WDHT2	400	1.132	GWHL	\$30.193	\$57.240	\$0.01432	\$3.504	\$2.269	\$0.01687
	WDHT3	400	1.132	GWHL	\$30.193	\$57.240	\$0.01432	\$3.441	\$4.948	\$0.02120
	MIDH	400	1.036	GMHL	POA	POA	POA	\$2.655	\$0.525	\$0.00051
Demand Large	EDLT1	400	1.078	GELL	\$35.833	\$27.987	\$0.00534	\$4.237	\$1.070	\$0.01457
	EDLT2	400	1.078	GELL	\$35.833	\$27.987	\$0.00534	\$3.504	\$2.269	\$0.01687
	EDLT3	400	1.078	GELL	\$35.833	\$27.987	\$0.00534	\$3.441	\$4.948	\$0.02120
	WDLT1	400	1.184	GWLL	\$47.093	\$91.351	\$0.01432	\$4.237	\$1.070	\$0.01457
	WDLT2	400	1.184	GWLL	\$47.093	\$91.351	\$0.01432	\$3.504	\$2.269	\$0.01687
	WDLT3	400	1.184	GWLL	\$47.093	\$91.351	\$0.01432	\$3.441	\$4.948	\$0.02120
	MIDL	400	1.087	GMLL	\$30.437	\$17.518	\$0.00480	\$2.655	\$0.525	\$0.00051
Demand Medium	EDMT1	120	1.078	GELL	\$20.352	\$29.164	\$0.00534	\$4.237	\$1.070	\$0.01457
	EDMT2	120	1.078	GELL	\$20.352	\$29.164	\$0.00534	\$3.504	\$2.269	\$0.01687
	EDMT3	120	1.078	GELL	\$20.352	\$29.164	\$0.00534	\$3.441	\$4.948	\$0.02120
	WDMT1	120	1.184	GWLL	\$24.325	\$93.082	\$0.01432	\$4.237	\$1.070	\$0.01457
	WDMT2	120	1.184	GWLL	\$24.325	\$93.082	\$0.01432	\$3.504	\$2.269	\$0.01687
	WDMT3	120	1.184	GWLL	\$24.325	\$93.082	\$0.01432	\$3.441	\$4.948	\$0.02120
	MIDM	120	1.087	GMLL	\$19.093	\$18.380	\$0.00480	\$2.655	\$0.525	\$0.00051
Demand Small	EDST1	30	1.078	GELL	\$2.171	\$33.780	\$0.00534	\$4.237	\$1.070	\$0.01457
	EDST2	30	1.078	GELL	\$2.171	\$33.780	\$0.00534	\$3.504	\$2.269	\$0.01687
	EDST3	30	1.078	GELL	\$2.171	\$33.780	\$0.00534	\$3.441	\$4.948	\$0.02120
	WDST1	30	1.184	GWLL	\$3.894	\$98.262	\$0.01432	\$4.237	\$1.070	\$0.01457
	WDST2	30	1.184	GWLL	\$3.894	\$98.262	\$0.01432	\$3.504	\$2.269	\$0.01687
	WDST3	30	1.184	GWLL	\$3.894	\$98.262	\$0.01432	\$3.441	\$4.948	\$0.02120
	MIDS	30	1.087	GMLL	\$2.208	\$22.664	\$0.00480	\$2.655	\$0.525	\$0.00051

GST Inclusive Rates

TARIFFS APPLYING TO STANDARD ASSET CUSTOMERS – SMALL (<100 MWh per annum)										
GST Inclusive										
Tariff Description	Network Tariff Code	Minimum Chargeable Demand	Default Distribution Loss Factor		Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)		
					Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)
		kilowatts	Value	Code	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour
Volume Large	EVLT1		1.078	GELL	\$1.081		\$0.14719	\$0.151		\$0.01457
	EVLT2		1.078	GELL	\$1.081		\$0.14719	\$0.244		\$0.01687
	EVLT3		1.078	GELL	\$1.081		\$0.14719	\$0.373		\$0.02120
	WVLT1		1.184	GWLL	\$1.845		\$0.41403	\$0.151		\$0.01457
	WVLT2		1.184	GWLL	\$1.845		\$0.41403	\$0.244		\$0.01687
	WVLT3		1.184	GWLL	\$1.845		\$0.41403	\$0.373		\$0.02120
	MIVL		1.087	GMLL	\$1.082		\$0.08755	\$0.124		\$0.00051
Volume Small	EVST1		1.078	GELL	\$1.081		\$0.14808	\$0.151		\$0.01457
	EVST2		1.078	GELL	\$1.081		\$0.14808	\$0.244		\$0.01687
	EVST3		1.078	GELL	\$1.081		\$0.14808	\$0.373		\$0.02120
	WVST1		1.184	GWLL	\$1.845		\$0.41614	\$0.151		\$0.01457
	WVST2		1.184	GWLL	\$1.845		\$0.41614	\$0.244		\$0.01687
	WVST3		1.184	GWLL	\$1.845		\$0.41614	\$0.373		\$0.02120
	MIVS		1.087	GMLL	\$1.082		\$0.09039	\$0.124		\$0.00051
Volume Night Controlled	EVNT1		1.078	GELL	\$0.112		\$0.00355			\$0.01457
	EVNT2		1.078	GELL	\$0.112		\$0.00355			\$0.01687
	EVNT3		1.078	GELL	\$0.112		\$0.00355			\$0.02120
	WVNT1		1.184	GWLL	\$0.132		\$0.01078			\$0.01457
	WVNT2		1.184	GWLL	\$0.132		\$0.01078			\$0.01687
	WVNT3		1.184	GWLL	\$0.132		\$0.01078			\$0.02120
	MIVN		1.087	GMLL	\$0.143		\$0.00330			\$0.00051
Volume Controlled	EVCT1		1.078	GELL	\$0.112		\$0.03148			\$0.01457
	EVCT2		1.078	GELL	\$0.112		\$0.03148			\$0.01687
	EVCT3		1.078	GELL	\$0.112		\$0.03148			\$0.02120
	WVCT1		1.184	GWLL	\$0.132		\$0.09023			\$0.01457
	WVCT2		1.184	GWLL	\$0.132		\$0.09023			\$0.01687
	WVCT3		1.184	GWLL	\$0.132		\$0.09023			\$0.02120
	MIVC		1.087	GMLL	\$0.143		\$0.01253			\$0.00051

GST Inclusive Rates

TARIFFS APPLYING TO STANDARD ASSET CUSTOMERS – UNMETERED										
GST Inclusive										
Tariff Description	Network Tariff Code	Minimum Chargeable Demand	Default Distribution Loss Factor		Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)		
					Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)
		kilowatts	Value	Code	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour
Unmetered Supply	EVUT1		1.078	GELL	\$0.007		\$0.24208			\$0.01457
	EVUT1MI		1.078	GELL	\$0.007		\$0.24208			\$0.01457
	EVUT1MA		1.078	GELL	\$0.007		\$0.24208			\$0.01457
	EVUT2		1.078	GELL	\$0.007		\$0.24208			\$0.01687
	EVUT2MI		1.078	GELL	\$0.007		\$0.24208			\$0.01687
	EVUT2MA		1.078	GELL	\$0.007		\$0.24208			\$0.01687
	EVUT3		1.078	GELL	\$0.007		\$0.24208			\$0.02120
	EVUT3MI		1.078	GELL	\$0.007		\$0.24208			\$0.02120
	EVUT3MA		1.078	GELL	\$0.007		\$0.24208			\$0.02120
	WVUT1		1.184	GWLL	\$0.272		\$0.28303			\$0.01457
	WVUT1MI		1.184	GWLL	\$0.272		\$0.28303			\$0.01457
	WVUT1MA		1.184	GWLL	\$0.272		\$0.28303			\$0.01457
	WVUT2		1.184	GWLL	\$0.272		\$0.28303			\$0.01687
	WVUT2MI		1.184	GWLL	\$0.272		\$0.28303			\$0.01687
	WVUT2MA		1.184	GWLL	\$0.272		\$0.28303			\$0.01687
	WVUT3		1.184	GWLL	\$0.272		\$0.28303			\$0.02120
	WVUT3MI		1.184	GWLL	\$0.272		\$0.28303			\$0.02120
	WVUT3MA		1.184	GWLL	\$0.272		\$0.28303			\$0.02120
	MIVU		1.087	GMLL	\$0.229		\$0.03304			\$0.00051
	MIVUMI		1.087	GMLL	\$0.229		\$0.03304			\$0.00051
	MIVUMA		1.087	GMLL	\$0.229		\$0.03304			\$0.00051

GST Inclusive Rates

QUEENSLAND GOVERNMENT SOLAR BONUS SCHEME FOR STANDARD ASSET CUSTOMERS – SMALL (<100 MWh per annum) GST Inclusive										
Tariff Description	Network Tariff Code	Minimum Chargeable Demand	Default Distribution Loss Factor		Distribution Use Of System (DUOS)			Transmission Use Of System (TUOS)		
					Fixed Charge (NDFC)	Actual Demand Charge (NDADC)	Volume Charge (NDVC)	Fixed Charge (NTFC)	Capacity Charge (NTCC)	Volume Charge (NTVC)
		kilowatts	Value	Code	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour	dollars per day	dollars per kilowatt per month	dollars per kilowatt hour
Queensland Government Solar Bonus Scheme	NVG0						\$0.0000			
	NVG1						-\$0.4400			
	NVG2						-\$0.0800			
	GVG0						\$0.0000			

Note: The 44 c/kWh and 8 c/kWh feed-in tariffs associated with the Solar Bonus Scheme include GST (if any). As such, no amount will be added to the credit in respect of any GST payable.

GLOSSARY

Abbreviations

ACS	Alternative Control Services
AD	Authorised Demand
AER	Australian Energy Regulator
CAC	Connection Asset Customer
DLF	Distribution Loss Factor
DNSP	Distribution Network Service Provider
DUOS	Distribution Use of System
EG	Embedded Generator
Ergon Energy	Ergon Energy Corporation Limited
GWh	Gigawatt Hour
ICC	Individually Calculated Customer
kV	Kilovolt
kVA	Kilovolt-ampere
kW	Kilowatt
kWh	Kilowatt Hour
Law	National Electricity Law
LGA	Local Government Area
MWh	Megawatt Hour
NEM	National Electricity Market
NMI	National Metering Identifier
POA	Price on Application
Rules	National Electricity Rules
SAC	Standard Asset Customer
SCS	Standard Control Services
TNSP	Transmission Network Service Provider
TUOS	Transmission Use of System

Definitions

ACS – Street Lighting Services	A type of Alternative Control Service. Relates to the installation, operation and maintenance of street lighting assets owned by Ergon Energy. Ergon Energy recovers our costs in providing this service through a daily street lighting charge which we bill to retailers.
Actual Demand Charge	A type of charge (charging parameter) included in Ergon Energy's network tariff structures to signal the effect demand has on the shared network and system augmentation. The demand used in the calculation of the charge is the maximum demand recorded in any half hour period each month.
Alternative Control Service	A distribution service provided by Ergon Energy that the AER has classified as an Alternative Control Service under the Rules. Includes Fee Based Services, Quoted Services and ACS – Street Lighting Services.
Australian Energy Regulator (AER)	The AER is an independent statutory authority that is part of the Australian Competition and Consumer Commission. The AER is responsible for the economic regulation of electricity networks in the NEM. It also monitors the wholesale electricity and gas markets and is responsible for compliance with and enforcement of the National Electricity Law and Rules, National Gas Law and Rules, and the National Energy Retail Law and Rules.
Avoided TUOS	The amount paid to an eligible EG for the locational component of prescribed TUOS services that would have been payable by Ergon Energy to a TNSP had the EG not been connected to the distribution network. The methodology Ergon Energy uses to comply with the Rules is set out in the Information Guide for Standard Control Services Pricing.
Capacity Charge	A type of charge (charging parameter) included in Ergon Energy network tariff structures. The Capacity Charge is reflective of the costs associated with the network capacity required by a customer on a long term basis. It is similar to the Actual Demand Charge, but more effectively takes into account the impact low load factor customers have on system augmentation. The demand used for the calculation of the charge is the authorised demand, or if no authorised demand, an annual maximum demand.
Capital Contribution	A capital contribution is a prepayment for the provision of direct control services. A capital contribution may be charged to a customer if the new connection or modification for an existing connection is required to the network to accommodate the connection/modification. Ergon Energy's Capital Contribution Policy sets out circumstances in which a capital contribution may be required and details how the capital contribution to be charged to a customer is calculated.

Charging Parameter	The constituent elements of a tariff (as defined in the Rules).
Connection	The physical link to or through a Transmission Network or Distribution Network.
Connection Asset Customer (CAC)	Means a customer classified as a CAC in accordance with definitions in our Pricing Proposal. Typically reflect those customers with required capacity above 1,500 kVA; or with electricity consumption greater than 4 GWh (but less than 40 GWh) per year.
Connection Assets	Those components of a transmission or distribution system which are used to provide connection services. Connection Assets are those assets required to connect an electrical installation to the shared network and are all the assets from the Connection Point back up to and including the Network Coupling Point.
Connection Point	The agreed point of supply established between Network Service Provider(s) and another Registered Participant, Non-Registered Customer or franchise customer.
Customer	A person or entity that receives, or wants to receive a supply of electricity for a premises, or any other distribution service from Ergon Energy.
Dedicated Connection Assets	Assets that are dedicated to a network user of any size. In most circumstances these are 'Connection Assets'. This is because no other party is using the assets and it enables the user to pay for exactly the capacity and style of assets they seek to have. In some cases, Dedicated Connection Assets may later be shared with another customer in which case the Network Coupling Point is moved further downstream.
Demand	The amount of electricity energy being consumed at a given time measured in either watts (W) or volt amperes (VA). The difference between the two is the power factor.
Direct Control Service	Distribution services subject to economic regulation by the AER under the Rules. Direct Control Services are further subdivided into Standard Control Services and Alternative Control Services.
Distribution Loss Factor (DLF)	The factor applied to customers' metered energy consumption to determine total energy purchases at the transmission connection point that account for losses in the distribution network.
Distribution Network	The electrical system used to transport electricity from the high voltage transmission network connection point to distribution network users.
Distribution Use of System (DUOS) Charge	Component of the network tariffs which covers costs associated with connection services and/or use of the distribution network for the conveyance of electricity (i.e. Standard Control Services).

East Zone	Those areas where the network users are supplied from the distribution system connection to the national grid and have a relatively low distribution cost to supply. The local government areas covered by the East Zone are located in the Network Tariff Guide for Standard Control Services.
Electricity Market	Means the National Electricity Market (NEM) as administered by the Australian Energy Market Operator.
Embedded Generator (EG)	Means a customer classified as an EG in accordance with definitions in our Pricing Proposal. EGs are those customers that export energy into the distribution system, except for those customers with micro generation facilities that have been classified as a SAC (such as small scale photovoltaic (PV) generators).
Energy	The amount of electricity consumed by a consumer (or all customers) over a period of time. Energy is measured in terms of watt hours (Wh), kilowatt hours (kWh), megawatt hours (MWh) or gigawatt hours (GWh).
Fee Based Service	A type of Alternative Control Service which Ergon Energy undertakes at the request of an identifiable customer, retailer or appropriate third party which is in addition to our main network, connection and metering services and is levied as a separate charge. Fee Based Services have a fixed fee as the costs of providing the service (and therefore price) can be assessed in advance of the service being requested by a customer or retailer.
Final Distribution Determination	The AER's Final Distribution Determination sets the revenue and pricing control regime that Ergon Energy must comply with for the current regulatory control period.
Fixed Charge	A type of charge (charging parameter) included in Ergon Energy network tariffs which reflects the costs associated with connection assets (entry and exit services) and network user management services. For those customers with consumption less than 100 MWh per annum (SACs <100MWh), the fixed charge also recovers a portion of the shared network costs. The charge is levied on a fixed dollar amount per day.
Gigawatt hour (GWh)	1,000,000 kilowatt hours.
High Voltage (HV)	Refers to parts of the network that are 11 kV or above.
Individually Calculated Customer (ICC)	Means a customer classified as an ICC in accordance with definitions in our Pricing Proposal. Typically reflects those customers with electricity consumption greater than 40 GWh per year; or where a customer's circumstances and connection arrangement mean that average prices are meaningless or inappropriate (e.g. only two or three customers in a supply system, or customer connected close to a Transmission Connection Point).

Isolated Generation	Those areas supplied from Ergon Energy's isolated generation assets, except for the Mount Isa system. Includes communities in Western Queensland, the Gulf of Carpentaria, Cape York, various Torres Strait Islands, Palm Island and Mornington Islands. These areas are not subject to economic regulation by the AER, but are regulated by the Queensland Government.
kVA	1,000 Volt-Ampere which is a measure of the apparent power flow which is a measure of the total capacity required to supply a customer's load.
kW	1,000 Watts which is a measure of the real component of power being consumed by the consumer's load.
Large Customer	Are Individually Calculated Customers (ICC), Connection Asset Customers (CAC) or Embedded Generators (EG).
Large Customer Connection Arrangements	Refers to the arrangements applying from 1 July 2010, where new or augmented connection assets are paid for or contributed by the large customer (i.e. not included in the network tariff).
Large Customer Connection Service	Is a type of Alternative Control Service – Quoted Service which relates to the design and construction of connection assets for large customers.
Load Factor	Measure of the percentage of time a load is used in any given period. Loads used 24 hours per day, 7 days a week have a load factor of 1 or 100%.
Low Voltage (LV)	Refers to the sub 11 kV network.
Maximum Demand	The maximum demand recorded at a customer's individual meter or the maximum demand placed on the electrical distribution network system at any time or at a specific time or within a specific time period, such as a month. Maximum demand is an indication of the capacity required for a customer's connection or the electrical distribution network.
Megawatt Hour (MWh)	1,000 kilowatt hours
Mount Isa Zone	Those areas supplied from the isolated Mount Isa system. This zone is not connected to the national grid and would normally be excluded from the application of the Rules. However, under the <i>Electricity – National Scheme (Queensland) Act 1997</i> the Queensland Government has transferred responsibility for the economic regulation of the Mount Isa-Cloncurry supply network to the AER. The local government areas covered by the Mount Isa Zone are located in the Network Tariff Guide for Standard Control Services.
National Electricity Market (NEM)	The interconnected electricity grid covering Queensland, New South Wales, Victoria, Tasmania, South Australia and the Australian Capital Territory.

National Metering Identifier (NMI)	A unique number assigned to each metering installation.
Network Capacity	The maximum demand (kW) that the distribution network can provide for at any one time.
Network Coupling Point	The point at which Connection Assets join a Distribution Network, used to identify the distribution service price payable by a Connection Customer.
Network Tariff	Refers to the price (or tariff) that Ergon Energy sets to recover costs associated with the customer's connection and use of the distribution and transmission network. Network tariffs comprise DUOS and TUOS components.
Network User	There are four network user groups included in Ergon Energy's network tariff structures – Individually Calculated Customers (ICC), Connection Asset Customers (CAC), Standard Asset Customers (SAC) and Embedded Generators (EG). For the purposes of our Network Pricing Documents, the term 'network user' refers to both a 'customer' and an 'EG'.
Premises	Means premises owned or occupied by the customer.
Primary Tariff	The main network tariff applicable to a customer's premises. In some circumstances an additional (or secondary) tariff may apply to particular loads that are separately metered at a customer's premises (e.g. our Volume Controlled and Volume Night Controlled network tariffs which are available for customers who have appliances eligible to be controlled by network equipment).
Quoted Service	A type of Alternative Control Service. Similar to Fee Based Services, but they are priced on application as the nature and scope of these services is variable and the cost (and therefore price) are specific to the individual retailer's or customer's needs.
Regulatory Control Period	The regulatory control period is a five (5) year period set down by the AER. The current regulatory control period is 2010–11 to 2014–15.
Regulatory Year	Is a specific financial year within a regulatory control period.
Rules	National Electricity Rules – rules made under the National Electricity Law which governs the operation of the National Electricity Market.
Solar Bonus Scheme	A Queensland Government program that requires Ergon Energy to pay eligible customers for the surplus electricity generated from roof-top solar PV systems that is exported to the Queensland grid.

Standard Asset Customer (SAC)	Means a customer classified as a SAC in accordance with definitions in our Pricing Proposal. Typically reflects those customers with annual electricity consumption below 4 GWh per year. Includes customers with micro generation facilities (such as small scale PV generators) that have a similar service connection and usage profile as other SACs without such facilities.
Standard Control Service	A distribution service provided by Ergon Energy that the AER has classified as a Standard Control Service under the Rules. Includes core network, connection and metering services associated with the access and supply of electricity to customers. Ergon Energy recovers our costs in providing Standard Control Services through the DUOS component of network tariffs which are billed to retailers.
Street Lights (Major)	Standard major street lights are 100, 150, 250 and 400 watt High Pressure Sodium vapour lights and include any other non-standard or obsolete street lights that would be replaced with any of the above lights.
Street Lights (Minor)	Standard minor street lights are 50, 80 and 125 watt Mercury Vapour, 70 watt High Pressure Sodium vapour lights, and compact fluorescent lights of similar luminescence and include any other non-standard or obsolete street lights that would be replaced with any of the above lights.
Tariff Class	A class of customers for one or more direct control services who are subject to a particular tariff or particular tariffs (as predefined in the Rules).
Transmission Use of System (TUOS) Charge	Component of the network tariff which passes through costs associated with use of the transmission network. This includes Designated Pricing Proposal Charges (DPPC) as defined under the Rules.
Unmetered	A customer who takes supply where no meter is installed at the connection point.
Volume Charge	A type of charge (charging parameter) included in Ergon Energy network tariffs which recovers network operation asset costs and a portion of other assets costs not recovered by the Fixed Charge. For those customers with consumption less than 100 MWh per annum (SACs <100MWh), the volume charge also recovers a portion of the shared network costs not included in the fixed charge. The charge is levied as a fixed amount (dollars) per kilowatt hour (kWh) based on the energy consumption recorded by the customer's meter.
West Zone	Those areas outside the East Zone and connected to the national grid, which have a significantly higher distribution cost of supply than the East Zone. The local government areas covered by the West Zone are located in the Network Tariff Guide for Standard Control Services.

Contact Information

Manager Regulatory Determination and Pricing
Ergon Energy Corporation Limited
PO Box 264
FORTITUDE VALLEY QLD 4006
Telephone: 13 10 46
Email: netprice@ergon.com.au

