Experiment No. 5: Arduino-Based Manual Electronic Counter Using Proteus

1. AIM


To write and execute an Embedded C program for a manual electronic counter using Arduino IDE and simulate it in Proteus.

2. SOFTWARE REQUIRED

1. Proteus 8 Professional
2. Arduino IDE

3. PROCEDURE

1. Open Proteus and create a new schematic.
2. Place the Arduino UNO, 7-segment display, and push-button switch.
3. Connect the 7-segment display and switch to the appropriate Arduino pins.
4. Write the counter program in Arduino IDE.
5. Compile the program and export the HEX file.
6. Load the HEX file into the Arduino UNO component in Proteus.
7. Run the simulation and press the switch to increment the counter.
8. Observe the count displayed on the 7-segment display.

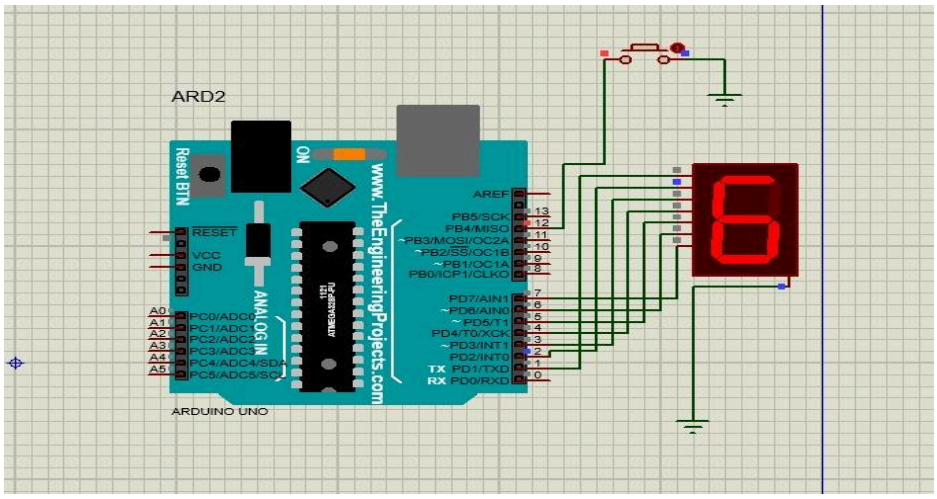

4. RESULT

The Arduino-based manual electronic counter was successfully programmed and simulated in Proteus. The 7-segment display showed the count when the push-button switch was pressed.