

Beyond Unitary Designs: Quantifying Trainability in Parameterized Quantum Circuits

Jinhong Zeng,^{1,*} Zhenyue Du,^{1,*} Penghui Yao,^{2,3} Jun Li,^{2,3,†} Zhaokai Li,^{1,4,5,‡} and Xinhua Peng^{1,4,5,§}

¹*Laboratory of Spin Magnetic Resonance, School of Physical Sciences,
Anhui Province Key Laboratory of Scientific Instrument Development and Application,
University of Science and Technology of China, Hefei 230026, China*

²*Institute of Quantum Precision Measurement, State Key Laboratory of Radio Frequency Heterogeneous Integration,
College of Physics and Optoelectronic Engineering, Shenzhen University, Shenzhen 518060, China*

³*Quantum Science Center of Guangdong-Hong Kong-Macao Greater Bay Area (Guangdong), Shenzhen 518045, China*

⁴*Hefei National Research Center for Physical Sciences at the Microscale,
University of Science and Technology of China, Hefei 230026, China*

⁵*Hefei National Laboratory, University of Science and Technology of China, Hefei 230088, China*

(Dated: May 6, 2026)

Parameterized quantum circuits (PQCs) represent a central class of controllable quantum evolutions, yet their trainability can be severely limited by exponentially vanishing gradients, known as the barren plateau phenomenon. Existing analyses typically rely on strong randomness assumptions, such as unitary designs and remain limited in addressing general structured circuits. In this Letter, we develop a measure-based framework to characterize the trainability of general PQCs and establish a level classification of gradient variance across orthogonal subspaces. Our results reveal a trainability advantage in previously unexplored unitary 1-designs compared to higher-order designs. We further introduce the improvement potential to quantify maximal variance enhancement under local disturbances. This framework provides unified analytical guidance for understanding and engineering trainable quantum circuits on near-term quantum hardware.

Introduction. Quantum technology has gradually come to play an indispensable role in a wide range of practical applications [1–5], particularly in frontier fields such as metrology, precision measurement, and quantum machine learning [6–13]. In the current Noisy Intermediate-Scale Quantum (NISQ) era, hardware imperfections and limited coherence times hinder the execution of complex quantum computation. To achieve quantum advantage under these constraints, Variational Quantum Algorithms (VQAs) have emerged as the dominant paradigm [14–21]. VQAs constitute a hybrid quantum-classical framework that solves complex problems by optimizing trainable PQCs via classical algorithms (e.g., gradient descent [22, 23]). Therefore, the successful execution of VQAs is highly dependent on the trainability of the chosen PQC. The trainability of a PQC is typically directly governed by the gradient variance of the cost function. When the gradient variance of the cost function vanishes exponentially with the system size, the average gradient concentrates around zero. This means that large-scale circuits with this property often require an exponentially large number of measurements to converge, leading to severe trainability issues. This phenomenon, known as the barren plateau [24], constitutes a central obstacle to achieving quantum advantage in the NISQ era.

To investigate the factors influencing the trainability of PQCs, the unitary 2-design framework is commonly used to analyze the gradient variance of a given PQC at a specific parameter [25–31]. The unitary 2-design framework is essentially a simulation of the Haar random distribution, relying on the assumption that the analyzed PQC can approximate the uniform Haar measure to some extent. However, PQCs that approximate the Haar measure exhibit strong randomness [26], which results in poor trainability and a lack of practical utility.

In practice, quantum circuits are typically designed with tai-

lored structures for specific problems, which inevitably leads to a lack of randomness. Common examples include shallow or locality-constrained hardware-efficient ansatzes [32], circuits generated by continuous-time evolution under structured Hamiltonians [33], and symmetry-constrained structures [34]. Such non-random PQCs may exhibit strong trainability and play an important role in practical applications. However, existing unitary 2-design frameworks are inherently tied to the strong randomness assumption; they are effectively restricted to analyzing untrainable circuits, leaving these practical, structured (and potentially trainable) circuits outside their scope. Many studies have attempted to extend the current analytical frameworks. For example, Refs. [35–38] extended the unitary 2-design framework to analyze PQCs composed of multiple unitary 2-design blocks, but each block remains constrained by the strong randomness assumption. The work in Ref. [39] sought to develop a more general analytical approach based on Jordan algebra decomposition. Nevertheless, these frameworks typically rely on prior knowledge of the circuit’s underlying mathematical structure, which is often difficult to determine. To systematically analyze the trainability of practical PQCs, it is necessary to propose a more comprehensive gradient variance framework applicable to a broader class of PQCs, and within which the mathematical structure behind a given circuit can be obtained straightforwardly.

In this Letter, we develop a measure-based framework to characterize the trainability of PQCs beyond the standard unitary design paradigm. This framework approximates the distribution of any PQC to arbitrary precision by developing a class of polynomial probability measures, and obtains explicit gradient variance expressions by decomposing this distribution using zonal polynomials and Weingarten calculus. We also establish a level classification for trainability by projecting the gradient variance into different orthogonal subspaces, which

reveals the significant advantages of the previously overlooked unitary 1-design in terms of trainability. Furthermore, we introduce the concept of “improvement potential” to quantify the maximal variance enhancement achievable under local perturbations. Our work provides systematic analytical guidance for identifying and enhancing the trainability of parameterized quantum circuits in the NISQ era.

Preliminaries. PQC play a central role in near-term quantum computing, serving as the primary framework for implementing variational quantum algorithms. Structurally, a circuit $U(\theta)$ consists of a sequence of parameterized quantum gates, whose tunable parameters θ control the circuit’s evolution. Formally, under the hardware-efficient ansatz, $U(\theta)$ is given by $U(\theta_1, \dots, \theta_L) = \prod_{l=1}^L U_l(\theta_l)W_l$, where $U_l(\theta_l) = \exp(-iH_l\theta_l)$ is a rotation gate and W_l is the entangling gate chosen from a fixed set of unitary operators. The cost function is of the form $C(\theta) = \text{Tr}[U(\theta)\rho U^\dagger(\theta)O]$. Here, ρ is the input density matrix, O is the target observable, and the rotation angles $\{\theta_j\}$ are typically assumed to be independent. Following the standard research on barren plateaus [24, 26], we characterize trainability by the gradient variance.

To analyze the structure of the partial derivative $\partial_\ell C := \partial C / \partial \theta_\ell$, we split the circuit at the parameter θ_ℓ into two parts, U_L and U_R , i.e., $U = U_L U_R$, where $U_L(\theta) = \prod_{j=\ell+1}^L U_j(\theta_j)W_j$, $U_R(\theta) = \prod_{i=1}^\ell U_i(\theta_i)W_i$. Consequently, the partial derivative $\partial_\ell C$ can be expressed as

$$\partial_\ell C = i \text{Tr}[U_R \rho U_R^\dagger [H_\ell, U_L^\dagger O U_L]]. \quad (1)$$

Let $X_L = i[H_\ell, U_L^\dagger O U_L]$, then the gradient variance can be expressed explicitly as

$$\text{Var}^{(\mu_L, \mu_R)}(\rho, O) = \int d\mu_L(U_L) d\mu_R(U_R) \text{Tr}[U_R \rho U_R^\dagger X_L]^2, \quad (2)$$

where $U_L \sim \mu_L$ and $U_R \sim \mu_R$, which means for any measurable set $A \subseteq \mathcal{U}(d)$, $\mathbb{P}(U_L \in A) = \mu_L(A)$, $\mathbb{P}(U_R \in A) = \mu_R(A)$. Here $\mathcal{U}(d)$ denotes the unitary group of degree d , and $\mathbb{P}$ is the probability distribution function.

Since the form of $\partial_\ell C$ is associated with the 1-moment of U_R and U_L , the concept of unitary designs is naturally applied to the evaluation of gradient variances. Formally, a probability measure μ is said to form a unitary t -design [40, 41] if, for every polynomial $p \in \text{Hom}(\mathcal{U}(d), t, t)$, we have $\int d\mu(U) p(U) = \int d\mu_H(U) p(U)$, where $\text{Hom}(\mathcal{U}(d), t, t)$ denotes the set of all homogeneous polynomials of degree t in both the matrix entries of U and $U^\dagger$, and μ_H is the normalized Haar measure.

As discussed in the Introduction, the assumption of a local unitary 2-design is not suitable for many practical PQCs. A new framework is required to develop a general theory of trainability. In the following, we introduce the framework of polynomial measures, which serves as the foundation for our work.

Polynomial approximation to general PQCs. When a PQC is equipped with a specific parameter distribution, it induces a probability measure μ . Here we introduce the notion of a *polynomial measure*. A finite measure μ is said to be poly-

nomial if it is absolutely continuous with respect to μ_H and its Radon–Nikodym derivative $d\mu/d\mu_H$ [42] is a polynomial. The space of polynomial probability measures is dense (in an appropriate sense) in the space of probability measures [43]. In other words, for an arbitrary PQC with a given parameter distribution, there exists a sequence of polynomial probability measures that approximates the corresponding measure to arbitrary accuracy. One can refer to the Supplementary Materials Sec. III for the rigorous proof. By continuity of the function $(\mu_L, \mu_R) \mapsto \text{Var}^{(\mu_L, \mu_R)}(\rho, O)$, if two pairs of probability measures (μ_L, μ_R) and (μ'_L, μ'_R) produce close expectation values for the relevant observables, the corresponding gradient variances $\text{Var}_\theta^{(\mu_L, \mu_R)}(\rho, O)$ and $\text{Var}_\theta^{(\mu'_L, \mu'_R)}(\rho, O)$ are also close. The proof of continuity would also be provided in the Supplementary Materials Sec. III. This compatibility implies that the trainability of arbitrary PQCs can be characterized by integrals of polynomial functions with respect to the Haar measure, whose evaluation is enabled by Weingarten calculus.

Given a polynomial probability measure μ with the Radon–Nikodym derivative f , not all monomials in f contribute to the gradient variance. By the Weingarten calculus, only those monomials lying in $\text{Hom}(\mathcal{U}(d), t, t)$ for some $t \in \mathbb{Z}_+$ contribute to the integral [44]. We refer to the sum of such monomials as the *balanced component* of f . The balanced component admits a decomposition in terms of zonal polynomials [45–47], which naturally arise in matrix-variate distributions (e.g., the Wishart distribution) and in integration over compact Lie groups [47]. For our case on the unitary group $\mathcal{U}(d)$, these polynomials are indexed by irreducible representations of $\mathcal{U}(d)$, which are labeled by non-increasing integer sequences $\lambda = (\lambda_1, \dots, \lambda_d)$ with $\lambda_1 \geq \dots \geq \lambda_d$ [48]. Let χ_λ denote the character of the irreducible representation V_λ and d_λ be its dimension. For each such index λ , one can associate a family of zonal polynomials [49], which are defined by

$$Z_{\lambda, V}(U) := d_\lambda \chi_\lambda(V^\dagger U). \quad (3)$$

According to the orthogonality relation $\langle Z_{\lambda, V_1}, Z_{\lambda', V_2} \rangle = \delta_{\lambda, \lambda'} \langle Z_{\lambda, V_1}, Z_{\lambda, V_2} \rangle$, one can expand the balanced component in the basis of zonal polynomials, which yields a decomposition of the gradient variance into independent contributions. Moreover, since $\text{Tr}[U \rho U^\dagger X_L]^2$ is a balanced polynomial in U of degree at most 2, only indices in the set $S_\alpha = \{\lambda : |\lambda| = 0, |\lambda_+| = \alpha\}$, $\alpha \leq 2$ contribute to the gradient variance, where $|\lambda_+|$ denotes the sum of the positive entries of λ . There are $\sum_{\alpha=0}^2 |S_\alpha| = 6$ such indices, and the corresponding zonal polynomials are given in [49] explicitly. Further details on the properties of zonal polynomials and their application to gradient variance calculations are provided in Supplementary Materials Sec. III.

Assume further that the parameters θ_l are i.i.d. uniformly distributed on $[0, 2\pi)$, then the polynomial measure associated with the PQC admits the explicit form given in the following proposition.

Proposition 1. Let $U(\theta) = \prod_{l=1}^L U_l(\theta_l)W_l$ be a parameterized

quantum circuit composed of fixed entangling gates $\{W_l\}$ and parameter-dependent rotation gates $\{U_l(\theta_l) := \exp(-iP_l\theta_l)\}$, where each P_l is a Pauli word and the parameters θ_l are i.i.d. uniformly distributed on $[0, 2\pi)$. For a Pauli word P , define

$$P_1 := I, \quad P_2 := P, \quad P_3 := \frac{I + iP}{\sqrt{2}}, \quad P_4 := \frac{I - iP}{\sqrt{2}}. \quad (4)$$

Then the following statements hold:

1. **Parameter-dependent rotation gate.** The probability distribution of a parameter-dependent rotation gate $U_l(\theta_l)$ is represented by the polynomial

$$1 + \frac{1}{2} \sum_{k=1}^2 Z_{(1,0,\dots,0,-1), P_{l,k}} + \frac{1}{4} \sum_{\lambda \in S_2} \sum_{k=1}^4 Z_{\lambda, P_{l,k}}. \quad (5)$$

2. **Fixed entangling gate.** The probability distribution of a fixed entangling gate W_l is represented by the Dirac distribution concentrated at W_l .

3. **Full circuit.** The probability distribution of the full circuit $U(\theta)$ is represented by the polynomial

$$1 + \frac{1}{2^L} \sum_{i_1, \dots, i_L=1}^2 Z_{(1,0,\dots,0,-1), \prod_{s=1}^L P_{s,i_s} W_s} + \frac{1}{4^L} \sum_{\lambda \in S_2} \sum_{i_1, \dots, i_L=1}^4 Z_{\lambda, \prod_{s=1}^L P_{s,i_s} W_s}. \quad (6)$$

Here, “represented by the polynomial” means that, when computing gradient variances, one may equivalently replace the probability measure of the circuit with the polynomial measure associated with the above polynomial.

Proposition 1 provides an explicit polynomial measure family to approximate any PQC under the hardware-efficient ansatz. Thus, the gradient variance of an arbitrary PQC can be obtained by the Weingarten calculus of polynomials with respect to the Haar measure. For rigorous proofs of Proposition 1, one can refer to the Supplementary Materials Sec. III. In the following section, we will delve deeper into the analysis of variance via an exponential-level classification theorem.

Level classification of variances. The above analysis shows that an arbitrary PQC can be approximated by polynomial probability measures. The balanced component of such measures, which governs the gradient variance, admits a decomposition in terms of zonal polynomials [45–47]. Consequently, the total variance can be expressed as the sum of three contributions:

$$\text{Var}^{(\mu_L, \mu_R)}(\rho, O) = \sum_{\alpha=0}^2 \text{Var}_\alpha^{(\mu_L, \mu_R)}(\rho, O), \quad (7)$$

where the α -th order variance is defined by

$$\text{Var}_\alpha^{(\mu_L, \mu_R)}(\rho, O) := \sum_{\lambda \in S_\alpha} \int d\mu_L(U_L) d\mu_R(U_R) \left(\int d\mu_H(V) \overline{Z_{\lambda,V}(U)} \text{Tr}[V \rho V^\dagger X_L]^2 \right). \quad (8)$$

Through the zonal polynomial decomposition, we have projected the variance onto several subspaces that admit explicit computation successfully. Among these, the bound $\text{Var}_0 \leq C_0(\rho, O)d^{-2}$, $C_0(\rho, O) > 0$ for the zeroth-order variance is a well-established result [24]. For the first- and second-order variances, we provide the following theoretical upper bounds.

Theorem 1. Let U_L and U_R be the unitaries obtained from the splitting defined before, with $U_L \sim \mu_L$ and $U_R \sim \mu_R$. Then the α -th-order variance admits the following asymptotic bounds:

$$\text{Var}_\alpha^{(\mu_L, \mu_R)}(\rho, O) \leq C_\alpha(\rho, O)d^{\alpha-2} \quad \text{for } \alpha = 0, 1, 2, \quad (9)$$

where $C_\alpha(\rho, O)$ is a constant independent on d .

Building on the uniform approximation by polynomial measures, Theorem 1 characterizes the variance contributions from orthogonal subspaces $\{\oplus_{\lambda \in S_\alpha} V_\alpha : \alpha = 0, 1, 2\}$ for general PQCs, thereby providing a level classification of total variances based on structural properties of measures. It demonstrates that the second-order variance determines whether there exists a barren plateau at the given parameter. Moreover, for a pure state ρ , we can further build a relation between the total variance and the first-order variance by

$$\text{Var}^{(\mu_L, \mu_R)}(\rho, O) \leq \frac{d}{2} \text{Var}_1^{(\mu_L, \mu_R)}(\rho, O) + O(d^{-1}), \quad (10)$$

indicating that a large first-order variance is necessary to avoid degraded trainability. Readers can refer to the Supplementary Materials Sec. IV for detailed proofs of Theorem 1 and Eq. (10).

By Eq. (8), the first-order contribution to the variance vanishes if at least one of μ_L or μ_R forms a unitary 1-design. It then follows from Eq. (10) that the total variance is bounded by $O(d^{-1})$. The following proposition establishes that this bound is tight.

Proposition 2. Fix a pure state ρ and an idempotent operator P on $\mathbb{C}^d$ (i.e., $P^2 = I$). For $m \in \mathbb{N}$, define a probability measure v_m on $\mathcal{U}(d)$ by

$$\frac{dv_m}{d\mu_H}(U) = c_m (\text{Tr}[U \rho U^\dagger P])^{2m}, \quad (11)$$

where $c_m > 0$ is the normalization constant. Then the following statements hold:

1. The measure v_m forms a unitary 1-design.

2. Moreover, for sufficiently large m , there exist probability measures μ_L and μ_R on $\mathcal{U}(d)$, and observables O_1, O_2 , such that

$$\text{Var}^{(\mu_L, \nu_m)}(\rho, O_1), \text{Var}^{(\nu_m, \mu_R)}(\rho, O_2) \geq \gamma d^{-1}, \quad (12)$$

where $\gamma > 0$ is a constant independent of d .

This result indicates that when the probability measure of one side of the circuit at a parameter forms a unitary 1-design, its total gradient variance can be at most on the order of d^{-1} , thereby exhibiting superior trainability compared to unitary 2-designs, which are bounded by the d^{-2} scaling. The proofs of Theorem 1 and Proposition 2 are provided in the Supplementary Material, Sec. IV.

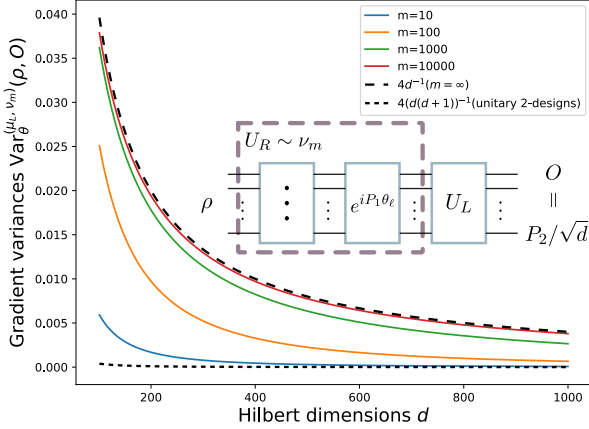


FIG. 1. The gradient variances of the circuit when adopting unitary 1-designs and unitary 2-designs as functions of the system size d . The inset shows the circuit structure used in this example. The long-dashed line represents the upper bound $4d^{-1}$ for unitary 1-designs in this circuit and the colored solid lines correspond to unitary 1-designs with μ_R taking different ν_m . The gradient variance gradually approaches the upper bound as m increases. In contrast, when the circuit adopts a unitary 2-design, the gradient variance is fixed at $4(d(d+1))^{-1}$ (short-dashed line).

Furthermore, we demonstrate the attainability of the d^{-1} scaling of the gradient variance at a given parameter θ_ℓ under a specific unitary 1-design setting. Consider the rotation gate at position θ_ℓ to be $\exp(-iP_1\theta_\ell)$ and the observable $O = P_2/\sqrt{d}$, where P_1 and P_2 are two noncommuting Pauli words and U_L is an operator commuting with P_2 . When μ_R forms a unitary 2-design, the variance $\text{Var}^{(\mu_L, \mu_R)}(\rho, O)$ can be computed as $4(d(d+1))^{-1}$, as indicated by the short-dashed line in Figure 1. When μ_R is taken as the unitary 1-design satisfying Eq. (9) with $P = [P_1, P_2]/2i$, the variance $\text{Var}^{(\mu_L, \mu_R)}(\rho, O)$ is bounded by the d^{-1} scaling and, as m increases (colored solid lines in Figure 2), approaches the upper bound $4d^{-1}$, marked by the long-dashed line.

The Improvement Potential. Beyond characterizing the trainability of a given PQC, it is also of interest to understand how to enhance trainability within a fixed circuit architecture. So far, several methods have been developed to enhance trainability, such as the substitution by shallow circuits, tailored

problem-specific ansatz, and optimized initialization strategies [36, 50–54]. However, these approaches typically rely on global or heuristic modifications and provide limited quantitative guidance within a fixed circuit structure. Here, we propose a formula to characterize the maximum improvement in trainability by inserting parametric oracles at a given position. Specifically, we insert a parametric oracle S_p associated with the probability measure μ on the right side of U_R . The probability measure for the combination of U_L and S_p is the convolution $\mu_L * \mu$. The schematic diagram of the process is shown in Figure 2.

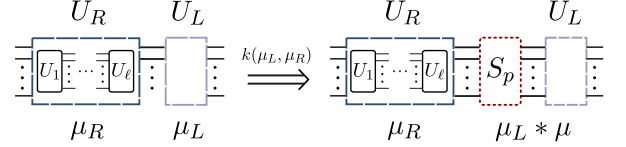


FIG. 2. The process of inserting a parametric oracle at a given position to potentially enhance trainability. Here, S_p denotes an arbitrary parametric unitary oracle associated with probability measure μ and the improvement potential $k(\mu_L, \mu_R)$ represents the maximal improvement of the total variance during the process.

Formally, we consider the following quantity

$$k(\mu_L, \mu_R) := \sup_{\mu \in \mathcal{P}(\mathcal{U}(d))} \frac{\text{Var}^{(\mu_L * \mu, \mu_R)}(\rho, O)}{\text{Var}^{(\mu_L, \mu_R)}(\rho, O)}, \quad (13)$$

which characterizes the maximal relative enhancement of variance at the parameter θ_ℓ by inserting an oracle. If $k(\mu_L, \mu_R) = 1$, the PQC exhibits no improvement potential at θ_ℓ ; whereas $k(\mu_L, \mu_R) > 1$ indicates the existence of improvement potential at that parameter. We provide the following criterion to determine whether $k(\mu_L, \mu_R) > 1$ or not:

Theorem 2. For a PQC at θ_ℓ with the probability measure pair (μ_L, μ_R) , the improvement potential obtained by inserting a parametric oracle at θ_ℓ is

$$k(\mu_L, \mu_R) = \frac{\|h * g\|_\infty}{\|hg\|_1}. \quad (14)$$

Here g is the Radon–Nikodym derivative $d\mu_L/d\mu_H$ and h represents the variance obtained after integrating over the right unitary defined by

$$h(V) = \int d\mu_R(U_R) \text{Tr}[V\rho V^\dagger i[U_R\rho U_R^\dagger, H_\ell]]^2. \quad (15)$$

Both functions can be obtained by the pair (μ_L, μ_R) .

Moreover, we find that the quantity $\text{Var}^{(\mu_L, \mu_H)}(\rho, O)$ provides a reference threshold. This threshold can be used to assess whether improvement is possible at a given parameter. For a pair of probability measures (μ_L, μ_R) , if $\text{Var}^{(\mu_L, \mu_R)}(\rho, O) < \text{Var}^{(\mu_H, \mu_R)}(\rho, O)$, then we can prove that the circuit must possess improvement potential at θ_ℓ . In contrast, for circuits where μ_R satisfies the unitary 2-design property, the gradient variance satisfies $\text{Var}^{(\mu_L, \mu_R)}(\rho, O) = \text{Var}^{(\mu_H, \mu_R)}(\rho, O)$.

In this case, such circuits exhibit no training potential, i.e., $k(\mu_L, \mu_R) = 1$. Therefore, all parameterized quantum circuits, after being optimized through the process illustrated in Figure 2, can achieve performance at a given parameter position that is no worse than that of unitary 2-design circuits. When $\text{Var}^{(\mu_L, \mu_R)}(\rho, O) \geq \text{Var}^{(\mu_H, \mu_R)}(\rho, O)$, no definitive conclusion can be drawn from this comparison alone. In this regime, the presence or absence of improvement potential must be determined using the criterion established in Theorem 2. More detailed discussions and constructive examples are provided in the Supplementary Material Sec. V.

Connection to classical theories and Applications. In the final part of this paper, we present three examples to validate our theory and illustrate potential applications to the characterization of trainability.

(i) **Equivalence with direct integration over parameter distributions.** Computing the gradient variance via integration with zonal polynomials in Proposition 1 is equivalent to direct integration over the parameter distribution. As an illustrative example, consider $U_R = \exp(-iP\theta)$, where P is a Pauli word and θ satisfies the uniform distribution on $[0, 2\pi)$. Then both the integral in Eq. (5) and the direct integration over θ yield the same gradient variance: $\frac{1}{4} \sum_{k=1}^4 \text{Tr}[P^k \rho P^k X_L]^2$. This agreement validates the correctness of our framework.

(ii) **Approximation of classical unitary design theory.** Any probability measure μ that forms a unitary 2-design can be approximated by a sequence of polynomial probability measures of the form

$$\left\{ \nu : \frac{d\nu}{d\mu_H} = 1 + \sum_{|\lambda_+| \geq 2} \sum_{V_\lambda} a_{\lambda, V_\lambda} Z_{\lambda, V_\lambda} \right\}, \quad (16)$$

where the coefficients a_{λ, V_λ} are chosen to ensure positivity and normalization.

(iii) **A practical criterion for trainability.** By Eq. 10, if the scalar

$$d \cdot \text{Var}_1^{(\mu_L, \mu_R)}(\rho, O)$$

decays faster than any polynomial in $\log_2(d)$, then a barren plateau occurs. Under the common assumption that all parameters are i.i.d. and uniformly distributed on $[0, 2\pi)$, one has

$$d \cdot \text{Var}_1^{(\mu_L, \mu_R)}(\rho, O) \approx 2 \text{Tr}[U \rho^2 U^\dagger X_L^2]. \quad (17)$$

This quantity can be efficiently estimated by replacing each rotation gate $\exp(-iP_j \theta_j)$ with a uniformly random choice from the set $\{P_j^1, P_j^2, P_j^3, P_j^4\}$, while keeping the entangling gates unchanged. Similar circuit constructions can be found in Ref. [55].

Conclusion and discussion. Trainability is a key metric for evaluating the performance of VQAs, as it determines

whether the circuit parameters of the underlying PQCs can be efficiently updated to a desirable solution. In this Letter, we developed a measure-theoretic framework based on balanced polynomial measures to characterize the trainability of arbitrary PQCs. Through zonal polynomial decomposition, this framework yields explicit expressions for the gradient variance and proposes a level classification system for trainability. Our work breaks through the strong randomness assumptions of the existing unitary design framework, enabling the trainability analysis of highly structured, practically meaningful PQCs and thereby paving the way for circuit design on near-term quantum hardware.

Looking ahead, it would be interesting to relate this framework to the decomposition of circuit-accessible spaces via dynamic Lie algebras [38, 56, 57], thereby developing a more physics-informed perspective. In addition, the framework is well-suited to the study of circuits with symmetries [34, 58, 59], which we leave for future work. Finally, our approach can be extended to other ansatz, such as the unitary coupled cluster ansatz [60–62] and the Hamiltonian variational ansatz [63, 64].

Acknowledgments.— The authors gratefully acknowledge the support of the National Science and Technology Major Project (Grant Nos. 2024ZD0302000, 2021ZD0303205, 2024ZD0300400), the National Natural Science Foundation of China (Grant Nos. 92165108, 12261160569, 12441502) and the Guangdong Provincial Quantum Science Strategic Initiative (GDZX2505001).

* These authors contribute equally

† lijunquantum@szu.edu.cn

‡ zkli@ustc.edu.cn

§ xhpeng@ustc.edu.cn

- [1] A. J. Daley, I. Bloch, C. Kokail, S. Flannigan, N. Pearson, M. Troyer, and P. Zoller, *Nature* **607**, 667 (2022).
- [2] H.-Y. Huang, M. Broughton, J. Cotler, S. Chen, J. Li, M. Mohseni, H. Neven, R. Babbush, R. Kueng, J. Preskill, *et al.*, *Science* **376**, 1182 (2022).
- [3] S. Bravyi, D. Gosset, and R. König, *Science* **362**, 308 (2018).
- [4] S. Lee, J. Lee, H. Zhai, Y. Tong, A. M. Dalzell, A. Kumar, P. Helms, J. Gray, Z.-H. Cui, W. Liu, *et al.*, *Nature communications* **14**, 1952 (2023).
- [5] D. R. Arvidsson-Shukur, N. Yunger Halpern, H. V. Lepage, A. A. Lasek, C. H. Barnes, and S. Lloyd, *Nature communications* **11**, 3775 (2020).
- [6] R. Liu, Y. Hou, Z. Wu, H. Zhou, J. Chen, Z. Li, and X. Peng, *Quantum Science and Technology* **9**, 045024 (2024).
- [7] A. Muñoz de las Heras, C. Tabares, J. T. Schneider, L. Tagliacozzo, D. Porras, and A. González-Tudela, *Physical Review Research* **6**, 013299 (2024).
- [8] A. M. de Las Heras, D. Porras, and A. González-Tudela, *Nanophotonics* **14**, 2075 (2025).
- [9] Y. Yang, R. J. Chapman, A. Youssry, B. Haylock, F. Lenzini, M. Lobino, and A. Peruzzo, *npj Quantum Information* **11**, 19 (2025).
- [10] T. Haug and M. Kim, *Physical Review A* **106**, 052611 (2022).

- [11] J. Miao, C.-Y. Hsieh, and S.-X. Zhang, *Physical Review Applied* **21**, 014053 (2024).
- [12] J. Tilly, H. Chen, S. Cao, D. Picozzi, K. Setia, Y. Li, E. Grant, L. Wossnig, I. Rungger, G. H. Booth, *et al.*, *Physics Reports* **986**, 1 (2022).
- [13] W. Wu, G. Yan, X. Lu, K. Pan, and J. Yan, in *International conference on machine learning* (PMLR, 2023) pp. 37745–37764.
- [14] A. Peruzzo, J. McClean, P. Shadbolt, M.-H. Yung, X.-Q. Zhou, P. J. Love, A. Aspuru-Guzik, and J. L. O’Brien, *Nature communications* **5**, 4213 (2014).
- [15] E. Farhi, J. Goldstone, and S. Gutmann, *arXiv preprint arXiv:1411.4028* (2014).
- [16] J. R. McClean, J. Romero, R. Babbush, and A. Aspuru-Guzik, *New Journal of Physics* **18**, 023023 (2016).
- [17] P. J. O’Malley, R. Babbush, I. D. Kivlichan, J. Romero, J. R. McClean, R. Barends, J. Kelly, P. Roushan, A. Tranter, N. Ding, *et al.*, *Physical Review X* **6**, 031007 (2016).
- [18] A. Kandala, A. Mezzacapo, K. Temme, M. Takita, M. Brink, J. M. Chow, and J. M. Gambetta, *nature* **549**, 242 (2017).
- [19] H. R. Grimsley, S. E. Economou, E. Barnes, and N. J. Mayhall, *Nature communications* **10**, 3007 (2019).
- [20] S. Endo, J. Sun, Y. Li, S. C. Benjamin, and X. Yuan, *Physical Review Letters* **125**, 010501 (2020).
- [21] V. Cimini, M. Valeri, S. Piacentini, F. Ceccarelli, G. Corrielli, R. Osellame, N. Spagnolo, and F. Sciarrino, *npj Quantum Information* **10**, 26 (2024).
- [22] K. Mitarai, M. Negoro, M. Kitagawa, and K. Fujii, *Physical Review A* **98**, 032309 (2018).
- [23] M. Schuld, V. Bergholm, C. Gogolin, J. Izaac, and N. Killoran, *Physical Review A* **99**, 032331 (2019).
- [24] J. R. McClean, S. Boixo, V. N. Smelyanskiy, R. Babbush, and H. Neven, *Nature communications* **9**, 4812 (2018).
- [25] C. Ortiz Marrero, M. Kieferová, and N. Wiebe, *PRX quantum* **2**, 040316 (2021).
- [26] Z. Holmes, K. Sharma, M. Cerezo, and P. J. Coles, *PRX Quantum* **3**, 010313 (2022).
- [27] W. Gong, D. Yuan, W. Li, and D.-L. Deng, *Physical Review Research* **6**, 023020 (2024).
- [28] A. Arrasmith, M. Cerezo, P. Czarnik, L. Cincio, and P. J. Coles, *Quantum* **5**, 558 (2021).
- [29] H. Qi, L. Wang, H. Zhu, A. Gani, and C. Gong, *Quantum Information Processing* **22**, 435 (2023).
- [30] M. Liu, J. Liu, Y. Alexeev, and L. Jiang, *npj Quantum Information* **8**, 137 (2022).
- [31] J. Cunningham and J. Zhuang, *Quantum Information Processing* **24**, 48 (2025).
- [32] H. C. Watanabe, R. Raymond, Y.-Y. Ohnishi, E. Kaminishi, and M. Sugawara, *IEEE Transactions on Quantum Engineering* **4**, 1 (2023).
- [33] C.-Y. Park and N. Killoran, *Quantum* **8**, 1239 (2024).
- [34] J. Lee, W. J. Huggins, M. Head-Gordon, and K. B. Whaley, *Journal of chemical theory and computation* **15**, 311 (2018).
- [35] F. G. Brandao, A. W. Harrow, and M. Horodecki, *Communications in Mathematical Physics* **346**, 397 (2016).
- [36] M. Cerezo, A. Sone, T. Volkoff, L. Cincio, and P. J. Coles, *Nature communications* **12**, 1791 (2021).
- [37] A. Pesah, M. Cerezo, S. Wang, T. Volkoff, A. T. Sornborger, and P. J. Coles, *Physical Review X* **11**, 041011 (2021).
- [38] M. Ragone, B. N. Bakalov, F. Sauvage, A. F. Kemper, C. Ortiz Marrero, M. Larocca, and M. Cerezo, *Nature Communications* **15**, 7172 (2024).
- [39] E. R. Anschuetz, *arXiv preprint arXiv:2408.11901* (2024).
- [40] D. Gross, K. Audenaert, and J. Eisert, *Journal of mathematical physics* **48** (2007).
- [41] C. Dankert, R. Cleve, J. Emerson, and E. Livine, *Physical Review A—Atomic, Molecular, and Optical Physics* **80**, 012304 (2009).
- [42] G. B. Folland, *Real analysis: modern techniques and their applications*, Vol. 40 (John Wiley & Sons, 1999).
- [43] The denseness is understood with respect to the weak* topology. See Supplemental Material for a detailed statement; see also standard references on distribution theory.
- [44] M. Fukuda, R. König, and I. Nechita, *Journal of Physics A: Mathematical and Theoretical* **52**, 425303 (2019).
- [45] A. T. James, *Annals of Mathematics* **74**, 456 (1961).
- [46] A. T. James, *The Annals of Mathematical Statistics* **35**, 475 (1964).
- [47] A. G. Constantine, *The Annals of Mathematical Statistics* **34**, 1270 (1963).
- [48] D. Bump *et al.*, *Lie groups*, Vol. 225 (Springer, 2004).
- [49] A. Roy and A. J. Scott, *Designs, codes and cryptography* **53**, 13 (2009).
- [50] H.-K. Zhang, S. Liu, and S.-X. Zhang, *Physical Review Letters* **132**, 150603 (2024).
- [51] X. Liu, G. Liu, H.-K. Zhang, J. Huang, and X. Wang, *IEEE Transactions on Quantum Engineering* (2024).
- [52] E. Grant, L. Wossnig, M. Ostaszewski, and M. Benedetti, *Quantum* **3**, 214 (2019).
- [53] A. Skolik, J. R. McClean, M. Mohseni, P. Van Der Smagt, and M. Leib, *Quantum Machine Intelligence* **3**, 5 (2021).
- [54] G. Verdon, M. Broughton, J. R. McClean, K. J. Sung, R. Babbush, Z. Jiang, H. Neven, and M. Mohseni, *arXiv preprint arXiv:1907.05415* (2019).
- [55] F. Arute, K. Arya, R. Babbush, D. Bacon, J. C. Bardin, R. Barends, R. Biswas, S. Boixo, F. G. Brandao, D. A. Buell, *et al.*, *nature* **574**, 505 (2019).
- [56] N. Diaz, D. García-Martín, S. Kazi, M. Larocca, and M. Cerezo, *arXiv preprint arXiv:2310.11505* (2023).
- [57] E. Fontana, D. Herman, S. Chakrabarti, N. Kumar, R. Yalovetzky, J. Heredge, S. H. Sureshbabu, and M. Pistoia, *Nature Communications* **15**, 7171 (2024).
- [58] L. Schatzki, M. Larocca, Q. T. Nguyen, F. Sauvage, and M. Cerezo, *npj Quantum Information* **10**, 12 (2024).
- [59] I. Marvian, *Physical Review Research* **6**, 043292 (2024).
- [60] A. G. Taube and R. J. Bartlett, *International journal of quantum chemistry* **106**, 3393 (2006).
- [61] M.-A. Filip and A. J. Thom, *The Journal of Chemical Physics* **153** (2020).
- [62] A. Anand, P. Schleich, S. Alperin-Lea, P. W. Jensen, S. Sim, M. Díaz-Tinoco, J. S. Kottmann, M. Degroote, A. F. Izmaylov, and A. Aspuru-Guzik, *Chemical Society Reviews* **51**, 1659 (2022).
- [63] D. Wecker, M. B. Hastings, and M. Troyer, *Physical Review A* **92**, 042303 (2015).
- [64] R. Wiersema, C. Zhou, Y. de Sereville, J. F. Carrasquilla, Y. B. Kim, and H. Yuen, *PRX quantum* **1**, 020319 (2020).