

# 2.7 $\Omega$ Low Voltage SPDT Analog Switch in 6-pin SC70

### **Features**

- Wide Power Supply Range: 1.8V to 5.5V
- High Bandwidth: 300MHz
- High Off-Isolation:84dB at 1MHz

51dB at 10MHz

- On-Resistance: 2.7 Ω (typ) at 5.0V
- Fast Switching Time
   t<sub>on</sub> = 12.0ns; t<sub>off</sub> = 5.0ns
- TTL/CMOS Compatible
- Break-Before-Make Switching
- Rail-to-Rail Signal Range
- Operation Temperature Range:


**-40**°C to 85°C

• Lead (Pb) Free SC70-6 Package

#### **Applications**

- Wireless Handsets
- MP3 Players
- Portable Electronic Devices
- Relay Replacement
- PDAs
- Audio & Video Signal Routing
- PCMCIA Cards
- Computer Peripherals
- Modems

#### **Pin Configuration**



SSS: production id

#### **Description**


The BL1551 is a Single Wide-Bandwidth, fast single-pole double-throw (SPDT) CMOS switch featuring an On-Resistance of 2.7 ohm at  $V_{\rm CC}$ =5.0V and wide power supply range from 1.8V to 5.5V. It can be used as an analog switch or as a low-delay bus switch. The 300MHz high bandwidth performance supports

the high frequency application.

Break-before-make function for both parts eliminates

Break-before-make function for both parts eliminates signal disruption during switching from preventing both switches being enabled simultaneously.

## **Block Diagram**

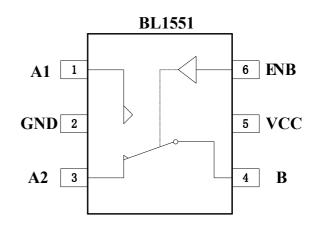

### **Function Table**

ENB	Function
1	A1 Connected to B
0	A2 Connected to B

## **Pin Description**

Pin Name	Туре	Description
VCC	PWR	Power Supply
GND	Ground	Ground
В	Input/Output	Data Port
A1	Input/Output	Data Port
A2	Input/Output	Data Port
ENB	Input	Logic Control Signal



### **ABSOLUTE MAXIMUM RATINGS**

Parameter	Symbol	Min	Max	Units
DC Supply Voltage	V <sub>CC</sub>	-0.3	6	V
DC Switch Voltage	V <sub>A1</sub> / V <sub>A2</sub> / V <sub>B</sub>	-0.3	V <sub>SUP</sub> + 0.3	V
DC Input Voltage	$V_{ENB}$	-0.3	V <sub>SUP</sub> + 0.3	V
Continuous Current	I <sub>(A1/A2/B)</sub>	-200	+200	mA
Peak Current <sup>(1)</sup>	I <sub>PEAK(A1/A2/B)</sub>	-300	+300	mA
Operating Temperature Range	T <sub>A</sub>	-40	85	${\mathbb C}$

#### Notes:

- (1) Pulsed at 1ms, 50% duty circle
- (2) Stress beyond above listed "Absolute Maximum Ratings" may lead permanent damage to the device. These are stress ratings only and operations of the device at these or any other conditions beyond those indicated in the operational sections of the specifications are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.
- (3) Control input(V<sub>ENB</sub>) must be held HIGH or LOW, and mustn't be floated.

## RECOMMENDED OPERATING CONDITIONS

DC Supply Voltage (V <sub>CC</sub> )	1.8V to 5.5V
Switch Input Voltage (V <sub>S</sub> )	0V to V <sub>CC</sub>
Control Input Voltage (V <sub>ENB</sub> )	0V to V <sub>CC</sub>
Operation Temperature (TA)	40°C to +85°C

## **ORDERING INFORMATION**

MODEL	PIN- PACKAGE	SPECIFIED TEMPERATURE RANGE	PACKAGE MARKING	PACKAGE OPTION
BL1551	SC70 - 6	- 40°C to +85°C	Asss (1)	Tape and Reel, 3000

#### WHERE (1):

"sss" IS 3 DIGITS PRODUCTION ID SIZE OF ALL OTHER CHARACTERS = 20 mil

COLOUR: LASER MARKING



# DC ELECTRICAL CHARACTERISTICS @ +2.7V Supply

Parameter	Symbol	Conditions	Guar	anteed	Limit	t Unit	
	- J			Typ. <sup>(1)</sup>	Max.		
		Analog Switch					
Analog Signal Range	$V_{A1}/V_{A2}/V_{B}$		0		$V_{CC}$	V	
A1 On-Resistance	R <sub>ON(A1)</sub>	$V_{CC} = 2.7V$ ; $I_B = -10mA$ ; $V_{A1} = 1.5V$		5.5		Ω	
A2 On-Resistance	R <sub>ON(A2)</sub>	$V_{CC}$ = 2.7V; $I_B$ =-10mA ; $V_{A2}$ =1.5V		5.5		Ω	
A1 On-Resistance Flatness <sup>(2)</sup>	R <sub>FLAT(A1)</sub>	$V_{CC}$ = 2.7V; $I_B$ =-10mA; $V_{A1}$ =1.5V		2.3		Ω	
A2 On-Resistance Flatness <sup>(2)</sup>	R <sub>FLAT(A2)</sub>	$V_{CC}$ = 2.7V; $I_B$ =-10mA; $V_{A2}$ =1.5V		2.3		Ω	
On-Resistance Match Between Channels <sup>(3)</sup>	$\triangle R_{ON}$	$V_{CC} = 2.7V; I_B = -10mA;$ $V_{A2} / V_{A1} = 1.5$		0.15	1	Ω	
A1 or A2 Off Leakage Current	I <sub>OFF(A1)</sub> or I <sub>OFF(A2)</sub>	$V_{CC}$ = 3.6V; $V_{A1}$ or $V_{A2}$ = 3V, 0.3V; $V_{B}$ = 0.3V, 3 V		0.01	1	uA	
B On Leakage Current	I <sub>ON(B)</sub>	$V_{CC}$ = 3.6V; $V_{A1}$ or $V_{A2}$ = 3.3V, 0.3V; $V_{B}$ = 0.3V, 3.3 V or floating		0.01	1	uA	
Digital I/O							
Input Voltage High	V <sub>IH</sub>	Minimum High Level Input Voltage	1			V	
Input Voltage Low	$V_{IL}$	Maximum Low Level Input Voltage			0.5	V	
Input Leakage Current	I <sub>ENB</sub>	V <sub>ENB</sub> = 0 or Vcc		0.01	1	uA	

- (1) Typical characteristics are at +3V supply and +25°C
- (2) Flatness is defined as the difference between the maximum and minimum value of on resistance as measured over the specified analog signal ranges.
- (3)  $\triangle R_{ON}$ =  $R_{ON(MAX)}$   $R_{ON(MIN)}$ , between A1 and A2 .



# **DYNAMIC CHARACTERISTICS @ +2.7V Supply**

Parameter	Symbol	mbol Conditions		Guar	anteed	Limit	Unit		
i arameter	Cymbol			Min.	Typ. (1)	Max.	Oilit		
AC ELECTRICAL CHARACTERISTICS									
Turn-On Time	t <sub>ON</sub>	$V_{CC} = 2.7V$ ; $V_{A1}$ or $300\Omega$ ; $C_L = 35pF$ ,			17.0		ns		
Turn-Off Time	t <sub>OFF</sub>	$V_{CC} = 2.7V$ ; $V_{A1}$ or $300\Omega$ ; $C_L = 35pF$ ,			9.0		ns		
Break-Before-Make Time	t <sub>BBM</sub>	$V_{CC}$ = 2.7V; $V_{A1}$ or $V_{A2}$ = 1.5V, $R_L$ = 300 $\Omega$ ; $C_L$ = 35pF			15.0		ns		
NC OFF Capacitance	$C_{OFF(A1)}$	f = 1	MHz		5.5		pF		
NO OFF Capacitance	$C_{OFF(A2)}$	f = 1	MHz		5.5		pF		
NC ON Capacitance	C <sub>ON(A1)</sub>	f = 1	MHz		15.5		pF		
NO ON Capacitance	C <sub>ON(A2)</sub>	f = 1	MHz		15.5		pF		
ADDITIONAL APPLIC	ATION CI	<b>HARACTERISTIC</b>	S						
3dB Bandwidth	f <sub>3dB</sub>	Signal = 0dBm, R	$_{L} = 50\Omega, C_{L} = 5pF$		300		MHz		
Off Isolation <sup>(2)</sup>	$R_L = 50\Omega, C_L = 5pF,$ $f = \frac{1}{2}$		f=1MHz		-84		dB		
On isolation	V <sub>Iso</sub>	Signal = $0dBm$ $f=10MHz$			-51		dB		
Supply									
Power Supply Range	V <sub>cc</sub>			1.8		5.5	V		

- (1) Typical characteristics are at +3V supply and  $25^{\circ}\text{C}$
- (2) Off Channel Isolation =  $20log_{10} [(V_{A1\backslash A2})/V_B]$



# DC ELECTRICAL CHARACTERISTICS @ +5.0V Supply

Parameter	Symbol	Conditions	Guar	anteed	Limit	t Unit	
1 4.4	- J			Typ. <sup>(1)</sup>	Max.		
		Analog Switch					
Analog Signal Range	$V_{A1}/V_{A2}/V_{B}$		0		V <sub>CC</sub>	V	
A1 On-Resistance	R <sub>ON(A1)</sub>	$V_{CC} = 5.0V$ ; $I_B = -10mA$ ; $V_{A1} = 3.5V$		2.7		Ω	
A2 On-Resistance	R <sub>ON(A2)</sub>	$V_{CC}$ = 5.0V; $I_B$ =-10mA; $V_{A2}$ =3.5V		2.7		Ω	
A1 On-Resistance Flatness <sup>(2)</sup>	R <sub>FLAT(A1)</sub>	$V_{CC} = 5.0V$ ; $I_B = -10mA$ ; $V_{A1} = 3.5V$		0.8		Ω	
A2 On-Resistance Flatness <sup>(2)</sup>	R <sub>FLAT(A2)</sub>	$V_{CC}$ = 5.0V; $I_B$ =-10mA; $V_{A2}$ =3.5V		0.8		Ω	
On-Resistance Match Between Channels <sup>(3)</sup>	$\triangle R_{ON}$	$V_{CC} = 5.0V; I_B = -10mA;$ $V_{A2} / V_{A1} = 3.5$		0.15		Ω	
A1 or A2 Off Leakage Current	I <sub>OFF(A1)</sub> or I <sub>OFF(A2)</sub>	$V_{CC}$ = 5.5V; $V_{NO}$ or $V_{NC}$ = 4.5V, 1.0V; $V_{COM}$ = 1.0V, 4.5 V		0.01	1	uA	
B On Leakage Current	I <sub>ON(B)</sub>	$V_{CC}$ = 5.5V; $V_{A1}$ or $V_{A2}$ = 4.5V, 1.0V; $V_{B}$ = 1.0V, 4.5 V or floating		0.01	1	uA	
Digital I/O							
Input Voltage High	V <sub>IH</sub>	Minimum High Level Input Voltage	1			V	
Input Voltage Low	$V_{IL}$	Maximum Low Level Input Voltage			0.5	V	
Input Leakage Current	I <sub>ENB</sub>	V <sub>ENB</sub> = 0 or Vcc		0.01	1	uA	

- (1) Typical characteristics are at +5.0V supply and +25°C
- (2) Flatness is defined as the difference between the maximum and minimum value of on resistance as measured over the specified analog signal ranges.
- (3)  $\triangle R_{ON}$ =  $R_{ON(MAX)}$   $R_{ON(MIN)}$ , between A1 and A2 .



# **DYNAMIC CHARACTERISTICS @ +5.0V Supply**

Parameter	Symbol	mbol Conditions L		Guar	anteed	Limit	Unit		
i arameter	Cymbol			Min.	Typ. (1)	Max.	Oilit		
AC ELECTRICAL CHARACTERISTICS									
Turn-On Time	t <sub>ON</sub>	$V_{CC} = 5.0V$ ; $V_{A1}$ or $300\Omega$ ; $C_L = 35pF$ ,			12.0		ns		
Turn-Off Time	t <sub>OFF</sub>	$V_{CC} = 5.0V$ ; $V_{A1}$ or $300\Omega$ ; $C_L = 35pF$ ,			5.0		ns		
Break-Before-Make Time	t <sub>BBM</sub>	$V_{CC}$ = 5.0V; $V_{A1}$ or $V_{A2}$ = 3.5V, $R_L$ = 300 $\Omega$ ; $C_L$ = 35pF			8.5		ns		
NC OFF Capacitance	C <sub>OFF(A1)</sub>	f = 1	MHz		5.5		pF		
NO OFF Capacitance	$C_{OFF(A2)}$	f = 1	MHz		5.5		pF		
NC ON Capacitance	C <sub>ON(A1)</sub>	f = 1	MHz		15.5		pF		
NO ON Capacitance	C <sub>ON(A2)</sub>	f = 1	MHz		15.5		pF		
ADDITIONAL APPLIC	ATION CI	<b>HARACTERISTIC</b>	S						
3dB Bandwidth	f <sub>3dB</sub>	Signal = 0dBm, R	$_{L} = 50\Omega, C_{L} = 5pF$		300		MHz		
Off Isolation <sup>(2)</sup>	$R_L = 50\Omega$ , $C_L = 5pF$ , $f = 1MHz$		f=1MHz		-84		dB		
On isolation	V <sub>Iso</sub>	Signal = $0$ dBm $f=10$ MHz			-51		dB		
Supply									
Power Supply Range	V <sub>cc</sub>			1.8		5.5	V		

- (1) Typical characteristics are at +5.0V supply and  $25^{\circ}\text{C}$
- (2) Off Channel Isolation =  $20log_{10} [(V_{A1\backslash A2})/V_B]$



## **TEST SETUP CIRCUITS**

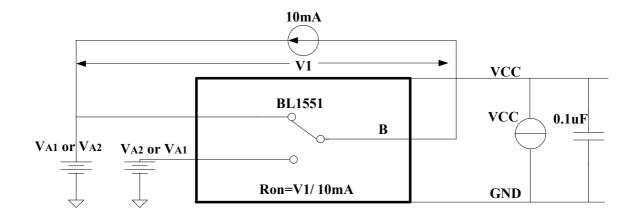


Figure 1. Test Circuit for On Resister

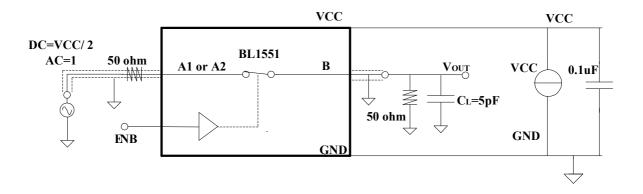


Figure 2. Test Circuit for Bandwidth



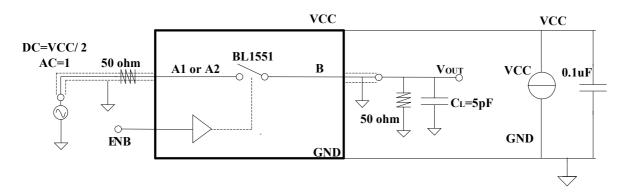



Figure 3. Test Circuit for Off Isolation



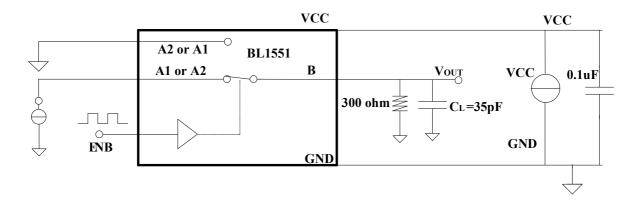

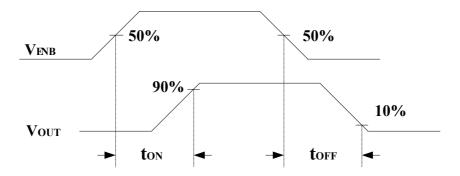

**Test Circuit 4. Test Circuit for Switch Times** 

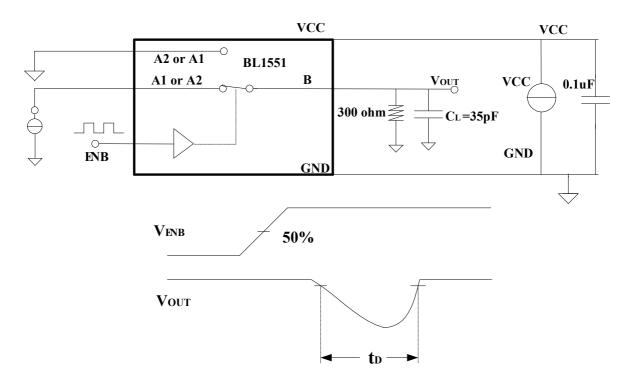


Test Circuit 5. Test Circuit for Break-Before-Make Time Delay,  $t_{\text{D}}$ 



# **PACKAGE OUTLINE DIMENSIONS (SC70-6)**

# SC70-6

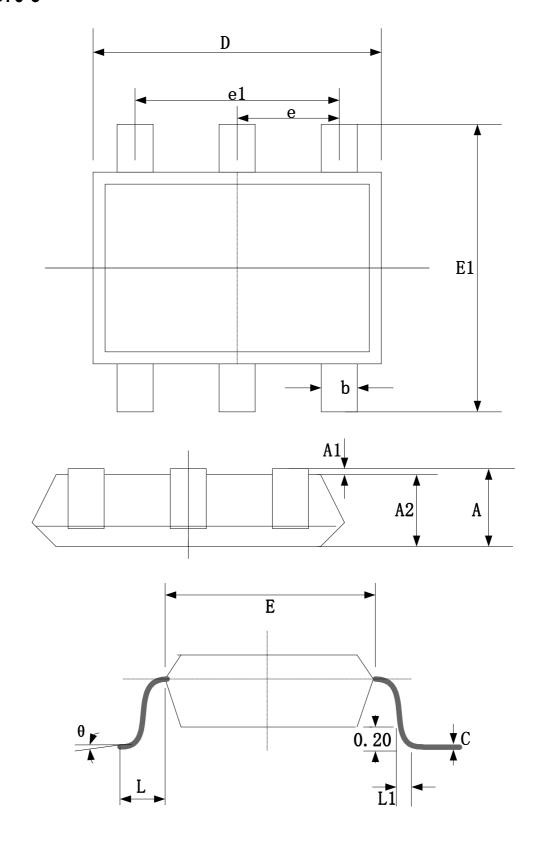



# **BL1551—Single SPDT Analog Switch**

Symbol	Dimensions i	n Millimeters	Dimension	s in Inches
Syllibol	Min	Max	Min	Max
Α	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.150	0.350	0.006	0.014
С	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
е	0.650	0.650TYP		STYP
e1	1.200	1.400	0.047	0.055
L	0.525	REF	0.021REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°