


# VSeq — 10-CHANNEL VOLTAGE SEQUENCER SCHEMATIC

Platform: STM32F103C8T6 (Blue Pill) | ADC Resolution: 12-Bit (0-3.3V Native Limit)

## TYPICAL INPUT STAGE PROTECTION & SCALING

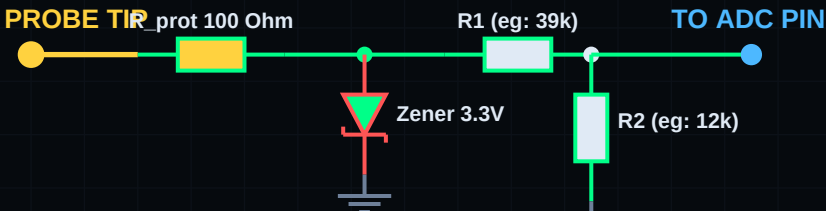

| VSeq CH | Pin | Signal / Rail | R1 (Top)    | R2 (GND) | Max V  |
|---------|-----|---------------|-------------|----------|--------|
| CH0     | PA0 | VCC_12V       | 39 kOhm     | 12 kOhm  | 14.0 V |
| CH1     | PA1 | VCC_5V        | 20 kOhm     | 22 kOhm  | 6.3 V  |
| CH2     | PA2 | VCC_3V3       | Direct (0R) | None     | 3.3 V  |
| CH3     | PA3 | TRIGGER       | Direct (0R) | None     | 3.3 V  |
| CH4     | PA4 | VRM_CORE      | Direct (0R) | None     | 3.3 V  |
| CH5     | PA5 | VRAM          | Direct (0R) | None     | 3.3 V  |
| CH6     | PA6 | V_FAN         | 39 kOhm     | 12 kOhm  | 14.0 V |
| CH7     | PA7 | VDDCI         | Direct (0R) | None     | 3.3 V  |
| CH8     | PB0 | PGOOD         | Direct (0R) | None     | 3.3 V  |
| CH9     | PB1 | VSOC          | Direct (0R) | None     | 3.3 V  |

## STM32F103C8T6 BOARD

(BLUE PILL / BLACK PILL)

- PA0 (ADC0) ← CH0 - 12V Rail
- PA1 (ADC1) ← CH1 - 5V Rail
- PA2 (ADC2) ← CH2 - 3.3V Rail
- PA3 (ADC3) ← CH3 - TRIGGER
- PA4 (ADC4) ← CH4 - VRM\_CORE
- PA5 (ADC5) ← CH5 - VRAM
- PA6 (ADC6) ← CH6 - V\_FAN
- PA7 (ADC7) ← CH7 - VDDCI
- PB0 (ADC8) ← CH8 - PGOOD
- PB1 (ADC9) ← CH9 - VSOC

USB Type-C / Micro

Doc: VSeq Hardware Schematic  
Revision: v1.1 (STM32 ADC Only)  
Date: 2026-07-06 | Author: Antigravity