


Packaging Diagrams and Parameters

6-Lead Plastic Small Outline Transistor (D4A) - 2.0x1.25mm Body [SC70]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

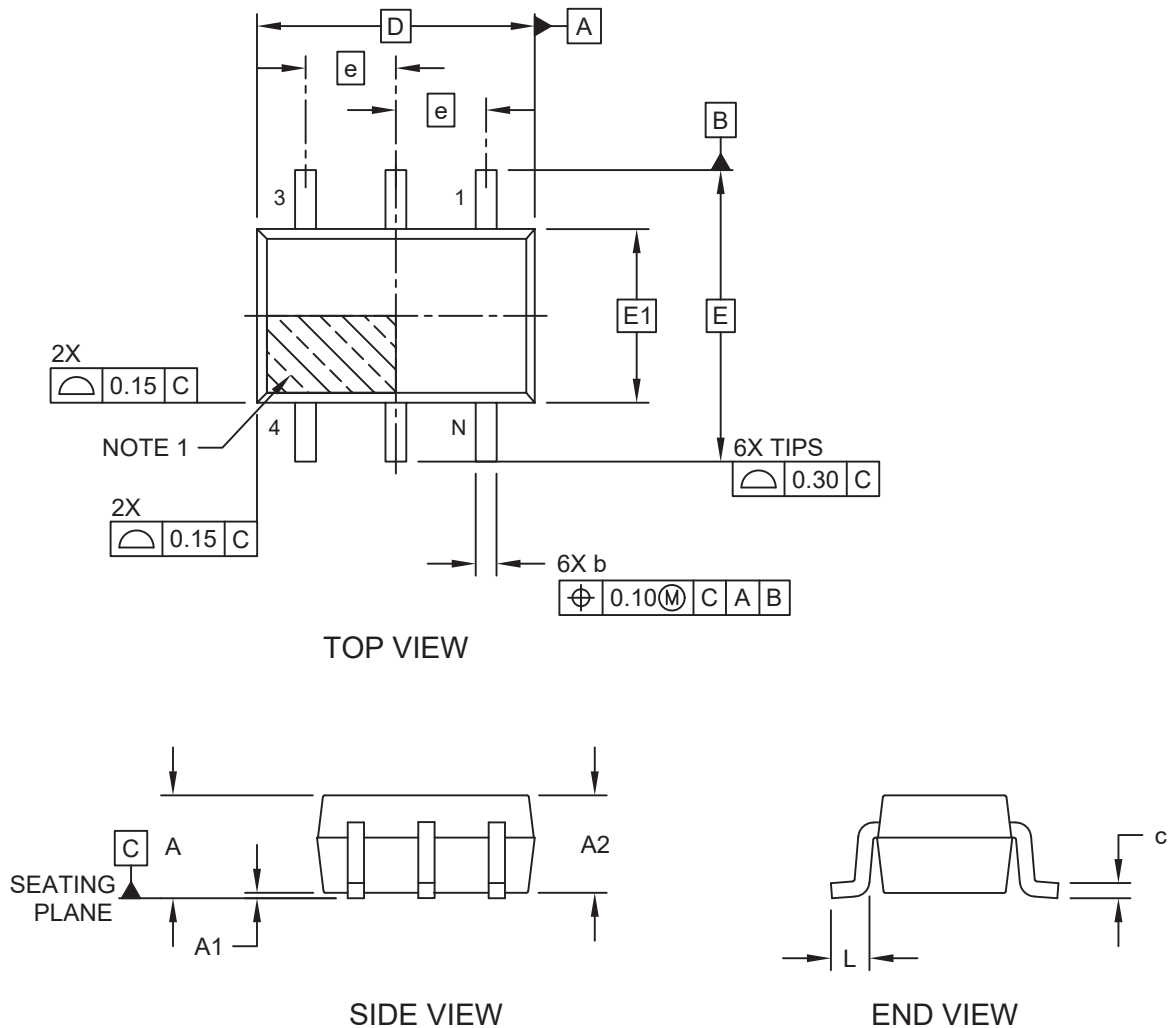

Packaging Diagrams and Parameters

6-Lead Plastic Small Outline Transistor (D4A) - 2.0x1.25mm Body [SC70]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

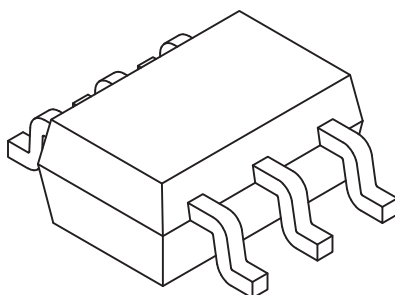

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Pins	N		6		
Pitch	e		0.65 BSC		
Overall Height	A		0.80	-	1.10
Standoff	A1		0.00	-	0.10
Molded Package Thickness	A2		0.80	0.90	1.00
Overall Length	D		2.00 BSC		
Exposed Pad Length	D2		2.50	2.60	2.70
Overall Width	E		2.10 BSC		
Exposed Pad Width	E1		1.25 BSC		
Terminal Width	b		0.15	-	0.30
Terminal Length	L		0.10	0.20	0.46
Lead Thickness	c		0.08	-	0.22


Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.15mm per side.
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

Land Pattern

6-Lead Plastic Small Outline Transistor (D4A) - 2.0x1.25mm Body [SC70]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

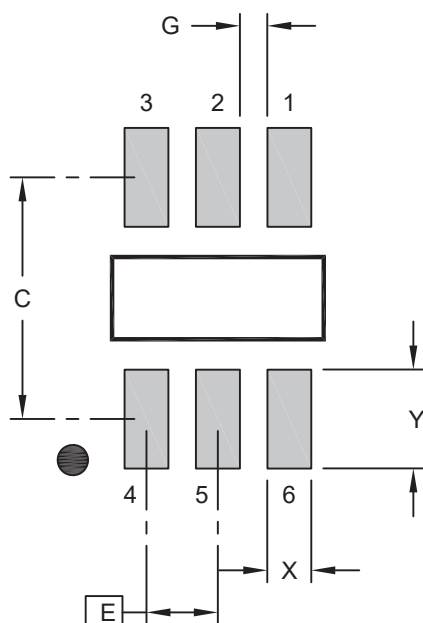

RECOMMENDED LAND PATTERN

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E	0.65 BSC		
Contact Pad Spacing	C		1.90	
Contact Pad Width (X6)	X			0.42
Contact Pad Length (Y6)	Y			0.77
Distance Between Pads	G	0.23		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-3133C