


44-KEY INFRARED RGB LED CONTROLLER



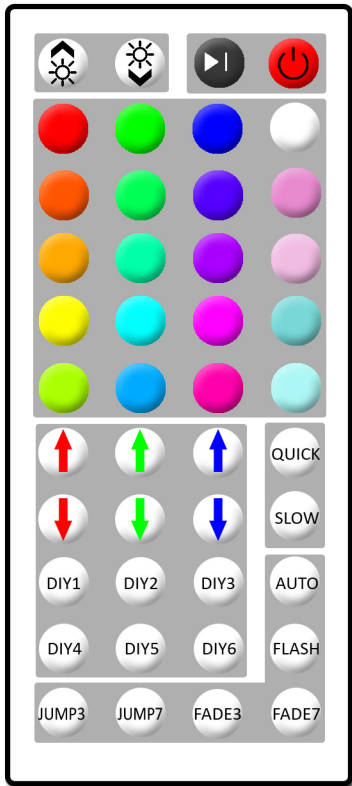


INSTRUCTION MANUAL


PRODUCT DESCRIPTION

THE 44-KEY RGB IR CONTROLLER ALLOWS YOU TO CHOOSE FROM OVER 20 STATIC COLORS WITH BRIGHTNESS CONTROL, AND 6 PRESET ANIMATIONS WITH SPEED CONTROL.

INSTALLATION INSTRUCTIONS

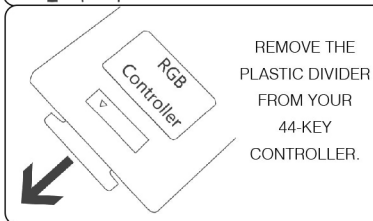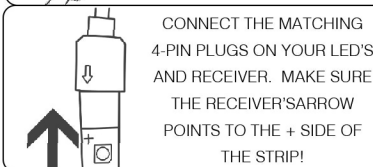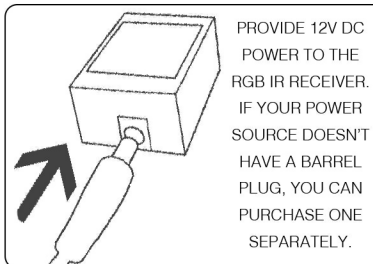

KEY FUNCTIONS

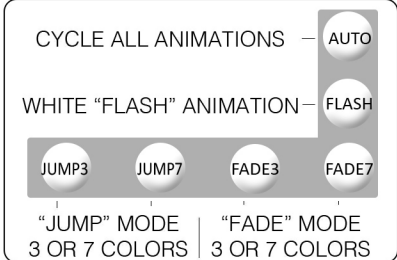

THE DIY BUTTONS ALLOW YOU TO SAVE UP TO 6 CUSTOM COLORS.

- 1: PRESS "DIY 1". THE RGB STRIP SHOULD SHINE WHITE (ALL CHANNELS ARE NOW AT MAX).
- 2: USE THE COLORED ARROWS TO CHANGE THE STRIP'S COLOR. (EX: LOWER THE GREEN CHANNEL FOR A PURPLE COLOR)
- 3: ONCE YOU'VE ADJUSTED THE COLOR TO YOUR LIKING, PRESS "DIY 1" AGAIN TO SAVE YOUR COLOR UNDER THE DIY 1 BUTTON. YOU CAN USE THIS PROCESS WITH DIY 1-6 FOR UP TO 6 COLORS!

TECHNICAL SPECIFICATIONS

WORKING TEMP:	-20-60° C
INPUT VOLTAGE:	12V DC
SIZE:	63 X 35 X 22 MM
OUTPUT:	0-72 WATT
CURRENT LOAD:	0-6 AMP
USE WITH:	SMD 5050 MULTI COLOR LED'S
FEATURES:	MEMORY FUNCTION
SIGNAL TYPE:	INFRARED
WARRANTY:	1 YEAR
THIS REMOTE CAN SAFELY CONTROL 2 REGULAR DENSITY SPOOLS OF SMD 5050 LED'S.	
FOR HIGH DENSITY SPOOLS OF SMD 5050 LED'S, THIS REMOTE CAN SAFELY CONTROL 1 SPOOL (16.4 FT).	
FOR LONGER DISTANCES, RGB AMPLIFIERS MUST BE INSTALLED TO AVOID OVERLOADING THE CONTROLLER.	