Lab 4 plus

*Lab 4 plus is a combination of Lab 4 and an extra activity on ARP.

Packet Tracer Simulation – Exploration of ARP and Switch Table Communications

Objectives

- To explore ARP and switching operations.

Introduction

The topology is given to you. All IP addresses have been assigned to all devices. Please follow each step in sequence.

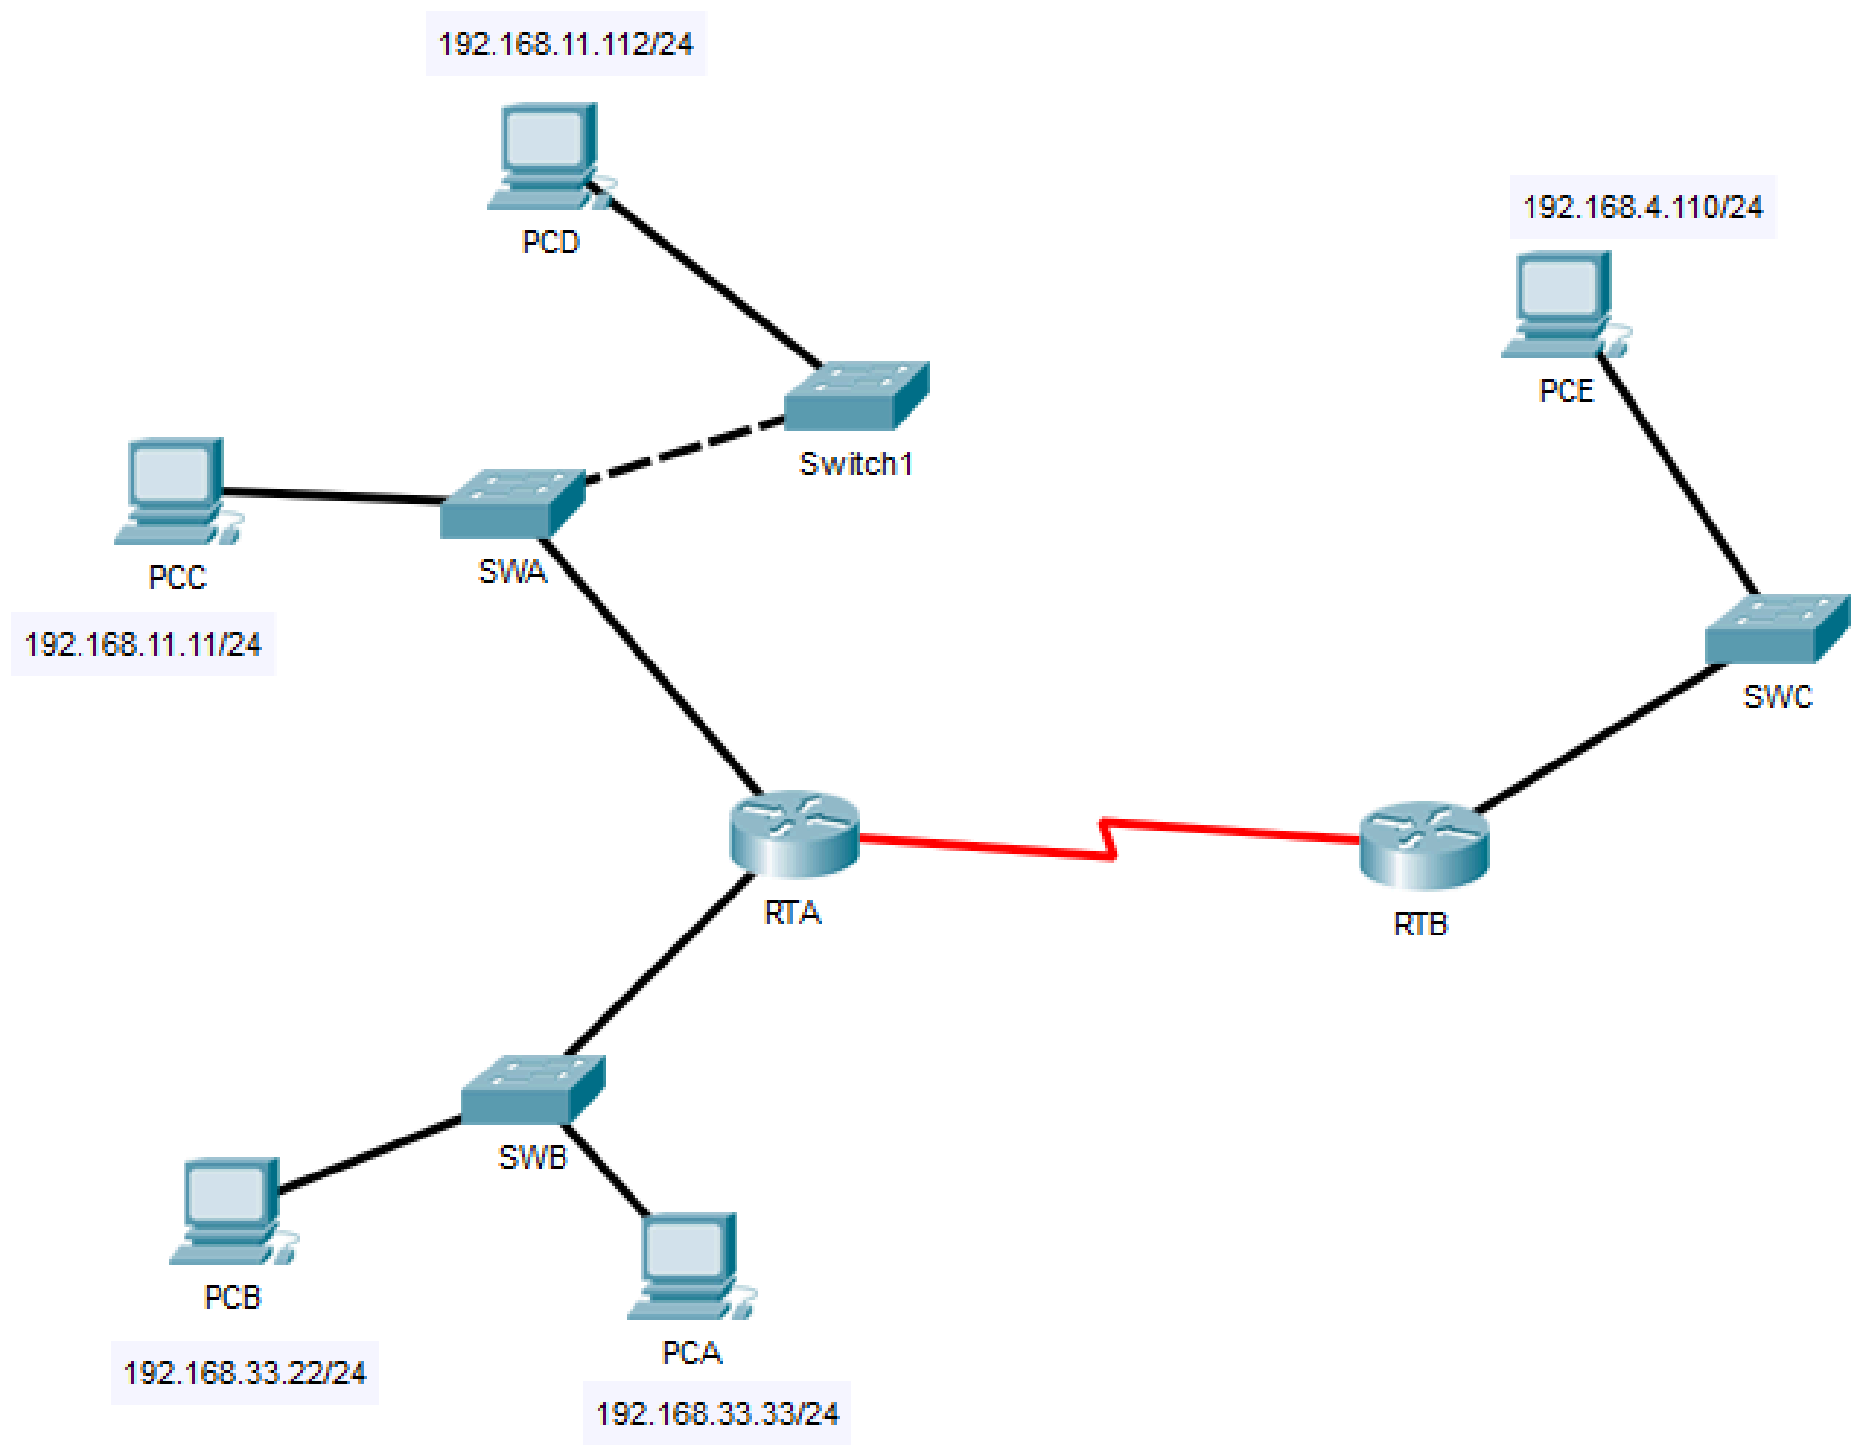

Figure 1

Part 1: Review the topology

Step 1: Perform the following tasks.

a. At Router RTA, enter the CLI. At the command prompt type the following commands. Snap the results after the last command and paste it here.

```
RTA>enable
RTA#show arp
```

```
RTA>enable
RTA#show arp
Protocol  Address          Age (min)  Hardware Addr   Type   Interface
Internet  192.168.11.1            -   0002.4A00.0E91  ARPA   FastEthernet1/0
Internet  192.168.33.1            -   000C.CF0C.593A  ARPA   FastEthernet0/0
RTA#
```

b. At Router RTB, enter the CLI. At the command prompt type the commands as in Figure 2. Snap the results after the last command and paste it here.

```
RTB>enable
RTB#show arp
Protocol  Address          Age (min)  Hardware Addr   Type   Interface
Internet  192.168.4.1             -   0001.977A.B614  ARPA   FastEthernet0/0
RTB#
```

c. At Switches SWA, SWAB and SWC, enter the CLI. At the command prompt type the following commands. Snap the results after the last command and paste it here.

```
SWA>enable
SWA#show arp

SWA#show mac-address-table
```

```
SWA>enable
SWA#show arp

SWA#show mac-address-table
          Mac Address Table
-------------------------------------------

Vlan    Mac Address       Type        Ports
----    -----------       --------    -----

   1    0002.4a00.0e91    DYNAMIC     Fa0/1
   1    000c.8546.7d85    DYNAMIC     Fa1/1
SWA#
```

SWA

```
SWB>enable
SWB#show arp

SWB#show mac-address-table
          Mac Address Table
-------------------------------------------

Vlan    Mac Address       Type        Ports
----    -----------       --------    -----

   1    000c.cf0c.593a    DYNAMIC     Fa0/1
SWB#
```

SWB

```
SWC>enable
SWC#show arp

SWC#show mac-address-table
          Mac Address Table
-------------------------------------------

Vlan    Mac Address       Type        Ports
----    -----------       --------    -----

   1    0001.977a.b614    DYNAMIC     Fa0/1
SWC#
```

SWC

d. At PCA, click on the PC icon, and then choose Desktop-Command Prompt. At the command prompt type **`arp -a`** and click enter. Snap the results after the last command and paste it here. Do this to all PCs in the topology.

```
Cisco Packet Tracer PC Command Line 1.0
C:\>arp -a
No ARP Entries Found
C:\>
```

PCA

```
Cisco Packet Tracer PC Command Line 1.0
C:\>arp -a
No ARP Entries Found
C:\>
```

PCB

```
Cisco Packet Tracer PC Command Line 1.0
C:\>arp -a
No ARP Entries Found
C:\>
```

PCC

```
Cisco Packet Tracer PC Command Line 1.0
C:\>arp -a
No ARP Entries Found
C:\>
```

PCD

```
Cisco Packet Tracer PC Command Line 1.0
C:\>arp -a
No ARP Entries Found
C:\>
```

PCE

e. What are your thoughts on the results?

From the data available, it is found that all PCs (PCA, PCB, PCC, PCD, PCE) and other devices in the topology do not communicate with each other. It means when network devices connect, it is ultimately going to recreate entries in ARP (Address Resolution Protocol) each time they listen for MAC address resolutions of other devices in order to send them data.

Part 2: Generate Network Traffic

Step 1: Generate traffic between PCA and PCB.

In the command prompt Perform the following tasks to reduce the amount of network traffic viewed in the simulation.

a. Click **PCA** and click the Desktop tab > Command Prompt.

b. Enter the **ping 192.168.33.22** command. This may take a few seconds.

c. In the Command prompt of PCA, type **arp –a**. Paste the result of this command here.

```
C:\>ping 192.168.33.22

Pinging 192.168.33.22 with 32 bytes of data:

Reply from 192.168.33.22: bytes=32 time=2ms TTL=128
Reply from 192.168.33.22: bytes=32 time<1ms TTL=128
Reply from 192.168.33.22: bytes=32 time<1ms TTL=128
Reply from 192.168.33.22: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.33.22:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 2ms, Average = 0ms

C:\>arp -a
  Internet Address      Physical Address      Type
  192.168.33.22         0060.47ea.a746        dynamic
```

d. In the Command prompt of PCB, type **arp –a**. Paste the result of this command here

```
C:\>arp -a
  Internet Address      Physical Address      Type
  192.168.33.33         0002.1755.9a06        dynamic
```

e. In the Command prompt of PCC, PCD and PCE, type **arp –a**. Paste the result of this command here.

```
C:\>arp -a
No ARP Entries Found
```

PCC

```
C:\>arp -a
No ARP Entries Found
```

PCD

```
C:\>arp -a
No ARP Entries Found
```

PCE

Step 2: Generate traffic between PCC to all other PCs except PCA.

a. Click **PCC** and click the Desktop tab > Command Prompt.

b. Enter the **ping 192.168.33.22** command (ping to PCB). Then type **arp –a**. Paste the result after these commands here.

```
C:\>ping 192.168.33.22

Pinging 192.168.33.22 with 32 bytes of data:

Request timed out.
Reply from 192.168.33.22: bytes=32 time<1ms TTL=127
Reply from 192.168.33.22: bytes=32 time<1ms TTL=127
Reply from 192.168.33.22: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.33.22:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>arp -a
  Internet Address      Physical Address      Type
  192.168.11.1          0002.4a00.0e91        dynamic
```

c. Enter the **ping 192.168.11.112** command (ping to PCD). Then type **arp –a**. Paste the result after these commands here.

```
C:\>ping 192.168.11.112

Pinging 192.168.11.112 with 32 bytes of data:

Reply from 192.168.11.112: bytes=32 time<1ms TTL=128
Reply from 192.168.11.112: bytes=32 time<1ms TTL=128
Reply from 192.168.11.112: bytes=32 time=1ms TTL=128
Reply from 192.168.11.112: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.11.112:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
C:\>arp -a
  Internet Address      Physical Address      Type
  192.168.11.1          0002.4a00.0e91        dynamic
  192.168.11.112        0001.6462.0278        dynamic
```

d. Enter the **ping 192.168.4.110** command (ping to PCE). Then type **arp –a**. Paste the result after these commands here.

```
C:\>ping 192.168.4.110

Pinging 192.168.4.110 with 32 bytes of data:

Request timed out.
Reply from 192.168.4.110: bytes=32 time=1ms TTL=126
Reply from 192.168.4.110: bytes=32 time=15ms TTL=126
Reply from 192.168.4.110: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.4.110:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 15ms, Average = 5ms
```

```
C:\>arp -a
  Internet Address      Physical Address      Type
  192.168.11.1          0002.4a00.0e91        dynamic
  192.168.11.112        0001.6462.0278        dynamic
```

e. Discuss the results you got from all the commands on PCC.

Conclusively, it can be said that ARP dynamically resolves the MAC addresses based on the outcomes of successful communication of a PCC with the other PCs (not from PCA).

f. At Router RTA, enter the CLI. At the command prompt type the following commands. Snap the results after the last command and paste it here.

```
RTA>enable
RTA#show arp
```

```
RTA>enable
RTA#show arp
Protocol  Address          Age (min)  Hardware Addr   Type   Interface
Internet  192.168.11.1            -   0002.4A00.0E91  ARPA   FastEthernet1/0
Internet  192.168.11.11          12   00D0.D39A.C0D9  ARPA   FastEthernet1/0
Internet  192.168.33.1            -   000C.CF0C.593A  ARPA   FastEthernet0/0
Internet  192.168.33.22          12   0060.47EA.A746  ARPA   FastEthernet0/0
RTA#
```

g. At Router RTB, enter the CLI. At the command prompt type the following commands. Snap the results after the last command and paste it here.

```
RTB>enable
RTB#show arp
```

```
RTB>enable
RTB#show arp
Protocol  Address          Age (min)  Hardware Addr   Type   Interface
Internet  192.168.4.1             -   0001.977A.B614  ARPA   FastEthernet0/0
Internet  192.168.4.110          12   0060.702D.7C08  ARPA   FastEthernet0/0
RTB#
```

Step 3: Switch MAC address table.

a. At Switch SWA, enter the CLI. At the command prompt type the following commands. Snap the results after the last command and paste it here.

```
SWA>enable
SWA#show arp

SWA#show mac-address-table
```

```
SWA>enable
SWA#show arp

SWA#show mac-address-table
          Mac Address Table
-------------------------------------------

Vlan    Mac Address       Type        Ports
----    -----------       --------    -----

   1    0002.4a00.0e91    DYNAMIC     Fa0/1
   1    000c.8546.7d85    DYNAMIC     Fa1/1
SWA#
```

b. At Switch SWB, enter the CLI. At the command prompt type the following commands. Snap the results after the last command and paste it here.

```
SWB>enable
SWB#show arp
```

```
SWB#show mac-address-table
```

```
SWB>enable
SWB#show arp

SWB#show mac-address-table
          Mac Address Table
-------------------------------------------

Vlan    Mac Address       Type        Ports
----    -----------       --------    -----

   1    000c.cf0c.593a    DYNAMIC     Fa0/1
SWB#
```

c. At Switches SWC and Switch1, enter the CLI. At the command prompt type the following commands. Snap the results after the last command and paste it here.

```
SWC>enable
SWC#show arp

SWC#show mac-address-table
```

```
SWC>enable
SWC#show arp

SWC#show mac-address-table
          Mac Address Table
-------------------------------------------

Vlan    Mac Address       Type        Ports
----    -----------       --------    -----

   1    0001.977a.b614    DYNAMIC     Fa0/1
SWC#
```

SWC

```
Switch>enable
Switch#show arp

Switch#show mac-address-table
          Mac Address Table
-------------------------------------------

Vlan    Mac Address       Type        Ports
----    -----------       --------    -----

   1    0005.5e95.187b    DYNAMIC     Fa0/1
Switch#
```

Switch1

d. Do switches use an ARP table?

No.

e. Explain your answer in (d).

Switches operate at Layer 2 of the OSI model (Data Link Layer) and utilize MAC address tables to forward Ethernet transmissions. Because switches rely solely on MAC addresses, they do not require IP addresses or ARP tables, which are essential for routers. In contrast, ARP tables assist devices within the same local network in communicating by linking IP addresses to MAC addresses.

f. What information does the command ***show mac-address-table*** give?

```
Switch>enable
Switch#show arp

Switch#show mac-address-table
          Mac Address Table
-------------------------------------------

Vlan    Mac Address       Type        Ports
----    -----------       --------    -----

   1    0005.5e95.187b    DYNAMIC     Fa0/1
Switch#
```

Part 3: Attach wireless lab results.

In this part, you will use the Lab 4 .pka file.

Step1: Change the filename of Lab 4.

a. Change the Lab 4 filename to include your name. **Example: Lab4AliAhmad.pkt*

b. Go through the instructions. As you complete the tasks, you will see the bottom right hand corner of the pkt file increase in completion percentage, until you get 100/100.

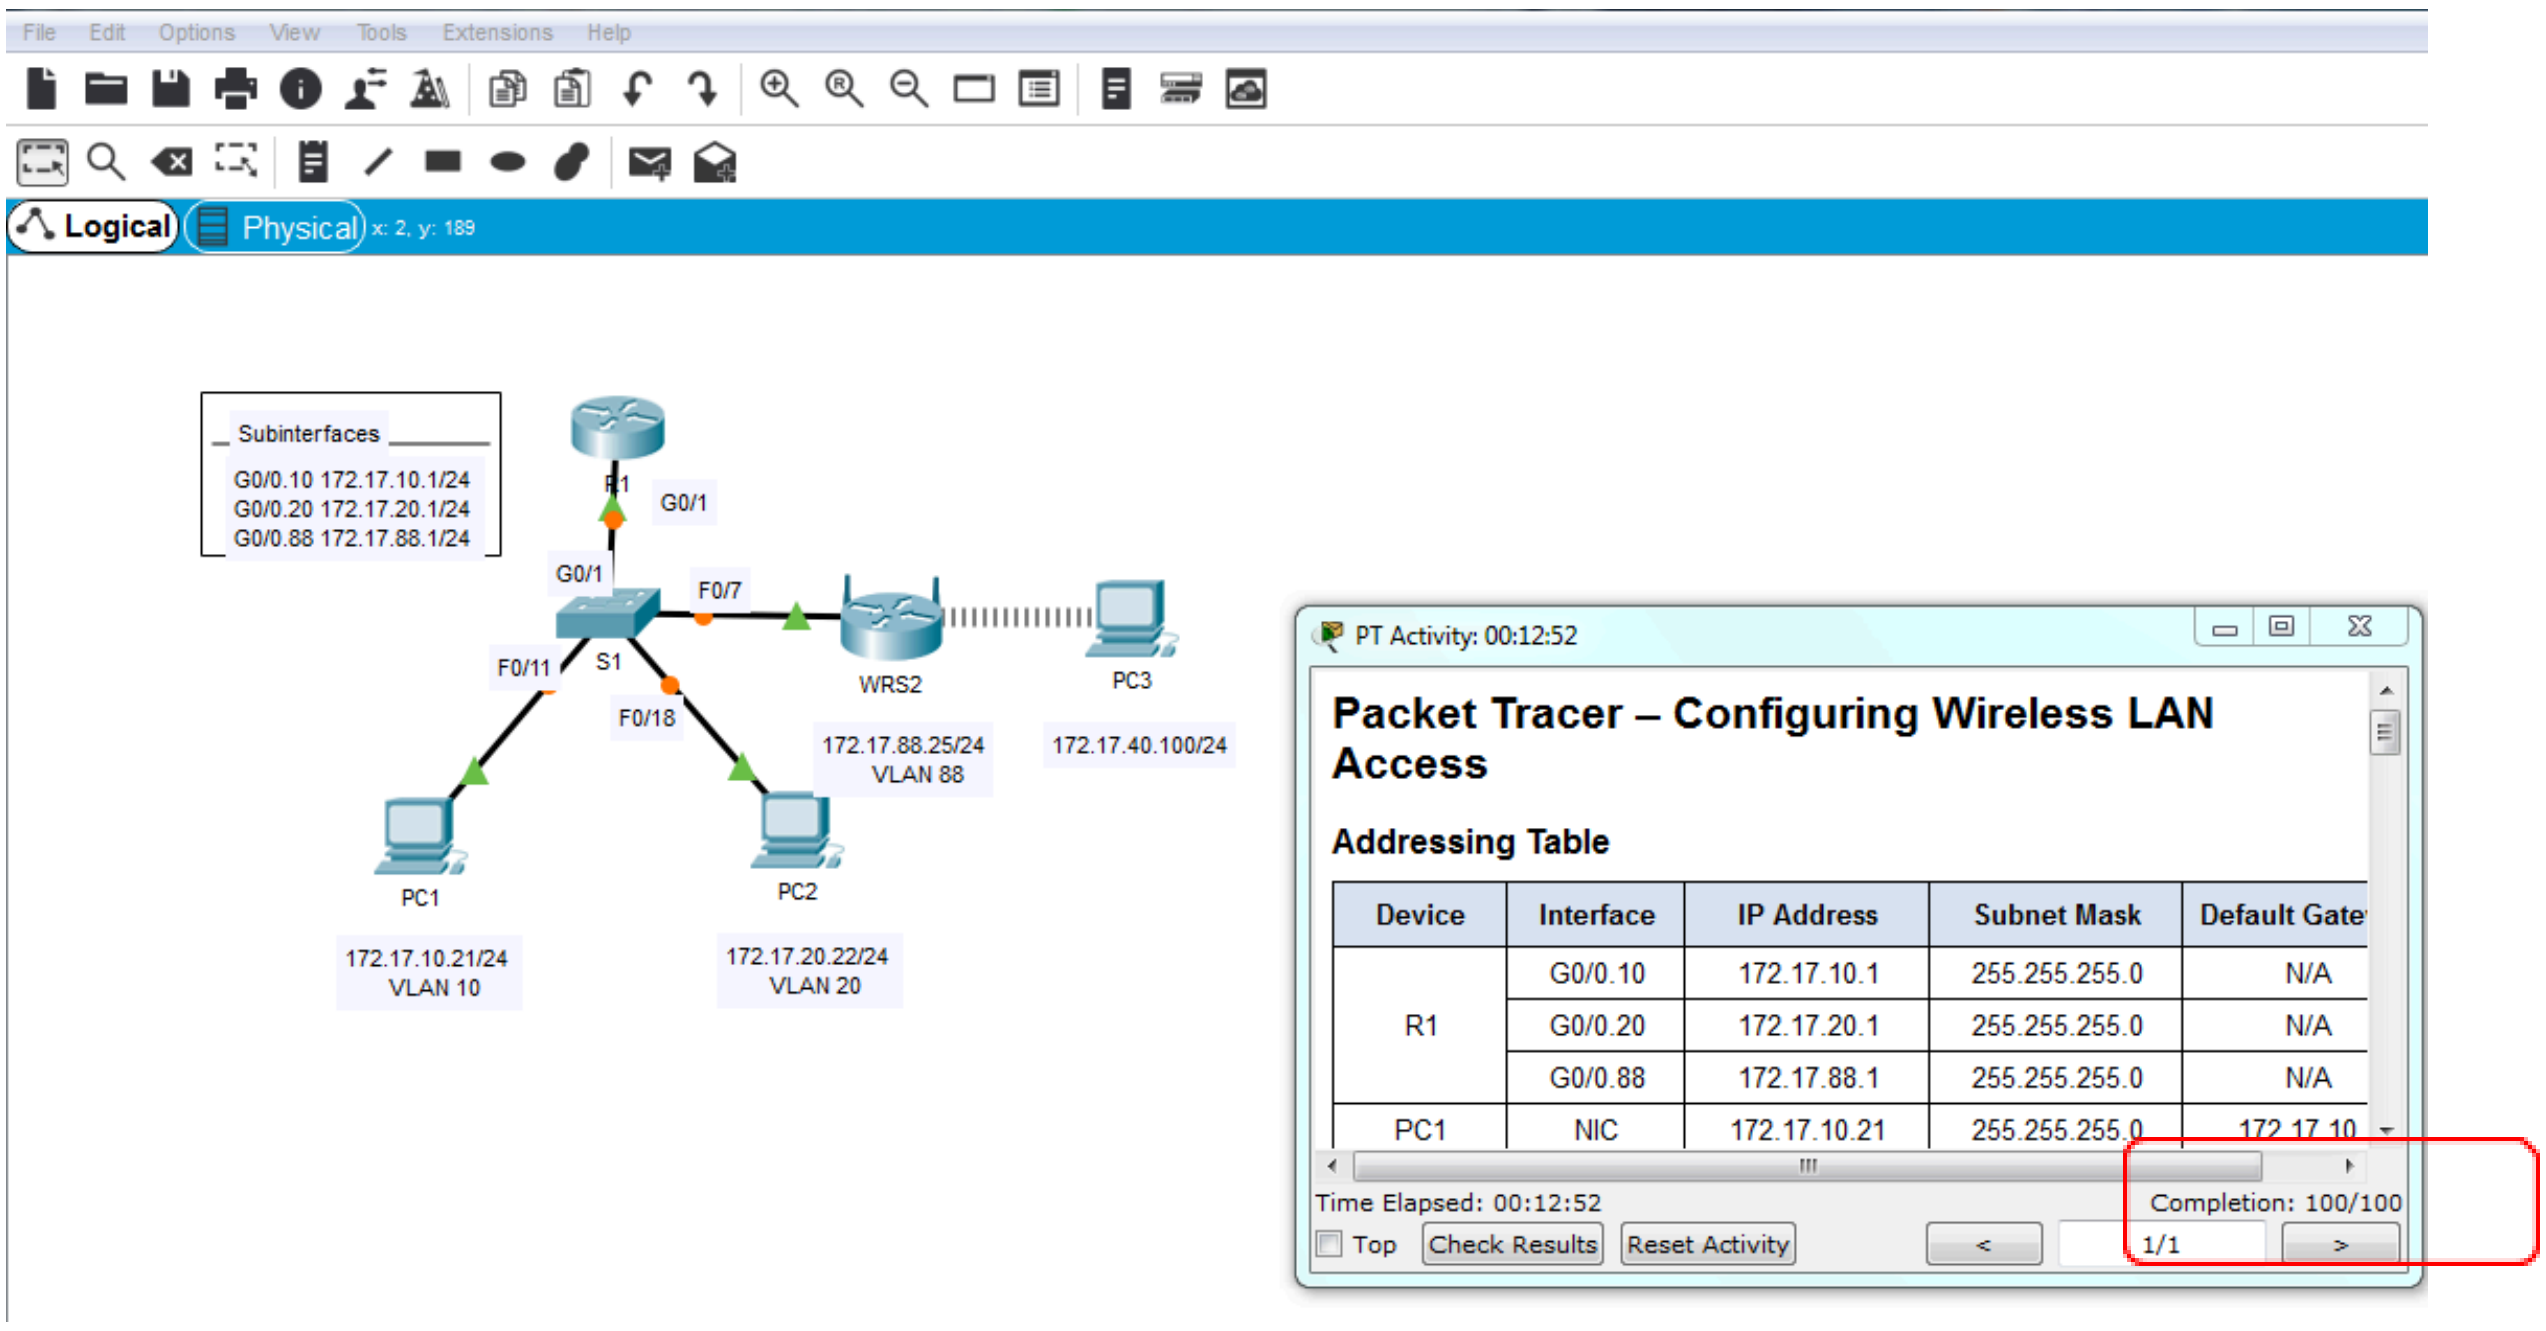

c. Once you have completed fully, capture the screen (which includes the filename, the topology and the activity wizard showing completion) and paste it here.