



LESTER B. PEARSON
Pearson Electrotechnology Centre

Installation and Repair of Telecommunications Equipment

Module 21 Telephone network systems

VOIP lab experiment#2 Configuring Elastix

Installation and Repair of Telecommunications Equipment

Name of student: _____

Group Number: _____

Date: _____



The purpose of the lab is to configure the Elastix software. You will be configuring the following settings:

- Type of installation
- Configure TCP/IP
- Time Zone
- Password
- IPV4 and IPV6
- Hostname configuration
- Time Zone selection

Type of installation

1- Choose Full install FreePbx 4.211.64 pressing enter

Installation and Repair of Telecommunications Equipment

Module 21 Telephone network systems

File Machine View Input Devices Help

Welcome to FreePBX 4.211.64 (Call-Forward)

FreePBX 4.211.64 with Asterisk 11

Full Install

Full Install -- No RAID

Full Install -- Advanced

HA Install -- Requires 250G or larger disk

FreePBX 4.211.64 with Asterisk 1.8

Full Install

Full Install -- No RAID

Full Install -- Advanced

HA Install -- Requires 250G or larger disk

Press [Tab] to edit options




© Copyright 2011 Schmooze Com, Inc. All Rights Reserved.






Configure TCP/IP

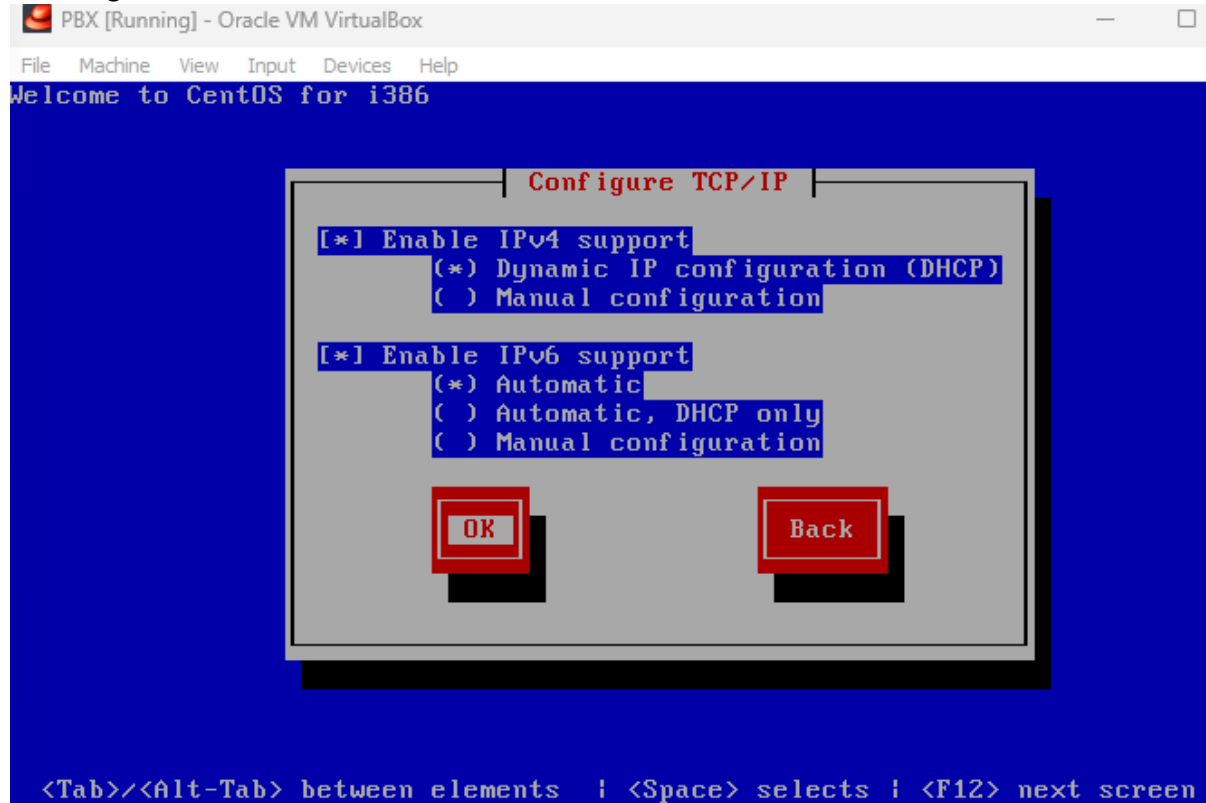


Press tab button to go to OK and then press “enter”

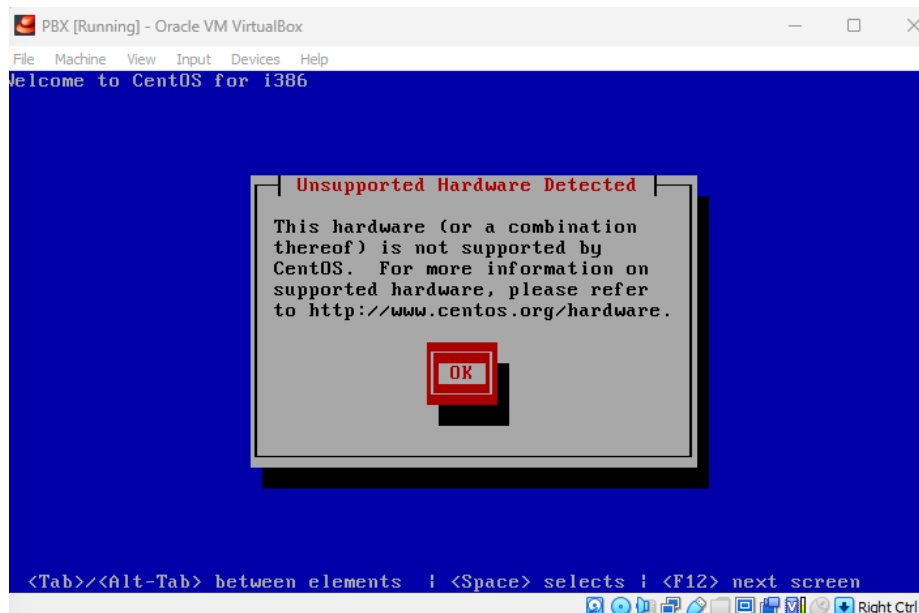

Just press “enter”



Time Zone

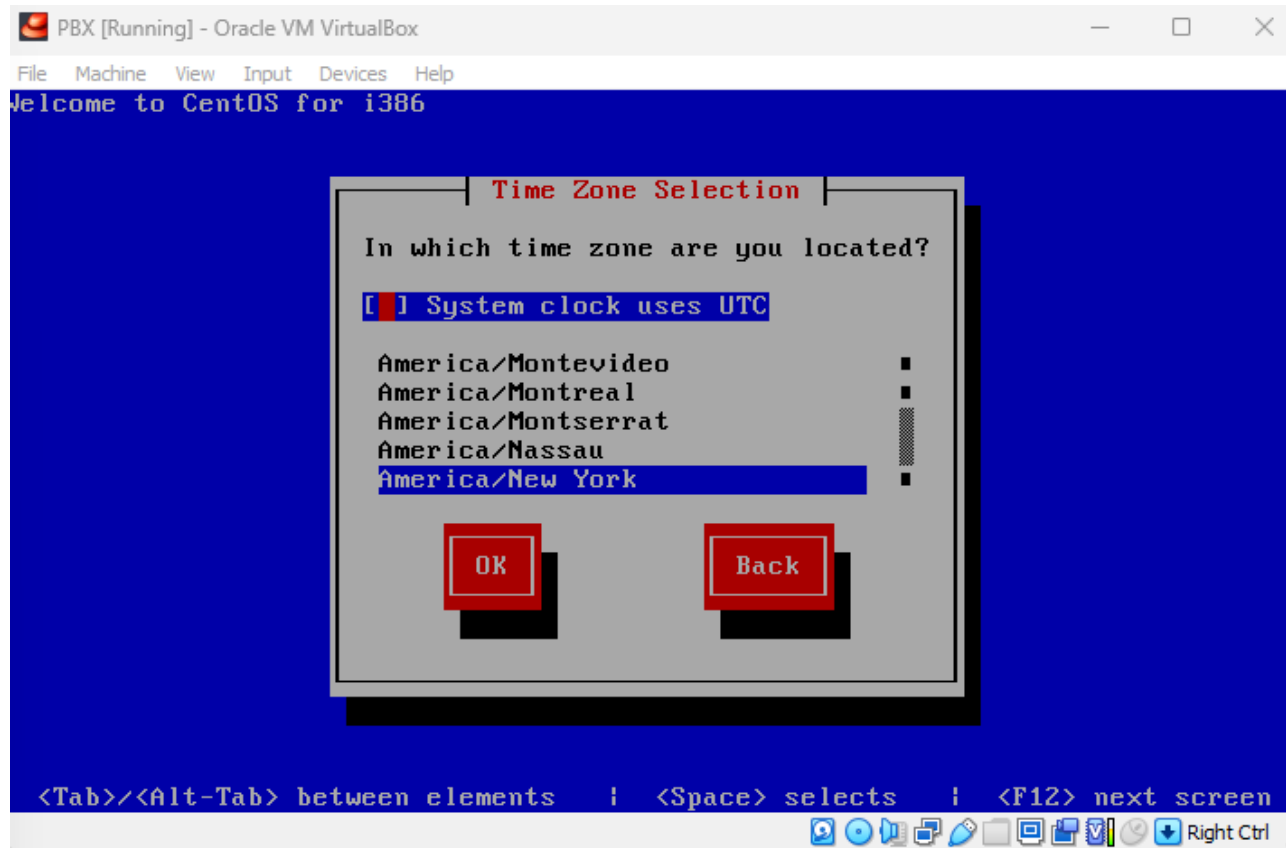


Press tab button to go to New york then select Montreal

Press tab button to go to OK and then press "enter"



Password selecting : use pec12345

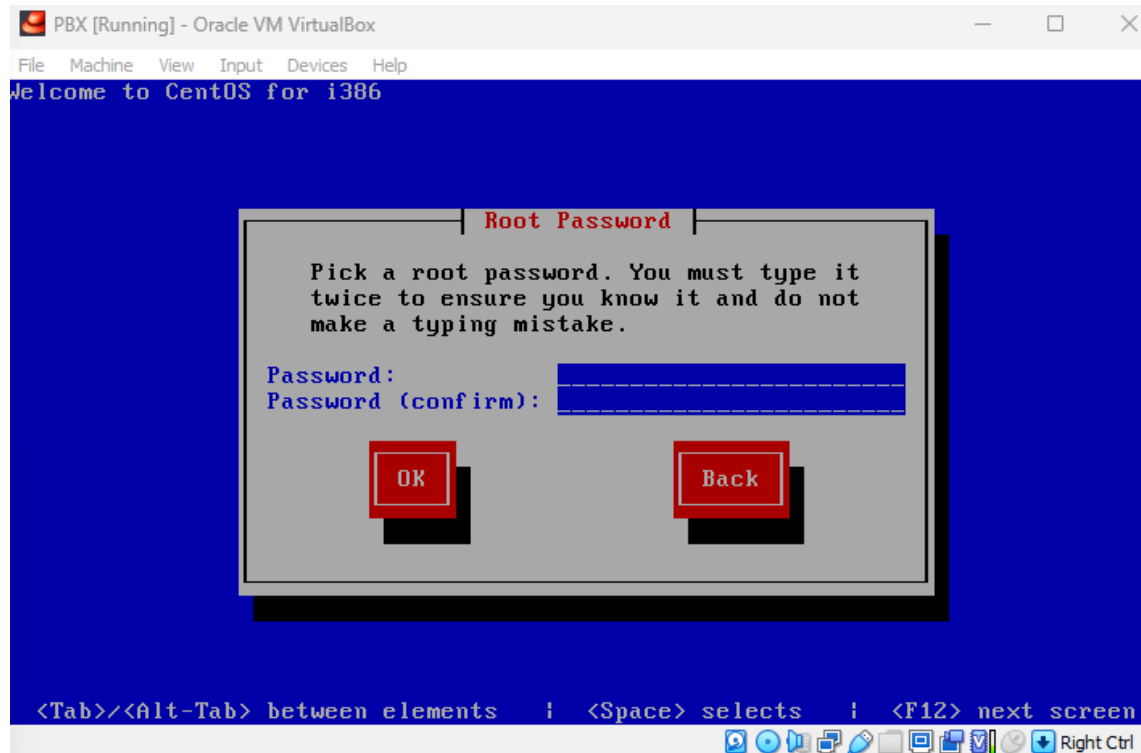

Press tab button to go to Ok and then press “enter”



Press tab button to go to Use Anyway then press “enter”



LESTER B. PEARSON
Pearson Electrotechnology Centre

Installation and Repair of Telecommunications Equipment

Module 21 Telephone network systems



LESTER B. PEARSON
Pearson Electrotechnology Centre

Installation and Repair of Telecommunications Equipment

Module 21 Telephone network systems

The screenshot shows a terminal window titled "PBX [Running] - Oracle VM VirtualBox". The terminal output displays the CentOS release information, login prompts for root, the ASCII art logo for FreePBX, the IP address for interface eth0, and instructions on how to access the FreePBX GUI. The prompt at the bottom is "root@localhost ~]#".

```
PBX [Running] - Oracle VM VirtualBox
File Machine View Input Devices Help

CentOS release 6.4 (Final)
Kernel 2.6.32-358.14.1.el6.i686 on an i686

localhost login: root
Password:

FreePBX

Interface eth0 IP: 192.168.100.119

Please note most tasks should be handled through the FreePBX UI.
You can access the FreePBX GUI by typing one of the above IP's in to your web browser.
For support please visit http://www.freepbx.org/support-and-professional-services

root@localhost ~]#
```


Username: **root**

Password: **pec12345**

Installation and Repair of Telecommunications Equipment

Module 21 Telephone network systems

Go to your google chrome and open the ip address showing in the screen.

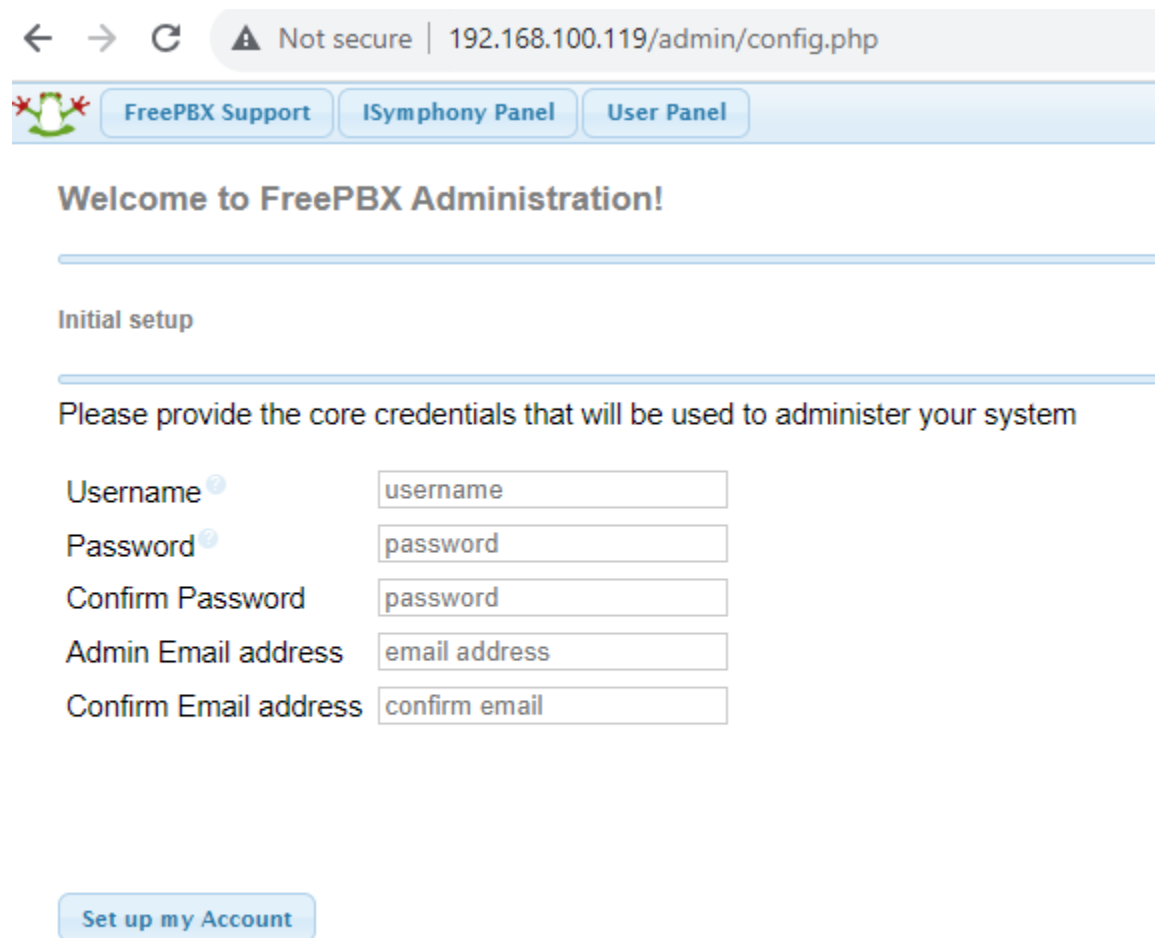

The screenshot shows a web browser window with the address bar displaying "192.168.100.119/admin/config.php". The page has a header with a FreePBX logo and three navigation buttons: "FreePBX Support", "iSymphony Panel", and "User Panel". Below the header, the main heading is "Welcome to FreePBX Administration!". A horizontal line separates this from the "Initial setup" section. The text "Please provide the core credentials that will be used to administer your system" is displayed. Below this, there are five input fields with labels: "Username" (containing "username"), "Password" (containing "password"), "Confirm Password" (containing "password"), "Admin Email address" (containing "email address"), and "Confirm Email address" (containing "confirm email"). At the bottom of the form is a blue button labeled "Set up my Account".

Create the admin user: Username: admin

Password: admin