

Communication protocols and norms in healthcare

HL7 Norm Continuation – HL7v3 and HL7 CDA

Course: Biomedical Informatics

Lecturer: Assoc. Ph.D. Miroslav Končar

E-mail:miroslav.koncar2@fer.hr

Komunikacijski protokoli i norme u zdravstvu

HL7 Norma Nastavak – HL7v3 i HL7 CDA

Kolegij: Biomedicinska informatika

Predavač: doc.dr.sc. Miroslav Končar

Email: miroslav.koncar2@fer.hr


HL7v3 approach

- The key challenges of HL7v2 relate to wide optionality and the lack of a robust methodology for creating the messages themselves
- Unlike HL7v2, the process of creating messages and specifications is presented as **explicitly documented methodology**
 - Creation of use case models (Model Driven Approach)
 - Definition of information models using UML notation
 - Includes reference model, vocabulary and data type specifications
 - Detailed definition of standard support by specification (part) of the HL7 application interface
- The main goal is not to replace HL7v2, but to support implementations at regional and national levels, and the creation of an electronic health record through a stable system design methodology and messaging interface.


HL7v3 pristup

- Ključni izazovi HL7v2 odnose se na široku opcionalnost i nedostatak robusne metodologije izrade samih poruka
- Za razliku od HL7v2, proces izrade poruka i specifikacija predočen je kao **eksplicitno dokumentirana metodologija**
 - Izrada modela slučajeva uporabe (engl. Model Driven Approach)
 - Definicija informacijskih modela korištenjem UML notacije
 - Uključuje referentni model, specifikacije vokabulara i tipova podataka
 - Detaljna definicija podržanosti norme specifikacijom (dijela) sučelja HL7 aplikacije
- Osnovni cilj nije zamijeniti HL7v2, već podržati implementacije na regionalnim i nacionalnim razinama, te izradu elektroničkog zdravstvenog zapisa kroz stabilnu metodologiju dizajna sustava i sučelja za izmjenu poruka

HL7v3 methodology

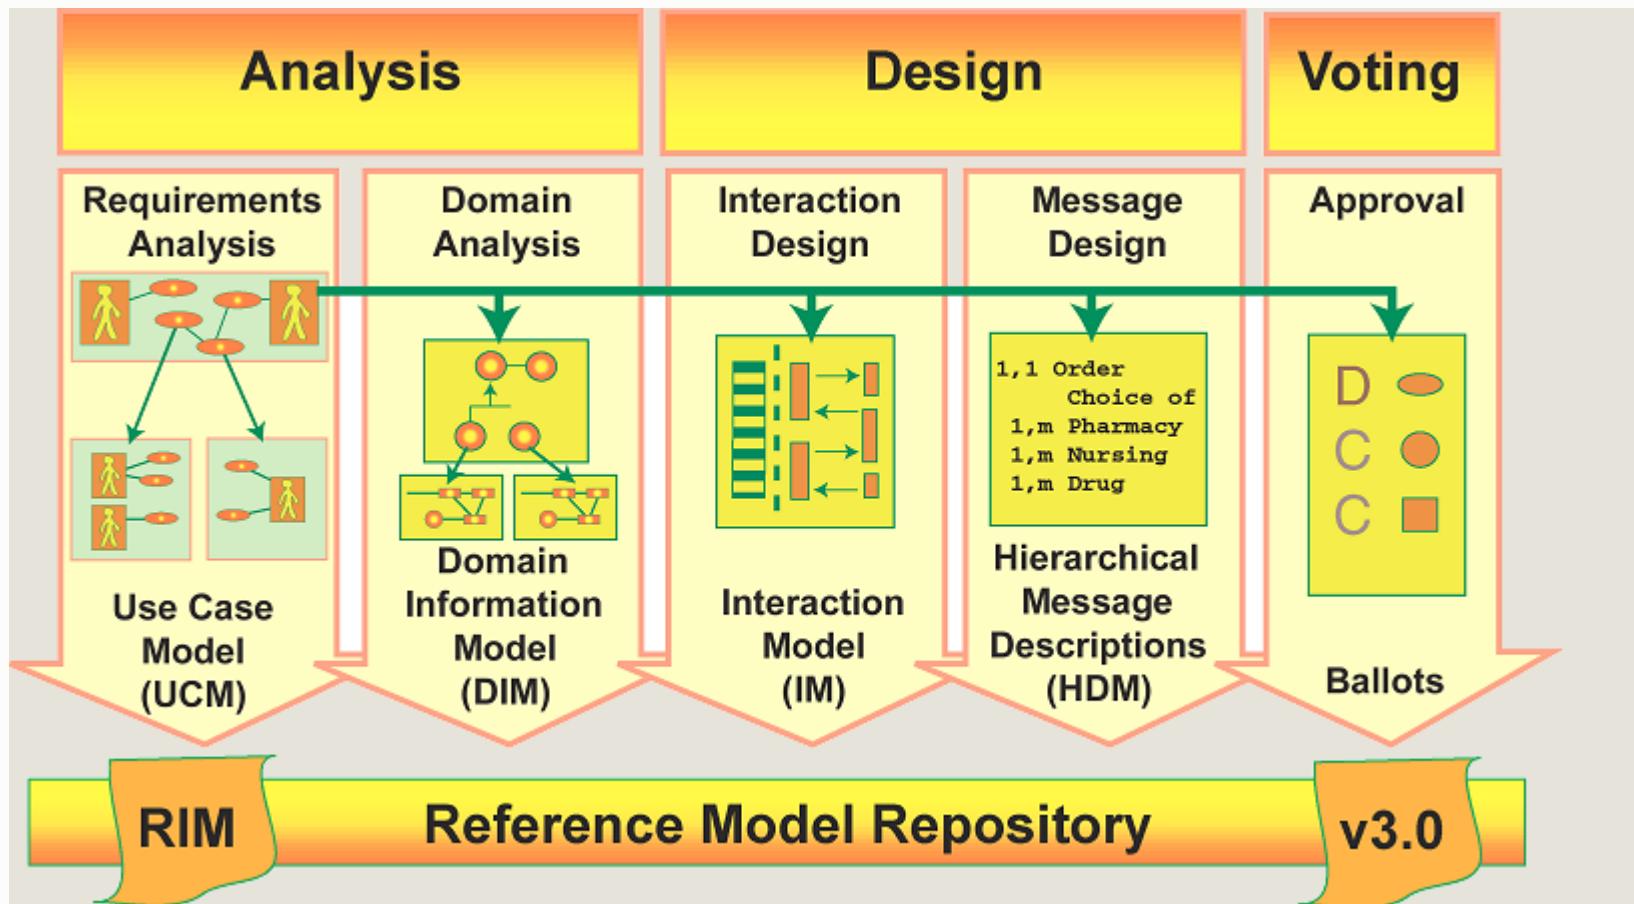

HL7v3 metodologija

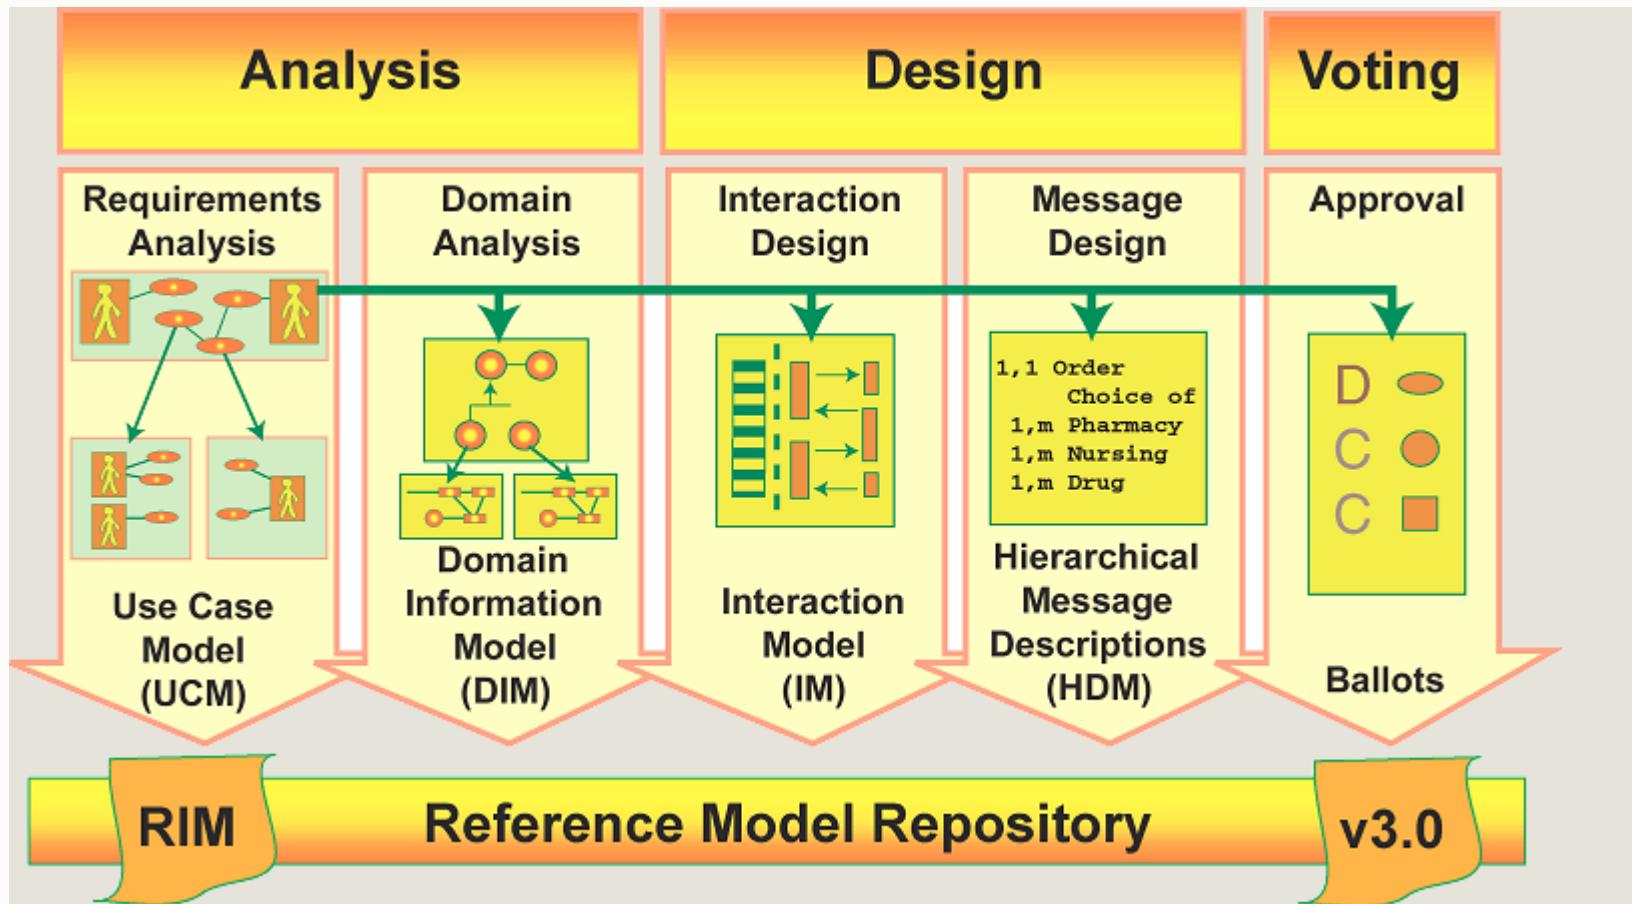

Main features of HL7v3 methodology

- Standardization of the "language" of all HL7v3 messages
 - Syntactic level – information models (RIM) and objects
 - Semantic level – standardization of vocabulary set
- Detailed description of events in healthcare
 - Definition of the responsibility of the sender and recipient of the message through interaction models
 - Description of the HL7 application interface
- Communication mechanisms and syntax
 - Using XML as message syntax – XML Implementation Technology Specification (ITS)
 - Requirements specifications for information transfer transport mechanisms (Minimum Lower Layer Protocol (MLLP), SOAP/Web Services, ebXML)

Glavne značajke HL7v3 metodologije

- Normizacija "jezika" svih HL7v3 poruka
 - Sintaktička razina – informacijski modeli (RIM) i objekti
 - Semantička razina – normizacija skupa vokabulara
- Detaljan opis događaja u zdravstvu
 - Definicija odgovornosti pošiljatelja i primatelja poruke kroz interakcijske modele
 - Opis sučelja HL7 aplikacije
- Komunikacijski mehanizmi i sintaksa
 - Korištenje XML-a kao sintakse poruka – XML Implementation Technology Specification (ITS)
 - Specifikacije zahtjeva na transportne mehanizme prijenosa informacija (Minimum Lower Layer Protocol (MLLP), SOAP/Web Services, ebXML)


HL7 RIM – Reference Information Model


- A static model that includes health information in the area of HL7 norm standardization
- RIM is modeled using UML notation (Object Management Group).
- The source of all information models in use
 - DMIM – Domain Message Information Model
 - RMIM – Refined Message Information Model
 - HMD – Hierarchical Message Description
 - MT - Message Types

HL7 RIM – Reference Information Model



- Statički model koji obuhvaća zdravstvene informacije u području normizacije HL7 norme
- RIM je modeliran koristeći UML notaciju (Object Management Group)
- Izvor svih informacijskih modela u primjeni
 - DMIM – Domain Message Information Model
 - RMIM – Refined Message Information Model
 - HMD – Hierarchical Message Description
 - MT – Message Types

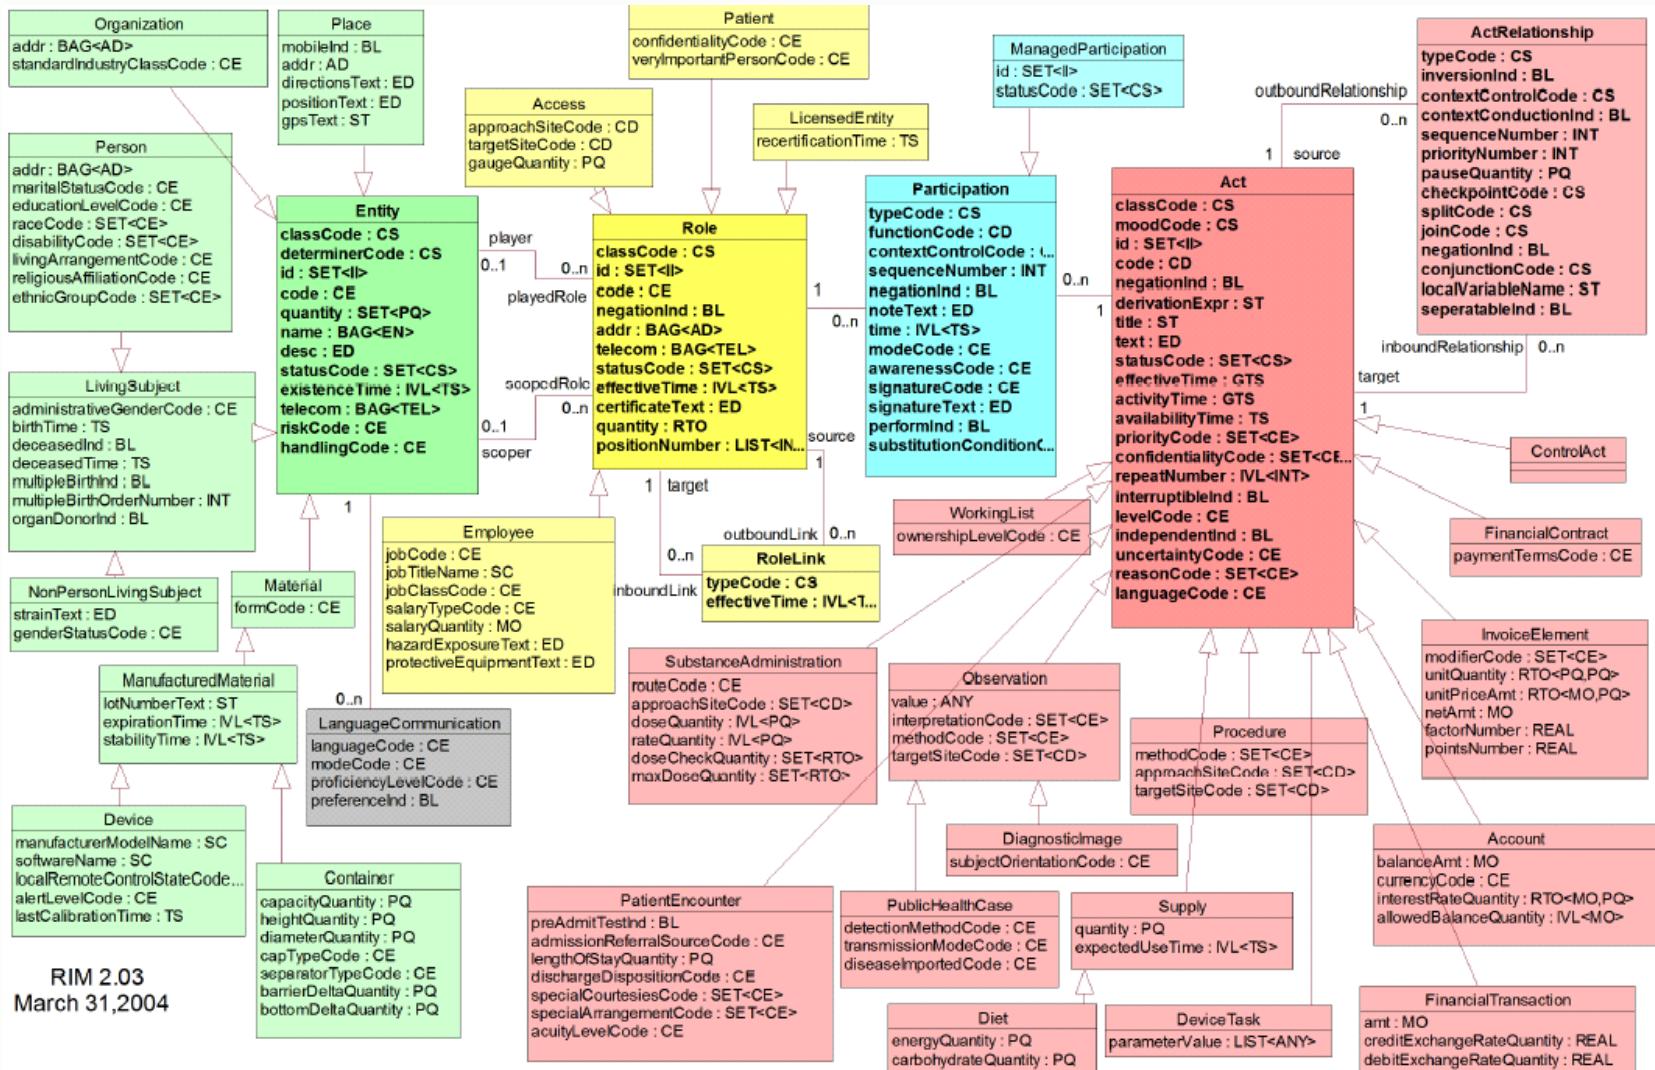


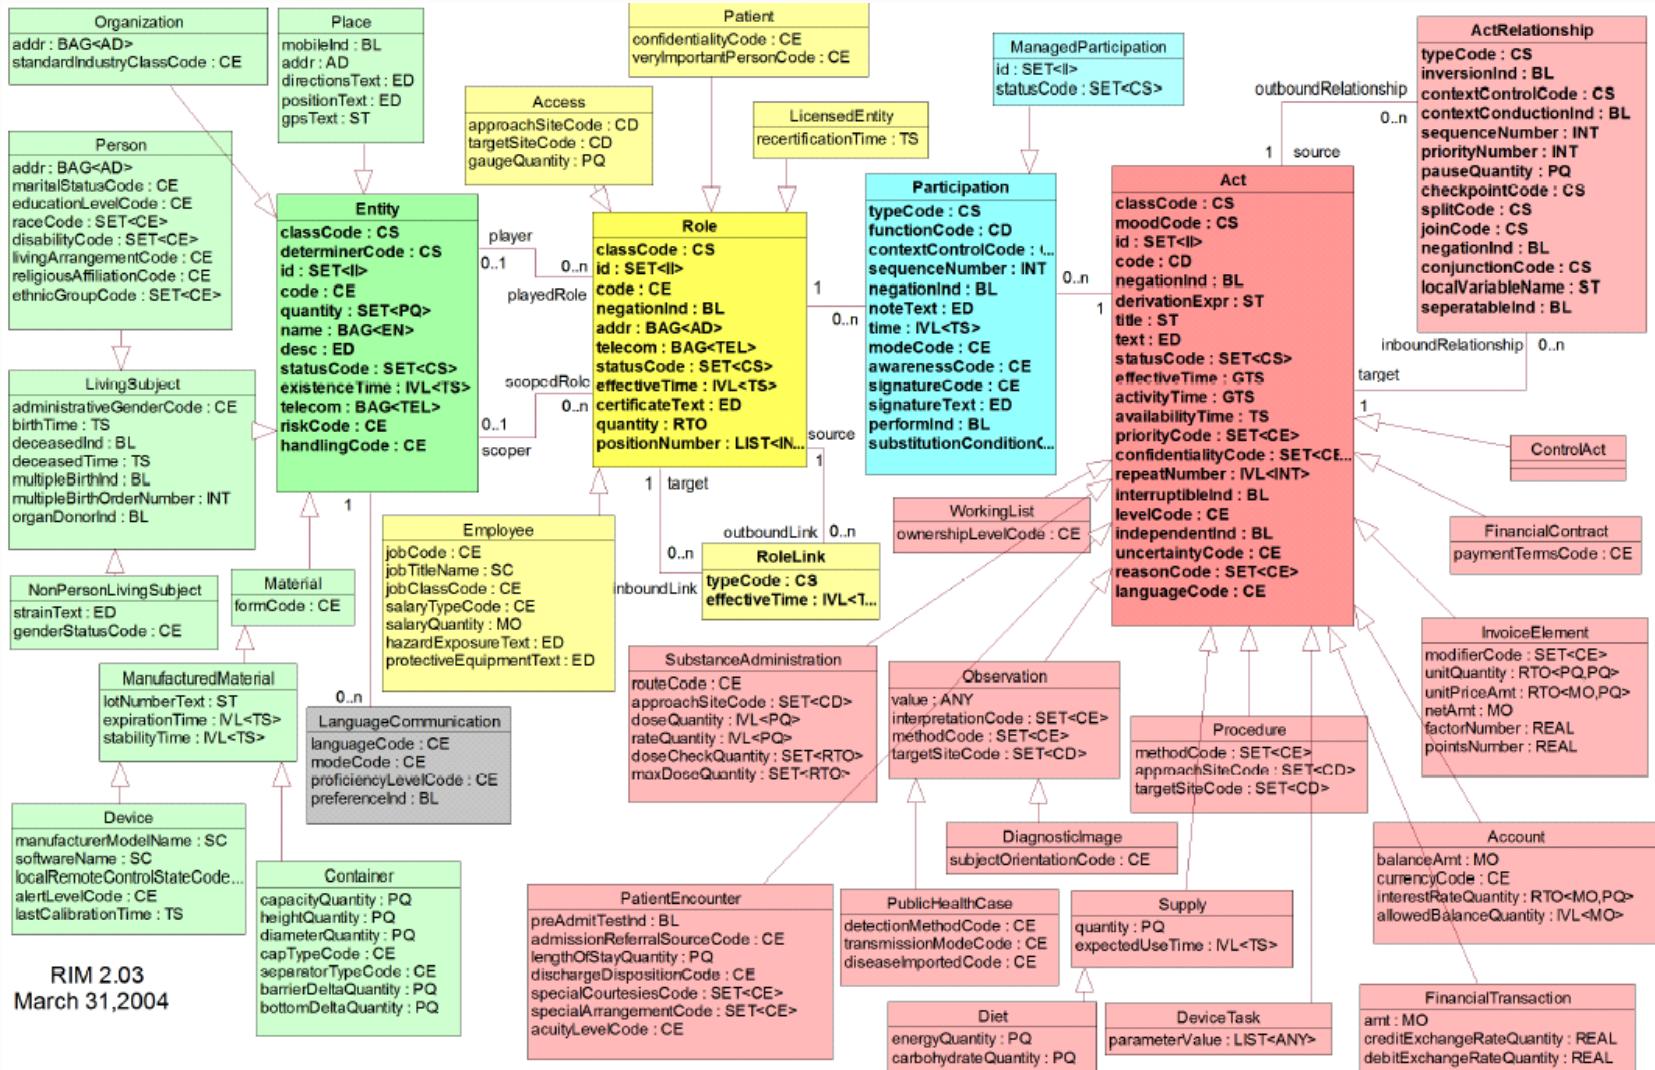

RIM 2.03
March 31, 2004

HL7v3 RIM - methodology

- All models are based on 4 basic types of objects
 - **Action**(English *Act*) - describes a case that occurs in the domain of healthcare
 - **Participation**(English *Participation*) - describes the context of the action
 - **Entity**(English *Entity*) – describes physical things and persons who participate in the said action
 - **the role**(English *Rolls*) – defines the roles of individual entities

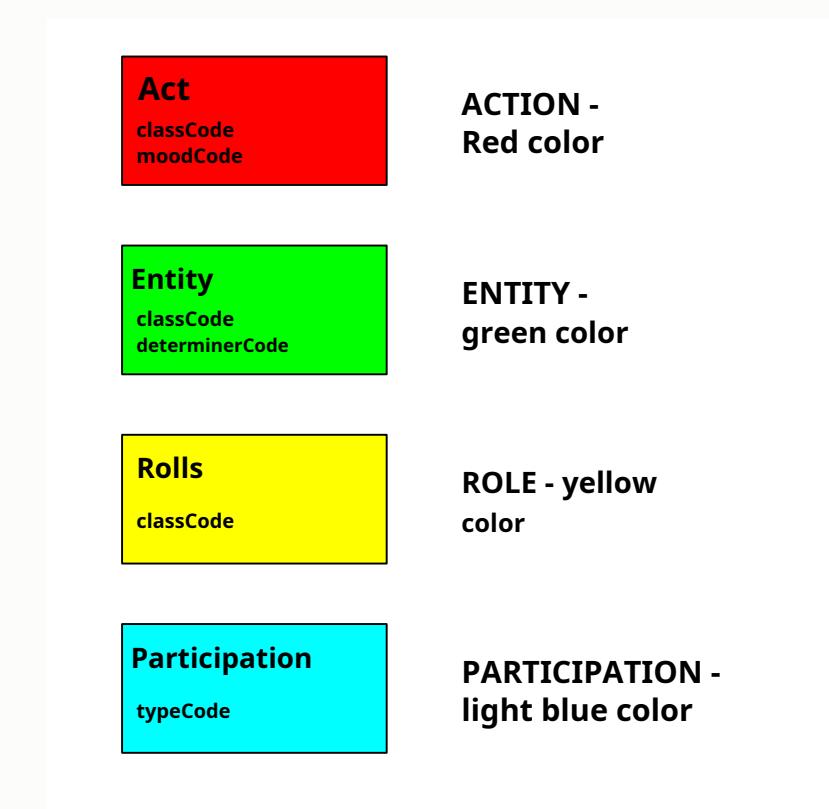

HL7v3 RIM - metodologija

- Svi modeli baziraju se na 4 temeljne vrste objekata
 - **Radnja** (engl. *Act*) - opisuje slučaj koji se događa u domeni zdravstva
 - **Sudjelovanje** (engl. *Participation*) - opisuje kontekst radnje
 - **Entitet** (engl. *Entity*) – opisuje fizičke stvari i osobe koji sudjeluju u navedenoj radnji
 - **Uloga** (engl. *Role*) – definira uloge pojedinih entiteta




HL7v3 information models

- DMIM (Domain Message Information Model) – includes information of interest to a particular technical committee, special interest group or project (e.g. laboratories, pharmacies, health record)
- RMIM (Refined Message Information Model) – describes a connected group of messages using HL7 modeling rules (analogy – use case)
- HMD – tabular representation of the sequence of elements contained in the RMIM


HL7v3 informacijski modeli

- DMIM (Domain Message Information Model) – obuhvaća informacije od interesa za pojedini tehnički odbor, specijalnu interesnu grupu ili projekt (npr. laboratoriji, ljekarne, zdravstveni karton)
- RMIM (Refined Message Information Model) – opisuje povezanu grupu poruka koristeći HL7 pravila modeliranja (analogija – use case)
- HMD – tablična reprezentacija sekvence elemenata sadržanih u RMIM-u

Example – Medical Records DMIM

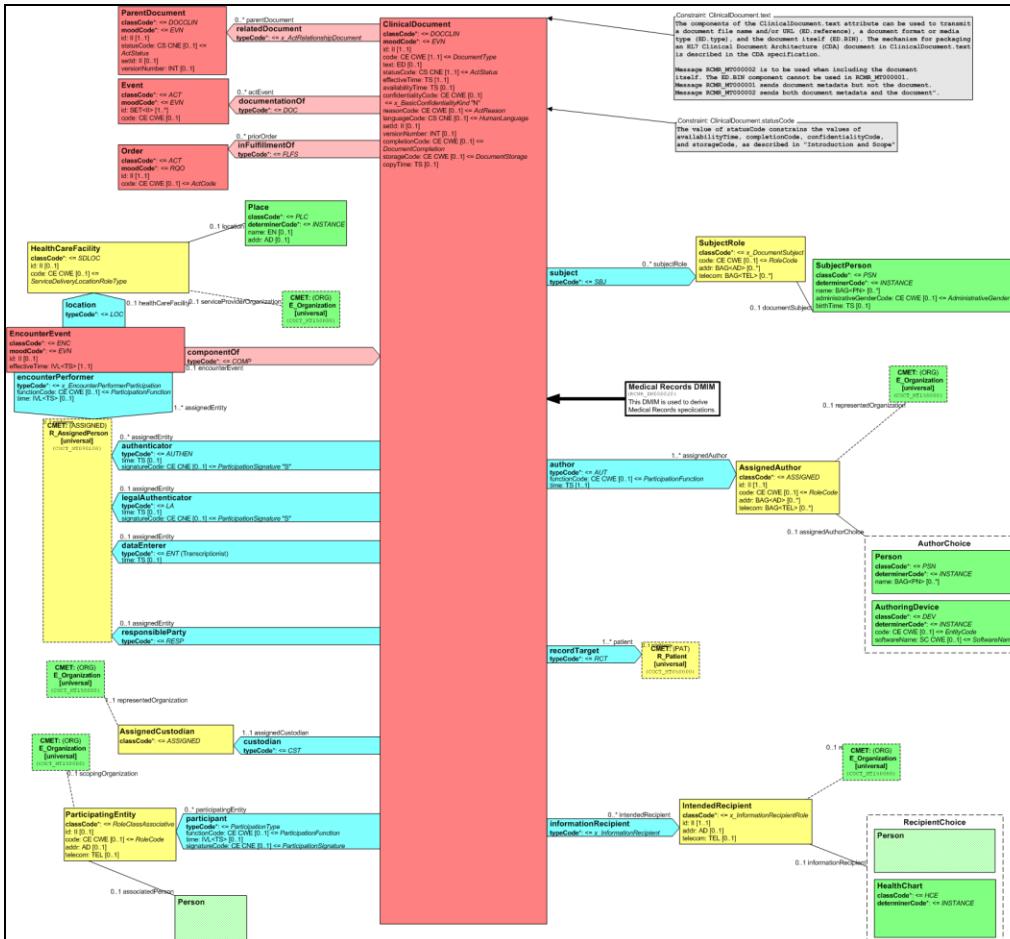


Primjer – Medical Records DMIM

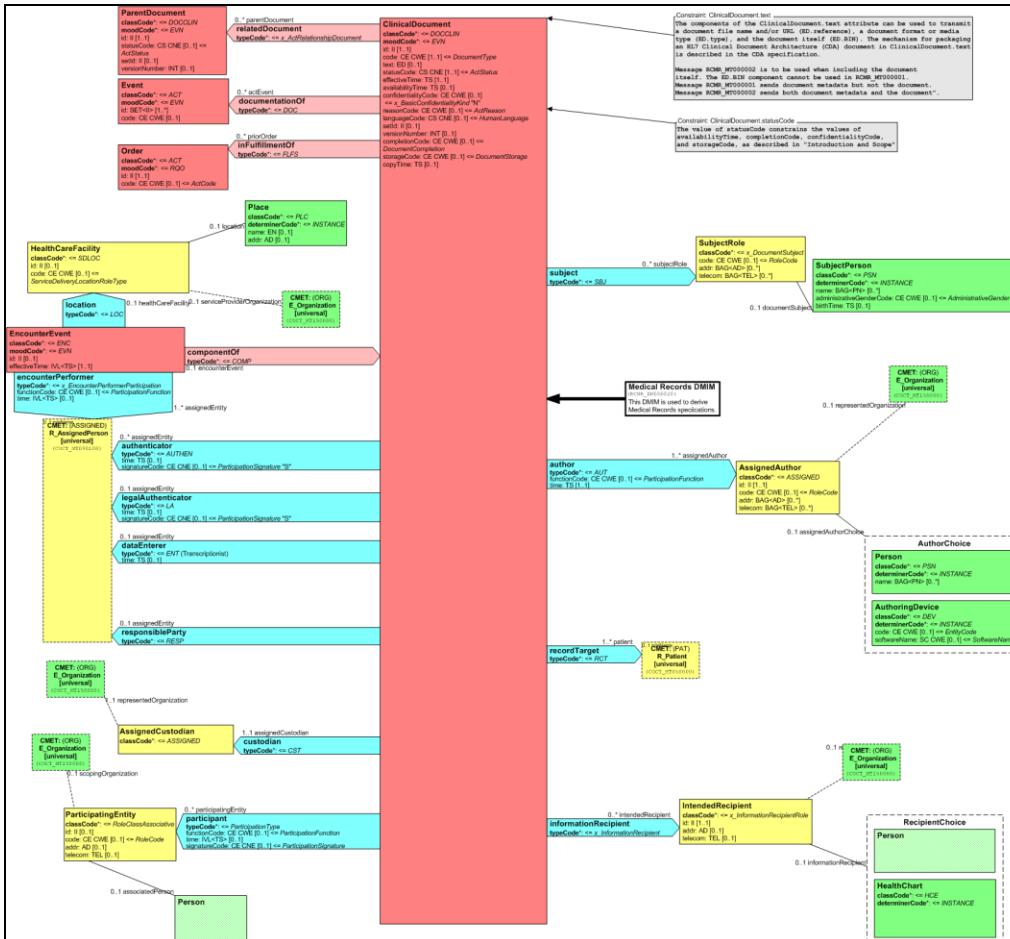

HL7v3 dynamics

- HL7 Interaction – key normative dynamic artifact
- HL7 interaction defined by three components
 - Trigger Event
 - Composite Message Type
 - Receiver Responsibility

The causing event
interaction

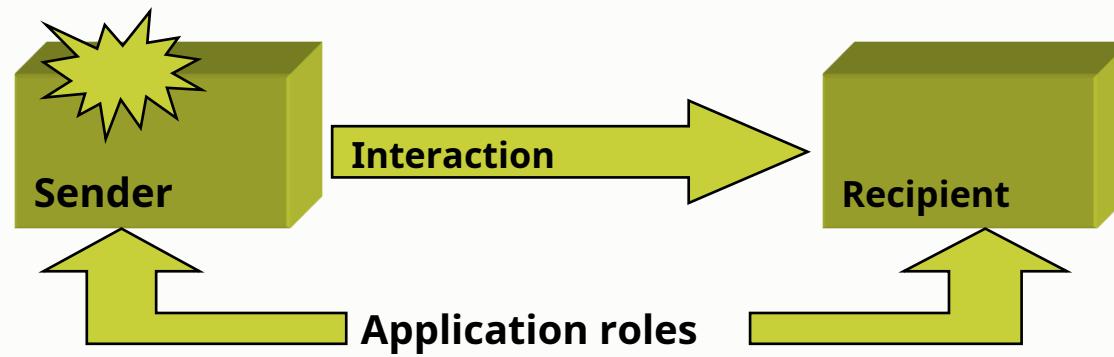

HL7v3 dinamika

- HL7 Interakcija – ključni normativni dinamički artifakt
- HL7 interakcija definirana sa tri komponente
 - Trigger Event
 - Composite Message Type
 - Receiver Responsibility

Dogadjaj koji uzrokuje interakciju



HL7v3 methodology in application

- Example – sending an invoice from the doctor's office to the insurance company
- Process analysis, information model, transport:
 - Ivan Ivić, doctor: "After every examination, I have to send a bill to the insurance company."
 - Insurance company: "The invoice must contain identification of the doctor and patient, medical procedures, date and signature of the doctor"
 - Computer scientist: "How much work..."




HL7v3 metodologija u primjeni

- Primjer – slanje računa iz ordinacije u osiguravajuće društvo
- Analiza procesa, informacijskog modela, transporta:
 - Ivan Ivić, liječnik: "Nakon svakog pregleda moram poslati račun u osiguravajuće društvo."
 - Osiguravajuće društvo: "Na računu mora pisati identifikacija liječnika i pacijenta, medicinske procedure, datum i potpis liječnika"
 - Informatičar: "Koliko posla..."




HL7v3 methodology in application

- Sending an invoice - Use Case
- HL7v3 modeling methodology
 - Action - sending invoice
 - Entities and roles – Marko Marić in the role of patient, Ivan Ivić in the role of doctor, the Clinic of Good Health in the role of cost center, HZZO in the role of insurance company

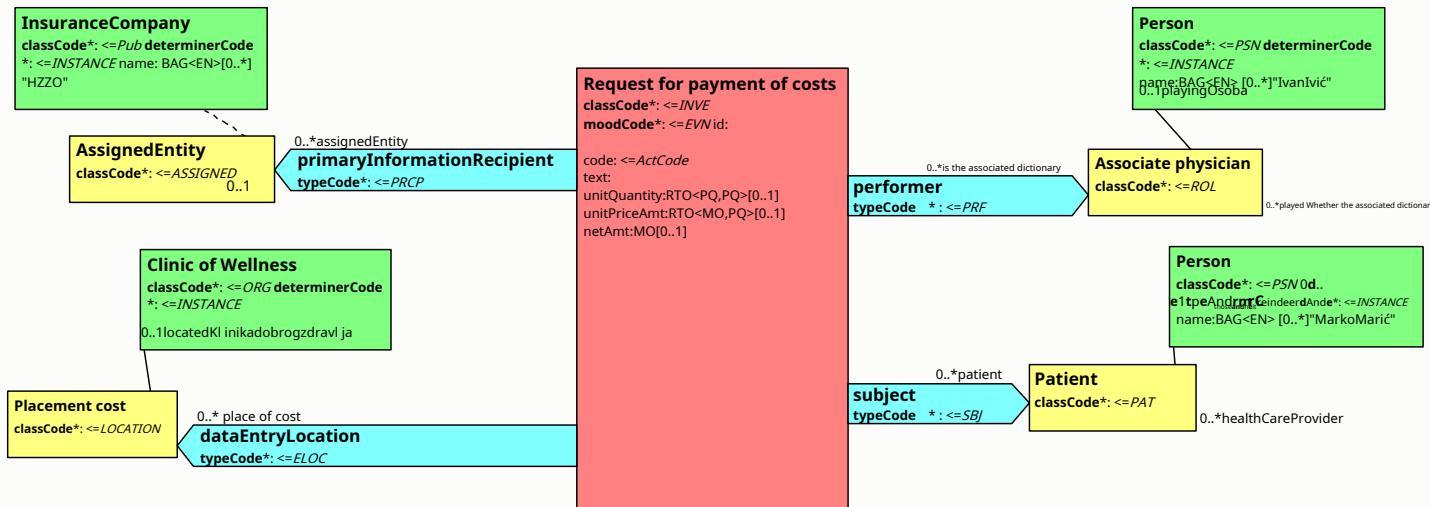


HL7v3 metodologija u primjeni

- Slanje računa – Use Case
- HL7v3 metodologija modeliranja
 - Radnja – slanje računa
 - Entiteti i uloge – Marko Marić u ulozi pacijenta, Ivan Ivić u ulozi liječnika, Klinika dobrog zdravlja u ulozi mjesta troška, HZZO u ulozi osiguravajućeg društva

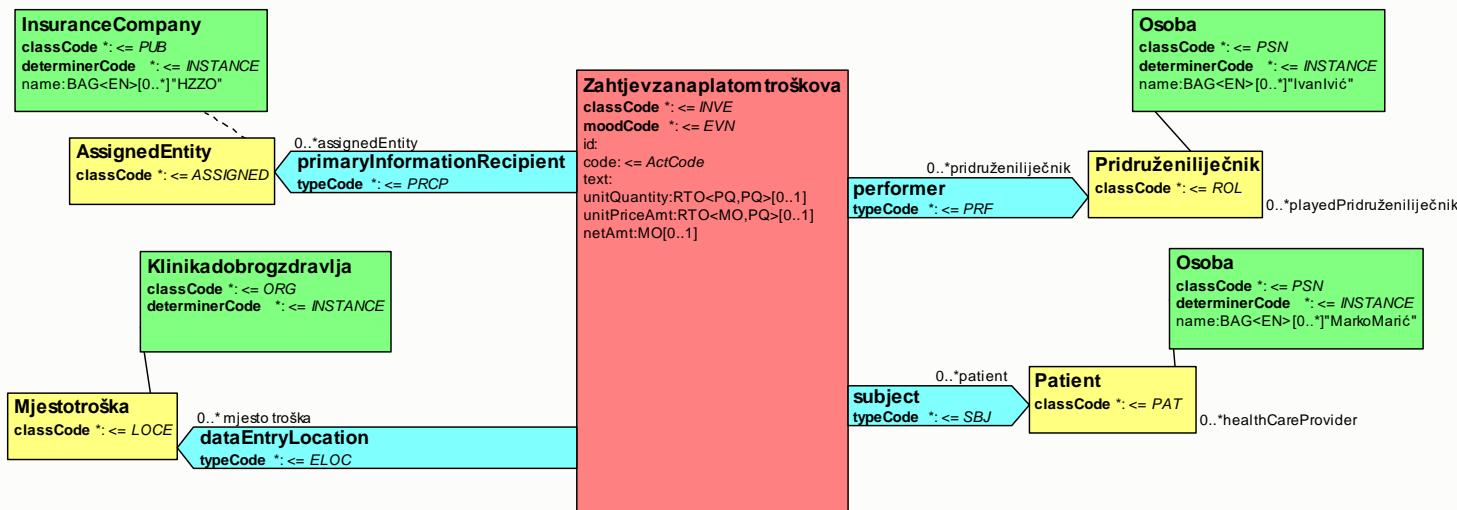


HL7v3 Challenges

- A series of problems in practice
 - Very complex and demanding implementations
 - A long learning process
 - Localization, especially outside the US
 - Lack of stable development tools
 - Complexity of modeling, dynamics, communication protocols, transport
 - Message size
- The result
 - Very low level of acceptance in the industry

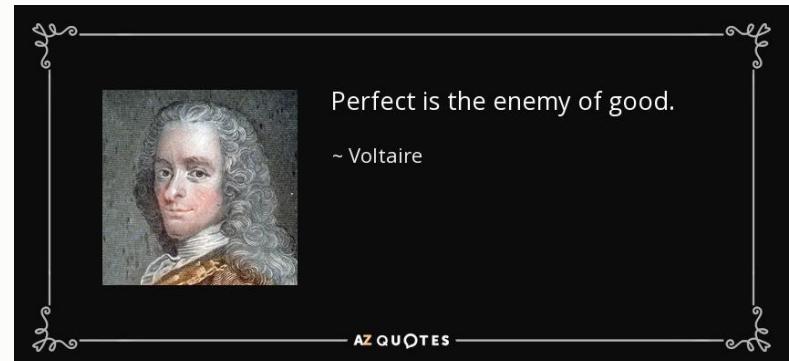

HL7v3 Izazovi

- Niz problema u praksi
 - Vrlo kompleksne i zahtjevne implementacije
 - Dugačak proces učenja
 - Lokalizacija, posebno izvan SAD-a
 - Nedostatak stabilnih alata za razvoj
 - Kompleksnost modeliranja, dinamike, komunikacijskih protokola, transporta
 - Veličina poruka
- Rezultat
 - Vrlo niska razina prihvaćenost u industriji

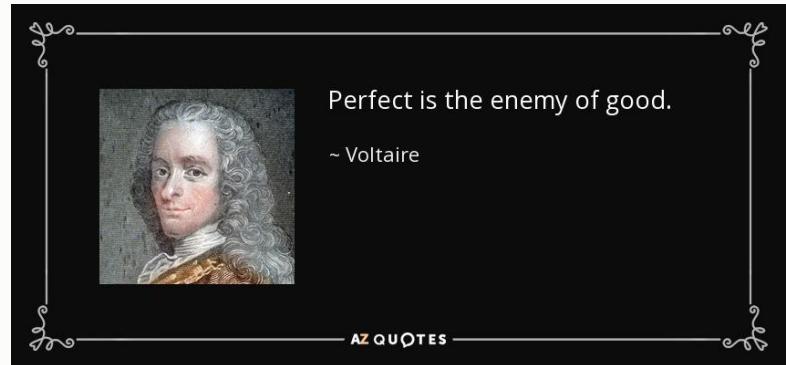

HL7 CDA

HL7 CDA

HL7 CDA

- HL7 CDA – Clinical Document Architecture
- HL7v2.xi v3 are primary *messaging specifications* – data transition, communication in treatment processes
- Why the need for CDA?
 - Documents are actually the most natural method of expressing health status
 - Healthcare workers are used to communicating with documents
 - All health records (including electronic ones) include documents - registers and repositories
 - Fragments of data are useful for a certain time and in a certain context; to ensure persistence, the system asks for (signed) documents

HL7 CDA

- HL7 CDA – Clinical Document Architecture
- HL7v2.x i v3 su primarno *messaging* specifikacije – tranzicija podataka, komunikacija u procesima liječenja
- Zašto potreba za CDA?
 - Dokumenti su zapravo najprirodnija metoda iskazivanja zdravstvenog stanja
 - Zdravstveni djelatnici su navikli na komunikaciju dokumentima
 - Svi zdravstveni zapisi (pa i oni elektronički) uključuju dokumente – registre i rezervorije
 - Fragmenti podataka su korisni za određeno vrijeme i u određenom kontekstu; za osiguranje persistencije, sustav traži (potpisane) dokumente

HL7 CDA – Objectives and application

- 6 key characteristics of CDA specifications and documents

- Persistence – the clinical document exists in its original state as long as the rules and/or regulations require it
- Manageability - the clinical document is maintained by the organization providing the care
- Possibility of authentication - a collection of information that is intended for legal authentication
- Preservation of context
- Completeness - document authentication refers to the entire content
- Human readability level

- Examples in application

- Dismissal letter
- The recipe
- Referral



HL7 CDA – Ciljevi i primjena

- 6 ključnih karakteristika CDA specifikacija i dokumenata
 - Perzistentnost – klinički dokument postoji u svom originalnom stanju dokle god pravila i(li) regulativa to nalažu
 - Upravljivost - klinički dokument je održavan od strane organizacije koja provodi njegu
 - Mogućnost autentikacije – kolekcija informacija koja je predviđena za zakonsku autentikaciju
 - Očuvanje konteksta
 - Cjelovitost – autentikacija dokumenata odnosi se na cijeli sadržaj
 - Ljudska razina čitljivosti
- Primjeri u primjeni
 - Otpusno pismo
 - Recept
 - Uputnica



HL7 CDA – Key settings

- Interoperability
 - Human readability level
 - Mapping the paper world into the electronic one
 - Computer level
 - Storage and management of clinical data
 - Preservation of context
 - Archiving in a consistent manner – enables documents to be reused
- The idea of meeting requirements on both levels
 - Guaranteed human processing - preservation of the basic form of the document
 - Iterative addition *tags* according to XML notation so that the document can be computerized
- HL7 CDA is the same as the ISO standard - ISO/HL7 27932:2008



[This Photo](#) by Unknown Author is licensed under [CC BY-SA-NC](#)

HL7 CDA – Ključne postavke

- Interoperabilnost
 - Ljudska razina čitljivosti
 - Mapiranje papirnatog svijeta u elektronički
 - Računalna razina
 - Pohranjivanje i upravljanje kliničkim podacima
 - Očuvanje konteksta
 - Arhiviranje na konzistentan način – omogućuje ponovo korištenje dokumenata
- Ideja ispunjenja zahtjeva na obje razine
 - Zagarantirano ljudsko procesiranje – očuvanje osnovne forme dokumenta
 - Iterativno dodavanje *tagova* prema XML notaciji kako bi se dokument dao računalno obradivati
- HL7 CDA je isto i ISO norma - ISO/HL7 27932:2008



[This Photo](#) by Unknown Author is licensed under [CC BY-SA-NC](#)



HL7 CDA – key settings cont'd

- HL7 CDA documents are
 - Encoded using XML
 - Based on HL7 RIM and HL7v3 data types, which then represent the basis for computer processing of information
 - Specifications are broad and comprehensive
 - The basic specification is limited and adapted to a particular use case using templates. *Templates*)
- CDA does not specify or condition
 - Transport mechanisms, i.e. the way in which the document is transferred from point A to point B
 - It can also be part of an HL7 message, with additional mapping requirements. In this case, the CDA document is transmitted as multimedia content
 - The way the document is physically stored
 - Creation and management of documents, but defines exclusively the architecture and format for exchange


HL7 CDA – ključne postavke cont'd

- HL7 CDA dokumenti su
 - Kodirani pomoću XML-a
 - Bazirani na HL7 RIM i HL7v3 tipovima podataka, koji onda predstavljaju osnovu za računalno procesiranje informacija
 - Specifikacije su široke i sveobuhvatne
 - Osnovna specifikacija se ograničava i prilagođava pojedinom slučaju uporabe korištenjem predložaka (engl. *Templates*)
- CDA ne specificira i ne uvjetuje
 - Transportne mehanizme, tj. način na koji se dokument prenosi iz točke A u točku B
 - Može biti i dio HL7 poruke, uz dodatne zahtjeve oko mapiranja. U tom slučaju CDA dokument se prenosi kao multimedijalni sadržaj
 - Način na koji se dokument fizički spremi u pohranu
 - Kreiranje i upravljanje dokumentima, već definira isključivo arhitekturu i format za razmjenu

Structure of the CDA document


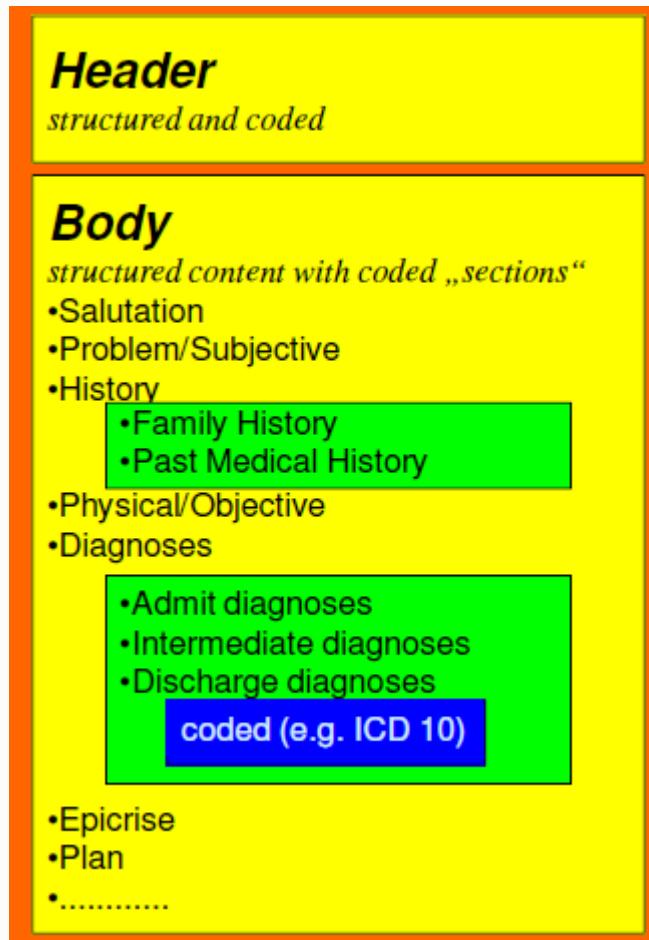


- the context in which the document is located
- key data for document changes




- clinical data about the patient
- XML hierarchy – data divided into sections, paragraphs, lists and tables

Struktura CDA dokumenta

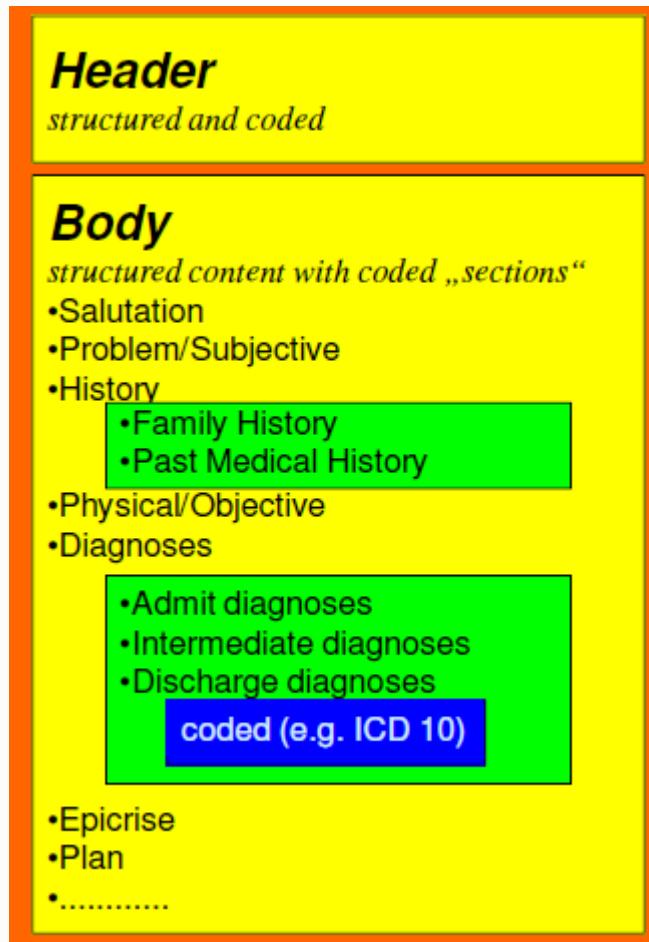


- kontekst u kojem se dokument nalazi
- ključni podaci za izmjene dokumenata




- klinički podaci o pacijentu
- XML hijerarhija – podaci podijeljeni u sekcije, paragafe, liste i tablice

Structure of the CDA document

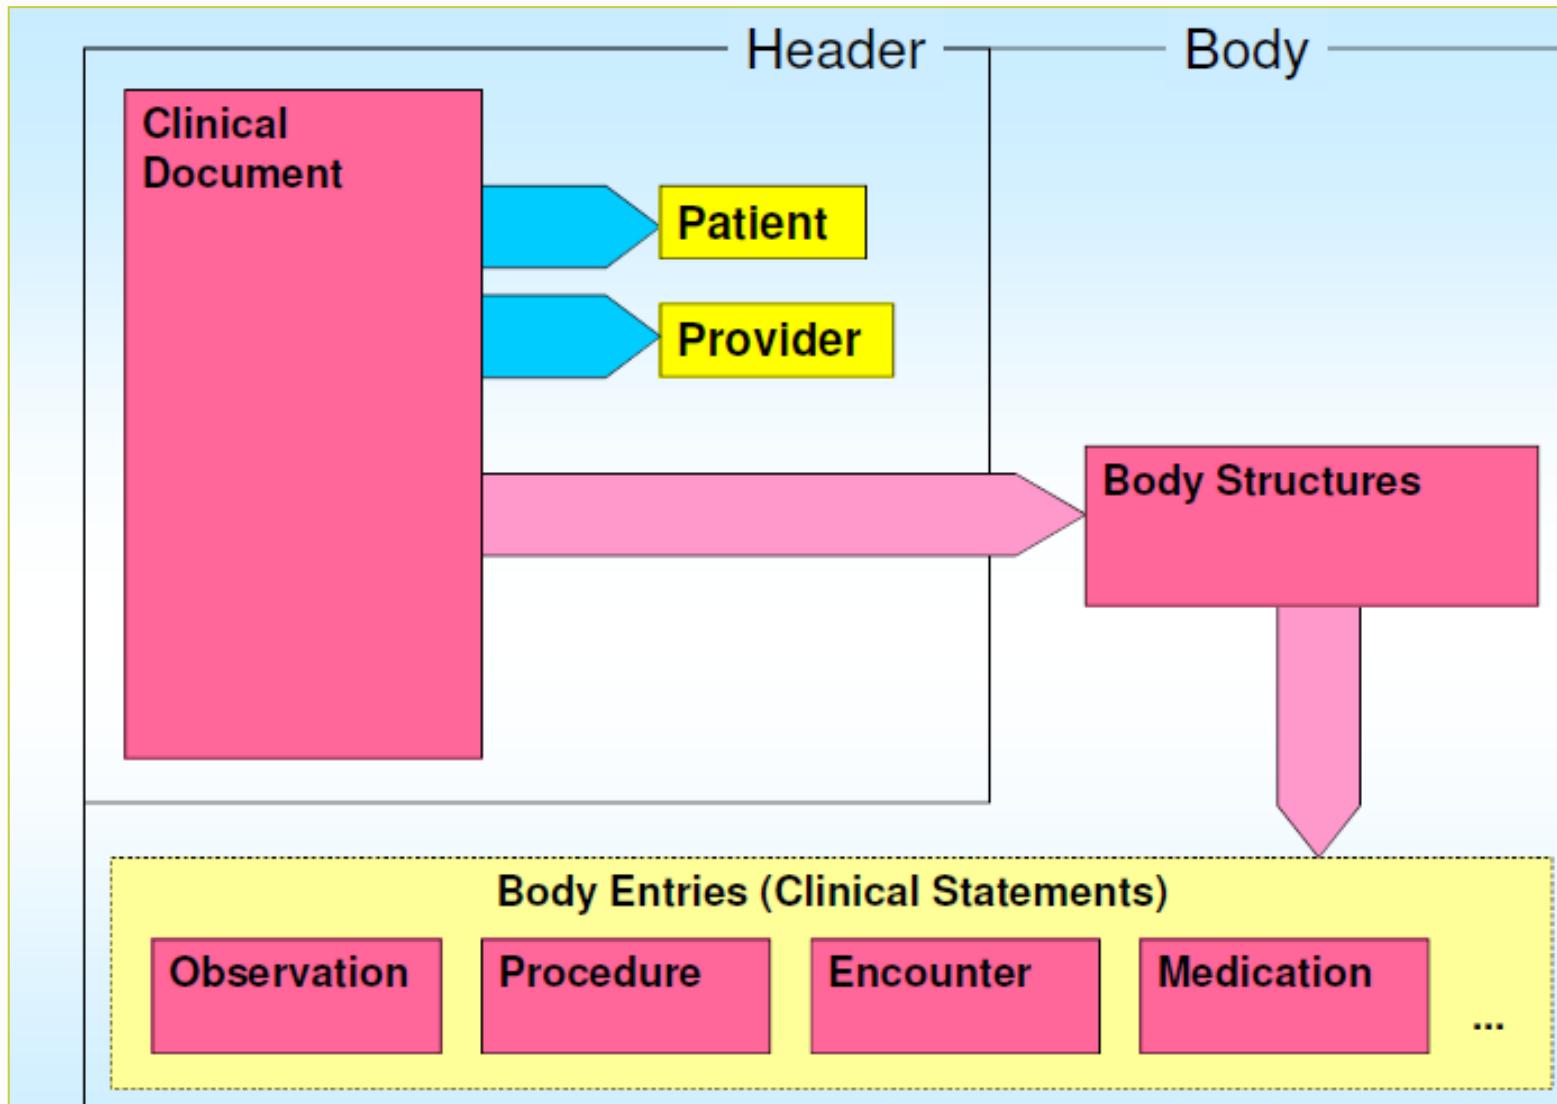

Struktura CDA dokumenta

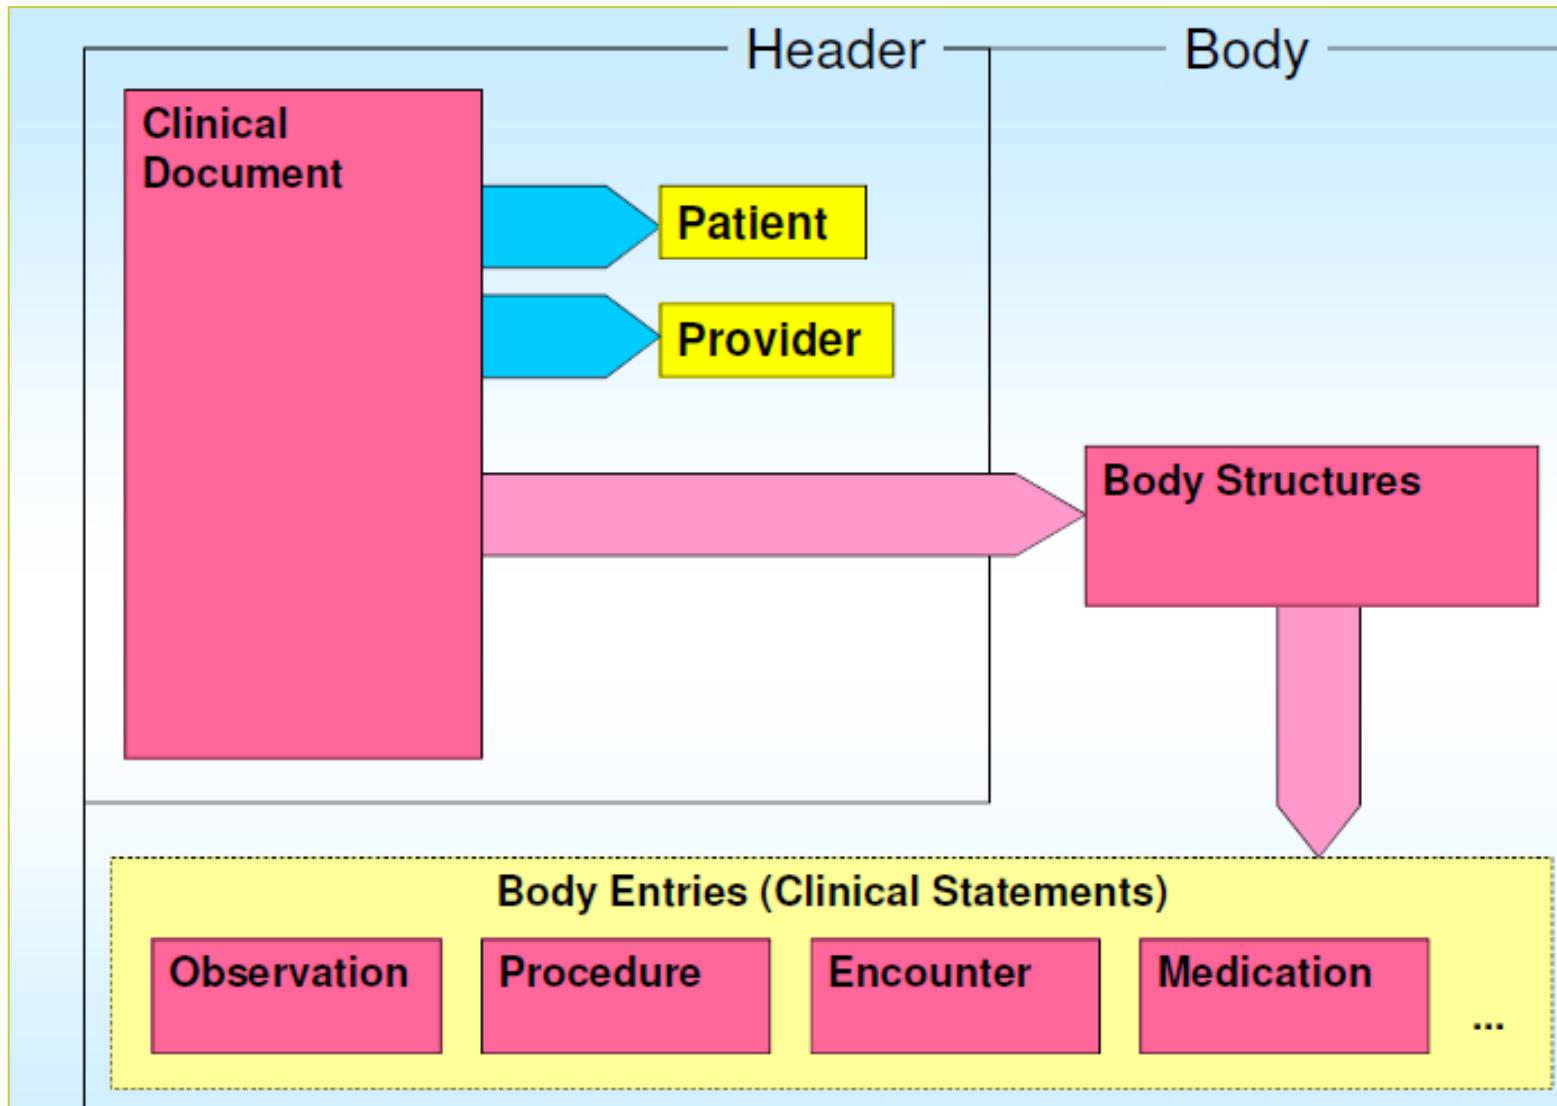

HL7 CDA Header

- Document identification and classification (see example on the next page)
 - ID, category, title, date, version
- Language, confidentiality, authorization, *patient consent*
- Digital signatures
- Content recipient
- Document manager
- Register of the document (the person who physically entered the data in the document)
- Responsible persons
- The patient
- Author

HL7 CDA Header

- Identifikacija i klasifikacija dokument (vidi primjer na slijedećoj strani)
 - ID, kategorija, naslov, datum, verzija
- Jezik, povjerljivost, autorizacija, *patient consent*
- Digitalni potpisi
- Primatelj sadržaja
- Menadžer dokumenta
- Upisnik dokumenta (osoba koja je fizički unijela podatke u dokument)
- Odgovorne osobe
- Pacijent
- Autor

Clinical Document

```

ClinicalDocument
classCode*: <= DOCLIN
moodCode*: <= EVN
id*: II [1..1]
code*: CE CWE [1..1] <= DocumentType
title: ST [0..1]
effectiveTime*: TS [1..1]
confidentialityCode*: CE CWE [1..1]
<= x_BasicConfidentialityKind
languageCode: CS CNE [0..1] <= HumanLanguage
setId: II [0..1]
versionNumber: INT [0..1]
copyTime: TS [0..1] (Deprecated)

```

Types of clinical documents (LOINC codes)

Code	Document-Type	Authoring Provider	Context
34133-9	Summarization of Episode Note	Practitioner	
18842-5	Discharge summarization note	Provider	
11490-0	Discharge summarization note	Physician	
34745-0	Discharge summarization note	Nurse	
34105-7	Discharge summarization note	Provider	Hospital
34106-5	Discharge summarization note	Physician	Hospital
18761-7	Transfer summarization note	Provider	
28616-1	Transfer summarization note	Physician	
28651-8	Transfer summarization note	Nurse	
18733-6	Ambulatory visit note		
18742-7	Arthroscopy report		
18743-5	Autopsy report		
18745-0	Cardiac catheterization report		
11488-4	Consultation note		
18747-6	CT report		
11520-4	Echocardiogram report		
15507-7	Emergency visit note		
11492-6	History and physical note		

Clinical Document

```

ClinicalDocument
classCode*: <= DOCLIN
moodCode*: <= EVN
id*: II [1..1]
code*: CE CWE [1..1] <= DocumentType
title: ST [0..1]
effectiveTime*: TS [1..1]
confidentialityCode*: CE CWE [1..1]
<= x_BasicConfidentialityKind
languageCode: CS CNE [0..1] <= HumanLanguage
setId: II [0..1]
versionNumber: INT [0..1]
copyTime: TS [0..1] (Deprecated)


```

Vrste kliničkih dokumenata
(LOINC codes)

Code	Document-Type	Authoring Provider	Context
34133-9	Summarization of Episode Note	Practitioner	
18842-5	Discharge summarization note	Provider	
11490-0	Discharge summarization note	Physician	
34745-0	Discharge summarization note	Nurse	
34105-7	Discharge summarization note	Provider	Hospital
34106-5	Discharge summarization note	Physician	Hospital
18761-7	Transfer summarization note	Provider	
28616-1	Transfer summarization note	Physician	
28651-8	Transfer summarization note	Nurse	
18733-6	Ambulatory visit note		
18742-7	Arthroscopy report		
18743-5	Autopsy report		
18745-0	Cardiac catheterization report		
11488-4	Consultation note		
18747-6	CT report		
11520-4	Echocardiogram report		
15507-7	Emergency visit note		
11492-6	History and physical note		

HL7 CDA Body

The document header (header) is connected to
I compose through ActRelationship

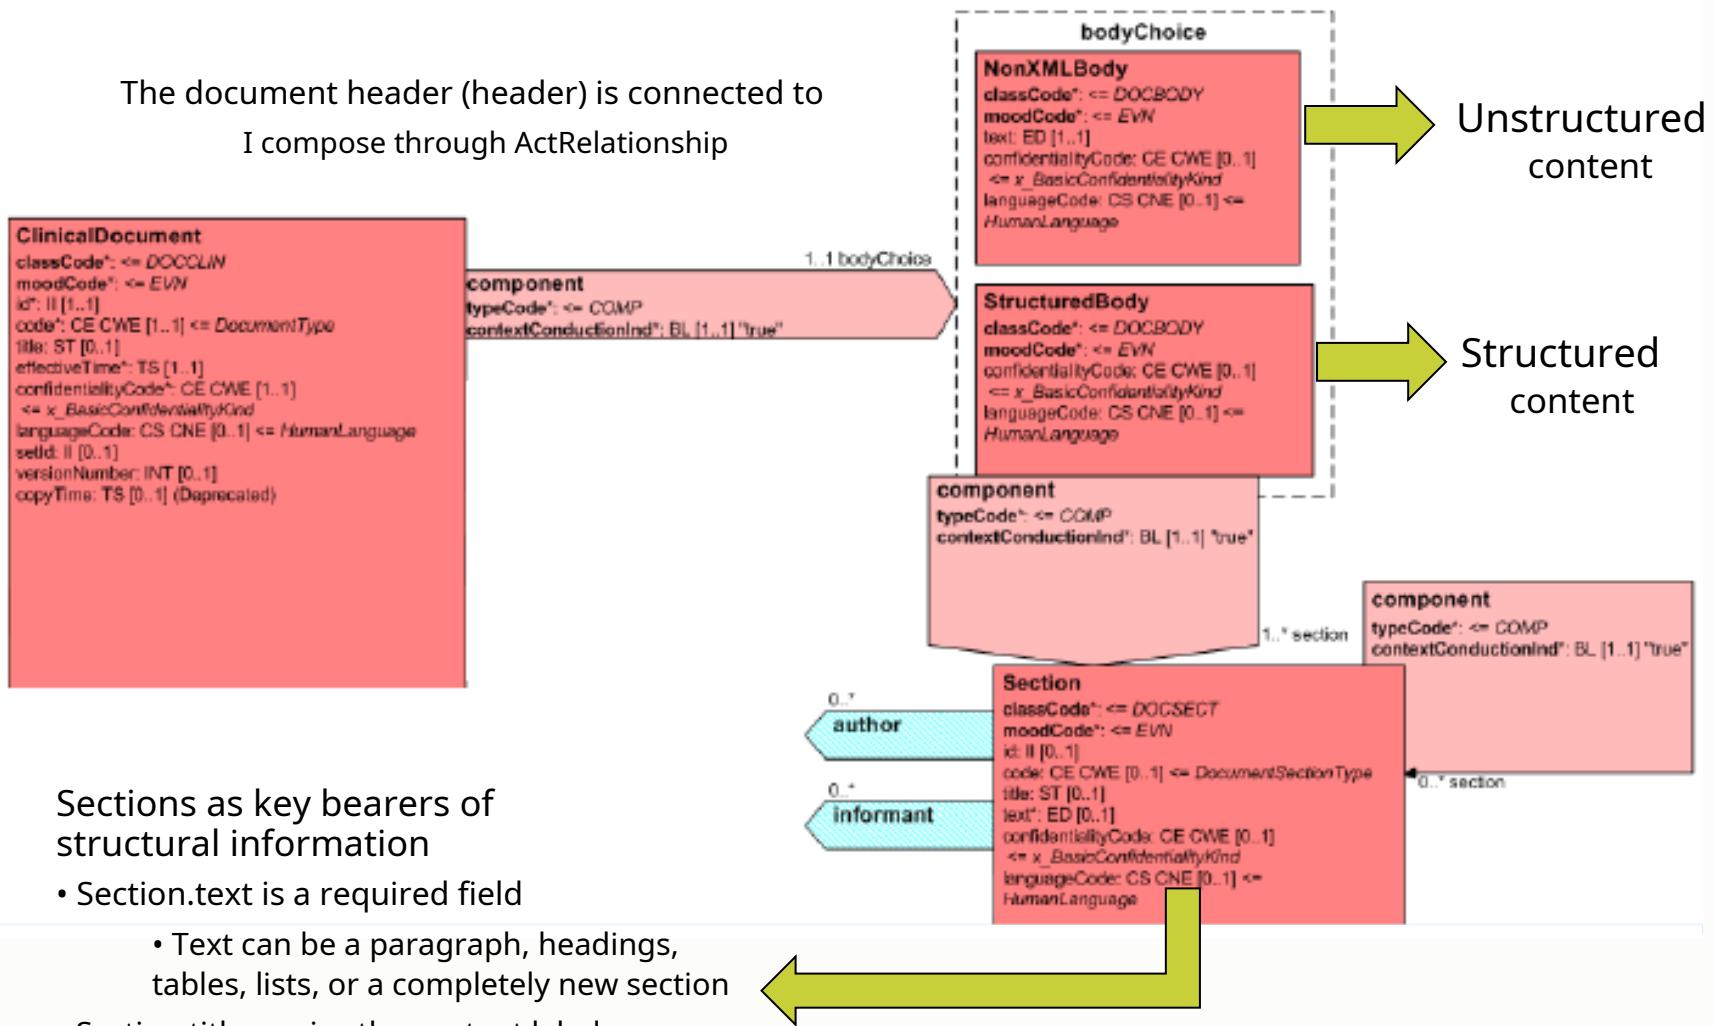


Sections as key bearers of structural information

- Section.text is a required field
 - Text can be a paragraph, headings, tables, lists, or a completely new section
 - Section.title carries the content label

HL7 CDA Body

Zaglavje dokumenta (header) povezan je sa sadžajem kroz ActRelationship

```
ClinicalDocument
classCode": <= DOCCLIN
moodCode": <= EVN
id: II [1..1]
code: CE CWE [1..1] <= DocumentType
title: ST [0..1]
effectiveTime: TS [1..1]
confidentialityCode: CE CWE [1..1]
<= x_BasicConfidentialityKind
languageCode: CS CNE [0..1] <= HumanLanguage
setId: II [0..1]
versionNumber: INT [0..1]
copyTime: TS [0..1] (Deprecated)
```

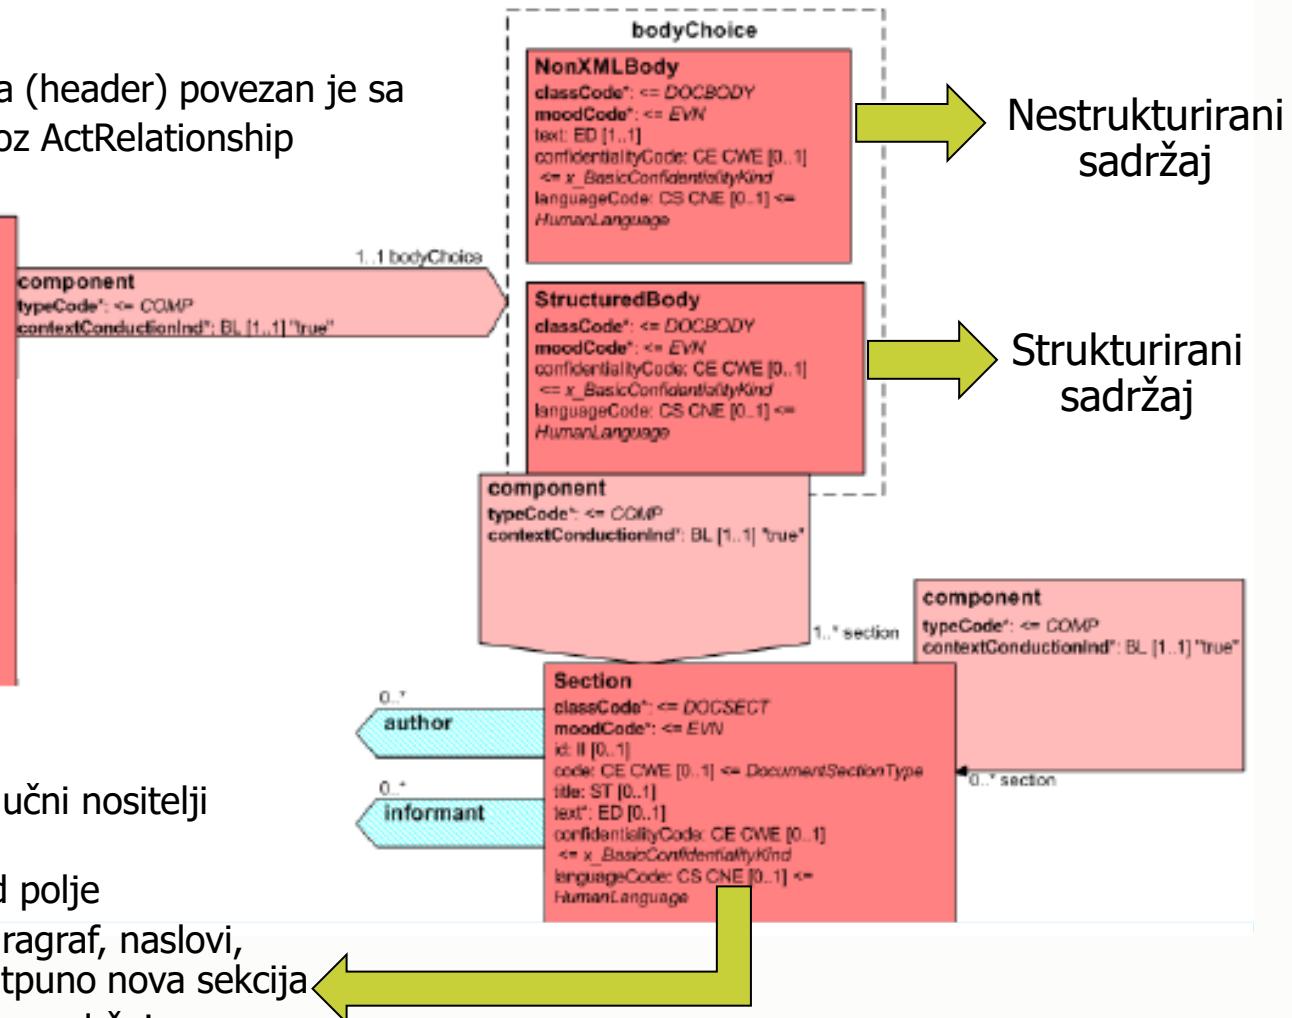

Sekcije (Section) kao ključni nositelji strukturnih informacija

- **Section.text** je required polje
 - Text može biti paragraf, naslovi, tablice, liste, ili potpuno nova sekcija
- **Section.title** nosi oznaku sadržaja

CDA Body

- Clinical content, either in the form of unstructured BLOB or structured markup text
- Body is composed of a number of Section components. Each Section component contains
 - Unique narrative block for each section (Section.text)
 - Section.text is crucial for human readability and interoperability
 - Zero, one or more clinical elements (Entries) and extension
- CDA Entries
 - Structured clinical content intended for further computer processing
 - As a rule, they encode what is in the corresponding Section.text part
 - Can be nested (*Entries within Entries*)
 - I can reference external objects

CDA Body

- Klinički sadržaj, bilo u formi ne-strukturiranog BLOB-a, ili strukturiranog markup teksta
- Body je sastavljen od niza Section komponenata. Svaka Section komponenta sadržava
 - Jedinstveni narativni blok za svaku sekciju (Section.text)
 - Section.text je ključan za ljudsku čitljivost i interoperabilnost
 - Nula, jedan ili više kliničkih elemenata (engl. Entries) i ekstenzija
- CDA Entries
 - Strukturirani klinički sadržaj koji je namijenjen dalnjem računalnom procesiranju
 - U pravili kodiraju ono što se nalazi u pripadajućem Section.text dijelu
 - Mogu biti ugniježdeni (*Entries within Entries*)
 - Mogu referencirati vanjske objekte

CDA Entries

- Types of clinical content within CDA Entry
 - Observations (text content and multimedia)
 - Region of interest (multimedia)
 - Administration of medicines
 - Procurement of materials (Supply)
 - Procedures
 - Relationships between individual treatment episodes (Encounter)
 - Class organizer – organization of multiple clinical contents in a group according to context
 - Generic Act

clinicalStatement

Observation

```
classCode*: <= OBS
moodCode*: <= x_ActMoodDocumentObservation
id: SET<II> [0..*]
code*: CD CWE [1..1] <= ObservationType
negationInd: BL [0..1]
derivationExpr: ST [0..1]
text: ED [0..1]
statusCode: CS CNE [0..1] <= ActStatus
effectiveTime: IVL<TS> [0..1]
priorityCode: CE CWE [0..1] <= ActPriority
repeatNumber: IVL<INT> [0..1]
languageCode: CS CNE [0..1] <= HumanLanguage
value: ANY [0..1]
interpretationCode: SET<CE> CNE [0..*]
methodCode: SET<CE> CWE [0..*]
targetSiteCode: SET<CD> CWE [0..*]
```

RegionOfInterest

```
classCode*: <= ROI/OVL
moodCode*: <= EVN
id*: SET<II> [1..*]
code*: CS CNE [1..1] <= ROIOverlayShape
value*: LIST<INT> [1..*]
```

ObservationMedia

```
classCode*: <= OBS
moodCode*: <= EVN
id: SET<II> [0..*]
languageCode: CS CNE [0..1] <= HumanLanguage
value*: ED [1..1]
```

SubstanceAdministration

```
classCode*: <= SBADM
moodCode*: <= x_DocumentSubstanceMood
id: SET<II> [0..*]
code: CD CWE [0..1] <= SubstanceAdministrationActCode
negationInd: BL [0..1]
text: ED [0..1]
statusCode: CS CNE [0..1] <= ActStatus
effectiveTime: GTS [0..1]
```


CDA Entries

- Tipovi kliničkog sadržaja unutar CDA Entry
 - Zapažanja (tekstualni sadržaj i multimedija)
 - Regija od interesa (multimedija)
 - Administracije lijekova
 - Nabava materijala (Supply)
 - Procedure
 - Odnosi između pojedinih epizoda liječenja (engl. Encounter)
 - Organiser klasa – organizacija više kliničkih sadržaja u grupu prema kontekstu
 - Generički Act


clinicalStatement <pre> Observation classCode*: <= OBS moodCode*: <= x_ActMoodDocumentObservation id: SET<II> [0..*] code*: CD CWE [1..1] <= ObservationType negationInd: BL [0..1] derivationExpr: ST [0..1] text: ED [0..1] statusCode: CS CNE [0..1] <= ActStatus effectiveTime: IVL<TS> [0..1] priorityCode: CE CWE [0..1] <= ActPriority repeatNumber: IVL<INT> [0..1] languageCode: CS CNE [0..1] <= HumanLanguage value: ANY [0..1] interpretationCode: SET<CE> CNE [0..*] methodCode: SET<CE> CWE [0..*] targetSiteCode: SET<CD> CWE [0..*]</pre>
RegionOfInterest <pre> classCode*: <= ROI/OVL moodCode*: <= EVN id*: SET<II> [1..*] code*: CS CNE [1..1] <= ROIOverlayShape value*: LIST<INT> [1..*]</pre>
ObservationMedia <pre> classCode*: <= OBS moodCode*: <= EVN id: SET<II> [0..*] languageCode: CS CNE [0..1] <= HumanLanguage value*: ED [1..1]</pre>
SubstanceAdministration <pre> classCode*: <= SBADM moodCode*: <= x_DocumentSubstanceMood id: SET<II> [0..*] code: CD CWE [0..1] <= SubstanceAdministrationActCode negationInd: BL [0..1] text: ED [0..1] statusCode: CS CNE [0..1] <= ActStatus effectiveTime: GTS [0..1]</pre>

XML representation of basic CDA components

```
<ClinicalDocument>
  ...
  <StructuredBody>
    <Section>
      <text>...</text>
    <Observation>
      ...
      </Observation>
      <Observation>
        <reference>
          <ExternalObservation>
            ...
            </ExternalObservation>
          </reference>
        </Observation>
      </Section>
      <Section>
        <Section>...</Section>
      </Section>
    </StructuredBody>
  </ClinicalDocument>
```

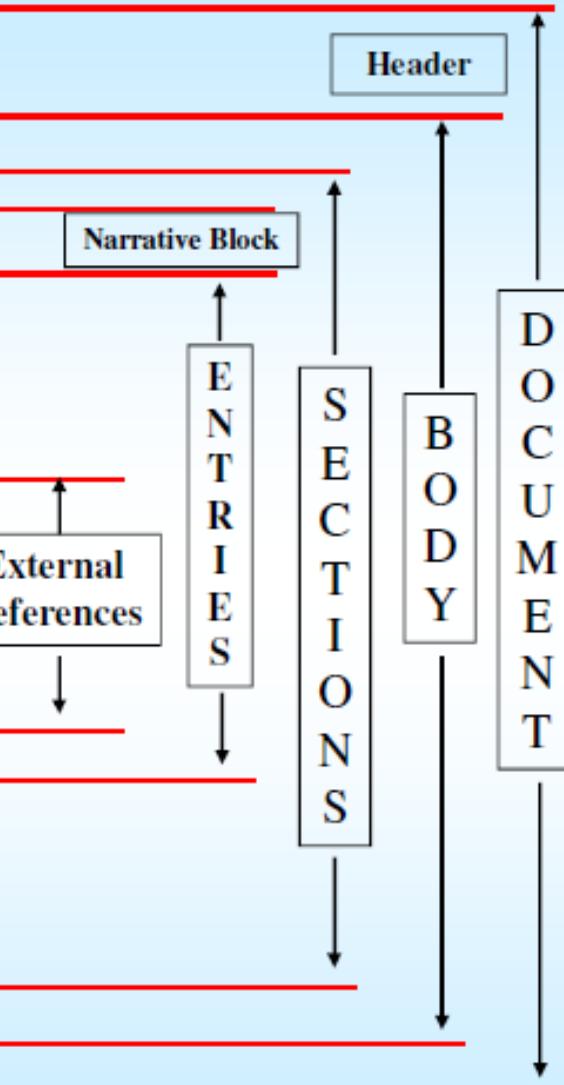

XML prikaz osnovnih CDA komponenti

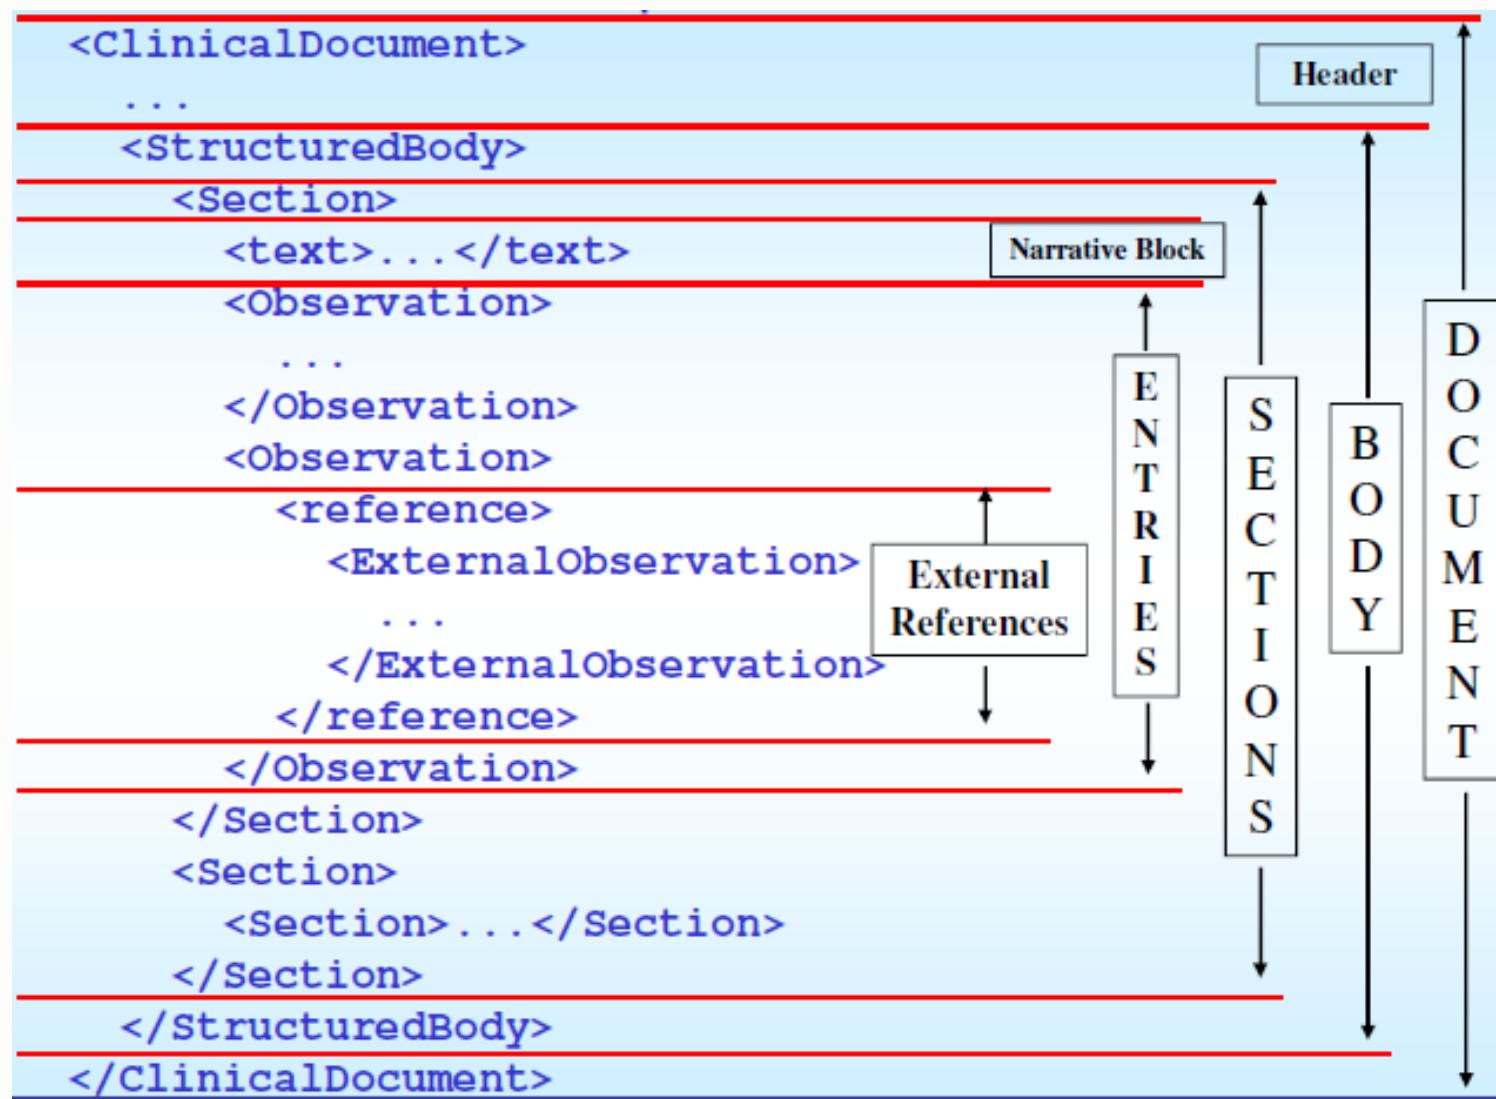

HL7 CDA levels (Levels = Sections)

CDA Release 2	
CDA Level 1	The unconstrained CDA specification.
CDA Level 2	The CDA specification with section-level templates applied. <i>"My discharge letter has the following structure"</i>
CDA Level 3	The CDA specification with entry-level (and optionally section-level) templates applied. <i>"My discharge letter contains the following granular data"</i>

Razine HL7 CDA (Levels = Sections)

CDA Release 2	
CDA Level 1	The unconstrained CDA specification.
CDA Level 2	The CDA specification with section-level templates applied. <i>"My discharge letter has the following structure"</i>
CDA Level 3	The CDA specification with entry-level (and optionally section-level) templates applied. <i>"My discharge letter contains the following granular data"</i>

HL7 CDA – Level 1

- ordinary narrative text with additional formatting

Level 1

```
<component>
  <!-- History -->
  <section>
    <title>29.08.2005: History</title>
    <text>Onset of asthma in his teens. He was
      hospitalized twice last year, and already
      twice this year.
    </text>
  </section>
</component>
```

HL7 CDA – Level 1

- običan narrative text sa dodatnim formatiranjem

Level 1

```
<component>
  <!-- History -->
  <section>
    <title>29.08.2005: History</title>
    <text>Onset of asthma in his teens. He was
      hospitalized twice last year, and already
      twice this year.
    </text>
  </section>
</component>
```

HL7 CDA – Level 2

- Coding sections within the CDA body for computer processing

Level 2

```
<component>
  <!-- History -->
  <section>
    <code code="10164-2" codeSystem="2.16.840.1.113883.6.1"
          codeSystemName="LOINC"/>
    <title>29.08.2005: History</title>
    <text>Onset of asthma in his teens. He was
          hospitalized twice last year, and already
          twice this year.
    </text>
  </section>
</component>
```

HL7 CDA – Level 2

- Kodiranje sekcija unutar CDA body za računalno procesiranje

Level 2

```
<component>
    <!-- History -->
    <section>
        <code code="10164-2" codeSystem="2.16.840.1.113883.6.1"
              codeSystemName="LOINC"/>
        <title>29.08.2005: History</title>
        <text>Onset of asthma in his teens. He was
              hospitalized twice last year, and already
              twice this year.
        </text>
    </section>
</component>
```

HL7 CDA – Level 3

- Coding of individual keywords within section of the CDA body for additional computing processing

Level 3

```
<component>
  <section>
    <code code="10164-2" codeSystemName="LOINC"
          codeSystem="2.16.840.1.113883.6.1" />
    <title>29.08.2005: History</title>
    <text>Onset of <content ID="a1">asthma</content> in
his teens. He was hospitalized twice last year, and already twice this
year. </text>
    <entry typeCode="COMP">
      <observation>
        <code code="195967001"
              codeSystem="2.16.840.1.113883.6.96"
              codeSystemName="SNOMED CT"
              displayName="Asthma">
          <originalText>
            <reference value="#a1"/>
          </originalText>
        </code>
        <observation>
          </entry>
        </section>
      </component>
```

HL7 CDA – Level 3


- Kodiranje pojedinih klučnih riječi unutar sekcija CDA tijela za dodatno računalno procesiranje

Level 3

```
<component>
  <section>
    <code code="10164-2" codeSystemName="LOINC"
          codeSystem="2.16.840.1.113883.6.1" />
    <title>29.08.2005: History</title>
    <text>Onset of <content ID="a1">asthma</content> in
his teens. He was hospitalized twice last year, and already twice this
year. </text>
    <entry typeCode="COMP">
      <observation>
        <code code="195967001"
              codeSystem="2.16.840.1.113883.6.96"
              codeSystemName="SNOMED CT"
              displayName="Asthma">
          <originalText>
            <reference value="#a1"/>
          </originalText>
        </code>
        <observation>
          <entry>
            </entry>
          </section>
        </component>
```


CDA RMIM - HMD

- CDA structured content intended for computer interoperability is based on HL7v3 RIM and HL7v3 data types
- CDA R-MIM is created by standard processes of cloning classes from RIM
- CDA Hierarchical description of the message (**Hierarchical Message Description – HMD**) is a tabular representation of the contents of R-MIM

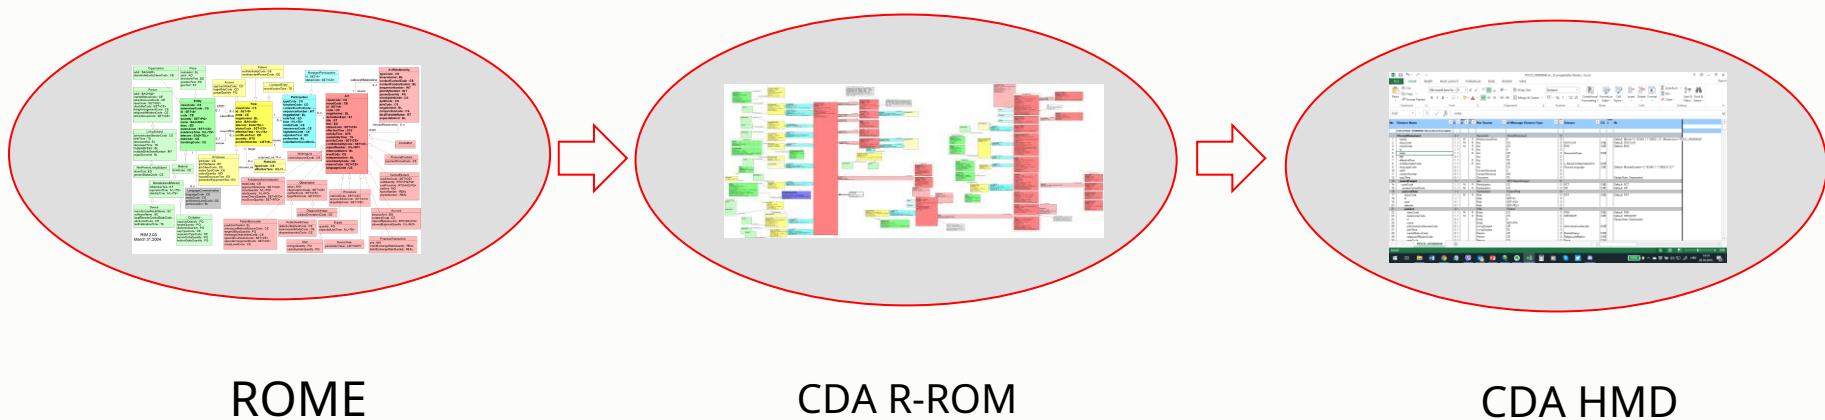

CDA RMIM - HMD

- CDA strukturirani sadržaj namijenjen računalnoj interoperabilnosti baziran je na HL7v3 RIM i HL7v3 tipovima podataka
- CDA R-MIM nastaje standardnim procesima kloniranja klasa iz RIM-a
- CDA Hijerarhijski opis poruke (**Hierarchical Message Description – HMD**) je tablični prikaz sadržaja R-MIM-a

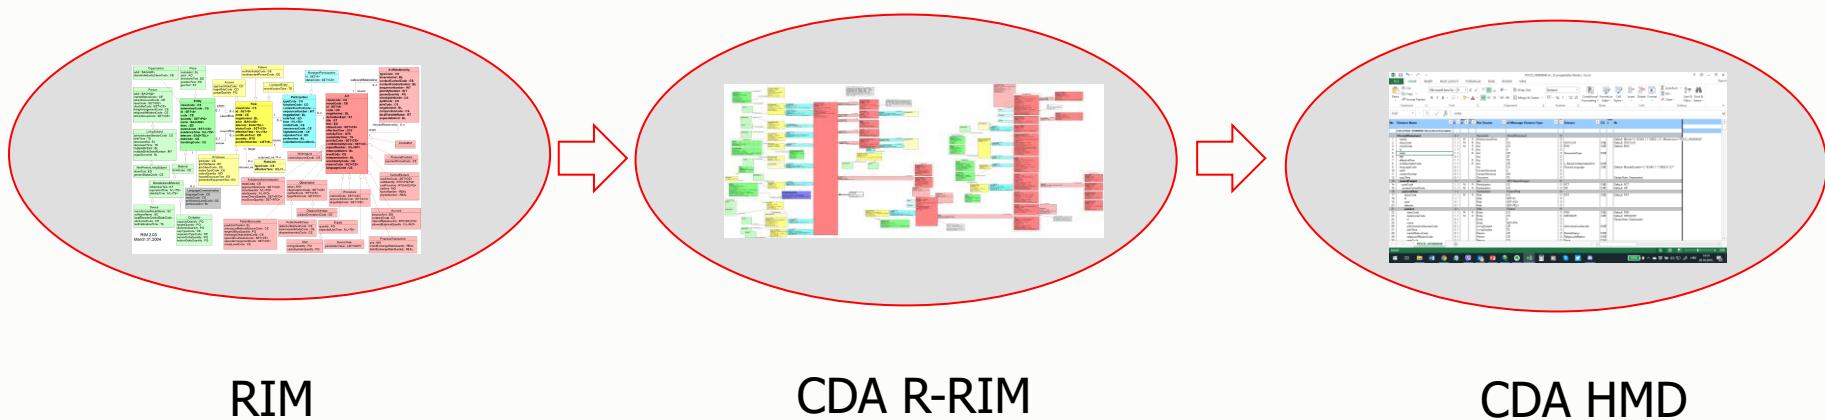

- Key artifact for validating and conforming CDA documents to modeling rules
- Source for CDA schema (XSL stylesheet)
- Document conformance to the schema is checked and measured at the level of each HL7 RIM attribute
- RIM Attributes can be defined as
 - **Mandatory***(in the HMD tabular display "bold" text and star) - the sender must send a value (NULL is not allowed)
 - An example is ClinicalDocument.typeId
 - Required* (asterisk) – the sender must fill in the value where it is known, regardless of the allowed number of repetitions (cardinality)
 - An example is Section.text
 - All attributes whose cardinality is 1 or greater

- Ključni artifakt za validaciju i sukladnost CDA dokumenata prema pravilima modeliranja
- Izvor za CDA shemu (XSL stylesheets)
- Sustav provjere dokumenta prema shemi provjerava i mjeri na razini svakog HL7 RIM atributa
- RIM Atributi mogu biti definirani kao
 - **Mandatory*** (u HMD tabličnom prikazu „boldani“ tekst i zvjezdica) – pošiljatelj mora poslati vrijednost (NULL nije dozvoljen)
 - Primjer je ClinicalDocument.typeId
 - **Required*** (zvjezdica) – pošiljatelj mora popuniti vrijednost tamo gdje je ona poznata, bez obzira na dozvoljeni broj ponavljanja (kardinalnost)
 - Primjer je Section.text
 - Svi atributi čija je kardinalnost 1 ili veći

HL7 CDA Human readability

- The standard guarantees that the recipient of the CDA document can present clinical content on a standard WEB browser
- Printable content is located in **Section.textfield**
- Taking into account the combination of narrative part and **CDAentries**, this implies the following settings
 - The recipient must have a clear deterministic way of presenting the document
 - It is not necessary for the sender to send a separate XSL document to print the document
 - Applies exclusively to authentic content
 - The CDA document may contain additional information that is exclusively for computer processing, but which are not authentic, and thus are not displayed on the browser
 - When structured content is derived from a narrative part, there must be a mechanism that describes that process (e.g. Author, human or computer coding), and vice versa

HL7 CDA Ljudska čitljivost

- Norma garantira da primatelj CDA dokumenta može prezentirati klinički sadržaj na standardnom WEB pregledniku
- Sadržaj za ispis nalazi se u **Section.text** polju
- Uvezši u obzir kombinaciju narativnog dijela i CDA *entries*, to podrazumijeva i slijedeće postavke
 - Primatelj mora imati jasan deterministički način kako prezentirati dokument
 - Nije nužno da pošiljatelj šalje poseban XSL dokument za ispis dokumenta
 - Odnosi se isključivo na autentičan sadržaj
 - CDA dokument može sadržavati dodatne informacije koje su isključivo za računalno procesiranje, ali koje nisu autentične, i na taj način se ne pokazuju na pregledniku
 - Kada se strukturiran sadržaj izvodi iz narativnog dijela, mora postojati mehanizam koji opisuje taj proces (npr. Autor, ljudsko ili računalno kodiranje), i obratno



CDA HMD

POCD_HD000040.xls [Protected View] - Excel

PROTECTED VIEW Be careful—files from the Internet can contain viruses. Unless you need to edit, it's safer to stay in Protected View. [Enable Editing](#)

G6

No Element Name Ca Ma Co Rim Source of Message Element Type S Domain CS Abst Nt

CDA (POCD_HD000040) Hierarchical Description

227	typeCode	1..1	M	R	ActRelationship	CS	D	COMP	CNE	Default: COMP	
228	contextConductionInd	1..1	M	R	ActRelationship	BL	D			Default: true	
229	**bodyChoice**	1..1			ActRelationship	NonXMLBody	StructuredBody	N			Y
230	**nonXMLBody**	1..1			Act	NonXMLBody	N				
231	classCode	1..1	M	R	Act	CS	D	DOCBODY	CNE	Default: DOCBODY	
232	moodCode	1..1	M	R	Act	CS	D	EVN	CNE	Default: EVN	
233	text	1..1			Act	ED	D				
234	confidentialityCode	0..1			Act	CE	D	x_BasicConfidentialityKind	CWE		
235	languageCode	0..1			Act	CS	D	HumanLanguage	CNE	Default: @codeSystem="2.16.840.1.1	
236	**structuredBody**	1..1			Act	StructuredBody	N				
237	classCode	1..1	M	R	Act	CS	D	DOCBODY	CNE	Default: DOCBODY	
238	moodCode	1..1	M	R	Act	CS	D	EVN	CNE	Default: EVN	
239	confidentialityCode	0..1			Act	CE	D	x_BasicConfidentialityKind	CWE		
240	languageCode	0..1			Act	CS	D	HumanLanguage	CNE	Default: @codeSystem="2.16.840.1.1	
241	**component**	1..*			Act	SET<Component3>	N				
242	typeCode	1..1	M	R	ActRelationship	CS	D	COMP	CNE	Default: COMP	
243	contextConductionInd	1..1	M	R	ActRelationship	BL	D			Default: true	
244	**section**	1..1			ActRelationship	Section	N				
245	classCode	1..1	M	R	Act	CS	D	DOCSECT	CNE	Default: DOCSECT	
246	moodCode	1..1	M	R	Act	CS	D	EVN	CNE	Default: EVN	
247	id	0..1			Act	II	D				
248	code	0..1			Act	CE	D	DocumentSectionType	CWE		
249	title	0..1			Act	ST	D				
250	text	0..1			Act	ED	D			Default: @mediaType="text/x-hl7-text"	
251	confidentialityCode	0..1			Act	CE	D	x_BasicConfidentialityKind	CWE		

POCD_HD000040

READY

CDA HMD

POCD_HD000040.xls [Protected View] - Excel

PROTECTED VIEW Be careful—files from the Internet can contain viruses. Unless you need to edit, it's safer to stay in Protected View. [Enable Editing](#)

No	Element Name	Ca	Ma	Co	Rim Source	of Message Element Type	S	Domain	CS	Abst	Nt
CDA (POCD_HD000040) Hierarchical Description											
227	typeCode	1..1	M	R	ActRelationship	CS	D	COMP	CNE		Default: COMP
228	contextConductionInd	1..1	M	R	ActRelationship	BL	D				Default: true
229	bodyChoice	1..1			ActRelationship	NonXMLBody StructuredBody	N				Y
230	nonXMLBody	1..1			Act	NonXMLBody	N				
231	classCode	1..1	M	R	Act	CS	D	DOCBODY	CNE		Default: DOCBODY
232	moodCode	1..1	M	R	Act	CS	D	EVN	CNE		Default: EVN
233	text	1..1			Act	ED	D				
234	confidentialityCode	0..1			Act	CE	D	x_BasicConfidentialityKind	CWE		
235	languageCode	0..1			Act	CS	D	HumanLanguage	CNE		Default: @codeSystem="2.16.840.1.1
236	structuredBody	1..1			Act	StructuredBody	N				
237	classCode	1..1	M	R	Act	CS	D	DOCBODY	CNE		Default: DOCBODY
238	moodCode	1..1	M	R	Act	CS	D	EVN	CNE		Default: EVN
239	confidentialityCode	0..1			Act	CE	D	x_BasicConfidentialityKind	CWE		
240	languageCode	0..1			Act	CS	D	HumanLanguage	CNE		Default: @codeSystem="2.16.840.1.1
241	component	1..*			Act	SET<Component3>	N				
242	typeCode	1..1	M	R	ActRelationship	CS	D	COMP	CNE		Default: COMP
243	contextConductionInd	1..1	M	R	ActRelationship	BL	D				Default: true
244	section	1..1			ActRelationship	Section	N				
245	classCode	1..1	M	R	Act	CS	D	DOCSECT	CNE		Default: DOCSECT
246	moodCode	1..1	M	R	Act	CS	D	EVN	CNE		Default: EVN
247	id	0..1			Act	II	D				
248	code	0..1			Act	CE	D	DocumentSectionType	CWE		
249	title	0..1			Act	ST	D				
250	text	0..1		R	Act	ED	D				Default: @mediaType="text/x-hl7-text"
251	confidentialityCode	0..1			Act	CE	D	x_BasicConfidentialityKind	CWE		

CDA Validation and Conformance

- A CDA document is considered valid if **minimally validates in accordance with the scheme**, although **uses coded elements from associated vocabularies**
- **IMPORTANT** –the computer cannot process the validity for the human readability part, and additional rules are introduced for the sender and receiver of the message, as follows:
 1. Recipient of the document
 - He assumes *default values* where they are defined, and the CDA document instance itself does not contain a value
 - Must process the entire CDA Header (but not necessarily display it!)
 - It must process the CDA Body to the level where it can be displayed in a web browser
 - If it is non-XML content, it must use/include a tool that can display the default content (according to MIME type)
 - If it is structured XML content
 - Must display the content found in Section.title, to clearly indicate the content tag. Lack of this value signals an unmarked section
 - Must display Section.text content according to formatting rules (text, HTML, multimedia, etc.)
 2. Sender of the document
 - Must construct the narrative block (Section.title and Section.text) in such a way that the recipient can display it in the browser

CDA Validacija i Sukladnost (conformance)



- CDA dokument se smatra valjanim ako se **minimalno validira sukladno sa shemom**, i ako koristi **kodirane elemente iz pripadajućih vokabulara**
- **VAŽNO** – računalo ne može procesirati valjanost za ljudski dio čitljivosti, te se uvode dodatna pravila za pošiljatelja i primatelja poruke, kako slijedi:
 1. Primatelj dokumenta
 - Prepostavlja *default* vrijednosti gdje su iste definirane, a sama instanca CDA dokumenta ne sadrži vrijednost
 - Mora procesirati cijeli CDA Header (ali ne nužno ga i prikazati!)
 - Mora procesirati CDA Body do razine da ga može pokazati u web pregledniku
 - Ako se radi o non-XML sadržaju, mora koristiti/uključivati alat koji može pokazati zadani sadržaj (sukladno MIME type)
 - Ako se radi o strukturiranom XML sadržaju
 - Mora prikazati sadržaj koji se nalazi u Section.title, kako bi jasno naznačio oznaku sadržaja. Nedostatak te vrijednosti signalizira sekciju bez oznake
 - Mora prikazati sadržaj Section.text prema pravilima formatiranja (text, HTML, multimedia, i slično)
 2. Pošiljatelj dokumenta
 - Mora konstruirati narativni blok (Section.title and Section.text) na način da ga primatelj može prikazati u pregledniku

CDA Validation and Conformance

Cont'd

- The recipient does not necessarily have to
 - Know how to process all the Entries that are inside the CDA message
 - Validate the entire document according to the templates
- The above functions may be part of additional requirements for local implementations

Cont'd

- Primatelj ne mora nužno
 - Znati procesirati sve Entries koji se nalaze unutar CDA poruke
 - Validirati cijeli dokument prema predlošcima
- Gore navedene funkcije mogu biti dio dodatnih zahtjeva na lokalne implementacije

Exchange of CDA documents

- The CDA document is a defined and complete information object that can
 - Exist outside the messaging context – is sent as a single information object
 - To be transmitted as content within an HL7 message
- Exchange of CDA document within HL7 message is also supported
 - In that case, the CDA document is actually a multimedia MIME object, encoded using ED (encapsulated data type).
 - In HL7V2, CDA documents are transferred within OBX (*Observation/Result*) of a segment within any message that implies the exchange of documents (e.g. *Medical Document Management, MDM*). The CDA Header is mapped to the TXA (Transcription Document Header) segment that precedes the OBX segment (see slide behind)
 - In HL7v3, CDAs can be transmitted in any message that exchanges documents (eg HL7v3 Medical Records Messages)
 - The standard includes the definition of the mapping between the fields within the segment and the CDA Header

Razmjena CDA dokumenata

- CDA dokument je definiran i kompletan informacijski objekt koji može
 - Postojati izvan konteksta razmjene poruka – šalje se kao jedinstven informacijski objekt
 - Prenositi se kao sadržaj unutar HL7 poruke
- Razmjena CDA dokumenta unutar HL7 poruke je također podržana
 - CDA dokument je u tom slučaju zapravo multimedijski MIME objekt, kodiran pomoću ED (encapsulated data type)
 - U HL7V2, CDA dokumenti se prenose unutar OBX (*Observation/Result*) segmenta unutar bilo koje poruke koja podrazumijeva razmjenu dokumenata (npr. *Medical Document Management, MDM*). CDA Header se mapira u TXA (Transcription Document Header) segment koji prethodi OBX segmentu (vidi slide iza)
 - U HL7v3, CDA se mogu prenositi u bilo kojoj poruci koja razmjenjuje dokumente (npr. HL7v3 Medical Records Messages)
 - Norma uključuje definiciju mapiranja između polja unutar segmenta i CDA Header-a

HL7 CDA in HL7 V2 message

MDM Segment - CDA Mapping example

TXA Field	CDA Component
TXA-2 Document type	ClinicalDocument.code
TXA-4 Activity date/time	ServiceEvent.effectiveTime
TXA-5 Primary activity provider code/name	ServiceEvent performer
TXA-6 Origination date/time	ClinicalDocument.effectiveTime
TXA-7 Transcription date/time TXA-9	dataEnterer.time
Originator code/name TXA-11	author
Transcriptionist code/name TXA-12	dataEnterer
Unique document number TXA-13	ClinicalDocument.id
Parent document number TXA-14 Placer	ParentDocument.id
order number	Order.id
TXA-18 Document confidentiality status	ClinicalDocument.confidentiality Code
TXA-22 Authentication person, time stamp	authenticator, legalAuthenticator
TXA-23 Distributed copies	informationRecipient

Mapping CDA Header content to
TXA segment in the MDM message

```

MSH| ...
EVN| ...
PID| ...
PV1| ...
TXA| ...

DBX| 1|ED|11492-6^History and Physical^LN||  

  ^multipart^related^A"  

  MIME-Version: 1.0  

  Content-Type: multipart/related; boundary="HL7-CDA-boundary";  

  type="text/xml"; start="10.12.45567.43"  

  Content-Transfer-Encoding: BASE64

--HL7-CDA-boundary
Content-Type: text/xml; charset="US-ASCII"
Content-ID: <10.12.45567.43>

... Base 64 of base CDA document, which contains
...
<observationMedia classCode="OBS" moodCode="EVN">
  <id root="10.23.4567.345"/>
  <value mediaType="image/jpeg">
    <reference value="left_hand_image.jpeg"/>
  </value>
</observationMedia>
...

--HL7-CDA-boundary
Content-ID: <10.23.4567.345>
Content-Location: canned_left_hand_image.jpeg
Content-Type: image/JPEG

... Base64 image ...

--HL7-CDA-boundary--  

...

```

Example message

HL7 CDA u HL7 V2 poruci

MDM Segment - CDA Mapping primjer

TXA Field	CDA Component
TXA-2 Document type	ClinicalDocument.code
TXA-4 Activity date/time	ServiceEvent.effectiveTime
TXA-5 Primary activity provider code/name	ServiceEvent performer
TXA-6 Origination date/time	ClinicalDocument.effectiveTime
TXA-7 Transcription date/time	dataEnterer.time
TXA-9 Originator code/name	author
TXA-11 Transcriptionist code/name	dataEnterer
TXA-12 Unique document number	ClinicalDocument.id
TXA-13 Parent document number	ParentDocument.id
TXA-14 Placer order number	Order.id
TXA-18 Document confidentiality status	ClinicalDocument.confidentialityCode
TXA-22 Authentication person, time stamp	authenticator, legalAuthenticator
TXA-23 Distributed copies	informationRecipient

```

MSH| ...
EVN| ...
PID| ...
PV1| ...
TXA| ...

DBX| 1|ED|11492-6^History and Physical^LN||  

  ^multipart^related'A'  

  MIME-Version: 1.0  

  Content-Type: multipart/related; boundary="HL7-CDA-boundary";  

  type="text/xml"; start="10.12.45567.43"  

  Content-Transfer-Encoding: BASE64

--HL7-CDA-boundary
Content-Type: text/xml; charset="US-ASCII"
Content-ID: <10.12.45567.43>

... Base 64 of base CDA document, which contains
...
<observationMedia classCode="OBS" moodCode="EVN">
  <id root="10.23.4567.345"/>
  <value mediaType="image/jpeg">
    <reference value="left_hand_image.jpeg"/>
  </value>
</observationMedia>
...

--HL7-CDA-boundary
Content-ID: <10.23.4567.345>
Content-Location: canned_left_hand_image.jpeg
Content-Type: image/JPEG

... Base64 image ...

--HL7-CDA-boundary--  

...

```

Mapiranje sadržaja CDA Headera u TXA segment u MDM poruci

Primjer poruke

Consolidated CDA

- A CDA document often results in a very complex structure. Therefore, templates are introduced in practice to profile the basic specification for easier use -> Consolidated CDA
- C-CDA is a set of templates that facilitate the implementation of a series of clinical documents based on CDA
- The idea of templates is to enable the following advantages:
 - *Reusable building blocks*
 - Faster implementations
 - Modularity (e.g. Blood pressure, diagnosis at discharge), which enables repackaging and use of the same in several different guidelines and implementations
 - Incremental interoperability
- Templates can be used at the following levels
 - Level 1 – template at the level of the document itself (e.g. discharge letter)
 - Level 2 – template at the section level within the document (e.g. Allergies or drug therapy)
 - Level 3 – template at the data level (entry) within the document (e.g. specific observations or procedures)
- C-CDA V2.1 supports [11 types of documents](#) (2020)

Consolidated CDA

- CDA dokument često rezultira vrlo kompleksnom strukturom. Stoga se u praksi uvode predlošci kako bi se profilirala osnovna specifikacija za lakšu uporabu -> Consolidated CDA
- C-CDA je set predložaka (engl. Templates) koji olakšavaju implementaciju niza kliničkih dokumenata baziranih na CDA
- Ideja predložaka je da omogućavaju slijedeće prednosti:
 - *Reusable building blocks*
 - Brže implementacije
 - Modularnost (npr. Krvni tlak, dijagnoza pri otpust), koja omogućava prepakiranje i korištenje istih u više različitih smjernica i implementacija
 - Inkrementalna interoperabilnost
- Predlošci se mogu koristiti na slijedećim razinama
 - Level 1 – predložak na razini samog dokumenta (npr. Otpusno pismo)
 - Level 2 – predložak na razini sekcije unutar dokumenta (npr. Alergije ili medikamentna terapija)
 - Level 3 – predložak na razini podatka (entry) unutar dokumenta (npr. Specifične observacije ili procedure)
- C-CDA V2.1 podržava [11 tipova dokumenata](#) (2020)

Example 1 – Non-XML CDA

```

<?xml version="1.0" encoding="UTF-8"?>
- <ClinicalDocument xsi:schemaLocation="urn:hl7-org:v3 infrastructure/cda/CDA_SDTC.xsd" xmlns="urn:hl7-org:v3"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
    <!--RealmCode, TypeID and templateID are inherited from the InfrastructureRoot class -->
    <realmCode code="KZ"/>
    <typeId extension="POCD_HD000040" root="2.16.840.1.113883.1.3"/>
    <templateId root="1.2.398.7.1.4.10.1.1.10"/>
    <templateId root="1.2.398.7.1.4.10.1.1.11"/>
    <id root="1.2.398.7.1.14.1.1.1467203468544"/>
    <code code="100" displayName="Document Name" codeSystemName="Document Type" codeSystem="1.2.398.7.1.10.3.1"/>
      <!-- Код и отображаемое наименование приведены только для примера, реальные значения могут отличаться -->
      <!-- Заголовок документа -->
    <title>Анализ крови на гепатит</title>
      <!-- Заголовок документа приведен для примера -->
    <effectiveTime value="20160629125600+0100"/>
    <confidentialityCode code="N" codeSystemName="Конфиденциальность" codeSystem="1.2.398.7.1.10.3.4"/>
    <languageCode code="RU-RU"/>
    <setId root="1.2.398.7.1.14.1.2.79745468654346"/>
    <versionNumber value="1"/>
+ <recordTarget>
  <!-- Author of the document, author -->
+ <author contextControlCode="OP" typeCode="AUT">
  <!-- System that generated the document -->
+ <author contextControlCode="OP" typeCode="AUT">
+ <custodian>
  <!-- Работник здравоохранения или система -->
+ <authenticator typeCode="AUTHEN">
+ <inFulfillmentOf typeCode="FLFS">
  <!-- VISIT -->
+ <componentOf>
- <component>
  - <nonXMLBody>
    <text representation="B64"
      mediaType="application/pdf">JVBERi0xLjQKJaqrrK0KNCAwIG9iago8PAovQ3JlYXRvciAoQXBhY2hIEZPUCBWZ
    </nonXMLBody>
  </component>
</ClinicalDocument>

```

Primjer 1 – non-XML CDA

```

<?xml version="1.0" encoding="UTF-8"?>
- <ClinicalDocument xsi:schemaLocation="urn:hl7-org:v3 infrastructure/cda/CDA_SDTC.xsd" xmlns="urn:hl7-org:v3"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
    <!--RealmCode, TypeID and templateID are inherited from the InfrastructureRoot class -->
    <realmCode code="KZ"/>
    <typeId extension="POCD_HD000040" root="2.16.840.1.113883.1.3"/>
    <templateId root="1.2.398.7.1.4.10.1.1.10"/>
    <templateId root="1.2.398.7.1.4.10.1.1.11"/>
    <id root="1.2.398.7.1.14.1.1.1467203468544"/>
    <code code="100" displayName="Document Name" codeSystemName="Document Type" codeSystem="1.2.398.7.1.10.3.1"/>
      <!-- Код и отображаемое наименование приведены только для примера, реальные значения могут отличаться -->
      <!-- Заголовок документа -->
    <title>Анализ крови на гепатит</title>
      <!-- Заголовок документа приведен для примера -->
    <effectiveTime value="20160629125600+0100"/>
    <confidentialityCode code="N" codeSystemName="Конфиденциальность" codeSystem="1.2.398.7.1.10.3.4"/>
    <languageCode code="RU-RU"/>
    <setId root="1.2.398.7.1.14.1.2.79745468654346"/>
    <versionNumber value="1"/>
+ <recordTarget>
  <!-- Author of the document, author -->
+ <author contextControlCode="OP" typeCode="AUT">
  <!-- System that generated the document -->
+ <author contextControlCode="OP" typeCode="AUT">
+ <custodian>
  <!-- Работник здравоохранения или система -->
+ <authenticator typeCode="AUTHEN">
+ <inFulfillmentOf typeCode="FLFS">
  <!-- VISIT -->
+ <componentOf>
- <component>
  - <nonXMLBody>
    <text representation="B64"
      mediaType="application/pdf">JVBERi0xLjQKJaqrrK0KNCAwIG9iago8PAovQ3JlYXRvciAoQXBhY2hIEZPUCBWZ
    </nonXMLBody>
  </component>
</ClinicalDocument>

```

Example 2 – structured CDA

- Consolidated CDA -link


Community Health and Hospitals: Discharge Summary			
Patient	Isabella Jones	Sex	Female
Date of birth	May 1, 2005	Ethnicity	Not Hispanic or Latino
Race	Aleut	Patient IDs	998991 2.16.840.1.113883.19.5.99999.2 111-00-2330 2.16.840.1.113883.4.1
Contact info	Primary Home: 1357 Amber Drive Beaverton, OR 97867, US Tel:  (816)278-6909		
Document Id	TT988 2.16.840.1.113883.19.5.99999.1		
Document Created	September 16, 2012, 19:04 -0400		
Care provision	Colonoscopy from September 9, 2012, 19:04 -0400 to September 16, 2012, 19:04 -0400		
Performer (primary care provider)	Dr. Henry Seven of Community Health and Hospitals		
Primary performer (primary care provider)	Dr. Henry Seven of Community Health and Hospitals		
Author	Henry Seven		
Contact info	1002 Healthcare Drive Portland, OR 99123, US Tel: 555-555-1002		
Encounter Id	9937012 2.16.840.1.113883.19	Encounter Type	Evaluation and Management
Encounter Date	From February 27, 2009, 13:00:00 +0500 to February 27, 2009, 13:00:00 +0500		
Encounter Location	id: 2.16.540.1.113883.19.2		
Next of kin (Mother)	Mrs. Martha Jones from January 1, 1959 to October 25, 2011		
Contact info	17 Daws Rd. Beaverton, OR 97867, US Tel: (999)555-1212		
Entered by	Henry Seven		
Contact info	1001 Village Avenue Portland, OR 99123, US Tel: 555-555-1002		
Signed	Henry Seven at ,		
Contact info	1001 Village Avenue Portland, OR 99123, US Tel: 555-555-1002		
Informant	Henry Seven		

Primjer 2 – struktirirani CDA


- Consolidated CDA - [link](#)

Community Health and Hospitals: Discharge Summary			
Patient	Isabella Jones	Sex	Female
Date of birth	May 1, 2005	Ethnicity	Not Hispanic or Latino
Race	Aleut	Patient IDs	998991 2.16.840.1.113883.19.5.99999.2 111-00-2330 2.16.840.1.113883.4.1
Contact info	Primary Home: 1357 Amber Drive Beaverton, OR 97867, US Tel:  (816)278-6909		
Document Id	TT988 2.16.840.1.113883.19.5.99999.1		
Document Created	September 16, 2012, 19:04 -0400		
Care provision	Colonoscopy from September 9, 2012, 19:04 -0400 to September 16, 2012, 19:04 -0400		
Performer (primary care provider)	Dr. Henry Seven of Community Health and Hospitals		
Primary performer (primary care provider)	Dr. Henry Seven of Community Health and Hospitals		
Author	Henry Seven		
Contact info	1002 Healthcare Drive Portland, OR 99123, US Tel: 555-555-1002		
Encounter Id	9937012 2.16.840.1.113883.19	Encounter Type	Evaluation and Management
Encounter Date	From February 27, 2009, 13:00:00 +0500 to February 27, 2009, 13:00:00 +0500		
Encounter Location	id: 2.16.540.1.113883.19.2		
Next of kin (Mother)	Mrs. Martha Jones from January 1, 1959 to October 25, 2011		
Contact info	17 Daws Rd. Beaverton, OR 97867, US Tel: (999)555-1212		
Entered by	Henry Seven		
Contact info	1001 Village Avenue Portland, OR 99123, US Tel: 555-555-1002		
Signed	Henry Seven at ,		
Contact info	1001 Village Avenue Portland, OR 99123, US Tel: 555-555-1002		
Informant	Henry Seven		

HL7 Messages and CDA Evolution

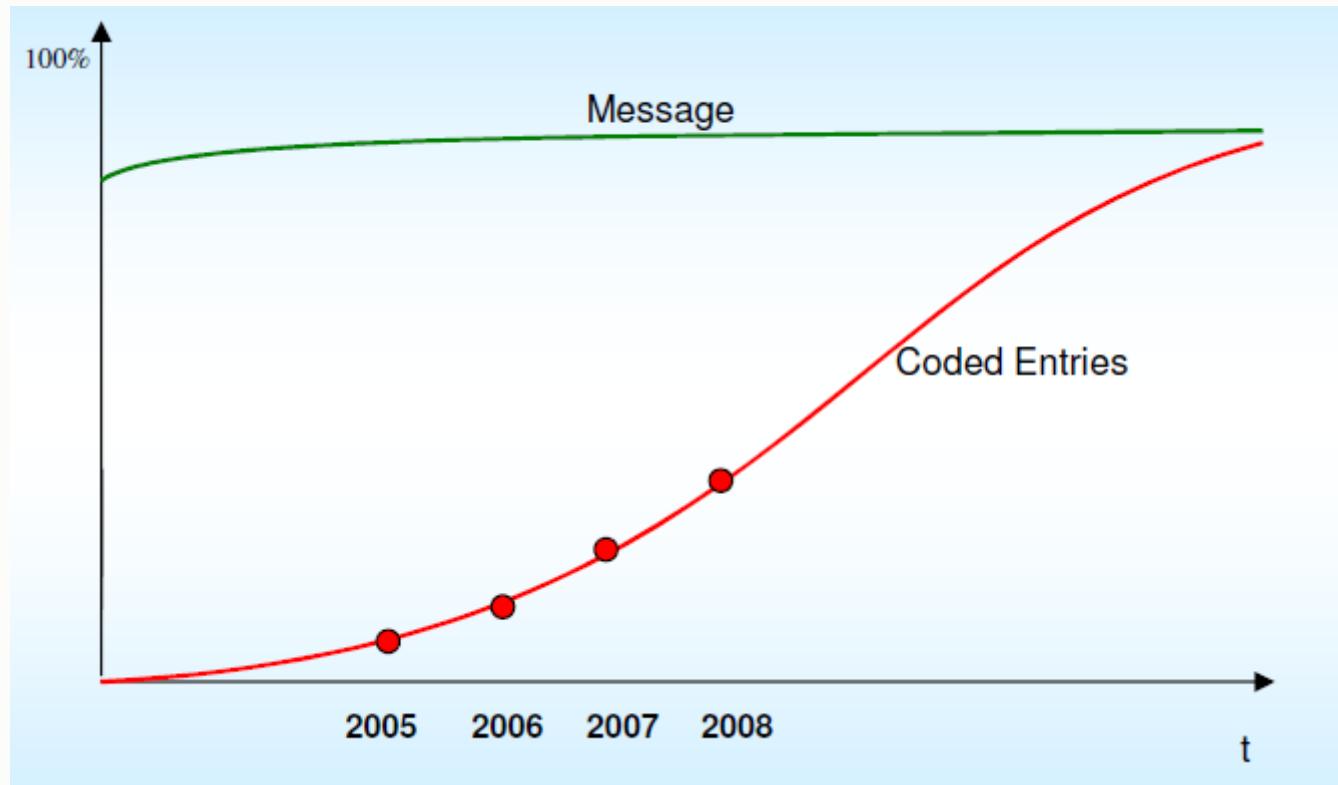


HL7 Poruke i CDA Evolucija

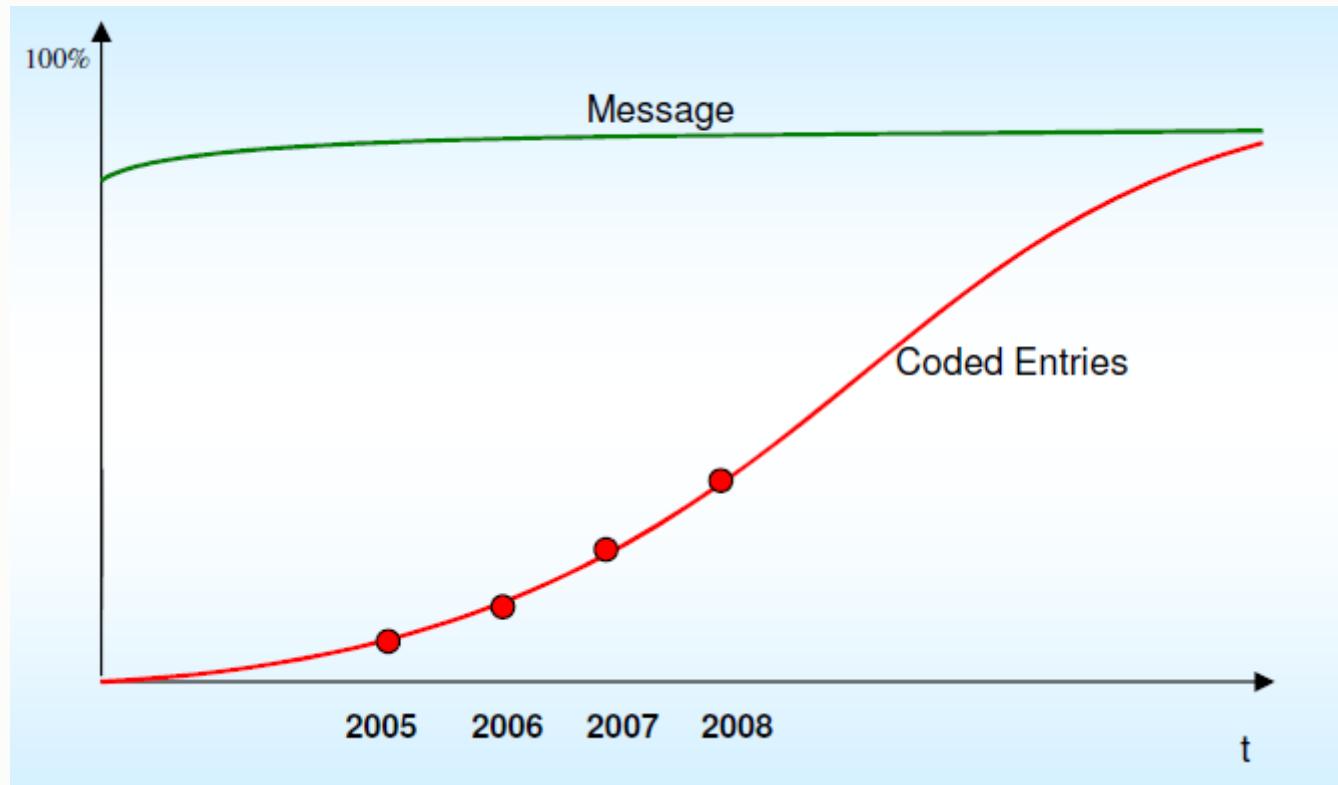

HL7: Message or Document???

Message

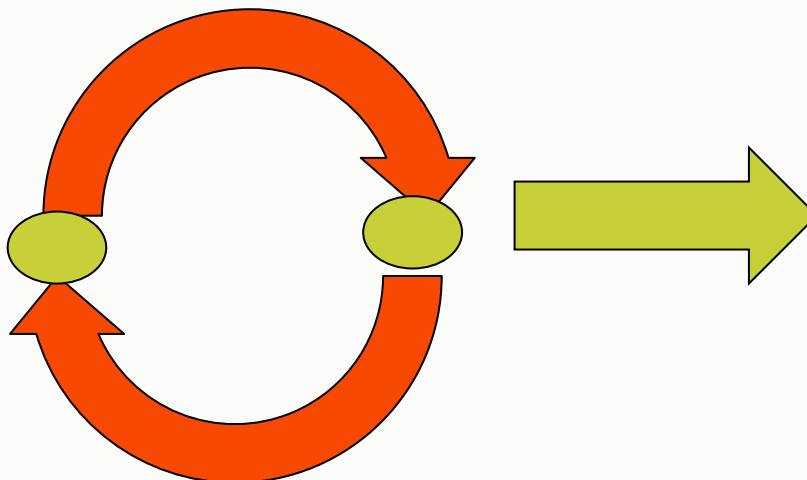

It reflects the state of affairs in
at a given moment

Support of ongoing processes


Document



Summary information of someone
complete process
Formal data transfer
for providing care

HL7: Poruka ili Dokument???

Poruka

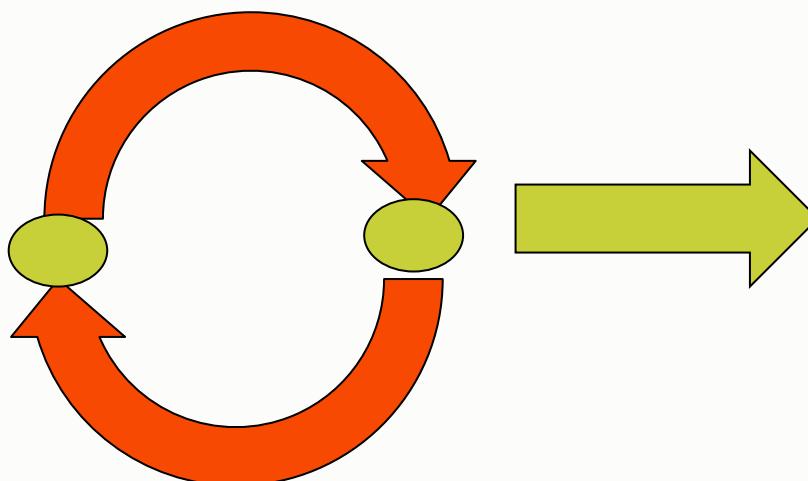

Odražava stanje stvari u
datom trenutku

Podrška procesima u tijeku

Dokument



Sumarni podatak nekog
cjelovitog procesa
Formalni prijenos podataka
za pružanje skrbi

Conclusion

- HL7v3 as a response to the shortcomings of HL7v2, and the option to implement national systems and electronic health records over time turned out to be quite complicated in practice
- HL7 CDA, due to its document management nature, has found a good response in practice
 - The challenge is still the complexity of the design and the variety of documents
 - Mostly in practice we meet Level 1 or Level 2 - very rarely Level 3
- Robustness of design vs speed of implementation - as a rule, inversely proportional
- In the next lecture – HL7 FHIR

Zaključak

- HL7v3 kao odgovor na nedostatke HL7v2, i opcija za implementaciju nacionalnih sustava i elektroničkih zdravstvenih zapisa s vremenom se pokazao dosta kompliciran u praksi
- HL7 CDA, zbog svoje prirode upravljanja dokumentima, je našao na dobar odaziv u praksi
 - Izazov je i dalje kompleksnost dizajna i raznolikost dokumenata
 - Uglavnom u praksi srećemo Level 1, ili Level 2 – vrlo rijetko Level 3
- Robusnost dizajna vs brzina implementacija – u pravilu obrnuto proporcionalne veličine
- U slijedećem predavanju – HL7 FHIR

Literature

- HL7v3 Normative content
 - https://www.hl7.org/implement/standards/product_brief.cfm?product_id=186
- HL7 CDA Normative content
 - http://www.hl7.org/implement/standards/product_brief.cfm?product_id=7
- HL7 Document vs. Messaging Paradigm
 - http://www.ringholm.de/docs/04200_en.htm
- Consolidated CDA Review
 - https://en.wikipedia.org/wiki/Consolidated_Clinical_Document_Architecture
 - https://www.hl7.org/implement/standards/product_brief.cfm?product_id=492
- Online tools for validation and testing of HL7 CDA (and others)
 - https://www.art-decor.org/mediawiki/index.php/Main_Page

Literatura

- HL7v3 Normativni sadržaj
 - https://www.hl7.org/implement/standards/product_brief.cfm?product_id=186
- HL7 CDA Normativni sadržaj
 - http://www.hl7.org/implement/standards/product_brief.cfm?product_id=7
- HL7 Document vs. Messaging Paradigm
 - http://www.ringholm.de/docs/04200_en.htm
- Consolidated CDA Review
 - https://en.wikipedia.org/wiki/Consolidated_Clinical_Document_Architecture
 - https://www.hl7.org/implement/standards/product_brief.cfm?product_id=492
- Online alati za validaciju i testiranje HL7 CDA (i ostalog)
 - https://www.art-decor.org/mediawiki/index.php/Main_Page