


SX1509

VDD Range: 1.425–3.6V

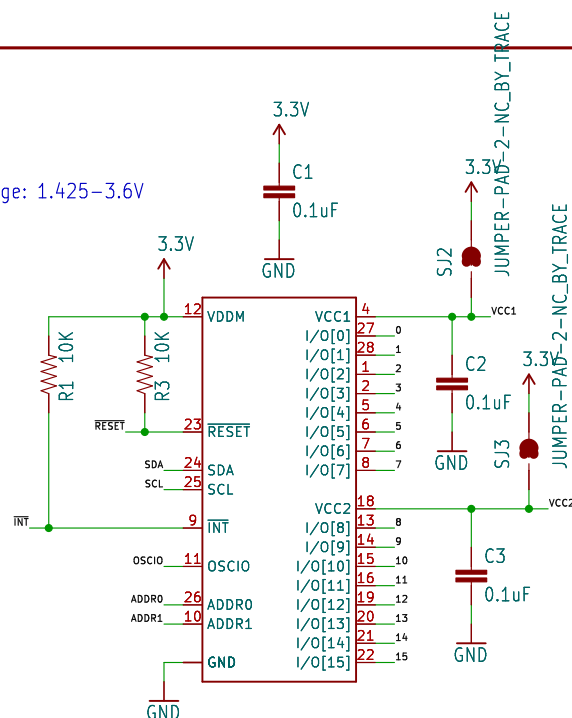


The VCC1/2 jumpers (SJ2, SJ3) set those pins to 3.3V.


Allowable VCC1/2 Range: 1.2–3.6V

I/O headers


SJ6 & SJ7 are used to select the voltage of the A power bus. DO NOT CLOSE BOTH JUMPERS

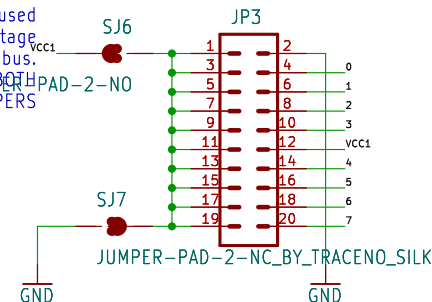

SJ8 & SJ9 are used to select the voltage of the B power bus. DO NOT CLOSE BOTH JUMPERS

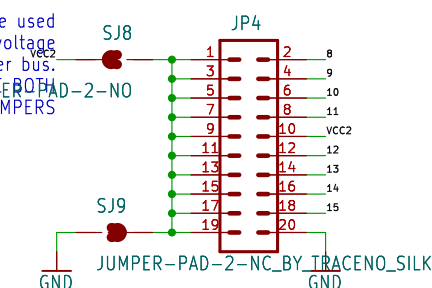


I2C Pull-up Resistors



SJ1 enables/disables 10k pull-up resistors on the SDA and SCL lines. (Default: closed)


I2C Address Select

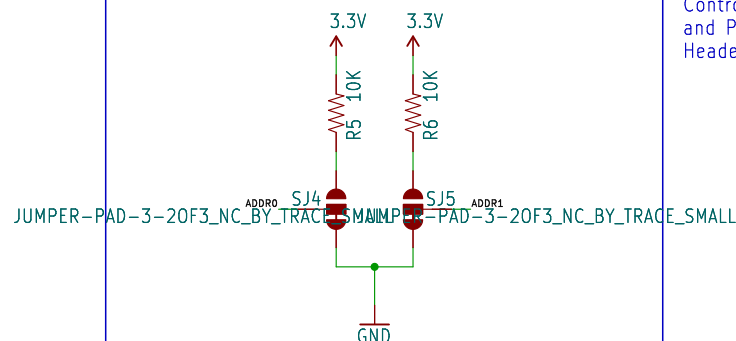

SJ4 and SJ5 set the I2C address of the SX1509.

I2C Addresses [ADDR1][ADDR0]:
00 – 0x3E (default)
01 – 0x3F
10 – 0x70
11 – 0x71

Control Signal and Power Input Headers

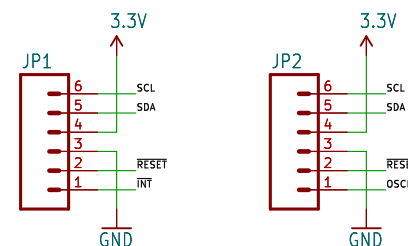

Released under the Creative Commons

Attribution Share-Alike 4.0 License

<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by:
Jim Lindblom

REV:
v20

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User Date:
KiCad E.D.A. eeschema 7.0.6

Rev:
Id: 1/1

