Installing OS to eMMC

REQUIRED FILES

You can download the Loader file and system image from the Downloads Summary page.

This guide explains how to use the RKDevTool to flash a system image to an eMMC.

Note: Ensure the board is in Maskrom mode and properly recognized by the system.

Windows **Linux / MacOS**

On Windows, open the RKDevTool and follow these steps to install the system to the eMMC.

① : Select the corresponding Loader file for your board

② : Select the corresponding system image file for your board (extract the downloaded image archive before use)

③ : Choose the `eMMC` option as the system storage medium

④ : Check the `Write by Address` option

⑤ : Click the `RUN` button to execute all operations

⑥ : Monitor the operation progress through this interface

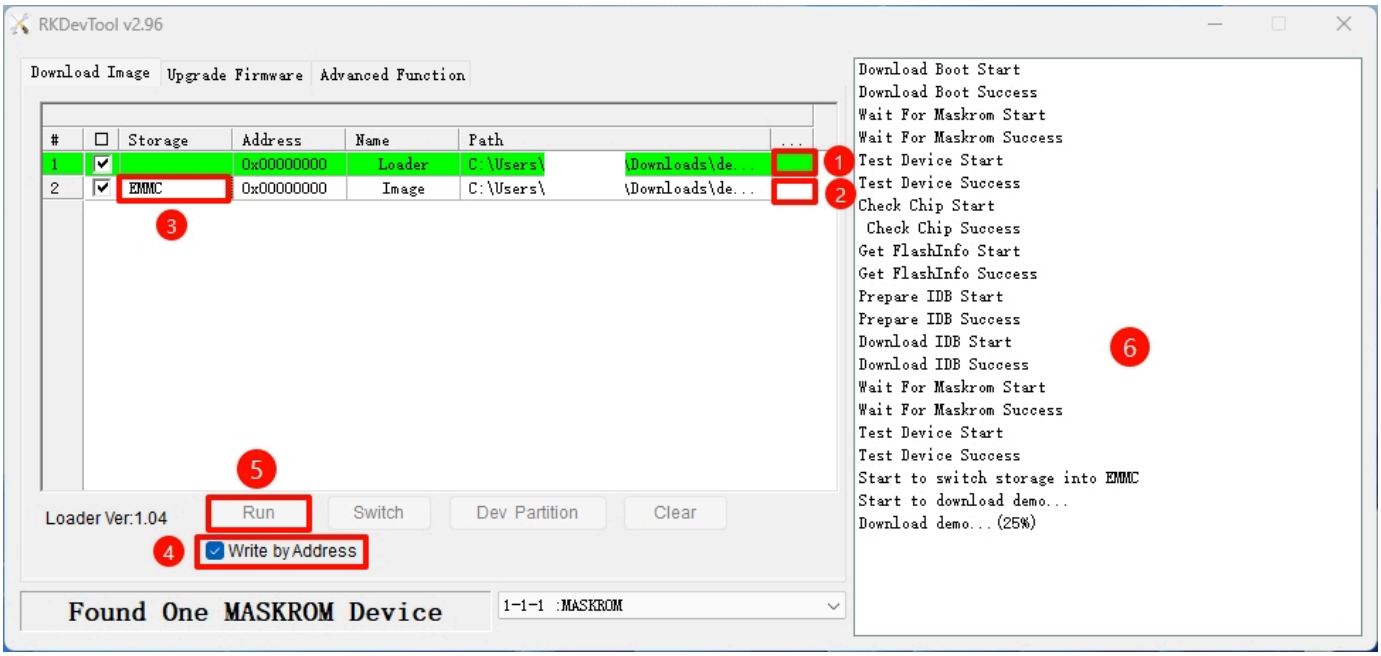

Disconnect the board from the PC, then power cycle the device. The system will automatically boot from the eMMC.

Report Issue

Edit this page

---

0 reactions

0 comments

You need to be logged into GitHub to post a comment. If you are already logged in, please ignore this message.

Radxa-docs © 2026 by Radxa Computer (Shenzhen) Co.,Ltd. is licensed under CC BY 4.0