

## W02-P1: Use express generator to create a server side framework, and display your info

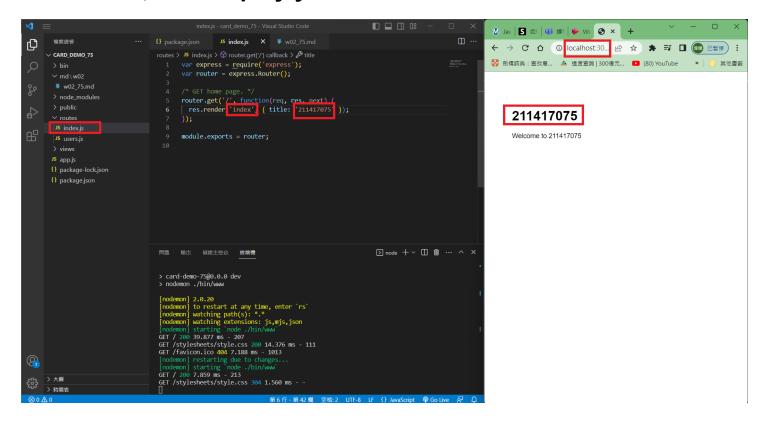


## W02-P2: show static page of card demo with your info

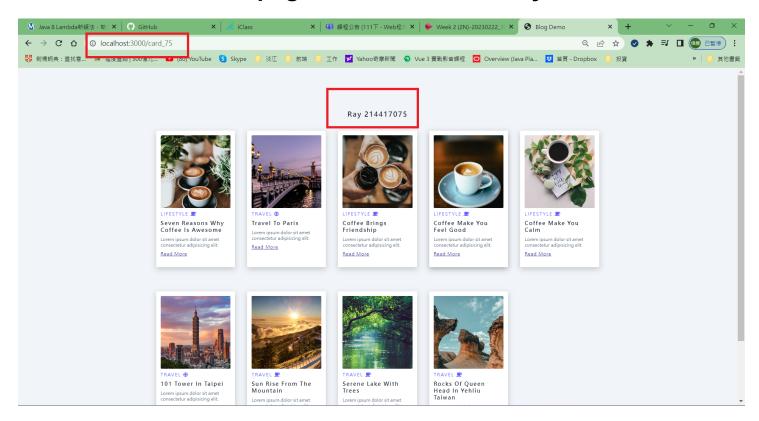

```
檔案(F) 編輯(E) 選取項目(S) 檢視(V) 移至(G) 執行(R) 終端機(T) 說明(H)
                                                                                                                                                                                                       D
      V CARD DEMO 75
Q
                                                                                                                                      var express = require('express');
                                     8 var usersRouter = require('./routes/users');
                                                                                                                                       var router = express.Router();
                                    10 const cardRouter 75 = require('./routes/card 75');
                                                                                                                                      /* GET home page. */
router.get('/', function(reg, res, next) {
                                                                                                                                      res.render('card_75/index', { name: 'Ray', id: '214417075' });
                                          var app = express();
                                          app.set('views', path.join(_dirname, 'views'));
app.set('view engine', 'ejs');
        index.html
                                          app.use(logger('dev'));
         JS card 75.is
                                          app.use(express.json());
app.use(express.urlencoded({ extended: false }));
         JS index.is
        JS users.is
                                          app.use(cookieParser());
app.use(express.static(path.join(__dirname, 'public')));
                                          app.use('/', indexRouter);
app.use('/users', usersRouter);
                                          app.use('/card_75', cardRouter_75);
       {} package-lock.json
                                             next(createError(404));
                                                                                                                                              <div class="section-title">
  <h2><%= name %> <%= id %></h2>
                                                                                                                                              <div class="blogs-center2">
    <article class="blog">
                                            res.locals.message = err.message;
res.locals.error = req.app.get('env') === 'development' ?
                                                                                                                                                    alt="Coffee photo"
class="img blog-img"
                                                                                                                                                   <div class="blog-content">
                                                                                                                                                    <span>lifestyle <i class="fa-solid fa-mug-saucer"></i></span>
     > 時間表
                                                                                                                                                                    第 10 行,第 51 欄 空格: 2 UTF-8 LF {} JavaScript ♀ Go Live 反 ↓
```

## W02-P3: database connection to wp2\_demo\_xx

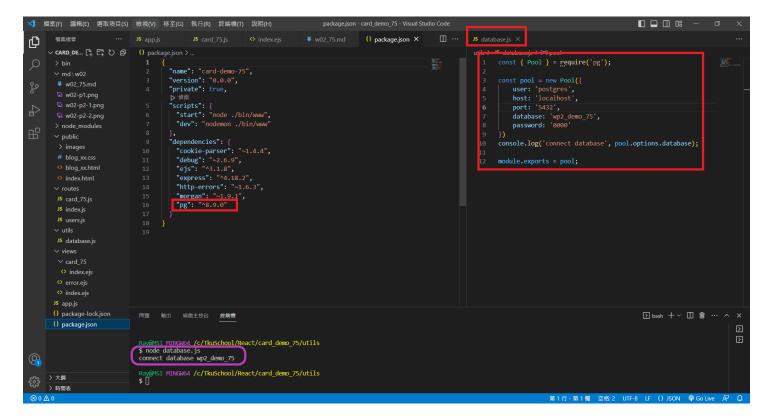

## W02-P4: create table card\_xx with 2 data

