

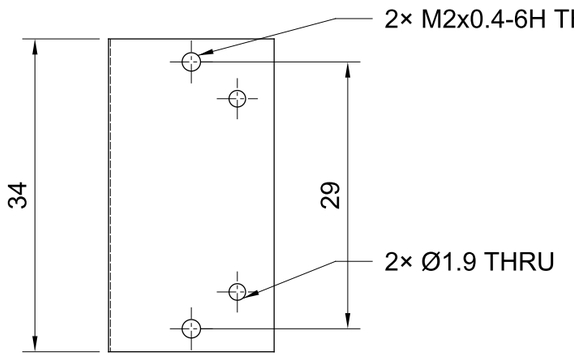


TOP



ISOMETRIC (1:1)




FRONT




RIGHT

NOTES: 1. NOMINAL3D PROFILE FROM SAME REVISION STEP; DO NOT SCALE PAPER.
2. LINEAR +/-0.10; HOLE POSITIONS +/-0.05 UNLESS MARKED.
3. CONTACT SIZE +/-0.05; PLANAR CONTACT FLATNESS0.05.
4. FITTING PROFILE:0.10 MAX MATERIAL REMOVAL FROM STEP.
5. EDGE BREAK0.10-0.20; LIGHT DEBURR ONLY ON THIN LINER RIMS.
6. TAP2xM2x0.4-6H THRU AFTER1.60 DRILL; KEEP COB LAND FLAT.
7. COB BOND LAND12x12; NO GLUE OR BURRS ON OPTICAL FACE.


COB COLLECTOR	SCALE 1.5:1 MM THIRD ANGLE
AL01 · 1050/1060 ALUMINIUM · Makit	SHEET 1 OF 15 REV 47a887e8 helicopter-aluminium-drawing

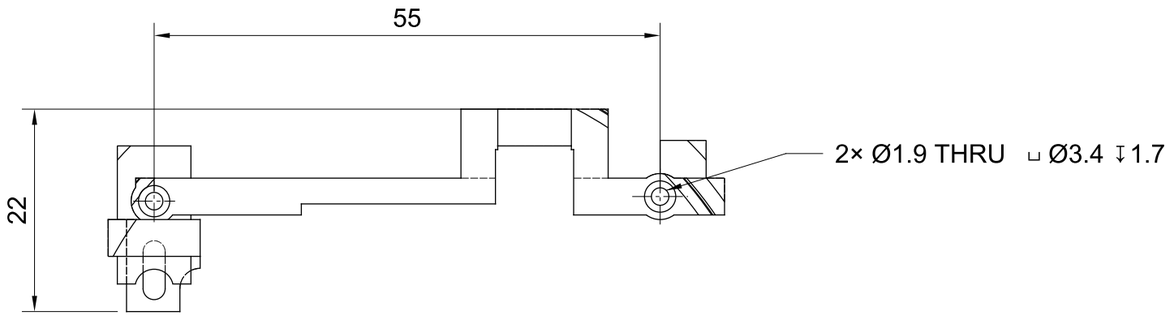


TOP

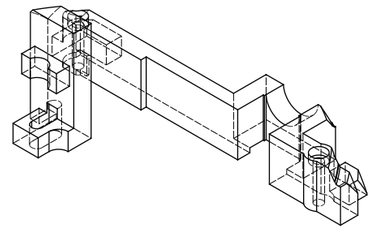

ISOMETRIC (1:1)

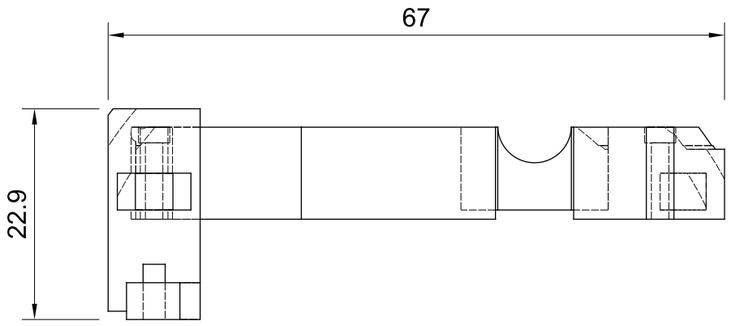

FRONT




RIGHT

NOTES: 1. NOMINAL3D PROFILE FROM SAME REVISION STEP; DO NOT SCALE PAPER.
2. LINEAR +/-0.10; HOLE POSITIONS +/-0.05 UNLESS MARKED.
3. CONTACT SIZE +/-0.05; PLANAR CONTACT FLATNESS0.05.
4. FITTING PROFILE:0.10 MAX MATERIAL REMOVAL FROM STEP.
5. EDGE BREAK0.10-0.20; LIGHT DEBURR ONLY ON THIN LINER RIMS.
6. WIRE EXIT CHANNEL R4.00; KEEP LOWER WEB INTACT.
7. TWO CLEARANCE HOLES1.90; CBORE3.40x1.70 AT TOP.
8. ROOT SLOT6.40x2.40; SIDE RELIEF8.40x4.40 PER STEP.


LEFT THERMAL BRIDGE

SCALE 1.5:1 MM THIRD ANGLE


AL02 · 1050/1060 ALUMINIUM · Makit

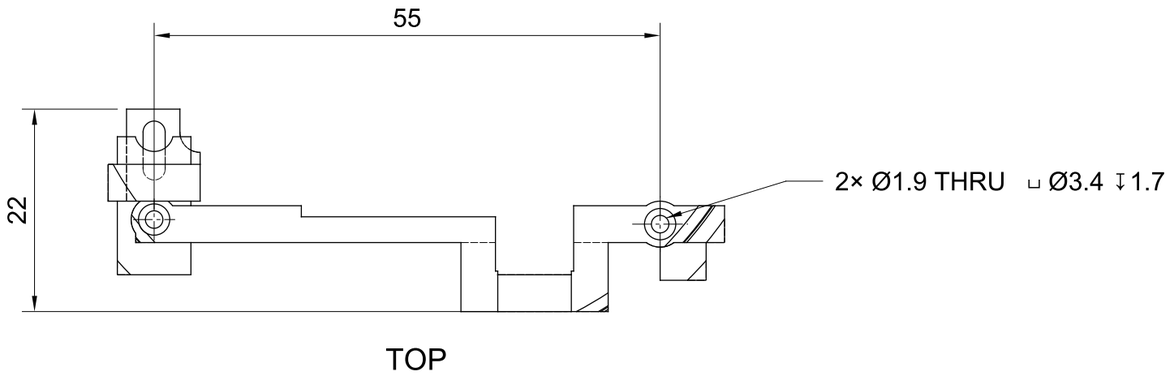


TOP



ISOMETRIC (1:1)

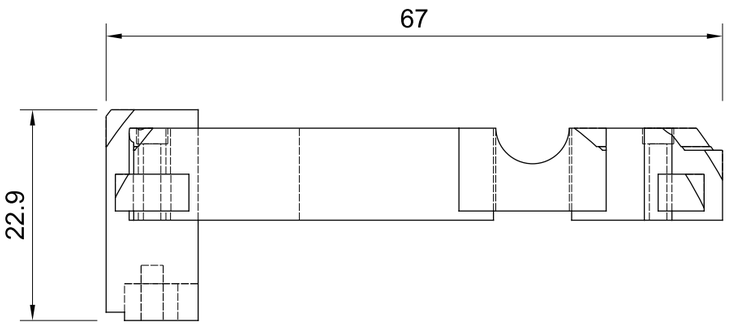

FRONT




RIGHT

NOTES: 1. NOMINAL3D PROFILE FROM SAME REVISION STEP; DO NOT SCALE PAPER.
2. LINEAR +/-0.10; HOLE POSITIONS +/-0.05 UNLESS MARKED.
3. CONTACT SIZE +/-0.05; PLANAR CONTACT FLATNESS0.05.
4. FITTING PROFILE:0.10 MAX MATERIAL REMOVAL FROM STEP.
5. EDGE BREAK0.10-0.20; LIGHT DEBURR ONLY ON THIN LINER RIMS.
6. WIRE EXIT CHANNEL R4.00; KEEP LOWER WEB INTACT.
7. TWO CLEARANCE HOLES1.90; CBORE3.40x1.70 AT TOP.
8. ROOT SLOT6.40x2.40; SIDE RELIEF8.40x4.40 PER STEP.


RIGHT THERMAL BRIDGE

SCALE 1.5:1 MM THIRD ANGLE


AL03 · 1050/1060 ALUMINIUM · Makit

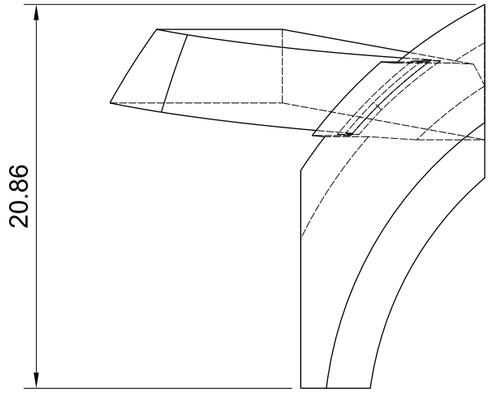


TOP



ISOMETRIC (2:1)

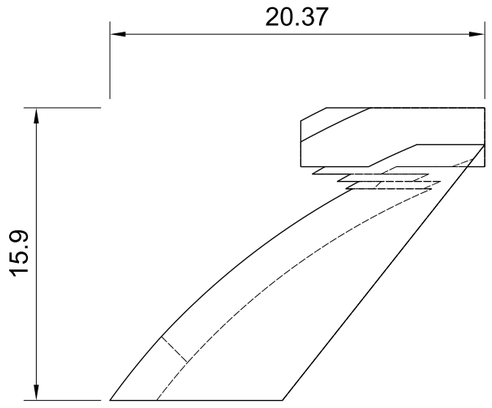

FRONT

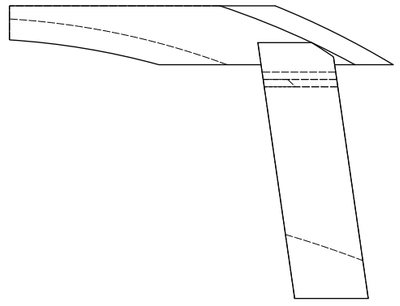


RIGHT

NOTES: 1. NOMINAL3D PROFILE FROM SAME REVISION STEP; DO NOT SCALE PAPER.
2. LINEAR +/-0.10; HOLE POSITIONS +/-0.05 UNLESS MARKED.
3. CONTACT SIZE +/-0.05; PLANAR CONTACT FLATNESS0.05.
4. FITTING PROFILE:0.10 MAX MATERIAL REMOVAL FROM STEP.
5. EDGE BREAK0.10-0.20; LIGHT DEBURR ONLY ON THIN LINER RIMS.
6. LOWER LAP Z26.10; SEPARABLE0.10 THERMAL INTERFACE.
7. SPHERICAL CAP FOOT R46.85; DO NOT GLUE LOWER SPLIT LAP.


LEFT UPPER HEAT LINK

SCALE 3:1 MM THIRD ANGLE


AL04 · 1050/1060 ALUMINIUM · Makit

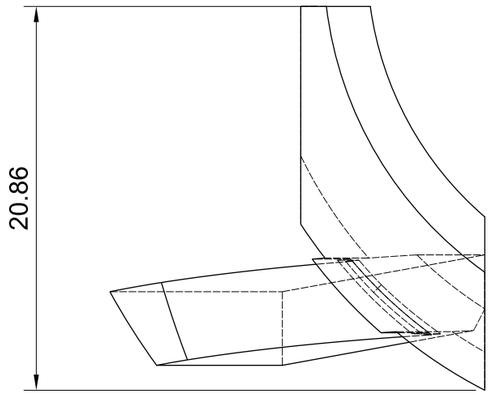


TOP



ISOMETRIC (2:1)

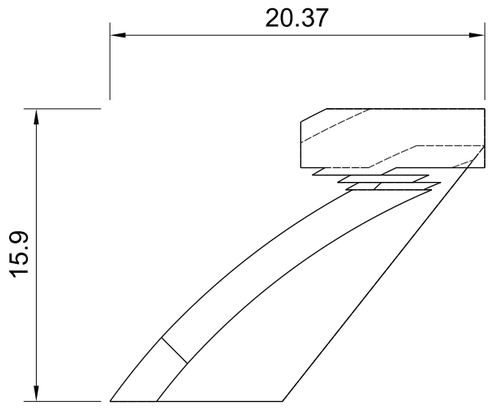


FRONT

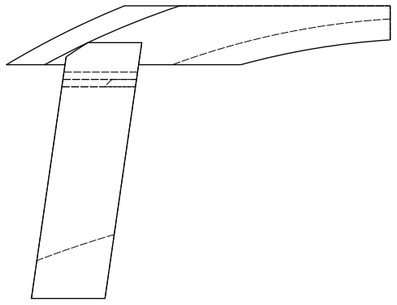


RIGHT

NOTES: 1. NOMINAL3D PROFILE FROM SAME REVISION STEP; DO NOT SCALE PAPER.
2. LINEAR +/-0.10; HOLE POSITIONS +/-0.05 UNLESS MARKED.
3. CONTACT SIZE +/-0.05; PLANAR CONTACT FLATNESS0.05.
4. FITTING PROFILE:0.10 MAX MATERIAL REMOVAL FROM STEP.
5. EDGE BREAK0.10-0.20; LIGHT DEBURR ONLY ON THIN LINER RIMS.
6. LOWER LAP Z26.10; SEPARABLE0.10 THERMAL INTERFACE.
7. SPHERICAL CAP FOOT R46.85; DO NOT GLUE LOWER SPLIT LAP.


# RIGHT UPPER HEAT LINK	SCALE 3:1 MM THIRD ANGLE
AL05 · 1050/1060 ALUMINIUM · Makit	SHEET 5 OF 15 REV 47a887e8 helicopter-aluminium-drawing

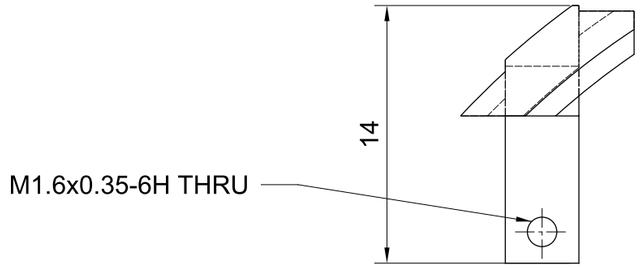


TOP



ISOMETRIC (2:1)




FRONT




RIGHT

NOTES: 1. NOMINAL3D PROFILE FROM SAME REVISION STEP; DO NOT SCALE PAPER.
2. LINEAR +/-0.10; HOLE POSITIONS +/-0.05 UNLESS MARKED.
3. CONTACT SIZE +/-0.05; PLANAR CONTACT FLATNESS0.05.
4. FITTING PROFILE:0.10 MAX MATERIAL REMOVAL FROM STEP.
5. EDGE BREAK0.10-0.20; LIGHT DEBURR ONLY ON THIN LINER RIMS.
6. TAP M1.6x0.35-6H THRU AFTER1.25 DRILL.
7. SPHERICAL CONTACT R46.85 PER STEP; HAND-TIGHTEN SHALLOW THREAD.


# LEFT FORE CONTACT SHOE	SCALE 3:1 MM THIRD ANGLE
AL06 · 1050/1060 ALUMINIUM · Makit	SHEET 6 OF 15 REV 47a887e8 helicopter-aluminium-drawing

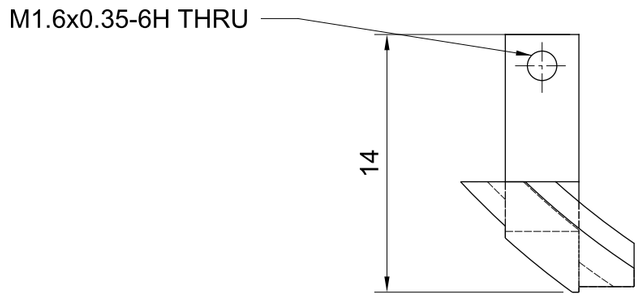


TOP



ISOMETRIC (2:1)



FRONT




RIGHT

NOTES: 1. NOMINAL3D PROFILE FROM SAME REVISION STEP; DO NOT SCALE PAPER.
2. LINEAR +/-0.10; HOLE POSITIONS +/-0.05 UNLESS MARKED.
3. CONTACT SIZE +/-0.05; PLANAR CONTACT FLATNESS0.05.
4. FITTING PROFILE:0.10 MAX MATERIAL REMOVAL FROM STEP.
5. EDGE BREAK0.10-0.20; LIGHT DEBURR ONLY ON THIN LINER RIMS.
6. TAP M1.6x0.35-6H THRU AFTER1.25 DRILL.
7. SPHERICAL CONTACT R46.85 PER STEP; HAND-TIGHTEN SHALLOW THREAD.


RIGHT FORE CONTACT SHOE

SCALE 3:1 MM THIRD ANGLE


AL07 · 1050/1060 ALUMINIUM · Makit

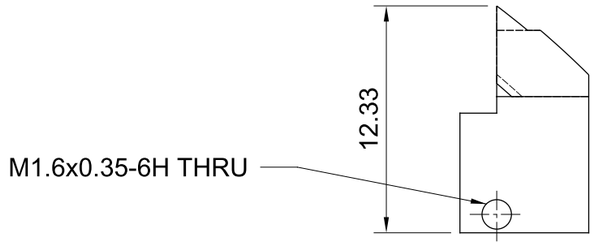


TOP



ISOMETRIC (2:1)




FRONT




RIGHT

NOTES: 1. NOMINAL3D PROFILE FROM SAME REVISION STEP; DO NOT SCALE PAPER.
2. LINEAR +/-0.10; HOLE POSITIONS +/-0.05 UNLESS MARKED.
3. CONTACT SIZE +/-0.05; PLANAR CONTACT FLATNESS0.05.
4. FITTING PROFILE:0.10 MAX MATERIAL REMOVAL FROM STEP.
5. EDGE BREAK0.10-0.20; LIGHT DEBURR ONLY ON THIN LINER RIMS.
6. TAP M1.6x0.35-6H THRU AFTER1.25 DRILL.
7. SPHERICAL CONTACT R46.85 PER STEP; HAND-TIGHTEN SHALLOW THREAD.


# LEFT AFT CONTACT SHOE	SCALE 3:1 MM THIRD ANGLE
AL08 · 1050/1060 ALUMINIUM · Makit	SHEET 8 OF 15 REV 47a887e8 helicopter-aluminium-drawing

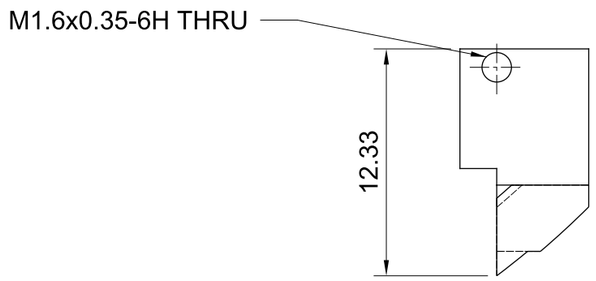


TOP



ISOMETRIC (2:1)




FRONT




RIGHT

NOTES: 1. NOMINAL3D PROFILE FROM SAME REVISION STEP; DO NOT SCALE PAPER.
2. LINEAR +/-0.10; HOLE POSITIONS +/-0.05 UNLESS MARKED.
3. CONTACT SIZE +/-0.05; PLANAR CONTACT FLATNESS0.05.
4. FITTING PROFILE:0.10 MAX MATERIAL REMOVAL FROM STEP.
5. EDGE BREAK0.10-0.20; LIGHT DEBURR ONLY ON THIN LINER RIMS.
6. TAP M1.6x0.35-6H THRU AFTER1.25 DRILL.
7. SPHERICAL CONTACT R46.85 PER STEP; HAND-TIGHTEN SHALLOW THREAD.


# RIGHT AFT CONTACT SHOE	SCALE 3:1 MM THIRD ANGLE
AL09 · 1050/1060 ALUMINIUM · Makit	SHEET 9 OF 15 REV 47a887e8 helicopter-aluminium-drawing

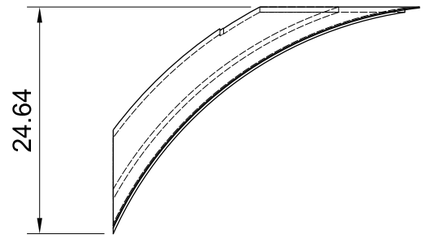


TOP



ISOMETRIC (1:1)

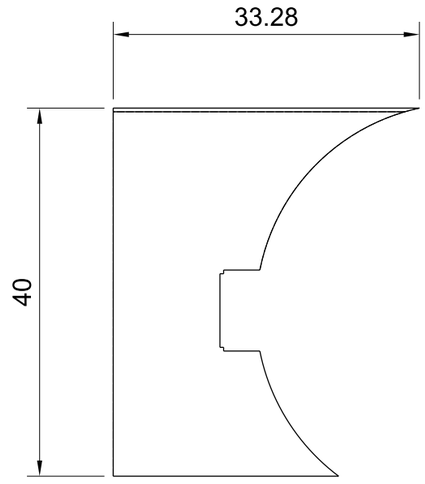

FRONT

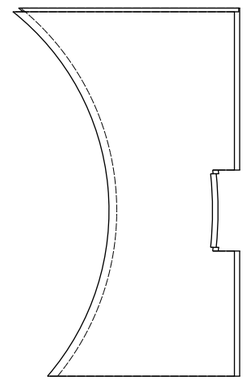


RIGHT

NOTES: 1. NOMINAL3D PROFILE FROM SAME REVISION STEP; DO NOT SCALE PAPER.
2. LINEAR +/-0.10; HOLE POSITIONS +/-0.05 UNLESS MARKED.
3. CONTACT SIZE +/-0.05; PLANAR CONTACT FLATNESS0.05.
4. FITTING PROFILE:0.10 MAX MATERIAL REMOVAL FROM STEP.
5. EDGE BREAK0.10-0.20; LIGHT DEBURR ONLY ON THIN LINER RIMS.
6. FORMED SPHERICAL SHEET; NOT A DEVELOPABLE FLAT PATTERN.
7. R OUT<=47.45; R IN>=46.95; NOM T0.50; MIN FORMED T0.40.
8. FORM ON TOOL, THEN TRIM; DRY FIT TO ACTUAL PRINTED SHELL.

LEFT FORE SHELL LINER

SCALE 1.5:1 MM THIRD ANGLE


AL10 · 1050/1060 ALUMINIUM · Makit

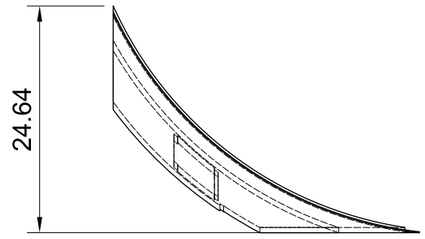


TOP



ISOMETRIC (1:1)

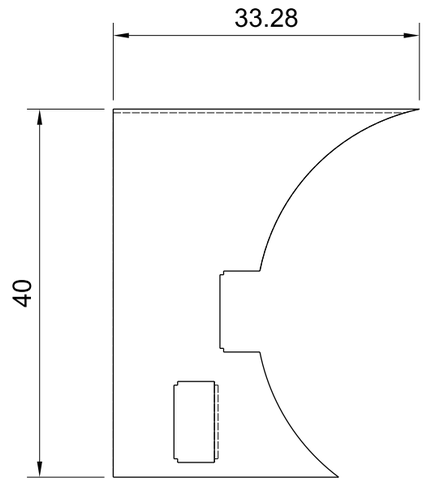

FRONT

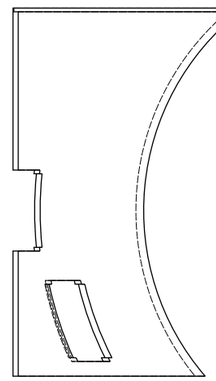


RIGHT

NOTES: 1. NOMINAL3D PROFILE FROM SAME REVISION STEP; DO NOT SCALE PAPER.
2. LINEAR +/-0.10; HOLE POSITIONS +/-0.05 UNLESS MARKED.
3. CONTACT SIZE +/-0.05; PLANAR CONTACT FLATNESS0.05.
4. FITTING PROFILE:0.10 MAX MATERIAL REMOVAL FROM STEP.
5. EDGE BREAK0.10-0.20; LIGHT DEBURR ONLY ON THIN LINER RIMS.
6. FORMED SPHERICAL SHEET; NOT A DEVELOPABLE FLAT PATTERN.
7. R OUT<=47.45; R IN>=46.95; NOM T0.50; MIN FORMED T0.40.
8. FORM ON TOOL, THEN TRIM; DRY FIT TO ACTUAL PRINTED SHELL.


RIGHT FORE SHELL LINER

SCALE 1.5:1 MM THIRD ANGLE


AL11 · 1050/1060 ALUMINIUM · Makit

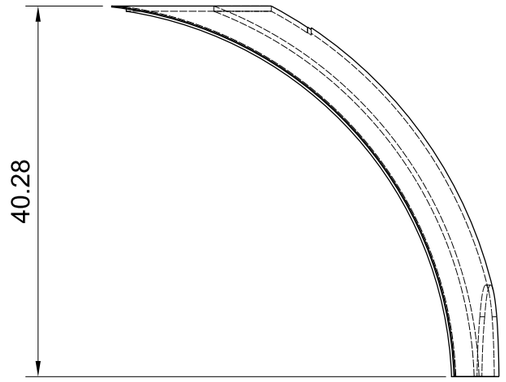


TOP



ISOMETRIC (1:1)

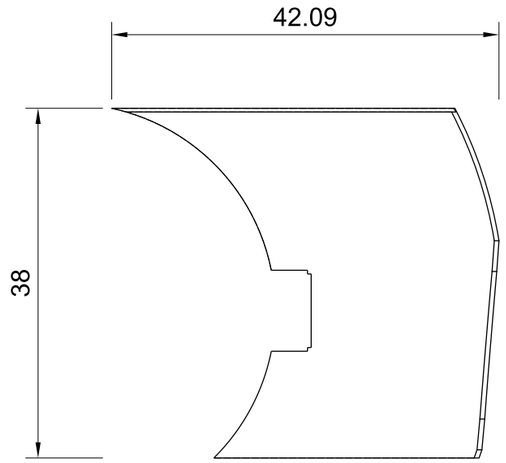

FRONT

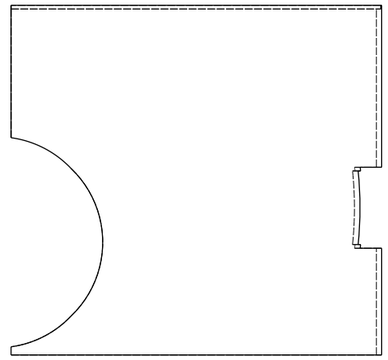


RIGHT

NOTES: 1. NOMINAL3D PROFILE FROM SAME REVISION STEP; DO NOT SCALE PAPER.
2. LINEAR +/-0.10; HOLE POSITIONS +/-0.05 UNLESS MARKED.
3. CONTACT SIZE +/-0.05; PLANAR CONTACT FLATNESS0.05.
4. FITTING PROFILE:0.10 MAX MATERIAL REMOVAL FROM STEP.
5. EDGE BREAK0.10-0.20; LIGHT DEBURR ONLY ON THIN LINER RIMS.
6. FORMED SPHERICAL SHEET; NOT A DEVELOPABLE FLAT PATTERN.
7. R OUT<=47.45; R IN>=46.95; NOM T0.50; MIN FORMED T0.40.
8. FORM ON TOOL, THEN TRIM; DRY FIT TO ACTUAL PRINTED SHELL.


LEFT AFT SHELL LINER

SCALE 1.5:1 MM THIRD ANGLE


AL12 · 1050/1060 ALUMINIUM · Makit

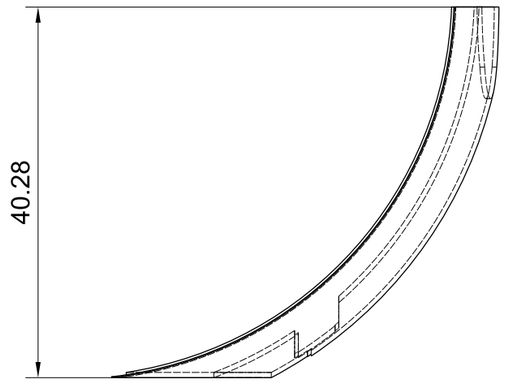


TOP

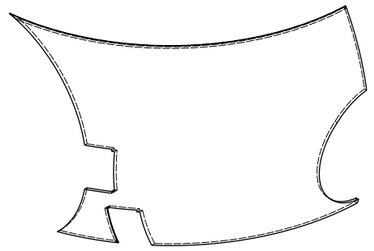

ISOMETRIC (1:1)

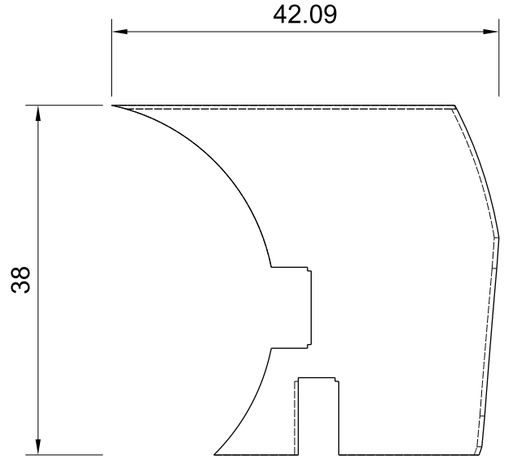

FRONT

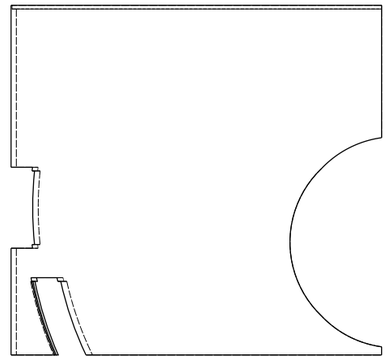


RIGHT

NOTES: 1. NOMINAL3D PROFILE FROM SAME REVISION STEP; DO NOT SCALE PAPER.
2. LINEAR +/-0.10; HOLE POSITIONS +/-0.05 UNLESS MARKED.
3. CONTACT SIZE +/-0.05; PLANAR CONTACT FLATNESS0.05.
4. FITTING PROFILE:0.10 MAX MATERIAL REMOVAL FROM STEP.
5. EDGE BREAK0.10-0.20; LIGHT DEBURR ONLY ON THIN LINER RIMS.
6. FORMED SPHERICAL SHEET; NOT A DEVELOPABLE FLAT PATTERN.
7. R OUT<=47.45; R IN>=46.95; NOM T0.50; MIN FORMED T0.40.
8. FORM ON TOOL, THEN TRIM; DRY FIT TO ACTUAL PRINTED SHELL.


RIGHT AFT SHELL LINER

SCALE 1.5:1 MM THIRD ANGLE


AL13 · 1050/1060 ALUMINIUM · Makit

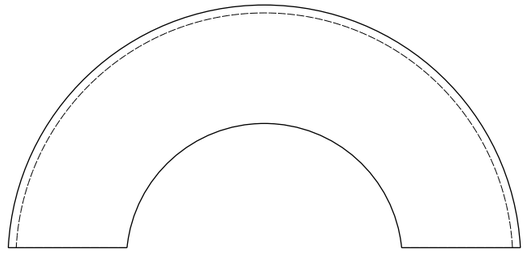

TOP



ISOMETRIC (1:1)

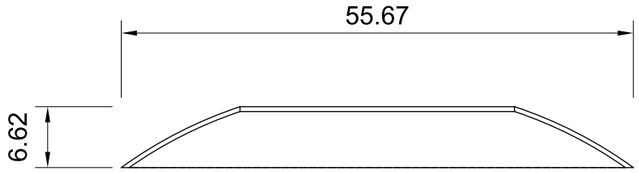

FRONT


RIGHT

NOTES: 1. NOMINAL3D PROFILE FROM SAME REVISION STEP; DO NOT SCALE PAPER.
2. LINEAR +/-0.10; HOLE POSITIONS +/-0.05 UNLESS MARKED.
3. CONTACT SIZE +/-0.05; PLANAR CONTACT FLATNESS0.05.
4. FITTING PROFILE:0.10 MAX MATERIAL REMOVAL FROM STEP.
5. EDGE BREAK0.10-0.20; LIGHT DEBURR ONLY ON THIN LINER RIMS.
6. FORMED SPHERICAL SHEET; NOT A DEVELOPABLE FLAT PATTERN.
7. R OUT<=47.45; R IN>=46.95; NOM T0.50; MIN FORMED T0.40.
8. FORM ON TOOL, THEN TRIM; DRY FIT TO ACTUAL PRINTED SHELL.


LEFT CAP LINER

SCALE 1.5:1 MM THIRD ANGLE


AL14 · 1050/1060 ALUMINIUM · Makit

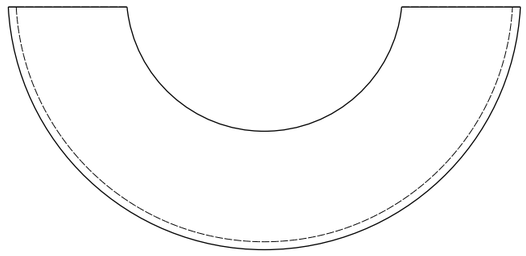


TOP



ISOMETRIC (1:1)

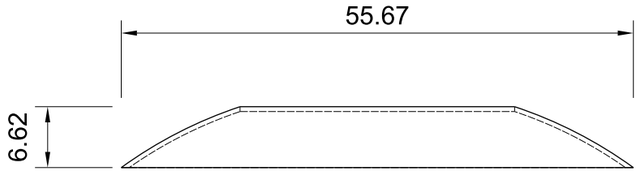

FRONT



RIGHT

NOTES: 1. NOMINAL3D PROFILE FROM SAME REVISION STEP; DO NOT SCALE PAPER.
2. LINEAR +/-0.10; HOLE POSITIONS +/-0.05 UNLESS MARKED.
3. CONTACT SIZE +/-0.05; PLANAR CONTACT FLATNESS0.05.
4. FITTING PROFILE:0.10 MAX MATERIAL REMOVAL FROM STEP.
5. EDGE BREAK0.10-0.20; LIGHT DEBURR ONLY ON THIN LINER RIMS.
6. FORMED SPHERICAL SHEET; NOT A DEVELOPABLE FLAT PATTERN.
7. R OUT<=47.45; R IN>=46.95; NOM T0.50; MIN FORMED T0.40.
8. FORM ON TOOL, THEN TRIM; DRY FIT TO ACTUAL PRINTED SHELL.

RIGHT CAP LINER

SCALE 1.5:1 MM THIRD ANGLE

AL15 · 1050/1060 ALUMINIUM · Makit