


n8n - PostgreSQL - PgAdmin


Me. Eduardo Verri

Conectando ao PgAdmin IP_VM:8080

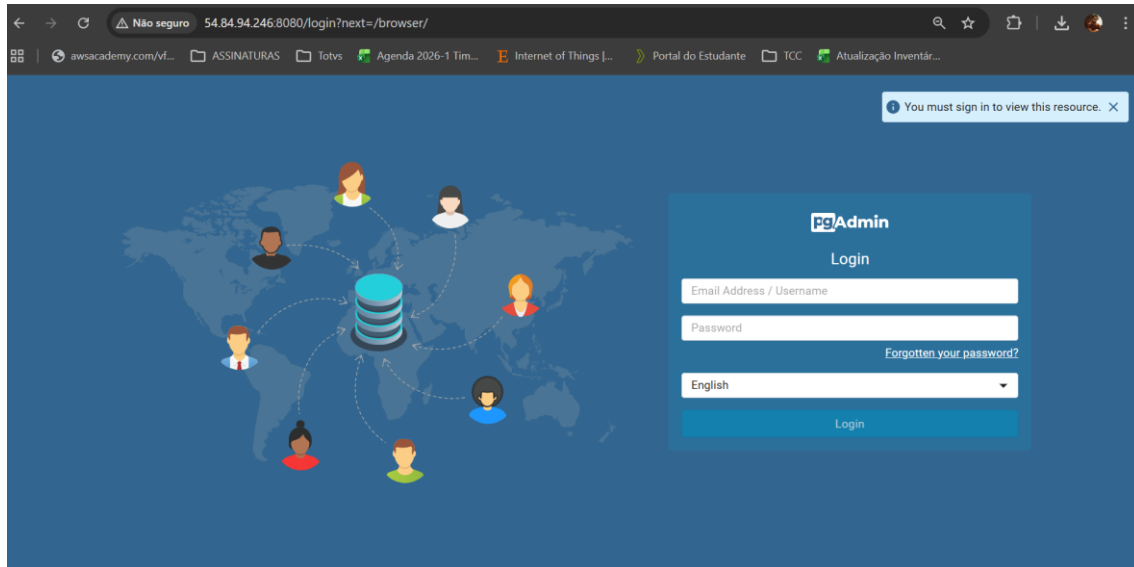

USERNAME=admin@admin.com



PASSWD=admin

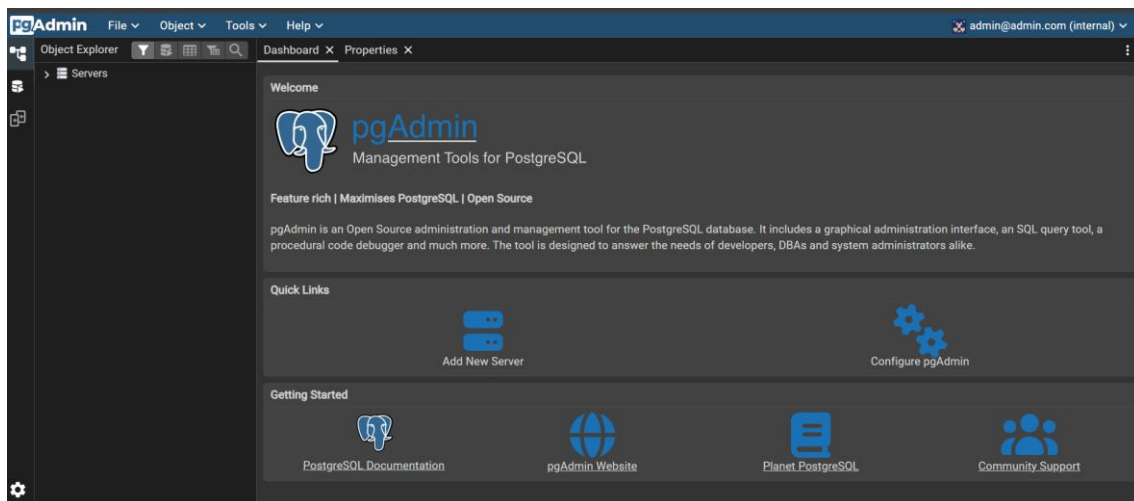

Clique com o botão direito em **Servers > Register > Server ...**


n8n - PostgreSQL - PgAdmin

Me. Eduardo Verri

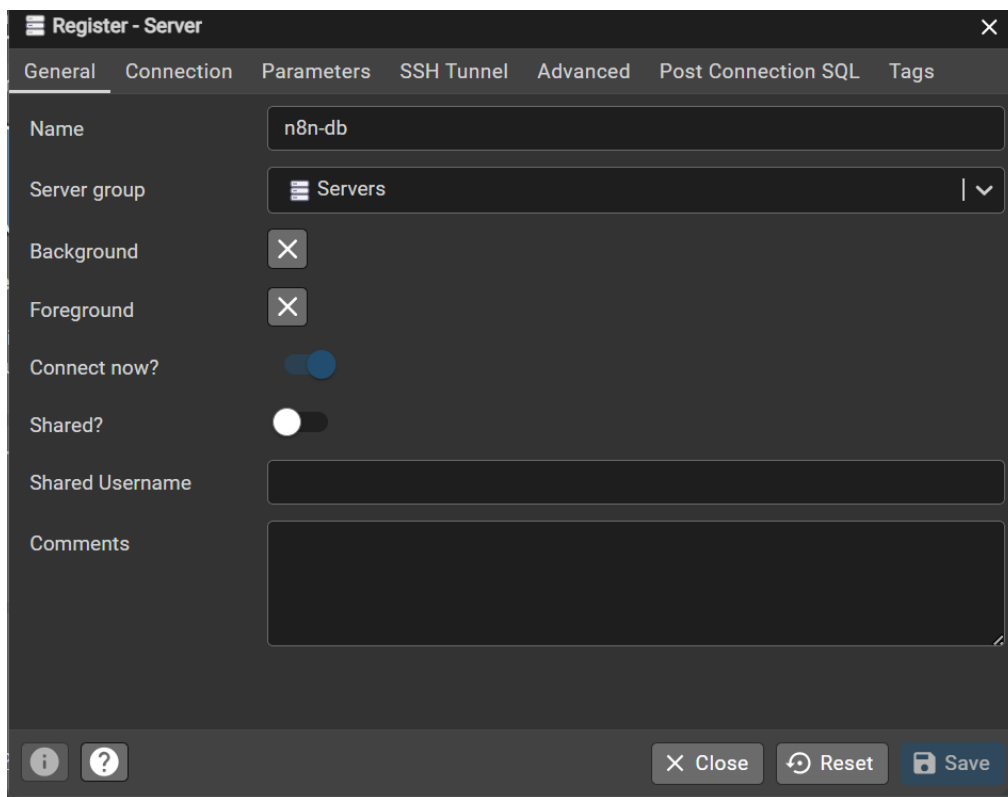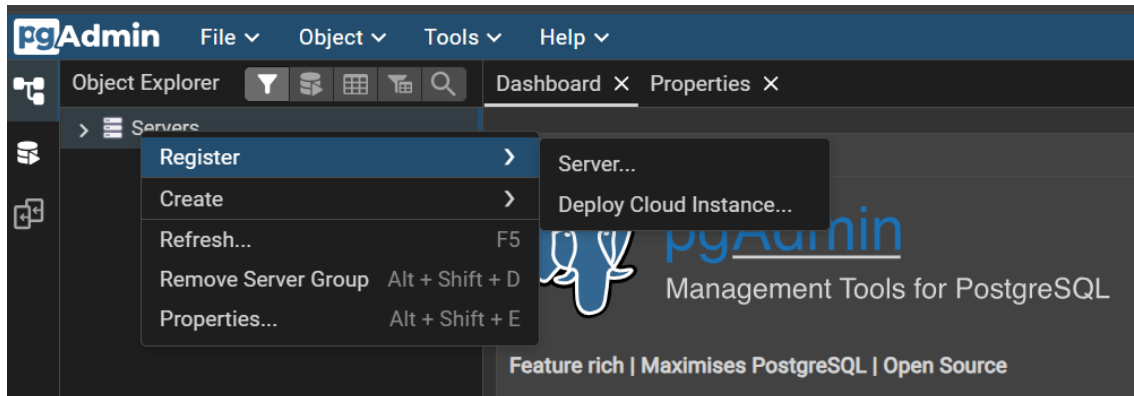

n8n - PostgreSQL - PgAdmin

Me. Eduardo Verri

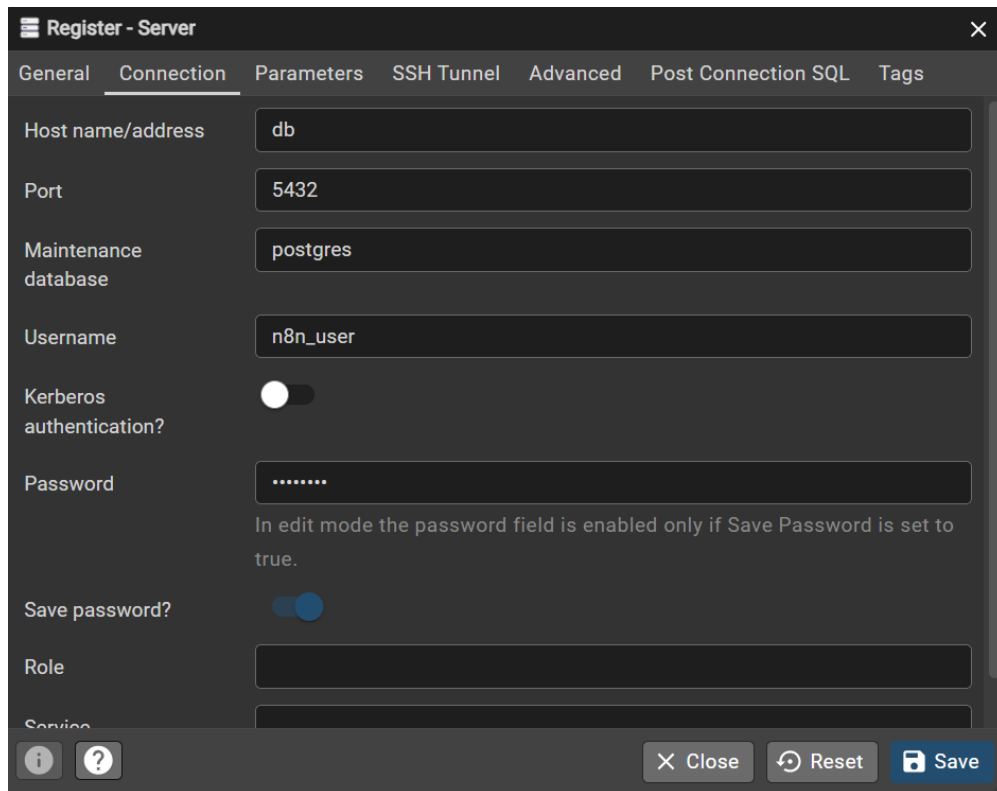

The screenshot shows the 'Register - Server' dialog box in PgAdmin, with the 'Connection' tab selected. The fields are as follows:


Field	Value
Host name/address	db
Port	5432
Maintenance database	postgres
Username	n8n_user
Kerberos authentication?	☐
Password	
Save password?	☒
Role	
Service	

At the bottom right, there are buttons for 'Close', 'Reset', and 'Save'. A note below the password field states: 'In edit mode the password field is enabled only if Save Password is set to true.'

HOST_NAME=db

USERNAME=n8n_user

PASSWD=urubu100

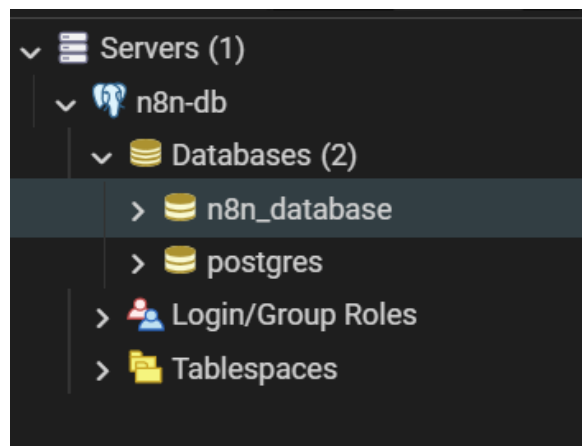

Acesse agora http://IP_VM para acessar o n8n

EMAIL=aadmin@admin.com

FIRST_NAME=admin

LAST_NAME=admin

n8n - PostgreSQL - PgAdmin

Me. Eduardo Verri

PASSWD=Admin2026

Set up owner account

Email *

First Name *


Last Name *

Password *

8+ characters, at least 1 number and 1 capital letter

☐ I want to receive security and product updates


Next

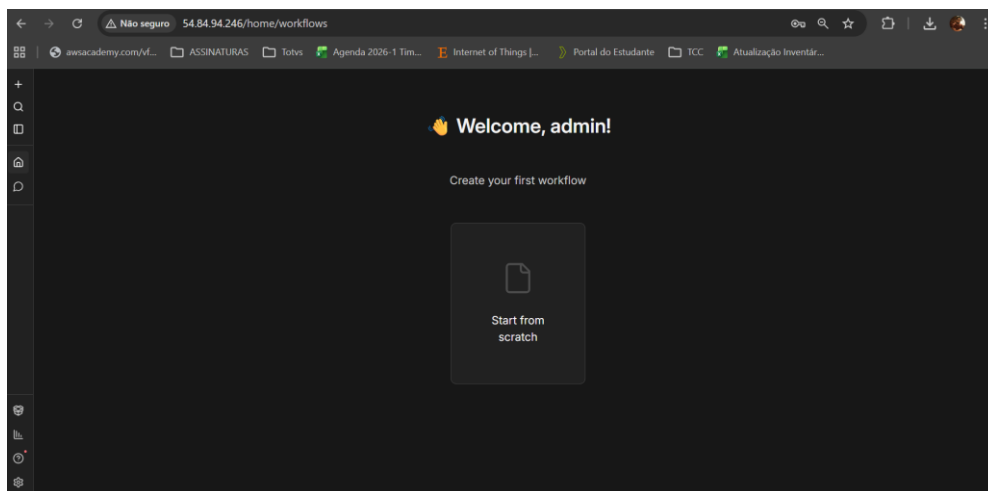

n8n - PostgreSQL - PgAdmin


Me. Eduardo Verri

Use `$ docker stats` para monitorar as estatísticas dos containers, para a máquina não sofrer...

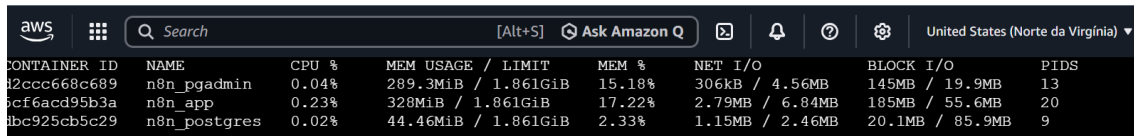

CONTAINER ID	NAME	CPU %	MEM USAGE / LIMIT	MEM %	NET I/O	BLOCK I/O	PIDS
82ccc668c689	n8n_pgadmin	0.04%	289.3MiB / 1.861GiB	15.18%	306kB / 4.56MB	145MB / 19.9MB	13
bcf6acd95b3a	n8n_app	0.23%	328MiB / 1.861GiB	17.22%	2.79MB / 6.84MB	185MB / 55.6MB	20
8bc925cb5c29	n8n_postgres	0.02%	44.46MiB / 1.861GiB	2.33%	1.15MB / 2.46MB	20.1MB / 85.9MB	9


Fique esperto também com o armazenamento da VM, eu criei um EBS pequeno de 8GiB, isso pode ser um problema no futuro... monitore o tamanho do root com `$ df -hT /`

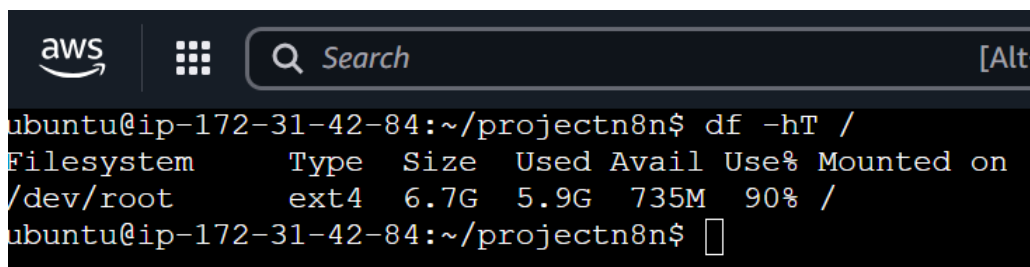

```
ubuntu@ip-172-31-42-84:~/projectn8n$ df -hT /
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/root        ext4  6.7G  5.9G  735M  90% /
ubuntu@ip-172-31-42-84:~/projectn8n$
```

Vamos tentar um novo projetinho, que cria QR Code a partir de uma chamada de Webhook! Para testar utilize


```
curl -X POST http://IP_VM/webhook-test/generate-qr -H "Content-Type: application/json" -d '{"text": "https://google.com"}'
```

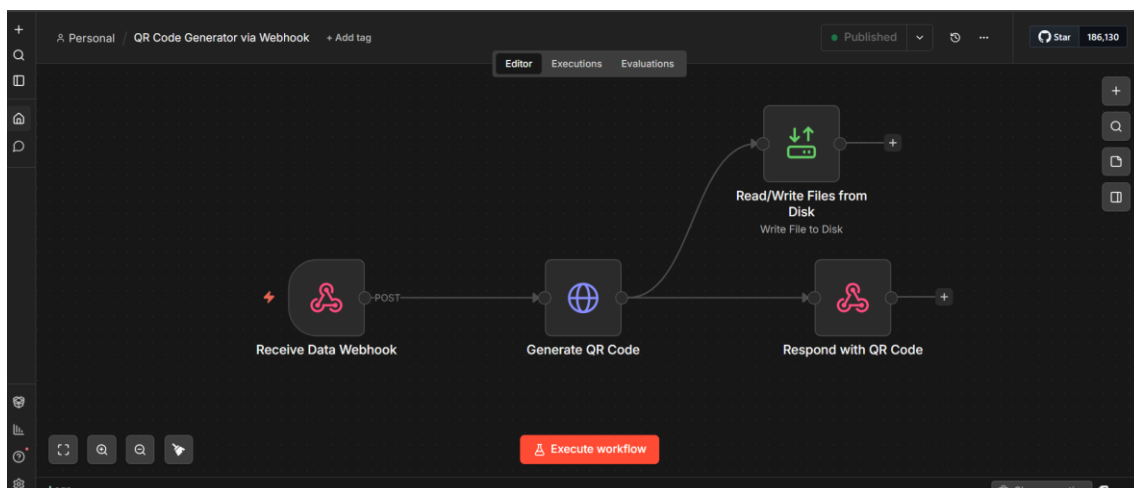

Publique o seu workflow e teste agora em produção! Mas lembre-se de olhar a url de produção!

n8n - PostgreSQL - PgAdmin

Me. Eduardo Verri

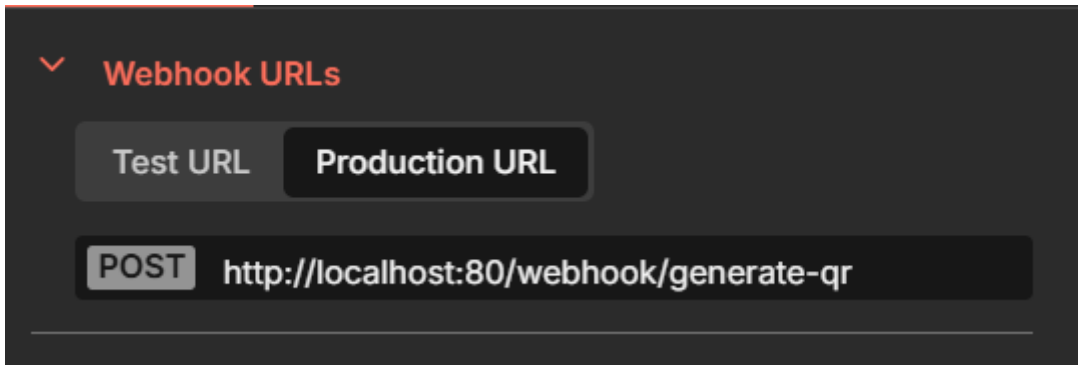

```
urubu100@sptech02608: ~  
urubu100@sptech02608:~$ curl -X POST http://54.84.94.246/webhook/generate-qr -H "Content-Type: application/json" -d '{"text": "3SIS arrasa!"}'  
[{"headers":{"host":"54.84.94.246","user-agent":"curl/7.58.0","accept":"*//*","content-type":"application/json","content-length":"24"},"params":{"query":{"body":{"text":"3SIS arrasa!"},"webhookUrl":"http://localhost:80/webhook/generate-qr","executionMode":"production"}}}]urubu100@sptech02608:~$
```




```
aws  
ubuntu@ip-172-31-42-84:~/projectn8n/local-files$ ls -lh  
total 8.0K  
-rw-r--r-- 1 ubuntu ubuntu 323 Apr 29 22:26 qrcode_2026-04-29_19-26-36.png  
-rw-r--r-- 1 ubuntu ubuntu 323 Apr 29 22:28 qrcode_2026-04-29_19-28-03.png  
ubuntu@ip-172-31-42-84:~/projectn8n/local-files$
```

E observe que salvou os arquivos no seu disco!

Agora, volte para o seu PgAdmin! Selecione o **n8n_database** > **Query Tool**

n8n - PostgreSQL - PgAdmin

Me. Eduardo Verri

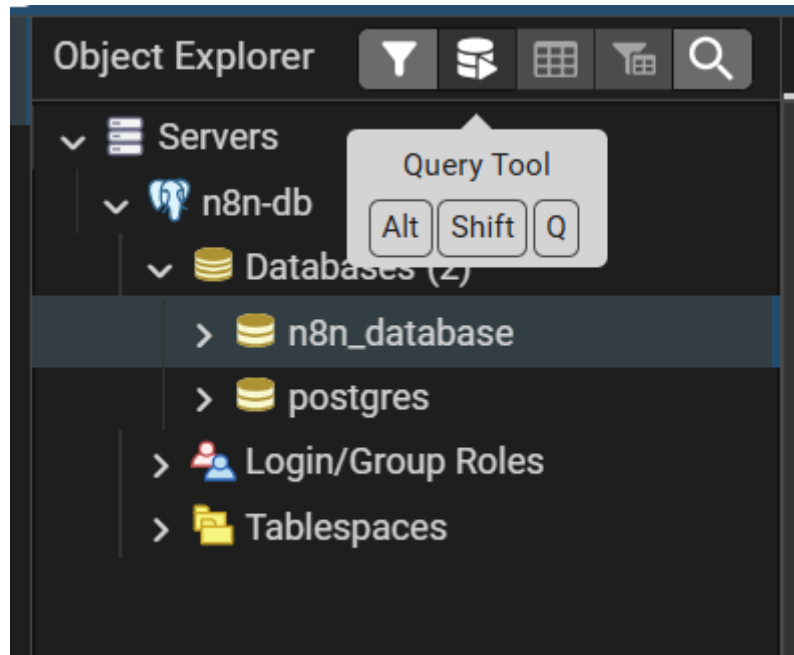

-- Histórico de execuções --

```
SELECT * FROM execution_entity ORDER BY "startedAt" DESC;
```

A screenshot of the PgAdmin interface showing the query results for the query 'SELECT * FROM execution_entity ORDER BY "startedAt" DESC;'. The 'Data Output' tab is active, displaying a table with 18 rows. The columns are: id (PK integer), finished (boolean), mode (character varying), retryOf (character varying), retrySuccessid (character varying), startedAt (timestamp with time zone (3)), stoppedAt (timestamp with time zone (3)), and waitTill (timestamp with time zone (3)). The rows show various execution records with timestamps and modes like 'webhook' and 'manual'.

id	finished	mode	retryOf	retrySuccessid	startedAt	stoppedAt	waitTill
18	true	webhook	[null]	[null]	2026-04-29 22:28:02.91+00	2026-04-29 22:28:03.418+00	[null]
17	true	webhook	[null]	[null]	2026-04-29 22:26:36.128+00	2026-04-29 22:26:36.599+00	[null]
16	true	manual	[null]	[null]	2026-04-29 22:22:55.121+00	2026-04-29 22:22:55.606+00	[null]
15	true	manual	[null]	[null]	2026-04-29 22:22:22.813+00	2026-04-29 22:22:22.847+00	[null]
14	true	manual	[null]	[null]	2026-04-29 22:20:56.297+00	2026-04-29 22:20:56.776+00	[null]
13	true	manual	[null]	[null]	2026-04-29 22:20:47.632+00	2026-04-29 22:20:47.645+00	[null]
12	false	manual	[null]	[null]	2026-04-29 22:18:04.15+00	2026-04-29 22:18:04.615+00	[null]
11	false	manual	[null]	[null]	2026-04-29 22:17:51.501+00	2026-04-29 22:17:51.993+00	[null]
10	false	manual	[null]	[null]	2026-04-29 22:17:07.408+00	2026-04-29 22:17:07.419+00	[null]

-- Definição do Workflow --

```
SELECT name, nodes FROM workflow_entity;
```

n8n - PostgreSQL - PgAdmin

Me. Eduardo Verri

