HACKERS DO BEM

FUNDAMENTAL - TURMA 20

Aluno : Caio Dos Santos Leal

MÓDULO 2

ATIVIDADE PRÁTICA 2

Atividade 2.6: passo 8

Arquivo mensagem.txt após criptografia utilizando a ferramenta Ccrypt no Kali Linux.

```
└─# ccrypt -h
ccrypt 1.11. Secure encryption and decryption of files and streams.

Usage: ccrypt [mode] [options] [file ...]
       ccencrypt [options] [file ...]
       ccdecrypt [options] [file ...]
       ccat [options] file ...

Modes:
    -e, --encrypt         encrypt
    -d, --decrypt         decrypt
    -c, --cat             cat; decrypt files to stdout
    -x, --keychange       change key
    -u, --unixcrypt       decrypt old unix crypt files

Options:
    -h, --help            print this help message and exit
    -V, --version         print version info and exit
    -L, --license         print license info and exit
    -v, --verbose         print progress information to stderr
    -q, --quiet           run quietly; suppress warnings
    -f, --force           overwrite existing files without asking
    -m, --mismatch        allow decryption with non-matching key
    -E, --envvar var      read keyword from environment variable (unsafe)
    -K, --key key         give keyword on command line (unsafe)
    -k, --keyfile file    read keyword(s) as first line(s) from file
    -P, --prompt prompt   use this prompt instead of default
    -S, --suffix .suf     use suffix .suf instead of default .cpt
    -s, --strictsuffix    refuse to encrypt files which already have suffix
    -F, --envvar2 var     as -E for second keyword (for keychange mode)
    -H, --key2 key        as -K for second keyword (for keychange mode)
    -Q, --prompt2 prompt  as -P for second keyword (for keychange mode)
    -t, --timid           prompt twice for encryption keys (default)
    -b, --brave           prompt only once for encryption keys
    -y, --keyref file     encryption key must match this encrypted file
    -r, --recursive       recurse through directories
    -R, --rec-symlinks    follow symbolic links as subdirectories
    -l, --symlinks        dereference symbolic links
    -T, --tmpfiles        use temporary files instead of overwriting (unsafe)
    --                    end of options, filenames follow

┌──(root㉿kali)-[/home/aluno/Documentos]
└─# ccrypt -e mensagem.txt
Enter encryption key:
Enter encryption key: (repeat)

┌──(root㉿kali)-[/home/aluno/Documentos]
└─# ls
cesar_cipher.py  mensagem.txt.cpt  payload.exe  teste.log

┌──(root㉿kali)-[/home/aluno/Documentos]
└─# cat mensagem.txt.cpt
E=◆#U◆=◆\◆i

┌──(root㉿kali)-[/home/aluno/Documentos]
└─#
```

Atividade 2.7: passo 5

Saída do Logcheck exibindo os eventos do sistema após alteração do nível de relatório

```
Applications  Remmina                                                    2026-02-11 21:18  aluno
Quick Connect
Quick Connect
Aplicativos  aluno@kali: ~                                               2026-02-11 21:18  aluno
aluno@kali: ~
Sessão  Ações  Editar  Exibir  Ajuda
┌──(root㉿kali)-[~]
└─# exit

┌──(aluno㉿kali)-[~]
└─$ sudo -u logcheck logcheck -o -t
This email is sent by logcheck. If you no longer wish to receive
such mail, you can either uninstall the logcheck package or modify
its configuration file (/etc/logcheck/logcheck.conf).

Security Events for sudo
=-=-=-=-=-=-=-=-=-=-=-=-
2026-02-11T21:08:16.099652-03:00 ip-192-168-98-40 sudo: pam_unix(sudo-i:session): session opened for user root(uid=0) by (uid=1001)
2026-02-11T21:13:07.004504-03:00 ip-192-168-98-40 sudo: pam_unix(sudo-i:session): session closed for user root
2026-02-11T21:15:43.736622-03:00 ip-192-168-98-40 sudo: pam_unix(sudo-i:session): session opened for user root(uid=0) by (uid=1001)
2026-02-11T21:17:50.685231-03:00 ip-192-168-98-40 sudo: pam_unix(sudo-i:session): session closed for user root
fev 11 21:08:16 kali sudo[2944]: pam_unix(sudo-i:session): session opened for user root(uid=0) by (uid=1001)
fev 11 21:13:07 kali sudo[2944]: pam_unix(sudo-i:session): session closed for user root
fev 11 21:15:43 kali sudo[4274]: pam_unix(sudo-i:session): session opened for user root(uid=0) by (uid=1001)
fev 11 21:17:50 kali sudo[4274]: pam_unix(sudo-i:session): session closed for user root

System Events
=-=-=-=-=-=-=
2026-02-11T21:06:11.462112-03:00 ip-192-168-98-40 kernel: audit: type=1400 audit(1770854771.443:2): apparmor="STATUS" operation="profile_load" profile="unconfined" name="docker-default" pid=1524 comm="apparmor_parser"
2026-02-11T21:06:11.506568-03:00 ip-192-168-98-40 dhclient[603]: XMT: Solicit on eth0, interval 4470ms.
2026-02-11T21:06:11.602104-03:00 ip-192-168-98-40 kernel: evm: overlay not supported
2026-02-11T21:06:11.618990-03:00 ip-192-168-98-40 dockerd[1231]: time="2026-02-11T21:06:11.618131773-03:00" level=info msg="[graphdriver] using prior storage driver: overlay2"
2026-02-11T21:06:11.625667-03:00 ip-192-168-98-40 dockerd[1231]: time="2026-02-11T21:06:11.625516656-03:00" level=info msg="Loading containers: start."
2026-02-11T21:06:11.938181-03:00 ip-192-168-98-40 kernel: Initializing XFRM netlink socket
2026-02-11T21:06:12.034256-03:00 ip-192-168-98-40 kernel: bridge: filtering via arp/ip/ip6tables is no longer available by default. Update your scripts to load br_netfilter if you need this.
2026-02-11T21:06:12.041256-03:00 ip-192-168-98-40 NetworkManager[717]: <info>  [1770854772.0360] manager: (docker0): new Bridge device (/org/freedesktop/NetworkManager/Devices/3)
2026-02-11T21:06:12.235255-03:00 ip-192-168-98-40 xrdp[1105]: [INFO ] starting xrdp with pid 1105
2026-02-11T21:06:12.239327-03:00 ip-192-168-98-40 xrdp[1105]: [INFO ] address [0.0.0.0] port [3389] mode 1
2026-02-11T21:06:12.242528-03:00 ip-192-168-98-40 xrdp[1105]: [INFO ] listening to port 3389 on 0.0.0.0
2026-02-11T21:06:12.248811-03:00 ip-192-168-98-40 xrdp[1105]: [INFO ] setting send buffer to 4194304 bytes
2026-02-11T21:06:12.249327-03:00 ip-192-168-98-40 NetworkManager[717]: <info>  [1770854772.2492] device (docker0): state change: unmanaged → unavailable (reason 'connection-assumed', managed-type: 'external')
2026-02-11T21:06:12.251024-03:00 ip-192-168-98-40 xrdp[1105]: [INFO ] send buffer set to 8388608 bytes
2026-02-11T21:06:12.251954-03:00 ip-192-168-98-40 NetworkManager[717]: <info>  [1770854772.2518] device (docker0): state change: unavailable → disconnected (reason 'connection-assumed', managed-type: 'external')
2026-02-11T21:06:12.254673-03:00 ip-192-168-98-40 xrdp[1105]: [INFO ] xrdp_listen_pp done
2026-02-11T21:06:12.255285-03:00 ip-192-168-98-40 NetworkManager[717]: <info>  [1770854772.2552] device (docker0): Activation: starting connection 'docker0' (bb4041e5-3d94-4bb3-962f-3ade40c5a1a8)
2026-02-11T21:06:12.255789-03:00 ip-192-168-98-40 NetworkManager[717]: <info>  [1770854772.2557] device (docker0): state change: disconnected → prepare (reason 'none', managed-type: 'external')
2026-02-11T21:06:12.257271-03:00 ip-192-168-98-40 NetworkManager[717]: <info>  [1770854772.2562] device (docker0): state change: prepare → config (reason 'none', managed-type: 'external')
2026-02-11T21:06:12.259338-03:00 ip-192-168-98-40 NetworkManager[717]: <info>  [1770854772.2564] device (docker0): state change: config → ip-config (reason 'none', managed-type: 'external')
2026-02-11T21:06:12.259517-03:00 ip-192-168-98-40 NetworkManager[717]: <info>  [1770854772.2566] device (docker0): state change: ip-config → ip-check (reason 'none', managed-type: 'external')
2026-02-11T21:06:12.262517-03:00 ip-192-168-98-40 NetworkManager[717]: <info>  [1770854772.2623] device (docker0): state change: ip-check → secondaries (reason 'none', managed-type: 'external')
2026-02-11T21:06:12.263291-03:00 ip-192-168-98-40 NetworkManager[717]: <info>  [1770854772.2631] device (docker0): state change: secondaries → activated (reason 'none', managed-type: 'external')
2026-02-11T21:06:12.482659-03:00 ip-192-168-98-40 dockerd[1231]: time="2026-02-11T21:06:12.473465852-03:00" level=info msg="Default bridge (docker0) is assigned with an IP address 172.17.0.0/16. Daemon option --bip can be used to s
et a preferred IP address"
2026-02-11T21:06:12.645186-03:00 ip-192-168-98-40 dockerd[1231]: time="2026-02-11T21:06:12.645070831-03:00" level=info msg="Loading containers: done."
2026-02-11T21:06:12.714117-03:00 ip-192-168-98-40 dockerd[1231]: time="2026-02-11T21:06:12.709922648-03:00" level=info msg="Docker daemon" commit=61416484 containerd-snapshotter=false storage-driver=overlay2 version=27.5.1+dfsg4
2026-02-11T21:06:12.714421-03:00 ip-192-168-98-40 dockerd[1231]: time="2026-02-11T21:06:12.710649479-03:00" level=info msg="Daemon has completed initialization"
2026-02-11T21:06:12.754646-03:00 ip-192-168-98-40 dockerd[1231]: time="2026-02-11T21:06:12.753928247-03:00" level=info msg="API listen on /run/docker.sock"
2026-02-11T21:06:12.858272-03:00 ip-192-168-98-40 cloud-init[481]: Cloud-init v. 25.3 running 'modules:final' at Thu, 12 Feb 2026 00:06:12 +0000. Up 15.33 seconds.
2026-02-11T21:06:12.898200-03:00 ip-192-168-98-40 cloud-init[481]: Cloud-init v. 25.3 finished at Thu, 12 Feb 2026 00:06:12 +0000. Datasource DataSourceEc2Local.  Up 15.41 seconds
2026-02-11T21:06:12.906488-03:00 ip-192-168-98-40 sh[2009]: Completed socket interaction for boot stage final
2026-02-11T21:06:13.009330-03:00 ip-192-168-98-40 systemd[1]: cloud-init-main.service: Unit process 480 (sh) remains running after unit stopped.
2026-02-11T21:06:13.009496-03:00 ip-192-168-98-40 systemd[1]: cloud-init-main.service: Consumed 1.617s CPU time over 7.741s wall clock time, 71M memory peak.
```

Atividade 2.8: passo 7

Verificação do endereço IP e localização utilizando o navegador Tor demonstrando mascaramento de identidade.

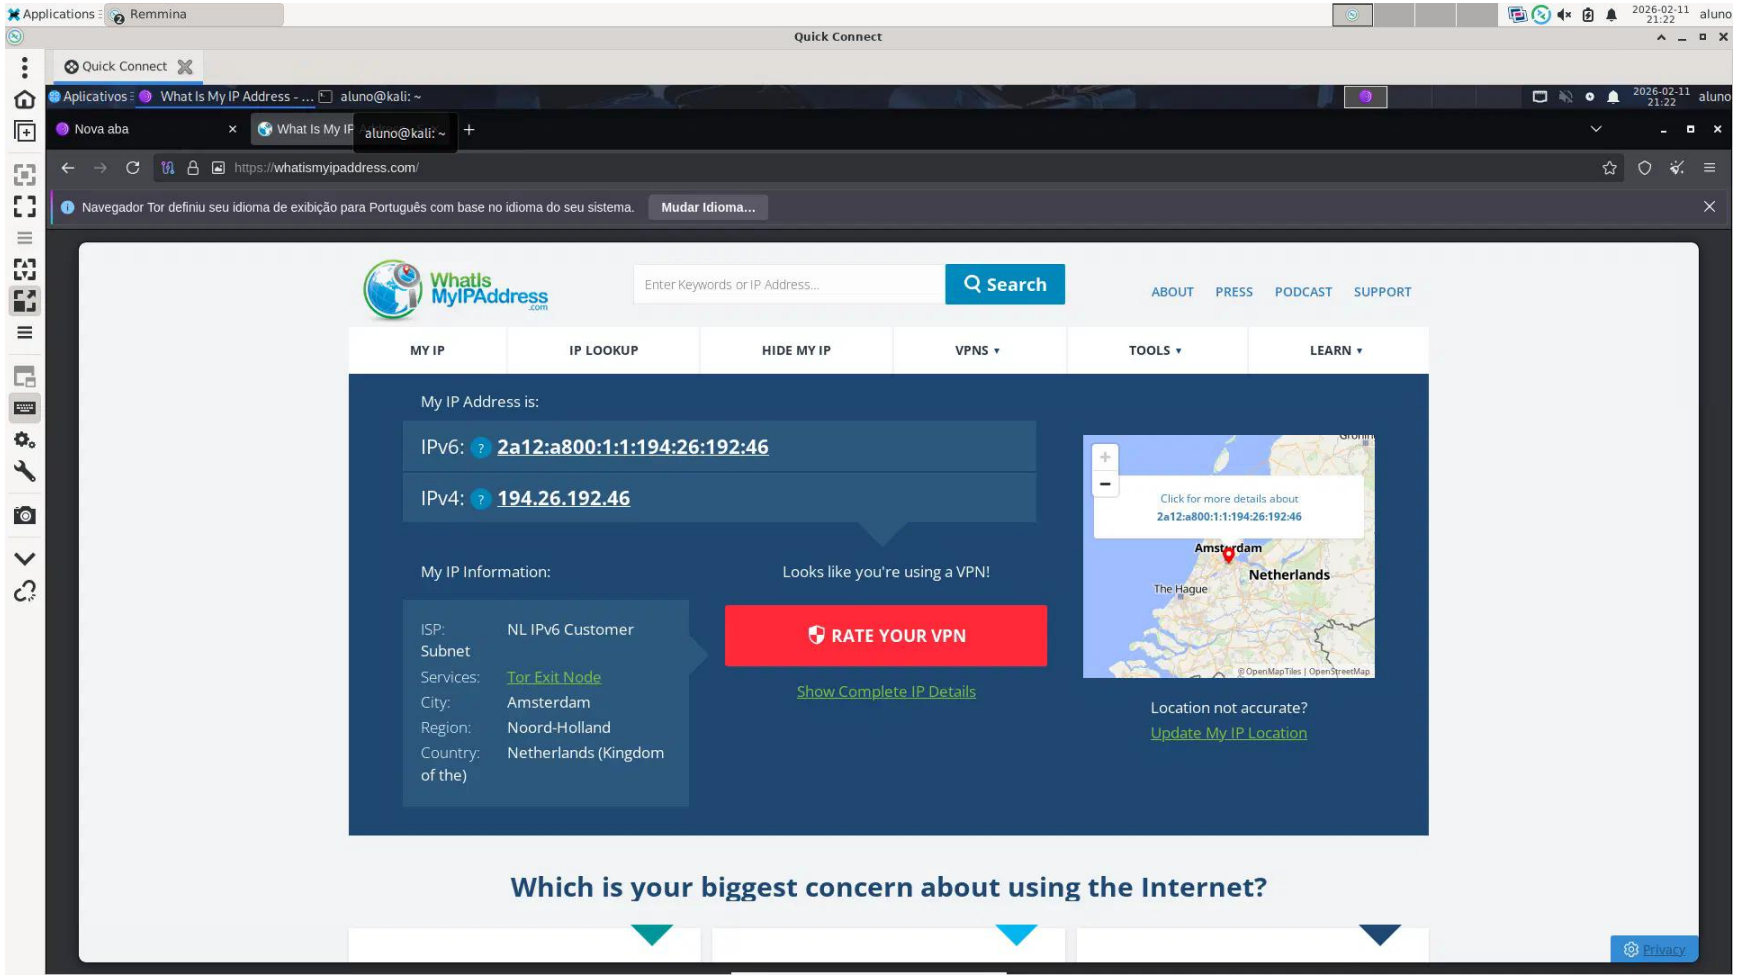

Atividade 2.9: passo 4

Acesso ao site The Hidden Wiki na rede Tor através de endereço .onion.

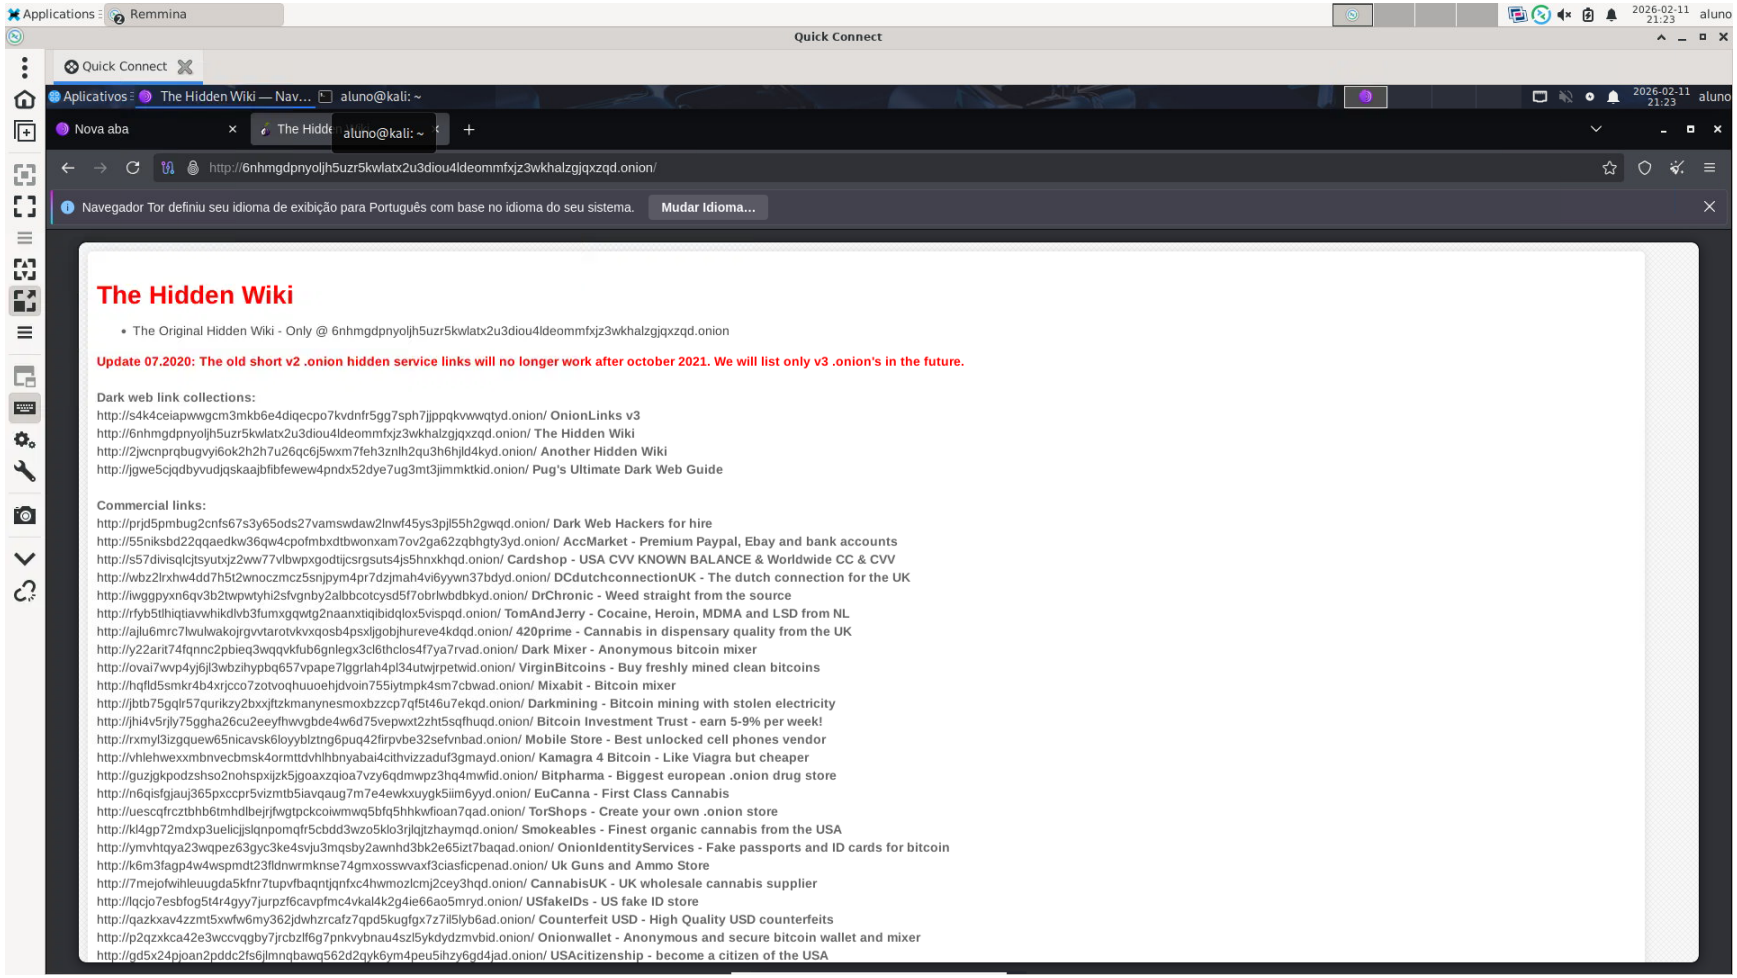

Atividade 2.10: passo 7
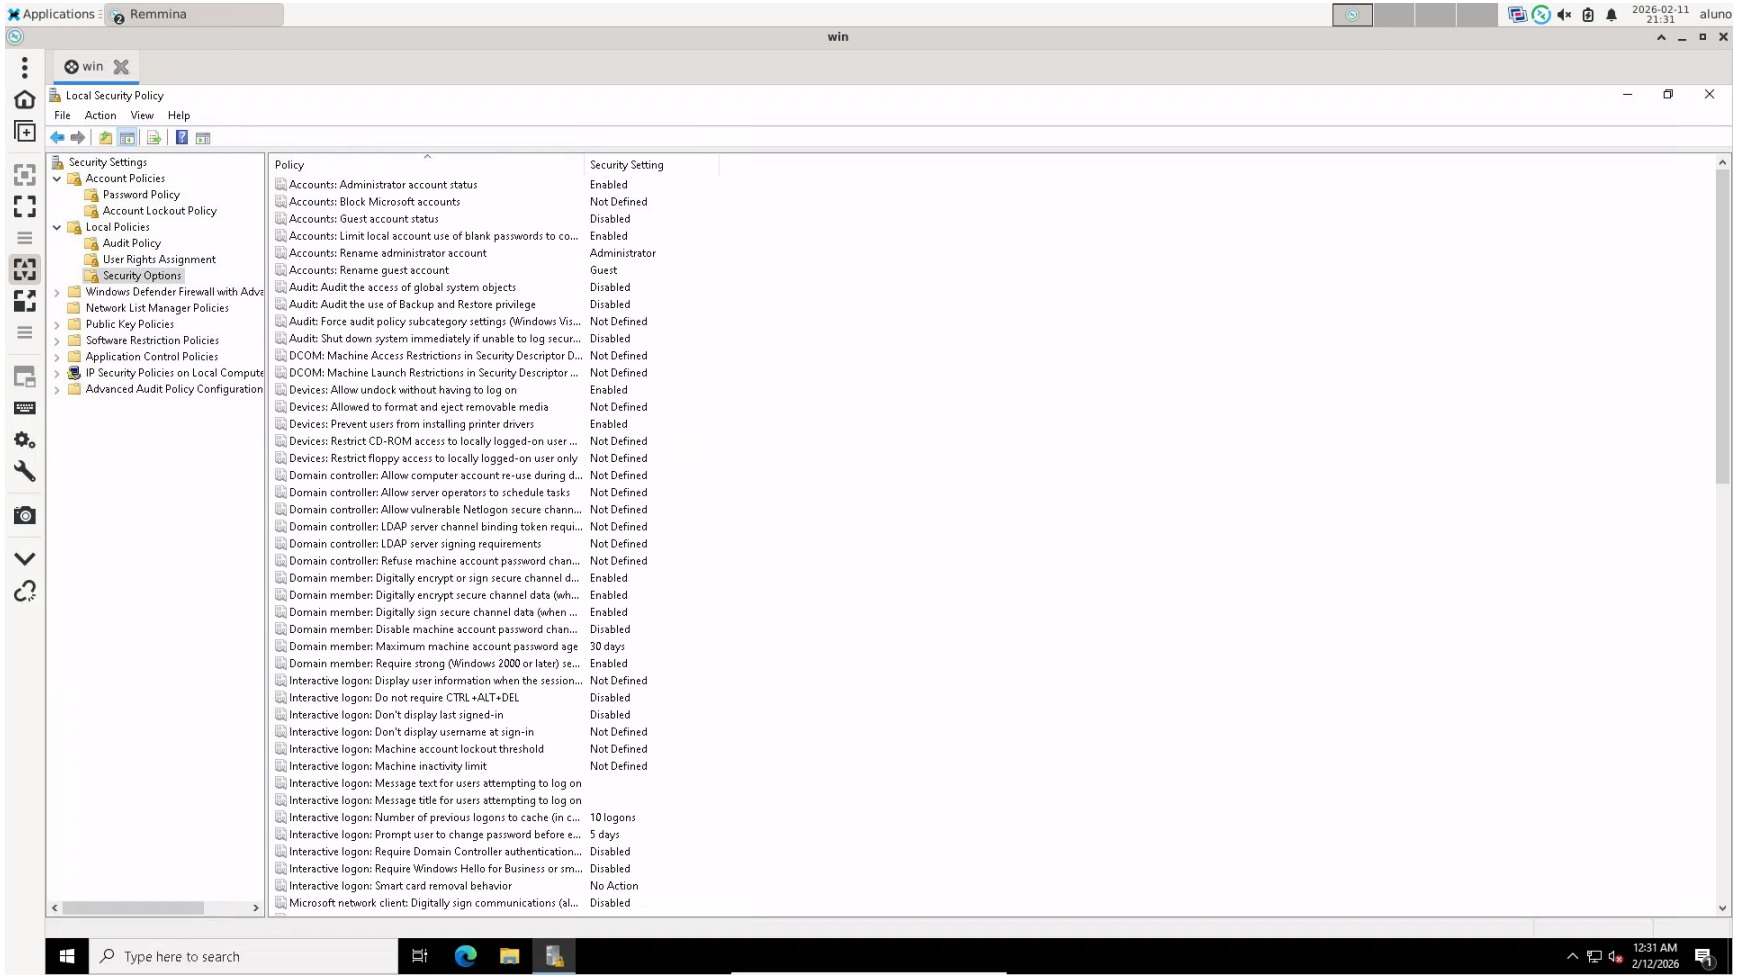
Visualização das opções de segurança em Security Options na Política de Segurança Local do Windows Server 2022.