HACKERS DO BEM

FUNDAMENTAL - TURMA 20

Aluno : Caio Dos Santos Leal

MÓDULO 11

ATIVIDADE PRÁTICA 2

Atividade 11.6: passo 9

Exibição da seção Security Associations em Main Mode no Windows Defender Firewall.

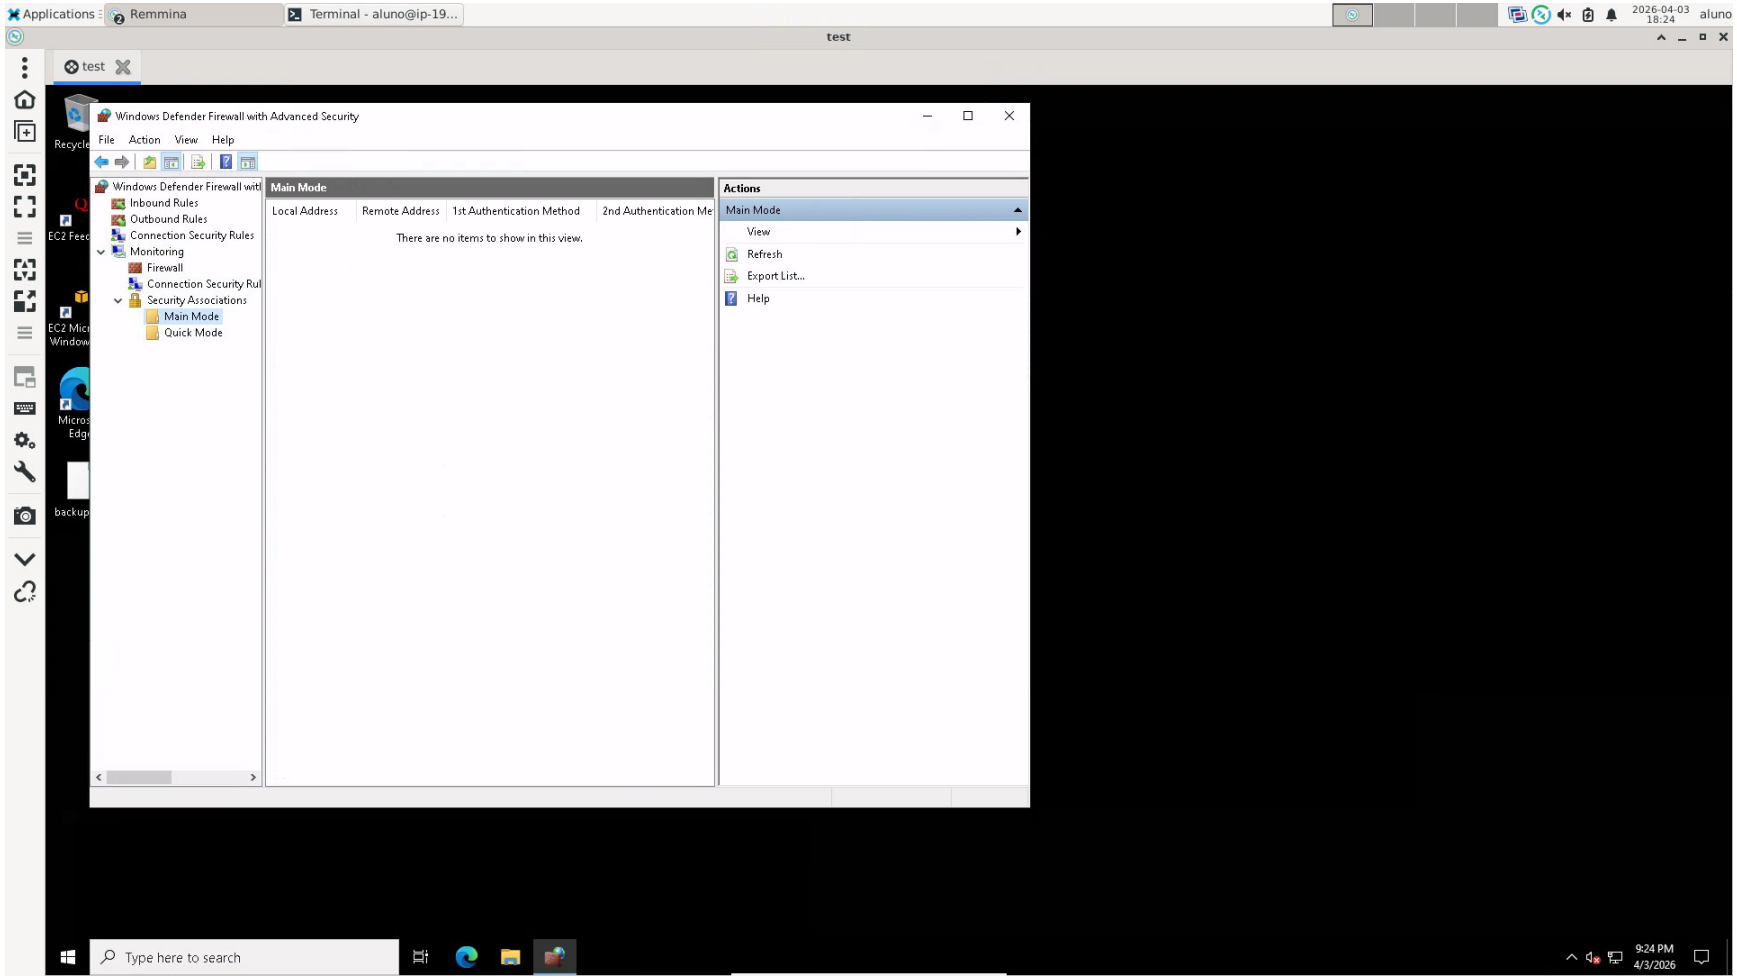

Atividade 11.7: passo 6

Exibição das regras do iptables após bloqueio do site globo.com.br.

```
┌──(aluno㉿kali)-[~]
└─$ sudo -i
[sudo] senha para aluno:
┌──(Message from Kali developers)
│
│ This is a minimal installation of Kali Linux, you likely
│ want to install supplementary tools. Learn how:
│ ⇒ https://www.kali.org/docs/troubleshooting/common-minimum-setup/
│
│ This is a cloud installation of Kali Linux. Learn more about
│ the specificities of the various cloud images:
│ ⇒ https://www.kali.org/docs/troubleshooting/common-cloud-setup/
└──(Run: "touch ~/.hushlogin" to hide this message)
┌──(root㉿kali)-[~]
└─# iptables -A INPUT -s globo.com.br -j DROP

┌──(root㉿kali)-[~]
└─# iptables -L
Chain INPUT (policy ACCEPT)
target     prot opt source               destination
DROP       all  --  186-192-83-5.prt.globo.com  anywhere

Chain FORWARD (policy DROP)
target     prot opt source               destination
DOCKER-USER  all  --  anywhere             anywhere
DOCKER-ISOLATION-STAGE-1  all  --  anywhere             anywhere
ACCEPT     all  --  anywhere             anywhere             ctstate RELATED,ESTABLISHED
DOCKER     all  --  anywhere             anywhere
ACCEPT     all  --  anywhere             anywhere
ACCEPT     all  --  anywhere             anywhere

Chain OUTPUT (policy ACCEPT)
target     prot opt source               destination

Chain DOCKER (1 references)
target     prot opt source               destination

Chain DOCKER-ISOLATION-STAGE-1 (1 references)
target     prot opt source               destination
DOCKER-ISOLATION-STAGE-2  all  --  anywhere             anywhere
RETURN     all  --  anywhere             anywhere

Chain DOCKER-ISOLATION-STAGE-2 (1 references)
target     prot opt source               destination
DROP       all  --  anywhere             anywhere
RETURN     all  --  anywhere             anywhere

Chain DOCKER-USER (1 references)
target     prot opt source               destination
RETURN     all  --  anywhere             anywhere

┌──(root㉿kali)-[~]
└─#
```

Atividade 11.8: passo 7

Exibição das regras NAT do iptables após redirecionamento DNS para 127.0.0.1.

```
This is a cloud installation of Kali Linux. Learn more about
the specificities of the various cloud images:
⇒ https://www.kali.org/docs/troubleshooting/common-cloud-setup/

(Run: "touch ~/.hushlogin" to hide this message)
┌──(root㉿kali)-[~]
└─# iptables -t nat -A OUTPUT -p udp --dport 53 -j DNAT --to-destination 127.0.0.1:53

┌──(root㉿kali)-[~]
└─# iptables -t nat -L
Chain PREROUTING (policy ACCEPT)
target     prot opt source               destination
DOCKER     all  --  anywhere             anywhere             ADDRTYPE match dst-type LOCAL

Chain INPUT (policy ACCEPT)
target     prot opt source               destination

Chain OUTPUT (policy ACCEPT)
target     prot opt source               destination
DOCKER     all  --  anywhere            !loopback/8           ADDRTYPE match dst-type LOCAL
DNAT       udp  --  anywhere             anywhere             udp dpt:domain to:127.0.0.1:53

Chain POSTROUTING (policy ACCEPT)
target     prot opt source               destination
MASQUERADE  all  --  172.17.0.0/16        anywhere

Chain DOCKER (2 references)
target     prot opt source               destination
RETURN     all  --  anywhere             anywhere

┌──(root㉿kali)-[~]
└─# iptables -t nat -D OUTPUT -p udp --dport 53 -j DNAT --to-destination 127.0.0.1:53

┌──(root㉿kali)-[~]
└─# iptables -t nat -L
Chain PREROUTING (policy ACCEPT)
target     prot opt source               destination
DOCKER     all  --  anywhere             anywhere             ADDRTYPE match dst-type LOCAL

Chain INPUT (policy ACCEPT)
target     prot opt source               destination

Chain OUTPUT (policy ACCEPT)
target     prot opt source               destination
DOCKER     all  --  anywhere            !ip-127-0-0-0.ec2.internal/8  ADDRTYPE match dst-type LOCAL

Chain POSTROUTING (policy ACCEPT)
target     prot opt source               destination
MASQUERADE  all  --  ip-172-17-0-0.ec2.internal/16  anywhere

Chain DOCKER (2 references)
target     prot opt source               destination
RETURN     all  --  anywhere             anywhere

┌──(root㉿kali)-[~]
└─#
```

Atividade 11.9: passo 13

Exibição do endereço IP após conexão VPN estabelecida com OpenVPN.

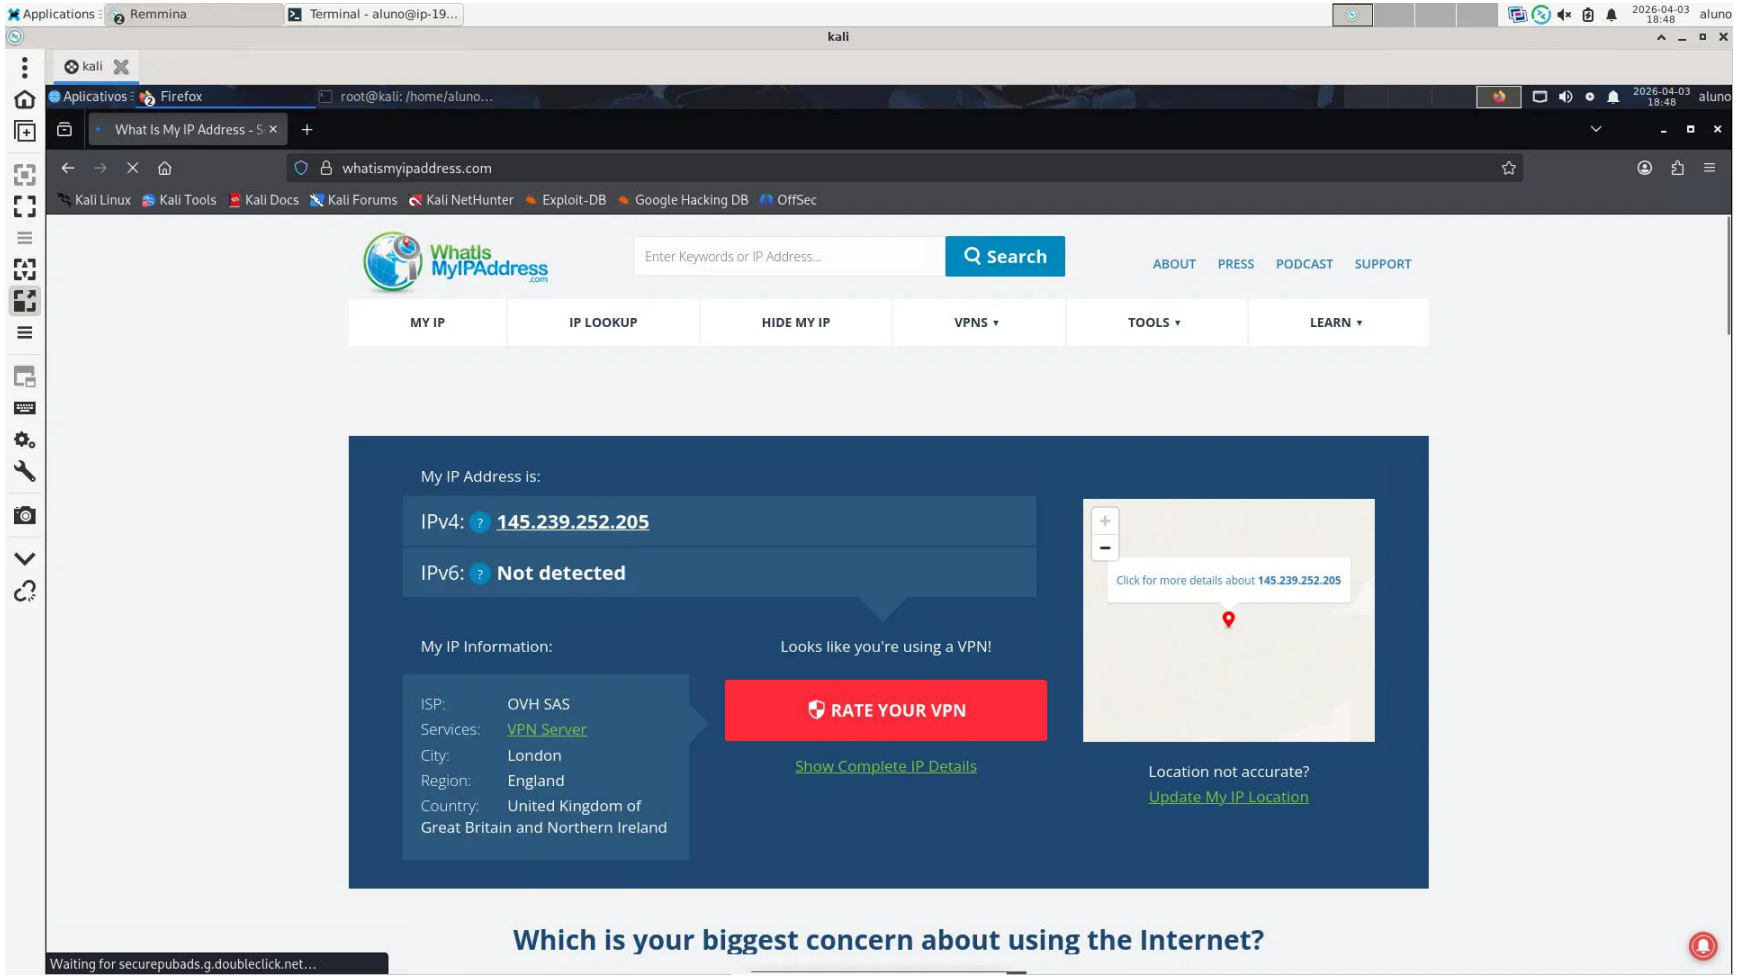

Atividade 11.10: passo 10
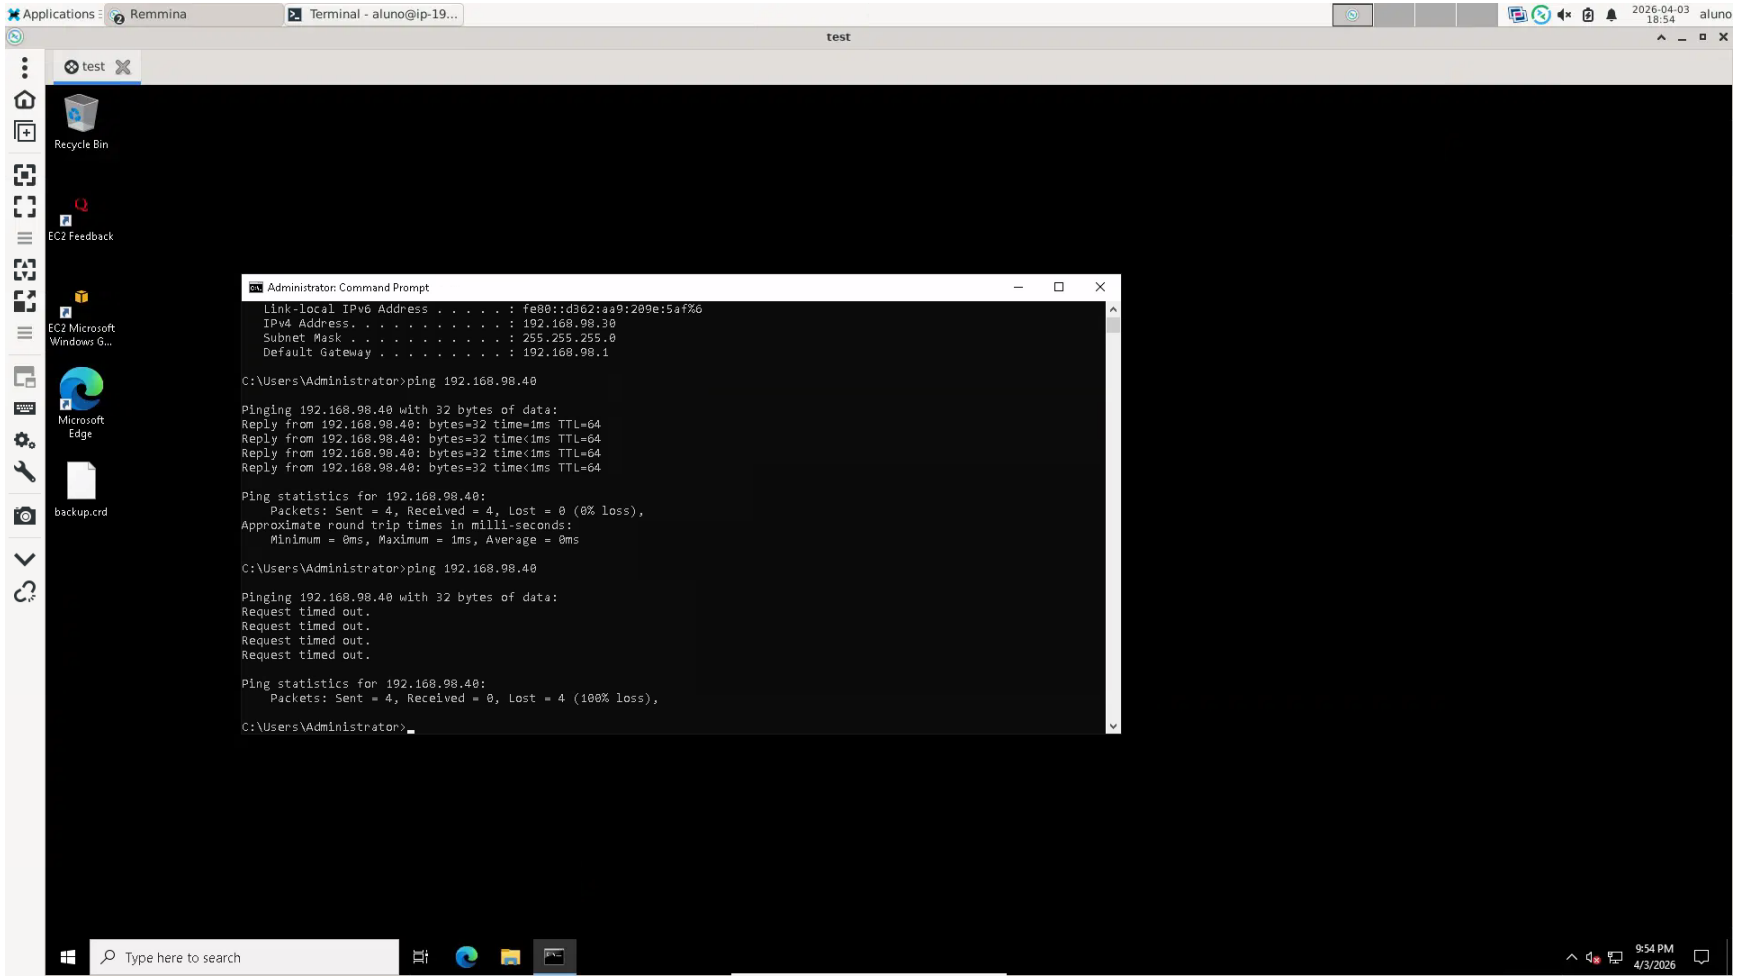
Teste de ping sem resposta após bloqueio de pacotes ICMP no Kali Linux.