



Rosenbrock | d=2 | shared initial point #1

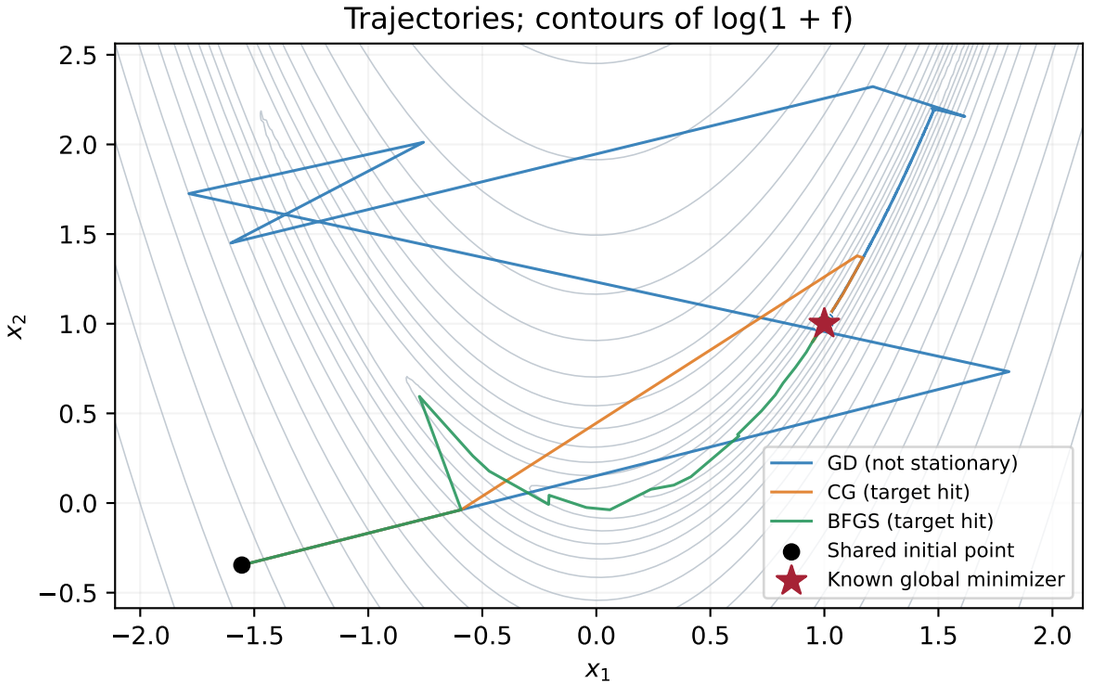

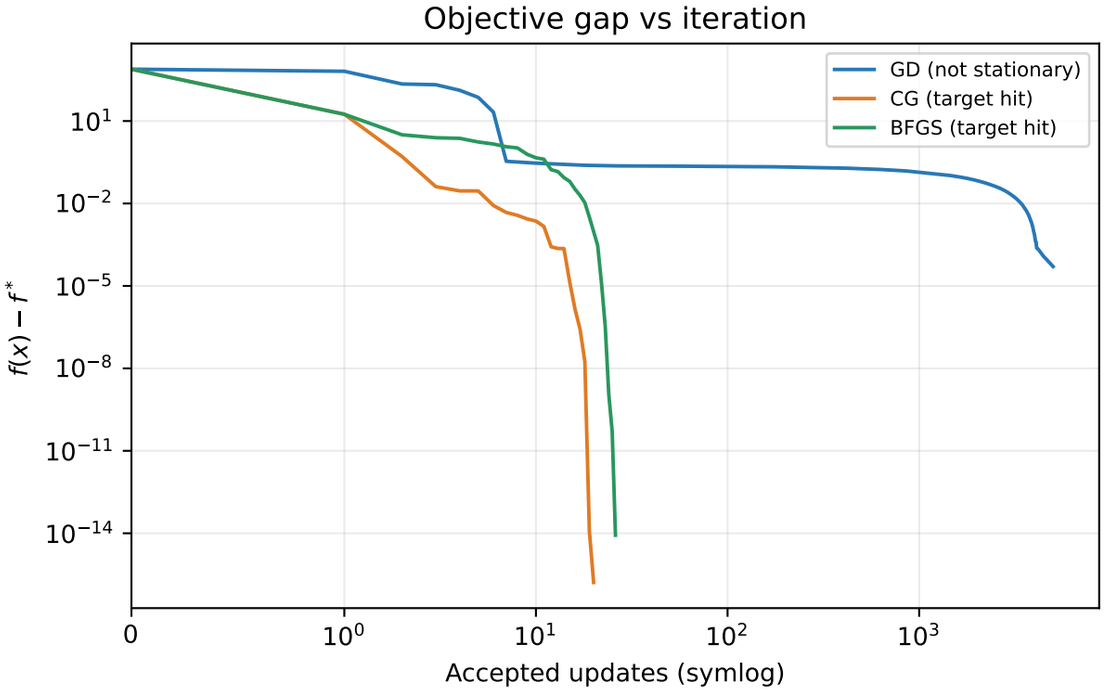

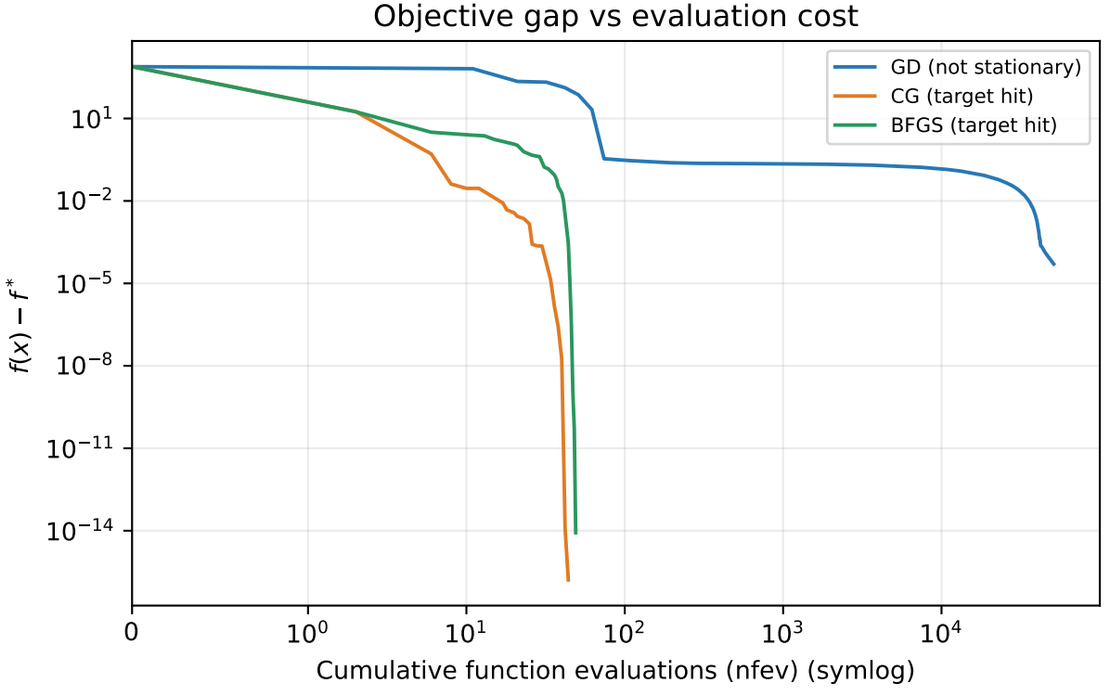

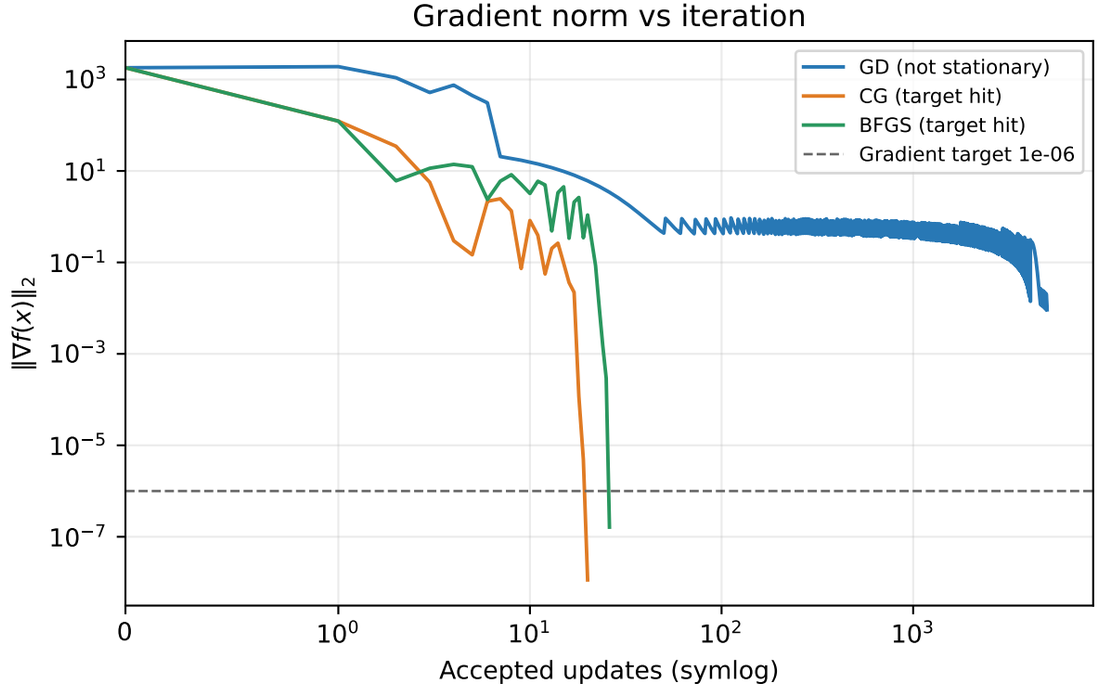

Log plots display max(value, 1e-16); raw logs remain unchanged. Terminal events include any unsuccessful final evaluations.