

CalCOFI.io Docs

2024-11-22

Table of contents

1	Process	4
2	Reports	5
2.1	Sanctuaries	5
3	Applications	6
4	API	7
4.1	/variables: get list of variables for timeseries	7
4.2	/species_groups: get species groups for larvae	7
4.3	/timeseries: get time series data	7
4.4	/cruises: get list of cruises	7
4.5	/raster: get raster map of variable	7
4.6	/cruise_lines: get station lines from cruises	8
4.7	/cruise_line_profile	8
5	Database	9
5.1	Database naming conventions	9
5.1.1	Name tables	9
5.1.2	Name columns	9
5.2	Use Unicode for text	10
5.3	Describe tables and columns	11
5.4	Relationships between tables	12
5.5	Spatial Tips	12
6	Portals	13
6.1	Overview	13
6.1.1	EDI (Environmental Data Initiative)	13
6.1.2	NCEI (National Centers for Environmental Information)	13
6.1.3	OBIS (Ocean Biodiversity Information System)	14
6.1.4	ERDDAP (Environmental Research Division Data Access Program)	14
6.2	Meta-Portals	14
6.2.1	Google Dataset Search	14
6.2.2	ODIS (Ocean Data Information System)	14
6.3	CalCOFLio Tools	15
6.3.1	APIs	15

6.3.2	Library	15
6.3.3	Apps	15
7	portals_a	16
7.1	Data Flow	16
8	portals_b	18
8.1	Portals	18
9	References	19
9.1	R packages	19

1 Process

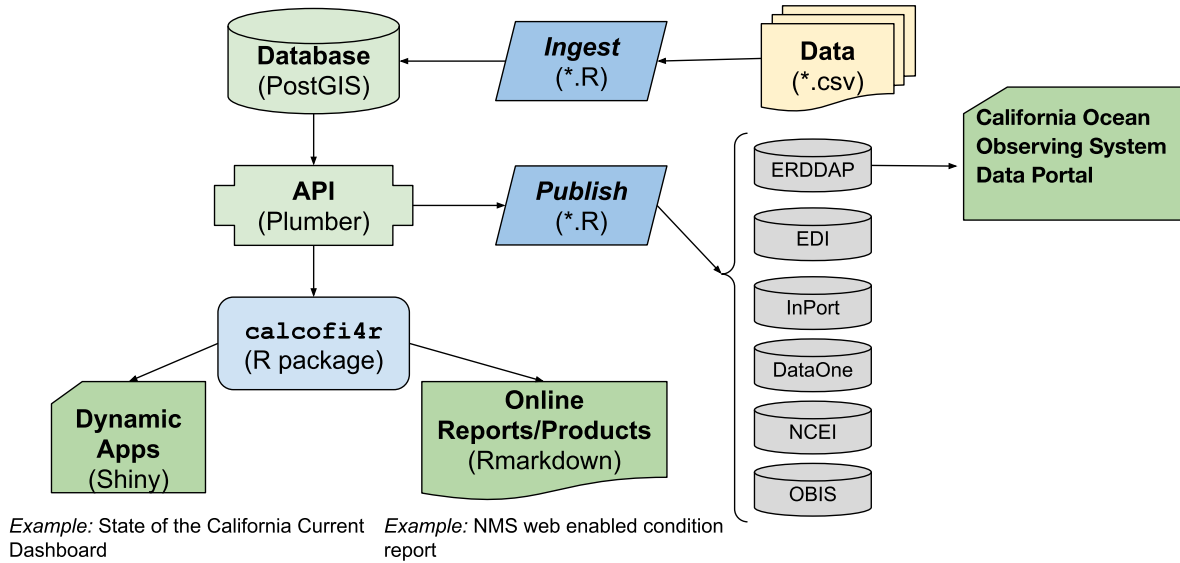


Figure 1.1: CalCOFI data workflow.

The original raw **data**, most often in tabular format [e.g., comma-separated value (*.csv)], gets **ingested** into the **database** by R **scripts** that use functions and lookup data tables in the R package **calcofi4r** where functions are organized into *Read*, *Analyze* and *Visualize* concepts. The application programming interface (**API**) provides a program-language-agnostic public interface for rendering subsets of data and custom visualizations given a set of documented input parameters for feeding interactive applications (**Apps**) using Shiny (or any other web application framework) and **reports** using Rmarkdown (or any other report templating framework). Finally, R scripts will **publish** metadata (as [Ecological Metadata Language](#)) and data packages (e.g., in Darwin format) for discovery on a variety of data **portals** oriented around slicing the tabular or gridded data ([ERDDAP](#)), biogeographic analysis ([OBIS](#)), long-term archive ([DataOne](#), [NCEI](#)) or metadata discovery ([InPort](#)). The **database** will be spatially enabled by PostGIS for summarizing any and all data by **Areas of Interest** (AoIs), whether pre-defined (e.g., sanctuaries, MPAs, counties, etc.) or arbitrary new areas. (Figure 1.1)

- ERDDAP: great for gridded or tabular data, but does not aggregate on the server or clip to a specific area of interest

2 Reports

2.1 Sanctuaries

- [Channel Islands WebCR](#)
web-enabled Condition Report
 - [Forage Fish](#)
example of using calcofi4r functions that pull from the API
- [UCSB Student Capstone](#)

3 Applications

- [CalCOFI Oceanography](#)
oceanographic summarization by arbitrary area of interest and sampling period
- [UCSB Student Capstone](#)

4 API

The raw interface to the Application Programming Interface (API) is available at:

- api.calcofi.io

Here we will provide more guidance on how to use the API functions with documented input arguments, output results and examples of use.

4.1 `/variables`: get list of variables for timeseries

Get list of variables for use in `/timeseries`

4.2 `/species_groups`: get species groups for larvae

Not yet working. Get list of species groups for use with variables `larvae_counts.count` in `/timeseries`

4.3 `/timeseries`: get time series data

4.4 `/cruises`: get list of cruises

Get list of cruises with summary stats as CSV table for time (`date_beg`)

4.5 `/raster`: get raster map of variable

Get raster of variable

4.6 /cruise_lines: get station lines from cruises

Get station lines from cruises (with more than one cast)

4.7 /cruise_line_profile

Get profile at depths for given variable of casts along line of stations

5 Database

5.1 Database naming conventions

We're circling the wagons to come up with the best conventions for naming. Here are some ideas:

- [Learn SQL: Naming Conventions](#)
- [Best Practices for Database Naming Conventions - Drygast.NET](#)

5.1.1 Name tables

- Table names are plural and use all lower case.

5.1.2 Name columns

- To name columns, use **snake-case** (i.e., lower-case with underscores) so as to prevent the need to quote SQL statements. (TIP: Use `janitor::clean_names()` to convert a table.)
- Unique **identifiers** are suffixed with:
 - `*_id` for unique integer keys;
 - `*_key` for unique string keys;
 - `*_seq` for auto-incrementing sequence integer keys.
- Suffix with **units** where applicable (e.g., `*_m` for meters, `*_km` for kilometers, `degc` for degrees Celsius). See [units vignette](#).
- Set geometry column to **geom** (used by [PostGIS](#) spatial extension). If the table has multiple geometry columns, use `geom` for the default geometry column and `geom_{type}` for additional geometry columns (e.g., `geom_point`, `geom_line`, `geom_polygon`).

5.2 Use Unicode for text

The [default character encoding for Postgresql](#) is unicode (UTF8), which allows for international characters, accents and special characters. Improper encoding can royally mess up basic text.

Logging into the server, we can see this with the following command:

```
docker exec -it postgis psql -l
```

List of databases					
Name	Owner	Encoding	Collate	Ctype	Access privileges
gis	admin	UTF8	en_US.utf8	en_US.utf8	=Tc/admin +
					admin=CTc/admin +
					ro_user=c/admin
lter_core_metabase	admin	UTF8	en_US.utf8	en_US.utf8	=Tc/admin +
					admin=CTc/admin +
					rw_user=c/admin
postgres	admin	UTF8	en_US.utf8	en_US.utf8	
template0	admin	UTF8	en_US.utf8	en_US.utf8	=c/admin +
					admin=CTc/admin
template1	admin	UTF8	en_US.utf8	en_US.utf8	=c/admin +
					admin=CTc/admin
template_postgis	admin	UTF8	en_US.utf8	en_US.utf8	
(6 rows)					

Use Unicode (utf-8 in Python or UTF8 in Postgresql) encoding for all database text values to support international characters and documentation (i.e., tabs, etc for markdown conversion).

- In **Python**, use [pandas](#) to read ([read_csv\(\)](#)) and write ([to_csv\(\)](#)) with UTF-8 encoding (i.e., `encoding='utf-8'`):

```
import pandas as pd
from sqlalchemy import create_engine
engine = create_engine('postgresql://user:password@localhost:5432/dbname')

# read from a csv file
df = pd.read_csv('file.csv', encoding='utf-8')

# write to PostgreSQL
df.to_sql('table_name', engine, if_exists='replace', index=False, method='multi', chunks=1000)
```

```
# read from PostgreSQL
df = pd.read_sql('SELECT * FROM table_name', engine, encoding='utf-8')

# write to a csv file with UTF-8 encoding
df.to_csv('file.csv', index=False, encoding='utf-8')
```

- In **R**, use `readr` to read (`read_csv()`) and write (`write_excel_csv()`) to force UTF-8 encoding.

```
library(readr)
library(DBI)
library(RPostgres)

# connect to PostgreSQL
con <- dbConnect(RPostgres::Postgres(), dbname = "dbname", host = "localhost", port = 5432)

# read from a csv file
df <- read_csv('file.csv', locale = locale(encoding = 'UTF-8')) # explicit
df <- read_csv('file.csv') # implicit

# write to PostgreSQL
dbWriteTable(con, 'table_name', df, overwrite = TRUE)

# read from PostgreSQL
df <- dbReadTable(con, 'table_name')

# write to a csv file with UTF-8 encoding
write_excel_csv(df, 'file.csv', locale = locale(encoding = 'UTF-8')) # explicit
write_excel_csv(df, 'file.csv') # implicit
```

5.3 Describe tables and columns

- Use the `COMMENT` clause to add descriptions to tables and columns, either through the GUI pgadmin.calcofi.io (by right-clicking on the table or column and selecting **Properties**) or with SQL. For example:

```
COMMENT ON TABLE public.aoi_fed_sanctuaries IS 'areas of interest (`aoi`) polygons for f
```

- Note the use of **markdown** for including links and formatting (e.g., bold, code, italics), such that the above SQL will render like so:

areas of interest (`aoi`) polygons for federal **National Marine Sanctuaries**;
loaded by *workflow* [load_sanctuaries](#)

- It is especially helpful to link to any *workflows* that are responsible for the ingesting or updating of the input data.
- These descriptions can be viewed in the CalCOFI **API** [api.calcofi.io](#) as CSV tables (see code in [calcofi/api: plumber.R](#)):
 - [api.calcofi.io/db_tables](#)
fields:
 - * `schema`: (only “public” so far)
 - * `table_type`: “table”, “view”, or “materialized view” (none yet)
 - * `table`: name of table
 - * `table_description`: description of table (possibly in markdown)
 - [api.calcofi.io/db_columns](#)
fields:
 - * `schema`: (only “public” so far)
 - * `table_type`: “table”, “view”, or “materialized view” (none yet)
 - * `table`: name of table
 - * `column`: name of column
 - * `column_type`: data type of column
 - * `column_description`: description of column (possibly in markdown)
- Fetch and display these descriptions into an interactive table with [calcofi4r::cc_db_catalog\(\)](#).

5.4 Relationships between tables

- See [calcofi/workflows: clean_db](#)
- TODO: add `calcofi/apps: db` to show latest tables, columns and relationships

5.5 Spatial Tips

- Use [ST_Subdivide\(\)](#) when running spatial joins on large polygons.

6 Portals

6.1 Overview

CalCOFI data is available through various portals, each serving different purposes and user needs. This document outlines the main access points and their characteristics.

6.1.1 EDI (Environmental Data Initiative)

- Complete dataset archives using DataOne software and EML metadata
- DOIs issued for all datasets ensuring citability
- Full archive allowing for any data file types
- Basic spatial and temporal filtering through web interface
- Download in original formats with metadata
- Access through DataOne API
- Links:
 - EDIREpository.org
 - CalCOFI datasets: [EDI query “CalCOFI”](#)

6.1.2 NCEI (National Centers for Environmental Information)

- Long-term archival of oceanographic data
- DOIs issued for dataset submissions
- Standardized metadata using ISO 19115-2
- Basic search interface with geographic and temporal filtering
- Data preserved in original submission formats
- Access through NCEI API services
- Links:
 - [NCEI Ocean Archive](#)
 - CalCOFI datasets: [NCEI search “CalCOFI”](#)

6.1.3 OBIS (Ocean Biodiversity Information System)

- Specialized in marine biodiversity data
- Standardized using DarwinCore fields
- Extended measurements supported via [extendedMeasurementOrFact](#)
- Powerful filtering by space, time, and taxonomic parameters
- Multiple download formats (CSV, JSON, Darwin Core Archive)
- Full REST API access
- Links:
 - [OBIS.org](#)
 - CalCOFI datasets: [obis.org/dataset](#) + “calcofi” Keyword

6.1.4 ERDDAP (Environmental Research Division Data Access Program)

- Tabular and gridded data server
- Advanced subsetting by space, time, and parameters
- Multiple output formats (CSV, JSON, NetCDF, etc.)
- RESTful API with direct data access
- Built-in data visualization tools
- No persistent identifiers but stable URLs
- Links:
 - [ERDDAP](#)
 - CalCOFI datasets:
 - * [ERDDAP, OceanView - CalCOFI seabirds](#)
 - * [ERDDAP, CoastWatch - CalCOFI oceanographic](#)

6.2 Meta-Portals

6.2.1 Google Dataset Search

The JSON-LD metadata in the Portal dataset web pages get indexed by [Google Dataset Search](#) through schema.org metadata. This ensures that CalCOFI data is discoverable through Google search and other search engines.

6.2.2 ODIS (Ocean Data Information System)

ODIS uses the same technology as Google Dataset Search (schema.org, JSON-LD), but focuses on ocean data. CalCOFI curates a sitemap of authoritative datasets to server to [ODIS.org](#)

This federated approach ensures that CalCOFI data remains:

- Discoverable through multiple channels
- Properly cited and attributed
- Integrated with global ocean data systems

6.3 CalCOFI.io Tools

CalCOFI is also developing an integrated database and tools that enable efficient data access and analysis:

6.3.1 APIs

- RESTful endpoints for programmatic access
- Filtering by space, time, and taxonomic parameters
- Relationship queries across tables
- Links:
 - api.calcofi.io
 - tile.calcofi.io

6.3.2 Library

- Direct data access from R
- Built-in analysis functions
- Integration with tidyverse ecosystem
- Link:
 - calcofi.io/calcofi4r


6.3.3 Apps

- Interactive data exploration with Shiny applications
- User-friendly interfaces
- Subset and download data
- Link:
 - calcofi.io, App button

7 portals_a

7.1 Data Flow

While it would be ideal for CalCOFI data to be available through a single portal, each portal has its strengths and limitations. The following diagram illustrates one possible realization of data flow between CalCOFI data and the portals: from raw data to the integrated database to portals and meta-portals.

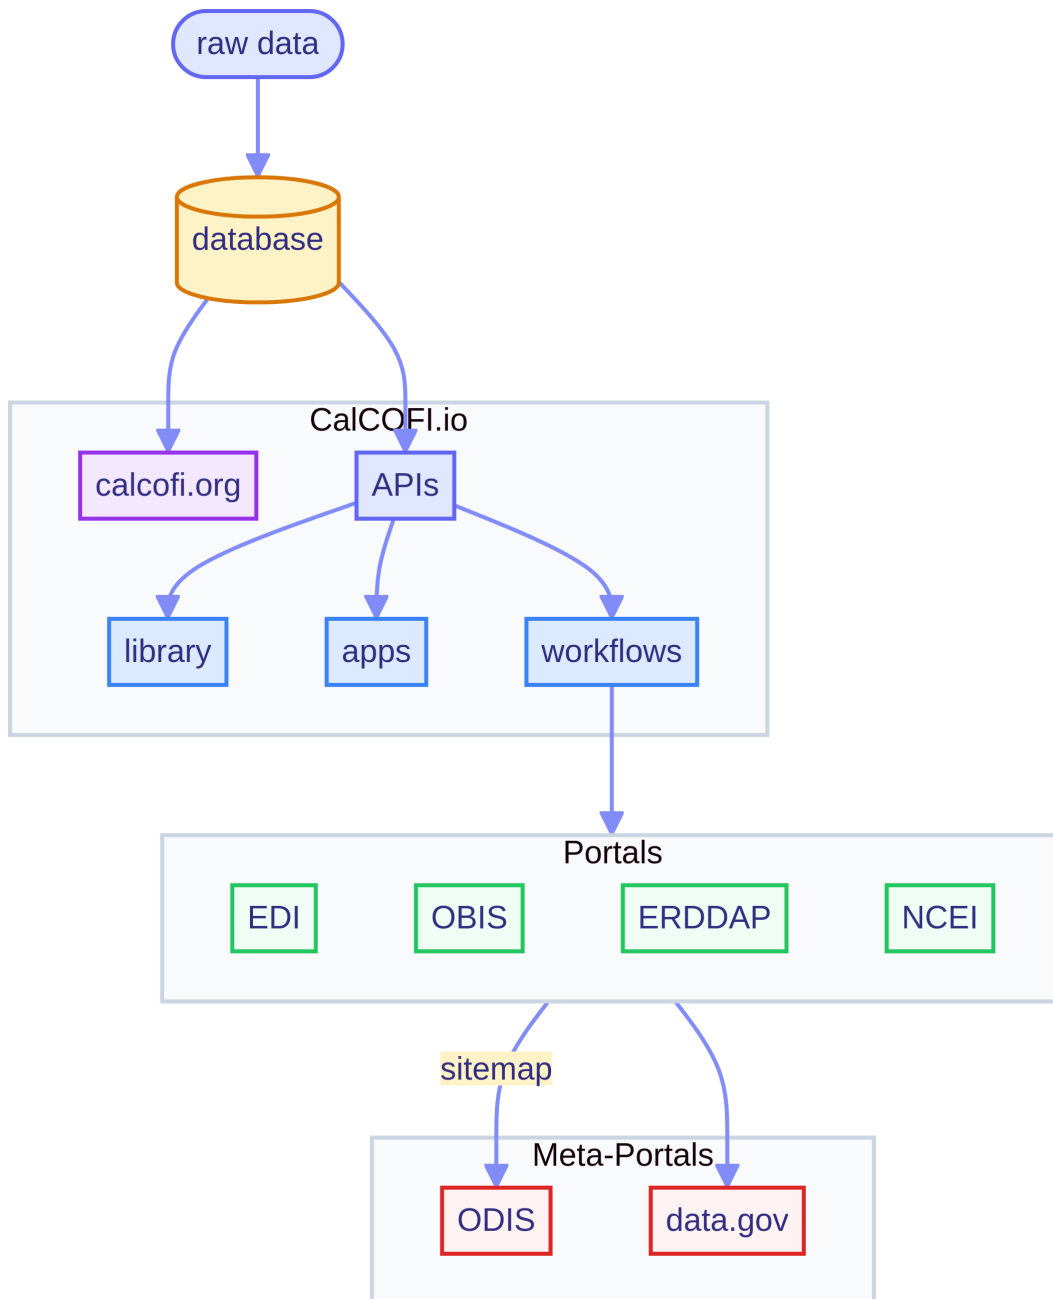

In practice, CalCOFI is a partnership with various contributing members, so the authoritative dataset might flow differently, such as from EDI to the database to the other portals. The other portals, such as OBIS or ERDDAP, serve different audiences or purposes. The meta-portals like ODIS and Data.gov then index these portals to provide broader discovery of CalCOFI datasets.

8 portals_b

8.1 Portals

Portal	Full Archive	Versioning	DOI issued	Query by xyt	Query by taxa	Multiple formats	API Access
EDI	:green_circle:	:green_circle:	:green_circle:	:yellow_circle:	:yellow_circle:	:red_circle:	:yellow_circle:
NCEI	:green_circle:	:green_circle:	:green_circle:	:red_circle:	:red_circle:	:red_circle:	:yellow_circle:
OBIS	:yellow_circle:	:yellow_circle:	:yellow_circle:	:green_circle:	:green_circle:	:yellow_circle:	:green_circle:
ERDDAP	:yellow_circle:	:red_circle:	:red_circle:	:green_circle:	:yellow_circle:	:green_circle:	:green_circle:

† Capability: :red_circle: none; :yellow_circle: partial; :green_circle: full

9 References

9.1 R packages

- API: plumber (Schloerke and Allen 2024)
- docs: Quarto (Allaire and Dervieux 2024)
- apps: Shiny (Chang et al. 2024)

Allaire, JJ, and Christophe Dervieux. 2024. *Quarto: R Interface to Quarto Markdown Publishing System*. <https://github.com/quarto-dev/quarto-r>.

Chang, Winston, Joe Cheng, JJ Allaire, Carson Sievert, Barret Schloerke, Yihui Xie, Jeff Allen, Jonathan McPherson, Alan Dipert, and Barbara Borges. 2024. *Shiny: Web Application Framework for r*. <https://shiny.posit.co/>.

Schloerke, Barret, and Jeff Allen. 2024. *Plumber: An API Generator for r*. <https://www.rplumber.io>.