

CalCOFI.io

Documentation

Benjamin D. Best

Erin Satterthwaite

2026-09-07

Table of contents

1	Process	3
2	Reports	5
2.1	Sanctuaries	5
3	Applications	6
4	Maps	7
4.1	Overview	7
4.2	Why hexagons?	8
4.3	The problem: aggregating millions of points at every zoom	8
4.4	The solution: query-as-URL hexagonal tiles	8
4.4.1	Resolution follows zoom	9
4.4.2	Request lifecycle	9
4.4.3	Cache invalidation by release	12
4.5	A worked example: sardine + temperature	12
4.6	How the data gets there	14
4.7	Repositories and code	14
5	Database	16
5.1	Naming conventions	16
5.1.1	Name tables	16
5.1.2	Name columns	16
5.1.3	Key conventions	16
5.2	Use Unicode for text	18
5.3	The core data model	20
5.3.1	What the release publishes: <code>obs_bio</code> + <code>obs_env</code> , and <code>obs</code> as a view	21
5.3.2	Shared reference tables	22
5.3.3	Taxonomy	22
5.3.4	Quality flags reach consumers only if consumers apply them	23
5.3.5	Depth is a coordinate, and it is bounded as one	23
5.4	Integrated database ingestion strategy	23
5.4.1	Overview	23
5.4.2	Release versioning	24
5.4.3	Metadata registries — the single sources of truth	26
5.4.4	Coverage is measured, never asserted	28

5.4.5	Citation and licence are a contract, and they are checked	28
5.4.6	Consuming descriptions	29
5.4.7	Publishing to portals	30
5.5	Darwin Core / OBIS ENV-DATA mapping	30
5.5.1	An id is filled only on an exact match	32
5.5.2	Three caveats for anyone building an export	33
5.6	Relationships between tables	34
5.7	Spatial Tips	34
6	Metadata & the ingest loop	35
6.1	One key, one record, one page	35
6.2	Where the words live	35
6.3	The Sheets, and what you may edit	36
6.4	Questions, and what <i>proposed</i> means	36
6.5	What happens after you edit	38
6.6	A new dataset, end to end	38
6.7	Who to contact	40
6.8	See also	40
7	Data Access	41
7.1	Where the data lives	41
7.2	Versions	42
7.3	Setup: the <code>httpfs</code> extension	43
7.4	Single-file tables	43
7.5	Hive-partitioned tables	44
7.6	From R	45
7.7	From Python	46
7.8	From your browser	48
7.9	Run it from anywhere	49
7.10	Reproducibility	49
7.11	Worked example: sardine larvae + temperature	50
8	Server Access	54
8.1	SSH, SFTP & PostgreSQL	54
8.2	The stack	54
8.3	Getting an account	55
8.4	Mac (Terminal)	56
8.5	Windows (PowerShell)	56
8.6	Windows (PuTTY)	56
8.7	Step 1 — SSH in	56
8.8	Mac (Terminal)	56
8.9	Windows (PowerShell)	57
8.10	Windows (PuTTY)	57

8.11	Step 2 — your database password	58
8.12	Mac	58
8.13	Windows	58
8.14	Step 3 — the database over the tunnel	59
8.14.1	Graphical clients	59
8.15	From R	61
8.16	From Python	61
8.17	DuckDB PostgreSQL	62
8.18	The CTD QA/QC database	63
8.19	Files: SFTP and the shared folder	65
8.20	Etiquette & limits	65
9	Matching Helpers	66
9.1	Install	66
9.2	The wrappers	66
9.3	Worked example: sardine larvae + temperature	67
9.4	Reproducible SQL	68
9.5	Run it from anywhere	68
9.6	The core engine: <code>cc_match_bio_env()</code>	69
9.7	Parameters	69
9.8	Migrating from the API	70
10	API	71
10.1	Endpoint → replacement	71
10.2	Legacy endpoint reference	72
10.2.1	<code>/variables</code> : get list of variables for timeseries	72
10.2.2	<code>/species_groups</code> : get species groups for larvae	72
10.2.3	<code>/timeseries</code> : get time series data	72
10.2.4	<code>/cruises</code> : get list of cruises	72
10.2.5	<code>/raster</code> : get raster map of variable	72
10.2.6	<code>/cruise_lines</code> : get station lines from cruises	72
10.2.7	<code>/cruise_line_profile</code>	73
11	Portals	74
11.1	Overview	74
11.2	Data Flow	74
11.3	Portal capabilities	74
11.3.1	EDI	76
11.3.2	NCEI	77
11.3.3	OBIS	77
11.3.4	ERDDAP	78
11.3.5	Zenodo	79
11.3.6	CalOOS	79

11.4	Metadata	79
11.5	Meta-Portals	80
11.5.1	Google Dataset Search	80
11.5.2	ODIS	80
11.5.3	data.gov (DCAT-US)	80
11.6	The dataset catalog, and who registers where	81
11.7	Archive of record, per dataset	82
11.8	Getting the data through calcofi.io	82
12	Status	85
12.1	2026-07-01	85
12.1.1	1. Ingest — A Versioned, Reproducible Integrated Database	85
12.1.2	2. Visualize — On-the-Fly Hexagons, Management Areas, and Partner Dashboards	86
12.1.3	3. Share — Publishing to ERDDAP & OBIS, plus Discovery Tools	87
12.1.4	Deliverables Crosswalk	87
12.1.5	Program Coordination	88
12.2	2025-12-01	89
12.2.1	A More Capable, User-Friendly Integrated App	89
12.2.2	A Stable, Well-Documented Database Foundation	89
12.2.3	Unified R Tools and Documentation Around DuckDB	90
12.2.4	Standards-Compliant Publication of Biological Data	90
12.2.5	Improved Public Access and Infrastructure	91
12.2.6	Overall Impact	91
12.3	2025-07-01	91
12.3.1	API Enhancements	92
12.3.2	Apps Development	92
12.3.3	calcofi4db: R Package & Data Management	93
12.3.4	calcofi4r: Spatial & Ecological Data Tools	93
12.3.5	Documentation (docs)	93
12.3.6	Server	94
12.3.7	Workflows	94
12.3.8	Key Themes & Impact	95
12.3.9	For More Details	95
13	References	96
13.1	R packages	96

1 Process

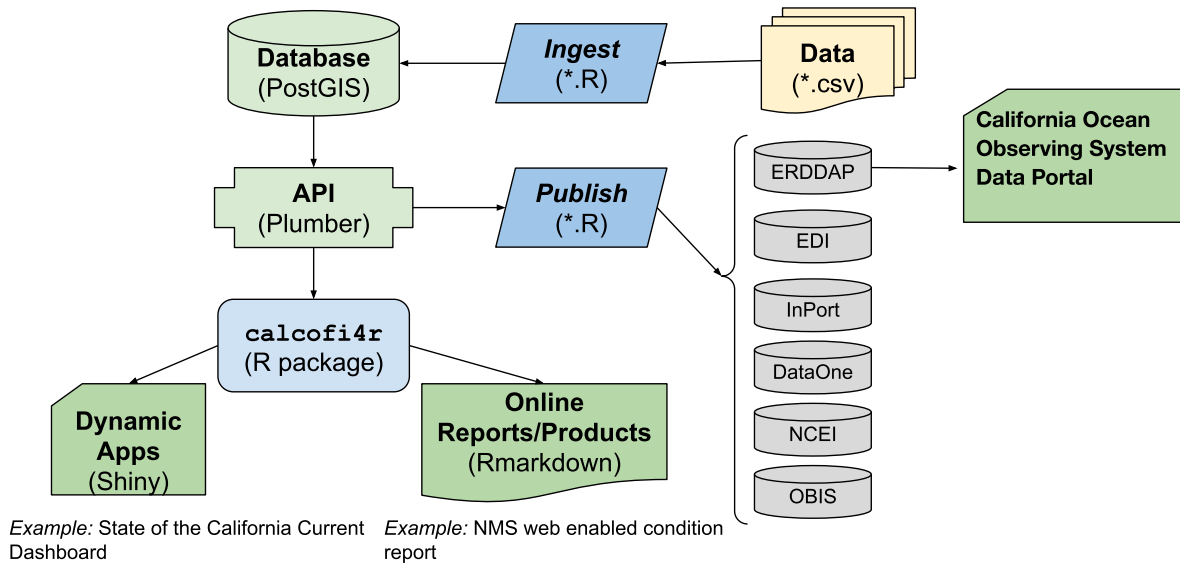


Figure 1.1: CalCOFI data workflow.

The original raw **data**, most often in tabular format [e.g., comma-separated value (*.csv)], gets **ingested** into the **database** by R **scripts** that use functions and lookup data tables in the R package **calcofi4r** where functions are organized into *Read*, *Analyze* and *Visualize* concepts. The application programming interface (**API**) provides a program-language-agnostic public interface for rendering subsets of data and custom visualizations given a set of documented input parameters for feeding interactive applications (**Apps**) using Shiny (or any other web application framework) and **reports** using Rmarkdown (or any other report templating framework). Finally, R scripts will **publish** metadata (as [Ecological Metadata Language](#)) and data packages (e.g., in Darwin format) for discovery on a variety of data **portals** oriented around slicing the tabular or gridded data ([ERDDAP](#)), biogeographic analysis ([OBIS](#)), long-term archive ([DataOne](#), [NCEI](#)) or metadata discovery ([InPort](#)). Every one of those datasets — and every one still awaiting ingestion — also has a page of its own at calcofi.io/datasets/: the **dataset catalog**, generated from the same database, joining every portal it reaches (see [Portals](#)). The **database** will be spatially enabled by PostGIS for summarizing any and all data by **Areas of Interest** (AoIs), whether pre-defined (e.g., sanctuaries, MPAs, counties, etc.) or arbitrary new areas. (Figure 1.1)

That figure is from 2022. The **publish** box on it is now real, and it is generated rather than scripted by hand: at every release one record per dataset (`datasets.json`) and one EML document per dataset are written, and from those two files come the dataset pages, the DCAT and STAC catalogs, the Darwin Core archives for OBIS, the EDI packages and ERDDAP's own metadata (Figure 6.1). How a provider's words get into that record — and what they edit to change it — is the subject of [Metadata & the ingest loop](#).

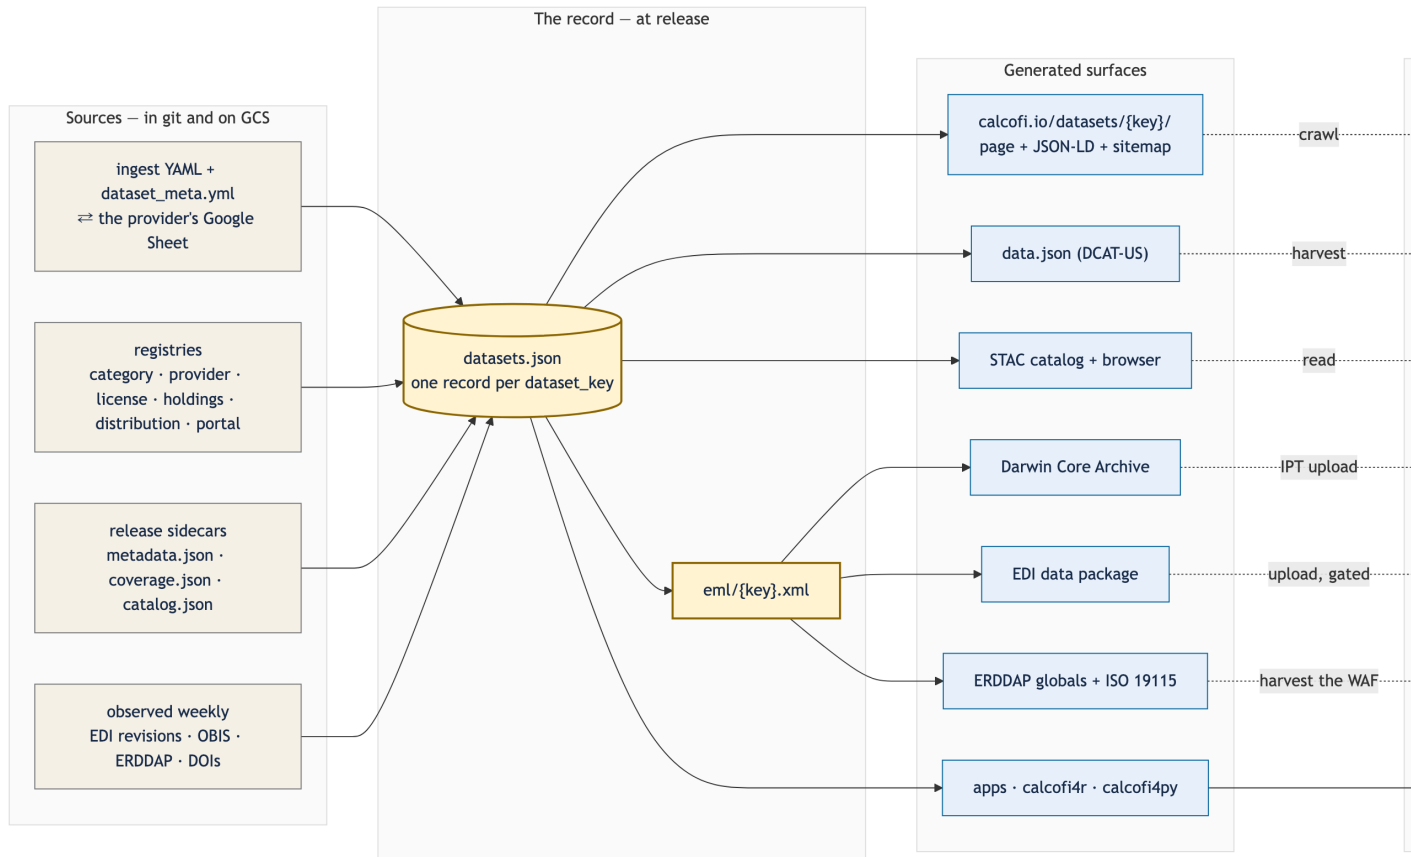


Figure 1.2: Everything a portal sees is generated from one record per dataset. The dotted boxes are catalogs run by others; each is pointed at a static file we already publish.

2 Reports

2.1 Sanctuaries

- [Channel Islands WebCR](#)
web-enabled Condition Report
 - [Forage Fish](#)
example of using calcofi4r functions that pull from the API
- [UCSB Student Capstone](#)

3 Applications

- [CalCOFI Schema](#)
per-release schema browser: ERD, tables, columns (with units + descriptions), datasets, measurement-type registry — sourced from the release `metadata.json` sidecar on GCS
- [CalCOFI Query](#)
browser-only DuckDB-WASM playground against the public release Parquet on GCS
- [CalCOFI Oceanography](#)
oceanographic summarization by arbitrary area of interest and sampling period
- [UCSB Student Capstone](#)

4 Maps

4.1 Overview

The CalCOFI [interactive app](#) renders **hexagonal heatmaps** of species occurrence and oceanographic variables — sardine larvae densities, sea-surface temperature, salinity, chlorophyll — across the entire CalCOFI sampling area, at any zoom level, in seconds. The engine that makes this possible is **H3T**, a tile service that converts a database query into a stream of hexagon tiles on demand.

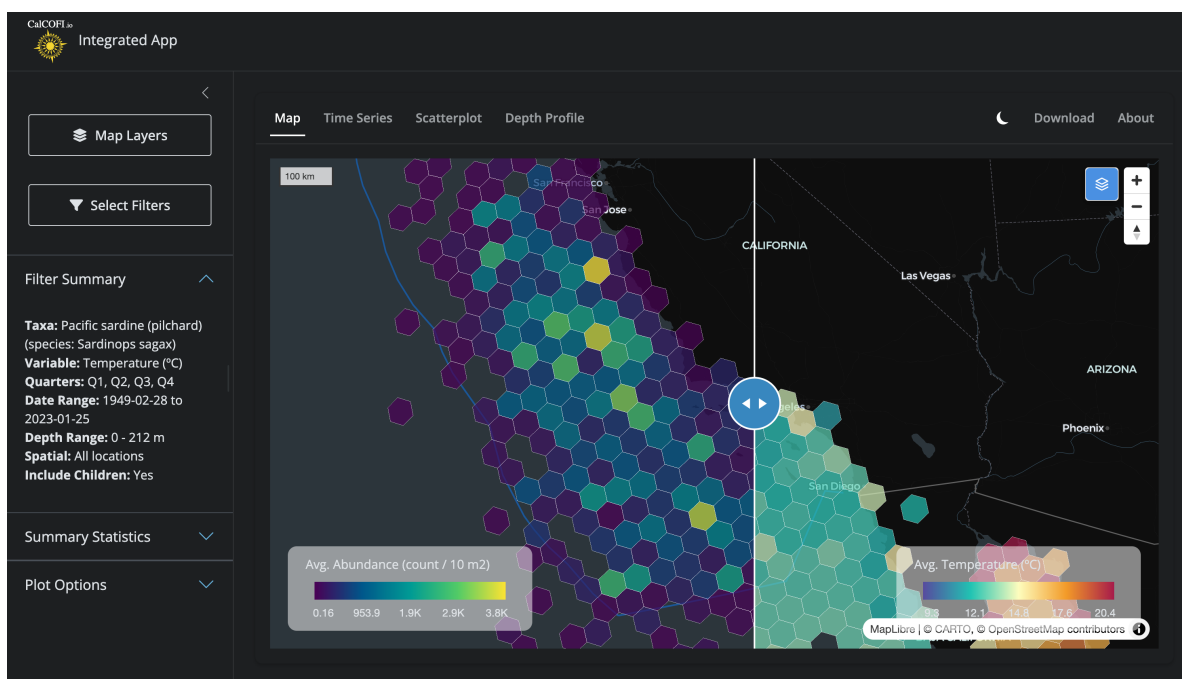


Figure 4.1: Side-by-side comparison in the [CalCOFI Integrated App](#): hexagons summarizing **biology** (Pacific sardine larvae abundance, left) and **environment** (sea-surface temperature, right) over the same area, era, and quarters, with a swipeable divider for direct visual comparison. Both layers are powered by the H3T tile service.

This chapter explains how H3T works, visually, for both the curious oceanographer and the developer who wants to extend it. Throughout, the guiding principle is:

DuckDB is the single source of truth. H3T tiles are a performance layer built on top of it — never an authoritative copy of the data.

4.2 Why hexagons?

H3 is [Uber’s hexagonal hierarchical geospatial index](#). Each cell is a hexagon, and every cell at resolution N nests neatly inside one parent cell at resolution $N - 1$. Hexagons have three useful properties for ecological data:

- **Equal area at a given resolution**, so densities are directly comparable across the map.
- **Every neighbor is the same distance away** (unlike a square grid, which has both edge and corner neighbors).
- **No latitude distortion** — a res-5 hex off Point Conception covers the same area as a res-5 hex off Cabo San Lucas.

Compared to a raster of pixels, hexagons aggregate point observations (a net tow, a CTD cast, a larvae count) without imposing an arbitrary north–south orientation, and the parent–child nesting lets the same dataset render coarsely when you’re zoomed out and finely when you’re zoomed in.

4.3 The problem: aggregating millions of points at every zoom

Before H3T, the db-viz-hex pre-computed every hex aggregation across **all 10 H3 resolutions** for every species and environmental variable at startup. The Shiny app then shipped the relevant resolution to the browser for each zoom change. This gave the app two problems:

1. **Slow startup.** Building those aggregations against the full bottle and ichthyo tables took >10 s every time the app launched.
2. **Heavy memory.** A multi-resolution `sf` grid for one variable is hundreds of megabytes; for dozens of variables it crowded out everything else on the Shiny server.

This is the same class of problem that the [MarineSensitivity stack](#) solved for rasters with a TiTiler factory + Varnish cache. H3T is the equivalent move for **hexagons**.

4.4 The solution: query-as-URL hexagonal tiles

The architecture rests on three ideas, each covered below: the H3 resolution that’s served depends on the zoom level; the entire tile request lifecycle is fronted by a cache; and a **release** parameter handles cache invalidation automatically when new data drops.

4.4.1 Resolution follows zoom

When the user zooms out to see the whole California Current, they don't need 7-meter hexagons — a 22 km hex is finer than the underlying sampling grid anyway. When they zoom in to a single CalCOFI line, they want as much detail as the data supports. H3T maps web-map zoom levels to H3 resolutions on the server side: zoom 0–1 → res 1 (~1106 km hexes), zoom 5–7 → res 5 (~22 km hexes), zoom 11+ → res 10 (~7.5 m hexes), and so on (Figure 4.2).

The trick is in the SQL: the db-viz-hex sends a **template** with a literal placeholder `hex_h3res{{res}}` (see `build_sp_sql()` in [db-viz-hex/app/functions_h3t.R](#)), and the API substitutes the right resolution for each tile before executing. One query string, ten zoom levels, one shared cache namespace.

4.4.2 Request lifecycle

When the user pans or zooms, MapLibre asks for tiles. Each tile URL looks like this:

```
h3tiles://h3t.calcofi.io/h3t/{z}/{x}/{y}.h3t?q=<base64-SQL>&release=v2026.04.08
```

The clever bit is the `q` parameter: it's the entire **SELECT** statement, base64-encoded with URL-safe characters (RFC 4648 §5). That means **the URL itself describes the data to render**, so two users asking for “average temperature for sardines, all quarters, 1949–2024” hit the exact same cache entry — no session state, no server-side query registry.

What happens next is shown in Figure 4.3. Caddy terminates TLS and forwards to Varnish, which checks its cache. On a hit, the user gets back a chunk of h3j JSON in well under 100 ms. On a miss, Varnish forwards to the Plumber API, which:

1. **Decodes** the base64 SQL.
2. **Validates** it with [sqlglot](#): single statement, must be **SELECT** (or **WITH ... SELECT**), must project exactly `cell_id`, `value`, `[n]`, no `read_csv/attach/load`, no shell calls, no schema beyond the published tables.
3. **Substitutes** `{{res}}` from the zoom level and wraps the inner query in a viewport bounding-box filter.
4. **Executes** against a read-only DuckDB connection with a 3-second timeout and a 50,000-row cap.
5. **Formats** the result as h3j JSON: `{"cells": [{"h3id": "8a1941a29a7ffff", "value": 12.37, "n": 42}, ...]}`.

The validation, read-only mode, timeout, and row cap are stacked guardrails: the public URL accepts arbitrary SQL because **none of the layers will let it do harm**. Even if a determined actor slipped a malformed statement past `sqlglot`, the DuckDB connection has no write permission, no extension load, and a hard execution budget.

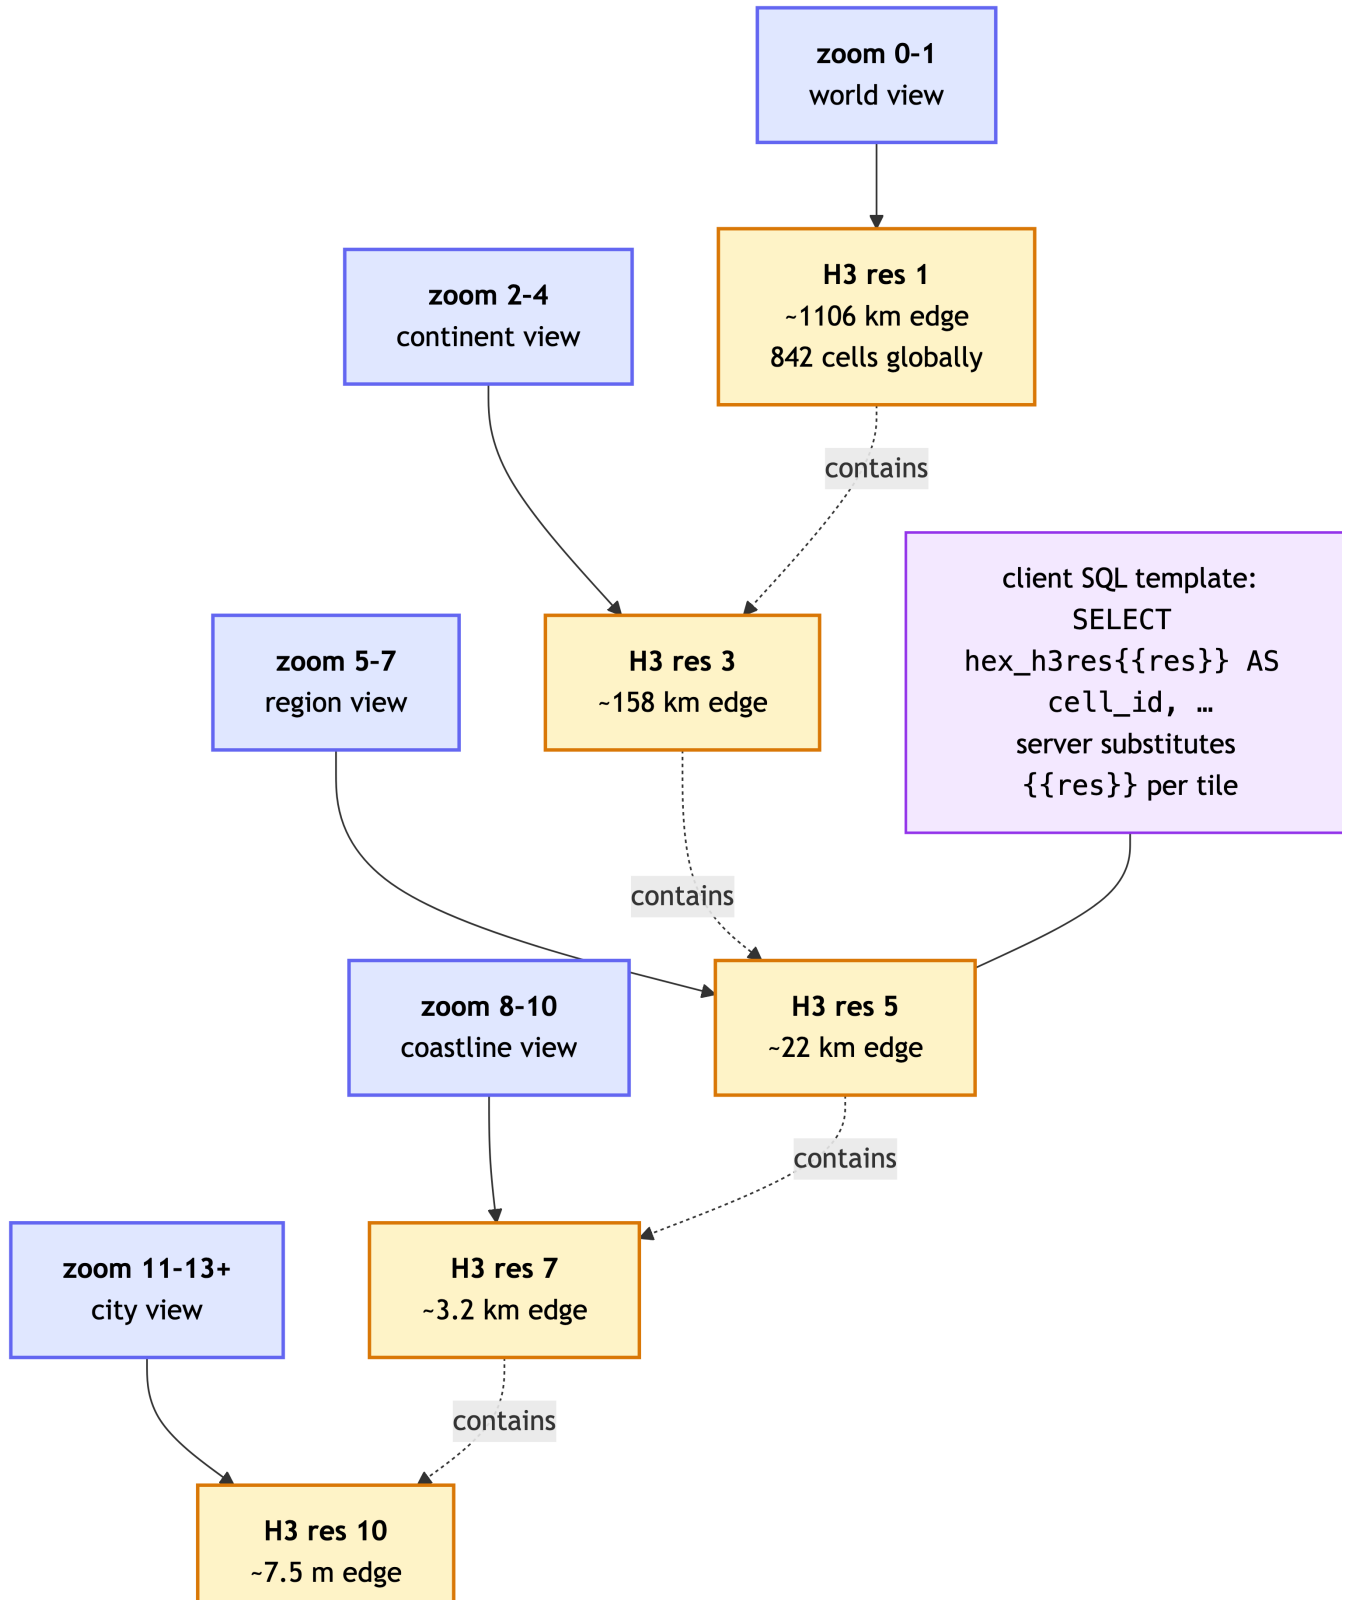


Figure 4.2: Web-map zoom level determines which H3 resolution the server returns. The same SQL template — `hex_h3res{{res}}` — adapts to each tile by server-side substitution. Hexagons at finer resolutions nest inside their coarser parents, so the data hierarchy and the visual hierarchy stay aligned.

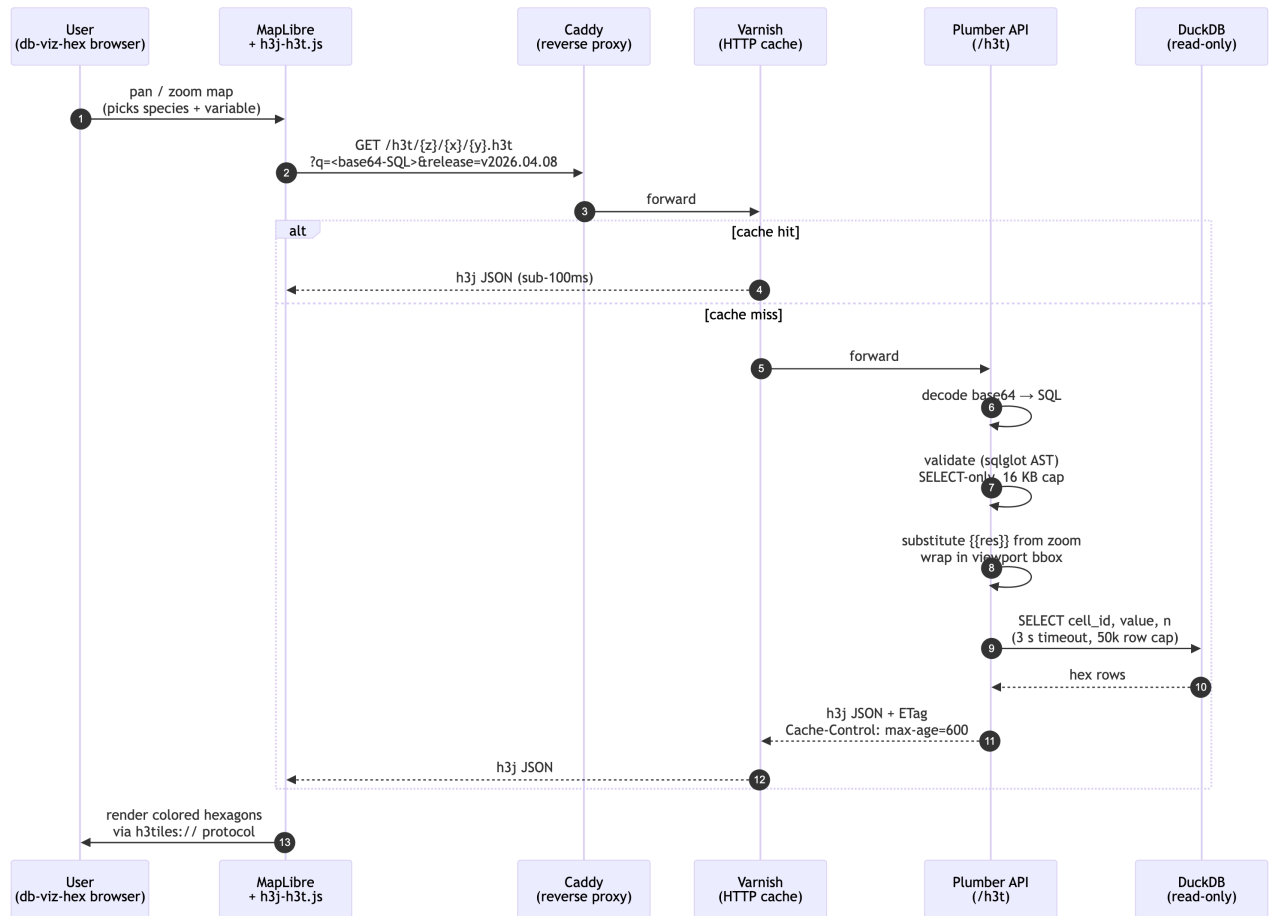


Figure 4.3: Tile request lifecycle. The browser asks for a tile by URL; Varnish caches identical URLs; on a miss, the Plumber API decodes and validates the SQL, runs it against a read-only DuckDB, and returns h3j-formatted hexagons. Validation + read-only DB + timeouts mean the public endpoint can accept arbitrary SQL safely.

4.4.3 Cache invalidation by release

Caches are easy to fill but notoriously hard to clear. H3T sidesteps the hard part entirely with a single trick: the `release` query parameter (Figure 4.4).

When CalCOFI publishes a new database release (e.g., `v2026.04.08`, see [Database](#)), a symlink at the API server is swapped to point at the new file. The next time the db-viz-hex loads, it asks `/h3t/meta` for the current release version, gets back `v2026.04.08`, and passes that into every subsequent tile URL. Because the URL is now different, Varnish **automatically cache-misses** — and the new tiles are generated against the fresh data on first request. Old tiles linger harmlessly in cache until evicted by LRU; they'd still serve correct data for their old release if anyone asked.

No purge command, no cache key surgery. Just: change one parameter, get a clean cache layer for free.

4.5 A worked example: sardine + temperature

To make this concrete, here is the full life of one click in the db-viz-hex:

1. User picks *Pacific sardine* (*Sardinops sagax*) and *temperature* in the sidebar, with date range 1949–2024 and all four quarters.
2. `build_sp_sql()` assembles a SQL template:

```
SELECT hex_h3res{{res}} AS cell_id,
       AVG(std_tally)    AS value,
       COUNT(*)          AS n
FROM bio_obs
WHERE scientific_name = 'Sardinops sagax'
      AND quarter IN (1, 2, 3, 4)
      AND time_start BETWEEN '1949-01-01' AND '2024-12-31'
GROUP BY 1
```

3. `h3t_b64()` base64-encodes the SQL → `q=U0VMRUNUIGHleF9oM3Jlc3t7cmVzfX0gQVMgY2VsbF9pZCwKICAgIC`
4. `fetch_h3t_stats()` calls `/h3t/stats?q=...&release=v2026.04.08` once to get `{min, max, p02, p98, n}`. The 2nd–98th percentiles drive a robust color scale that ignores outliers.
5. MapLibre requests tiles as the user pans:

```
h3tiles://h3t.calcofi.io/h3t/4/3/6.h3t?q=U0VMRUNU...&release=v2026.04.08
```

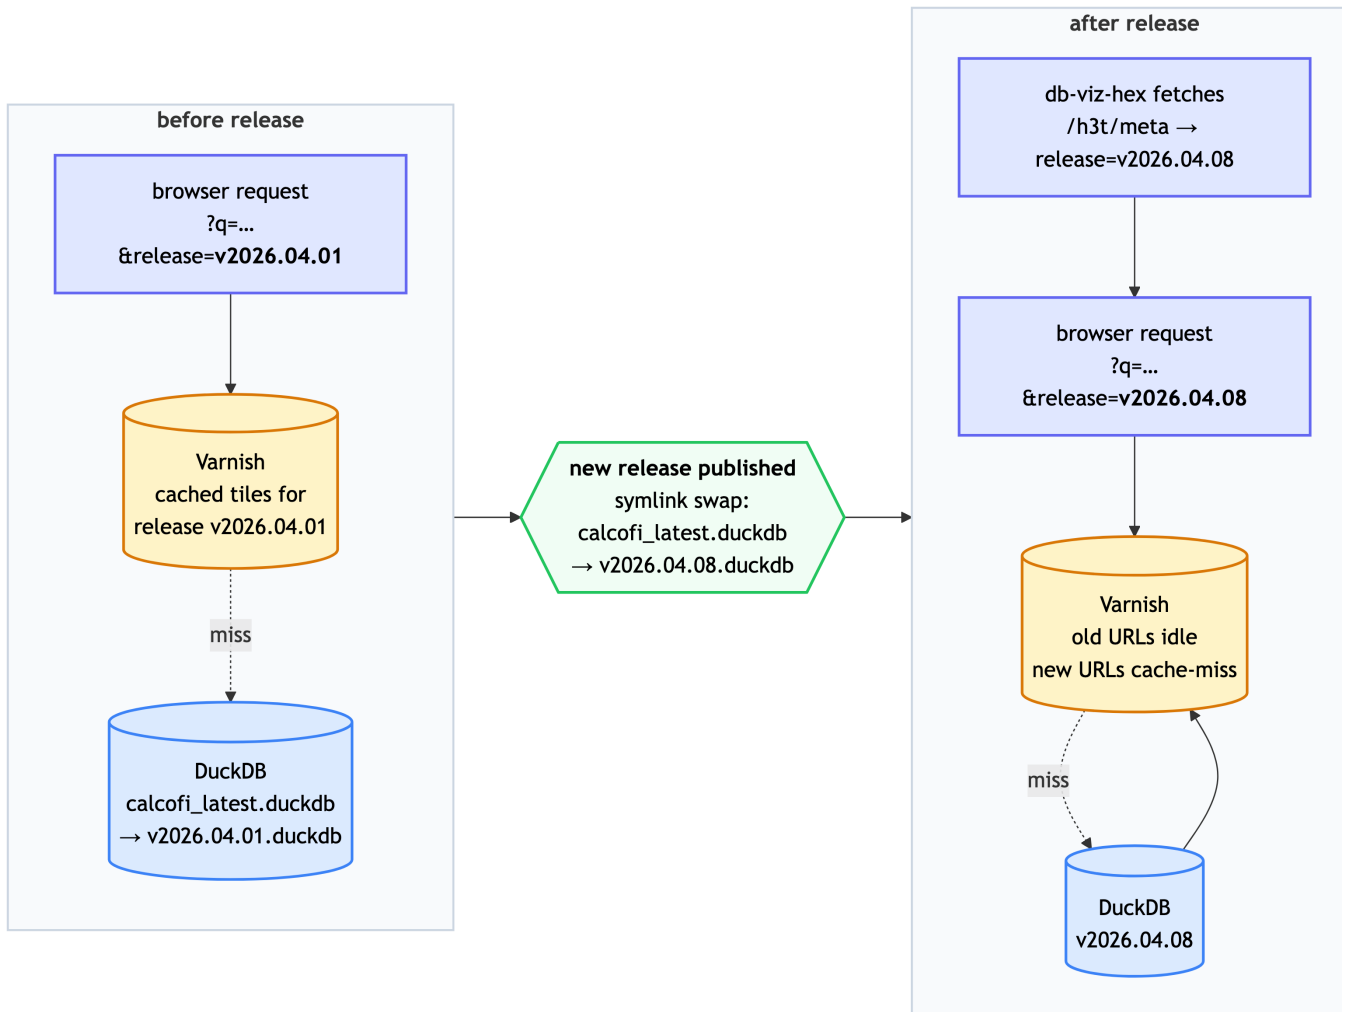


Figure 4.4: Cache invalidation by release. The `release` query parameter is part of every tile URL. When a new database release is published, the db-viz-hex picks up the new version from `/h3t/meta`, all subsequent tile URLs change, and Varnish refills naturally — no manual purge.

6. **Plumber** decodes, substitutes `{res}` (zoom 4 $\rightarrow$ res 3), wraps in a bounding-box filter for tile (4, 3, 6), runs the query, and returns:

```
{
  "cells": [
    { "h3id": "83390cffffffff", "value": 12.37, "n": 42 },
    { "h3id": "83390dffffffff", "value": 14.02, "n": 38 },
    { "h3id": "83390effffffffff", "value": 11.85, "n": 51 }
  ]
}
```

7. **MapLibre** paints each hex by interpolating the stats palette between p02 and p98. The user sees a smooth choropleth update as new tiles arrive.

The first time this query runs anywhere, it takes ~200–800 ms (Varnish miss, DuckDB execution). Every subsequent user requesting “sardines, all quarters, 1949–2024” hits Varnish and renders in under 100 ms.

4.6 How the data gets there

The H3T service is the *last* link in the CalCOFI data pipeline, not the first:

- Source data (Google Drive, NCEI, ERDDAP, SWFSC) is ingested through Quarto notebooks in [CalCOFI/workflows](#) into a working DuckDB database.
- A `release_database.qmd` step validates, freezes, and publishes a versioned DuckDB file to the API server.
- The H3T API mounts that file read-only and serves tiles from it.

For the schema details, see [Database](#). For the publish path, see [Portals](#).

4.7 Repositories and code

Repository	Role
CalCOFI/api-h3t	Plumber API, sqlglot validator, DuckDB driver, deployment configs
CalCOFI/db-viz-hex	Shiny consumer; SQL builders and map widgets in <code>app/functions_h3t.R</code>
bbest/mapgl @ feat/add-h3t-source	<code>add_h3t_source()</code> extension to the mapgl R package

Repository	Role
bbest/h3j-h3t @ fix/maplibre-v3-compatible	fix h3t protocol for MapLibre v3+/v4 and multiple sources on one page in INSPIRE/h3j-h3t

For the full technical contract — every endpoint, every validation rule, every deployment knob — see the [api-h3t README](#) and `deploy.md`.

5 Database

5.1 Naming conventions

There are only two hard things in Computer Science: cache invalidation and naming things. – Phil Karlton (Netscape architect)

Background reading: [Learn SQL: Naming Conventions](#) · [Best Practices for Database Naming Conventions](#).

5.1.1 Name tables

- Table names are **singular** and use all lower case.
 - Example: `cruise`, `site`, `species`, `lookup` (not `cruises`, `sites`, `lookups`)

5.1.2 Name columns

- To name columns, use **snake-case** (i.e., lower-case with underscores) so as to prevent the need to quote SQL statements. (TIP: Use `janitor::clean_names()` to convert a table.)
- Suffix with **units** where applicable (e.g., `*_m` for meters, `*_km` for kilometers, `*_degc` for degrees Celsius). See [units vignette](#).
- Set the geometry column to **geom** (used by the [PostGIS](#) spatial extension). If a table has multiple geometry columns, use `geom` for the default and `geom_{type}` for the rest (`geom_point`, `geom_line`, `geom_polygon`).

5.1.3 Key conventions

The **suffix** says **what kind of value it is**, and this is checked in review, because a character-valued identifier named `*_id` is a promise the data cannot keep:

suffix	value	examples
*_key	a string natural key — meaningful, stable, human-readable	<code>cruise_key</code> , <code>site_key</code> , <code>grid_key</code> , <code>sample_key</code> , <code>taxon_key</code> , <code>dataset_key</code> , <code>ship_key</code>
*_id	an integer key — a source counter or surrogate	<code>cast_id</code> , <code>bottle_id</code> , <code>species_id</code> , <code>obs_id</code> , <code>hex_id</code>
*_uuid	the provider's own identifier for that record, as they mint it (RFC 4122)	<code>cruise_uuid</code> , <code>source_uuid</code> , <code>station_uuid</code>
*_seq	an auto-incrementing sequence integer	—

Natural keys are preferred over surrogates wherever they are stable, and the four that carry the integration are worth stating exactly:

- **cruise_key** = YYYY-MM-NODC (e.g. 1998-02-33JD) — and the YYYY-MM is the month SWFSC *designates* for the whole cruise, never the month a cast or tow happened to fall in. A CalCOFI cruise routinely straddles a calendar boundary (5508BD ran 7 Aug – 25 Sep 1955), and the neighbouring month is usually a **real** cruise of the same ship, so keying by event month silently moves casts onto the wrong cruise with no foreign key ever failing. Events are keyed by containment in the reference cruise's observed date span first, then by the source's own designation, then by event month as a last resort — and which rule fired is recorded.
- **sample_key** = {dataset_key}:{sample_type}:{id} (e.g. `calcofi_bottle:cast:7644`) — globally unique across datasets *and* across event levels, so a site, a tow, a net, a cast and a bottle can share one table without collision.
- **site_key** is the CalCOFI station in "line station" form ("090.0 062.0"); **grid_key** is the shared grid cell; **dataset_key** = {provider}_{dataset} is the provenance stamp on every observation.
- **taxon_key** is a lowercase authority prefix plus that authority's accepted id — `worms:<AphiaID>`, or `itis:<TSN>` for birds, whose WoRMS taxonomy lags. See [Taxonomy](#) below.

Provider UUIDs are released as typed columns where the provider mints them.

They are not primary keys — the string keys above are — but they are the join back to the provider's own database, and dropping them would make that join impossible:

- **cruise.cruise_uuid** is NOAA/SWFSC's `CruiseId`, populated for every released cruise. It is a **public** join key, not an internal artefact.

- **sample.source_uuid** is the provider’s identifier for *that event* — SWFSC’s **site_uuid** on a site row, **tow_uuid** on a tow, **net_uuid** on a net — and is NULL for the datasets whose sources mint no UUID (15 of 16 do not).
- **sample.station_uuid** is the SWFSC station occupation an event belongs to, resolved in the release, with **station_uuid_method** saying how (the event’s own site, its parent’s, a match on (**cruise_key**, **site_key**, **order_occ**), or the single ichthyoplankton occupation within 24 hours).

source* provenance columns — the wrangling-time record of which source file and row a value came from — are a different thing entirely and **are stripped at the freeze**; they never reach a release.

i Note

sample.source_uuid, **sample.station_uuid** and **station_uuid_method** are decided and land with the provider-UUID workstream; **cruise.cruise_uuid** ships today. Check [catalog.json/metadata.json](#) for the release you are reading, or the [schema explorer](#).

Sequential integer keys carry a documented sort order so a rebuild reproduces them: **site_id** by (**cruise_key**, **order_occ**), **tow_id** by (**site_id**, **time_start**), **net_id** by (**tow_id**, **side**).

5.2 Use Unicode for text

The [default character encoding for Postgresql](#) is unicode (UTF8), which allows for international characters, accents and special characters. Improper encoding can royally mess up basic text.

Logging into the server, we can see this with the following command:

```
docker exec -it postgis psql -l
```

List of databases						
Name	Owner	Encoding	Collate	Ctype	Access privileges	
gis	admin	UTF8	en_US.utf8	en_US.utf8	=Tc/admin	+
					admin=CTc/admin	+
					ro_user=c/admin	
lter_core_metabase	admin	UTF8	en_US.utf8	en_US.utf8	=Tc/admin	+
					admin=CTc/admin	+
					rw_user=c/admin	
postgres	admin	UTF8	en_US.utf8	en_US.utf8		
template0	admin	UTF8	en_US.utf8	en_US.utf8	=c/admin	+

						admin=CTc/admin	
template1		admin		UTF8		en_US.utf8	en_US.utf8 =c/admin +
						admin=CTc/admin	
template_postgis		admin		UTF8		en_US.utf8	en_US.utf8

(6 rows)

Use Unicode (utf-8 in Python or UTF8 in Postgresql) encoding for all database text values to support international characters and documentation (i.e., tabs, etc for markdown conversion).

- In **Python**, use **pandas** to read (**read_csv()**) and write (**to_csv()**) with UTF-8 encoding (i.e., `encoding='utf-8'`):

```
import pandas as pd
from sqlalchemy import create_engine
engine = create_engine('postgresql://user:password@localhost:5432/dbname')

# read from a csv file
df = pd.read_csv('file.csv', encoding='utf-8')

# write to PostgreSQL
df.to_sql('table_name', engine, if_exists='replace', index=False, method='multi', chunks=1000)

# read from PostgreSQL
df = pd.read_sql('SELECT * FROM table_name', engine, encoding='utf-8')

# write to a csv file with UTF-8 encoding
df.to_csv('file.csv', index=False, encoding='utf-8')
```

- In **R**, use **readr** to read (**read_csv()**) and write (**write_excel_csv()**) to force UTF-8 encoding.

```
library(readr)
library(DBI)
library(RPostgres)

# connect to PostgreSQL
con <- dbConnect(RPostgres::Postgres(), dbname = "dbname", host = "localhost", port = 5432)

# read from a csv file
df <- read_csv('file.csv', locale = locale(encoding = 'UTF-8')) # explicit
df <- read_csv('file.csv') # implicit

# write to PostgreSQL
```

```

dbWriteTable(con, 'table_name', df, overwrite = TRUE)

# read from PostgreSQL
df <- dbReadTable(con, 'table_name')

# write to a csv file with UTF-8 encoding
write_excel_csv(df, 'file.csv', locale = locale(encoding = 'UTF-8')) # explicit
write_excel_csv(df, 'file.csv')                                     # implicit

```

5.3 The core data model

Sixteen source datasets — ichthyoplankton, zooplankton, bottle hydrography, CTD casts, DIC, underway meteorology, seabird and mammal transects, and more — used to reach the database as ~40 per-dataset tables. They now project into a small **core family** that every consumer reads. A dataset’s projection lives in its own ingest notebook (the generic shapes live in `calcofi4db`), so adding a dataset never edits a shared `switch()`.

table	grain	tier
sample	one row per physical sampling event — site, tow, net, cast, bottle, underway record, transect, subsample, region pool — with the hierarchy as an adjacency list (<code>parent_sample_key</code> , plus <code>root_sample_key</code> for the top of the chain)	core
obs	the occurrence headline : one scalar per row, <code>realm = bio</code> or <code>env</code> ; a bio row carries <code>taxon_key</code> and <code>life_stage</code> , an env row a CTD/bottle measurement	core (a view , see below)
obs_attribute	sub-occurrence detail — length- and stage-frequency bins (<code>bin_value</code> , <code>bin_label</code> , <code>count</code>) and categorical behaviour	core

table	grain	tier
sample_measurement	event-level effort and conditions — a net's <code>volume_sampled</code> and <code>std_haul_factor</code> , a cast's surface observations	core
obs_ctd_full	full-resolution CTD scans (~271 M rows); obs carries the thinned series	supplemental
obs_mets_full	full-resolution underway meteorology (~20 M rows)	supplemental

An observation's provenance is denormalized onto it on purpose: **obs** carries `dataset_key`, `cruise_key`, `grid_key`, the position, the datetime and `hex_id` (H3 at resolution 10, so coarser aggregations use `h3_cell_to_parent(hex_id, res)` rather than a column per resolution), so a rollup groups without a join. `geom` lives on **sample** and on the reference tables, never on **obs**.

5.3.1 What the release publishes: **obs_bio** + **obs_env**, and **obs** as a view

The assembly grain is **obs**; what the **release** publishes is the pair cut from it, because the questions consumers ask are shaped differently for the two realms:

- **obs_bio** — one object, the bio realm, with the gear and effort of the row's *own* sampling event inline (`tow_type`, `std_haul_factor`, `prop_sorted`, `volume_sampled_m3`) and the two standardized densities derived once (`density_per_10m2`, `density_per_1000m3`) plus `effort_class`. One taxon question = one file.
- **obs_env** — one object **per measurement_type**. One variable = one small fetch, which is what a browser-side reader (DuckDB-WASM cannot list a directory; the catalog gives it an explicit file list) actually needs.

Each is a strict superset of **obs** under a name mapping — **realm** is implied by which table you read, and **value** is `measurement_value` — and **obs** itself is a **view** the catalog carries (`catalog.json` → `views.obs`), a `UNION ALL` over the pair under **obs**'s original column names. `calcofi4r::cc_get_db()`, `calcofi4py` and the query site create it from the catalog, so `FROM obs` keeps working. Two consequences worth knowing:

- The release **proves** the pair reproduces **obs** before it freezes — row counts, distinct `obs_ids` and a hash signature of every column, per realm × dataset. The one allowed difference is a *depth fallback*: a bio row with no depth of its own carries its tow's span.

- **obs's** physical objects still ship for one release, marked **deprecated** in the catalog with **replaced_by**: ["obs_bio", "obs_env"]. **Migrate to the pair** — a consumer reading the view needs no change, a consumer building a path to **obs.parquet** does.

Do not rename **value**, **root_id** or **hex7** on the pair; new columns are appended and the view maps names, so consumers never have to.

5.3.2 Shared reference tables

cruise (one row per cruise, with **cruise_uuid**, the ship, and the observed **date_min/date_max** span that keys every other dataset's events), **ship**, **grid** (the CalCOFI station grid, materialized deterministically from **calcofi4r::cc_grid**), **spatial** + **spatial_attribute** (boundary layers), **sample_spatial** (the sample→layer memberships), **region**, **lookup**, **dataset** (one row per released dataset, with its measured coverage and its citation), **measurement_type** (the measurement vocabulary, below) and **climatology**.

climatology is the one baseline every anomaly subtracts. Until 2026-08-31 three products each computed their own and the same section read +1.4 °C in one and ~0 in another. It is a plain mean per dataset × **grid_key** × **calendar month** × 10 m depth bin × measurement type over **1993–2013**, kept only where 3 distinct cruises contribute, with the window stamped on every row. A cast's anomaly is its value minus the cell of *its own* calendar month; pooling months produces a seasonal-cycle map, not an anomaly.

5.3.3 Taxonomy

Three shared tables replace the ~7 per-dataset taxon tables:

- **taxon** — one row per taxon: **taxon_key** (**worms:<AphiaID>**, or **itis:<TSN>** when the taxon's class is **Aves**, because WoRMS bird taxonomy lags), the cross-reference ids (**worms_id**, **itis_id**, **gbif_id**), **parent_taxon_key**, **rank** and **rank_order**, the flattened lineage (**kingdom**, **phylum**, **class**, **order_taxon**, **family**), **scientific_name**, **common_name**, and **taxonomic_status with status_checked** — read the two together; a status with no check date is not a fact.
- **dataset_taxon** — the per-dataset vocabulary → **taxon_key** crosswalk. **obs** resolves its **taxon_key** by joining this on (**dataset_key**, **ds_taxa_code**), and **ds_source_json** records whatever ids the *source* itself supplied, so the source and the authority can be audited against each other.
- **taxon_group** — groupings for rollups.

Two distinctions that cost real data before they were written down. **The key authority and the cross-reference columns are different questions:** a bird keys **itis:** *and* carries a **worms_id**, because a consumer joining on **worms_id** would otherwise match zero seabirds. And a **key must be an accepted id** while a cross-reference is whatever the authority links

— a deprecated TSN is re-keyed onto its accepted successor and the event is recorded in `taxon.notes`.

When asserting lineage coverage, **split by rank position**: `family` is legitimately NULL above family rank, and `kingdom` is NULL for `worms:1 Biota`. A blanket non-NULL assertion is wrong, and someone will “fix” it by inventing data.

5.3.4 Quality flags reach consumers only if consumers apply them

`obs.measurement_qual` is **each dataset’s own vocabulary, uninterpreted** — bottle 6 = ok-from-CTD, 8 = suspect, 9 = missing; CTD 1/2 = use primary/secondary sensor, 8 = questionable, 9 = bad; DIC follows WOCE (2 good, 3 questionable, 4 bad, 9 missing). The registry is `metadata/measurement_qual.csv` in the workflows repo and it ships in `metadata.json`.

In August 2026 a 2.18 ml/L oxygen spike at 1,144 m turned out to be a bottle flagged suspect in the source **since 1955** — it reached a plotted app because no consumer filtered on the column. There is now one predicate per language — `calcofi4r::cc_qual_ok_sql()`, `calcofi4py.qual_ok_sql()`, the query site’s `qual0kSQL()` — NULL-safe, so an unflagged row is kept. **Apply it.** A value with a flag you do not read is not a value you can trust.

5.3.5 Depth is a coordinate, and it is bounded as one

Every released depth is finite, non-negative and no deeper than **6,500 m**, on `obs`, on `sample` and on the supplemental tables; a violation fails the release rather than shipping. Separately, `sample.seafloor_depth_m` carries the GEBCO 2025 sea-floor depth at the sample’s position (positive down, 0 on land, NULL outside the raster) so a consumer can judge a deep sample without fetching a raster. Where a sample’s deepest attributed depth exceeds the deepest GEBCO cell near it, that is **reported and ratcheted, never deleted**: nearly all such cases are minute-rounded 1949–1975 positions on slopes and canyons — the measurement is fine, the place is imprecise.

5.4 Integrated database ingestion strategy

5.4.1 Overview


The integrated database is built by the [CalCOFI/workflows](#) pipeline: one `ingest_{provider}_{dataset}.qmd` notebook per dataset (orchestrated by `targets`, engine functions in `calcofi4db`) writes Parquet shards plus JSON sidecars; `release_database.qmd` assembles them in an in-memory DuckDB, validates, and freezes a versioned, immutable **release** on public Google Cloud Storage (next section). Consumers — the apps, `calcofi4r::cc_get_db()`, the [schema](#) and [query](#) sites — read the release as Parquet over HTTPS with no credentials.

Alongside the releases, a **PostgreSQL** database (`calcofi`, PostgreSQL 18 + PostGIS 3.6 on the CalCOFI server) is the *working*, multi-user store for the CTD team’s QA/QC: originals loaded verbatim and immutable, a flag/proposal ledger beside them, derived products on top. It is private and reached over SSH — see [Server Access](#). DuckDB’s `postgres` extension joins the two worlds in one query (`calcofi4r::cc_pg_attach()`). (An earlier design ran the whole database in PostgreSQL with `dev/prod` schemas and a single `create_db.qmd`; that is superseded and only the legacy `gis` database remains, behind `tile.calcofi.io`.)

5.4.2 Release versioning

Each rendered `release_database.qmd` writes a frozen, immutable release to `gs://calcofi-db/ducklake/releases/{version}/` where `version` is `vYYYY.MM.DD`. The release directory holds the **sidecars** — the complete record of what the release is — and the `catalog.json` among them is the data-access contract: consumers resolve every table through it ([Data Access](#)) rather than building a path.

- `catalog.json` — structural manifest: `version`, `release_date`, `total_rows` / `total_size`, and per table `name`, `rows`, `partitioned`, `supplemental`. From the `v2026.09` releases it is **content-addressed** (`layout: "canonical"`, plus the `writer` settings — `compression`, `row-group size` — that make the bytes reproducible): each table carries `content_hash` (a whole-table signature), `compat_path` (its legacy per-release path) and `objects[]` — one object for a single-file table, one per partition for a partitioned one — each with a bucket-relative path (`ducklake/tables/{table}/{content_hash}/{table}.parquet`, or `ducklake/tables/{table}/{col}=bytes,sha256,content_hash,since` (the first version that shipped this exact object), its own `compat_path` and, for a partition, `partition_by` / `partition_value`. A partitioned table may also publish a whole-table **twin** — the one object without `partition_by` (`obs` does) — for `https-only` readers; it is read *instead of* the partitions, never alongside them. Objects are immutable and shared between versions, so `since` is the per-table “what changed”; `calcofi4r::cc_release_sources()` and `calcofi4py.release_sources()` are the resolvers (the twin comes back as `single_file`, excluded from `urls`).
- `relationships.json` — primary keys and foreign keys
- `metadata.json` — table and column descriptions, units, dataset block, measurement-type registry
- `RELEASE_NOTES.md` — this version’s section of `RELEASES.md` plus a generated appendix (tables and rows from `catalog.json`, datasets, the consumer-contract result, package versions)
- `parquet/` — the legacy per-release copy of the tables (single `.parquet` or hive-partitioned directories). Kept only for the promoted version, its predecessor and the **consolidated** versions; elsewhere it is removed by archive thinning (`metadata/release_policy.yml` in [CalCOFI/workflows](#), applied by `scripts/thin_releases.R`), while the sidecars stay.

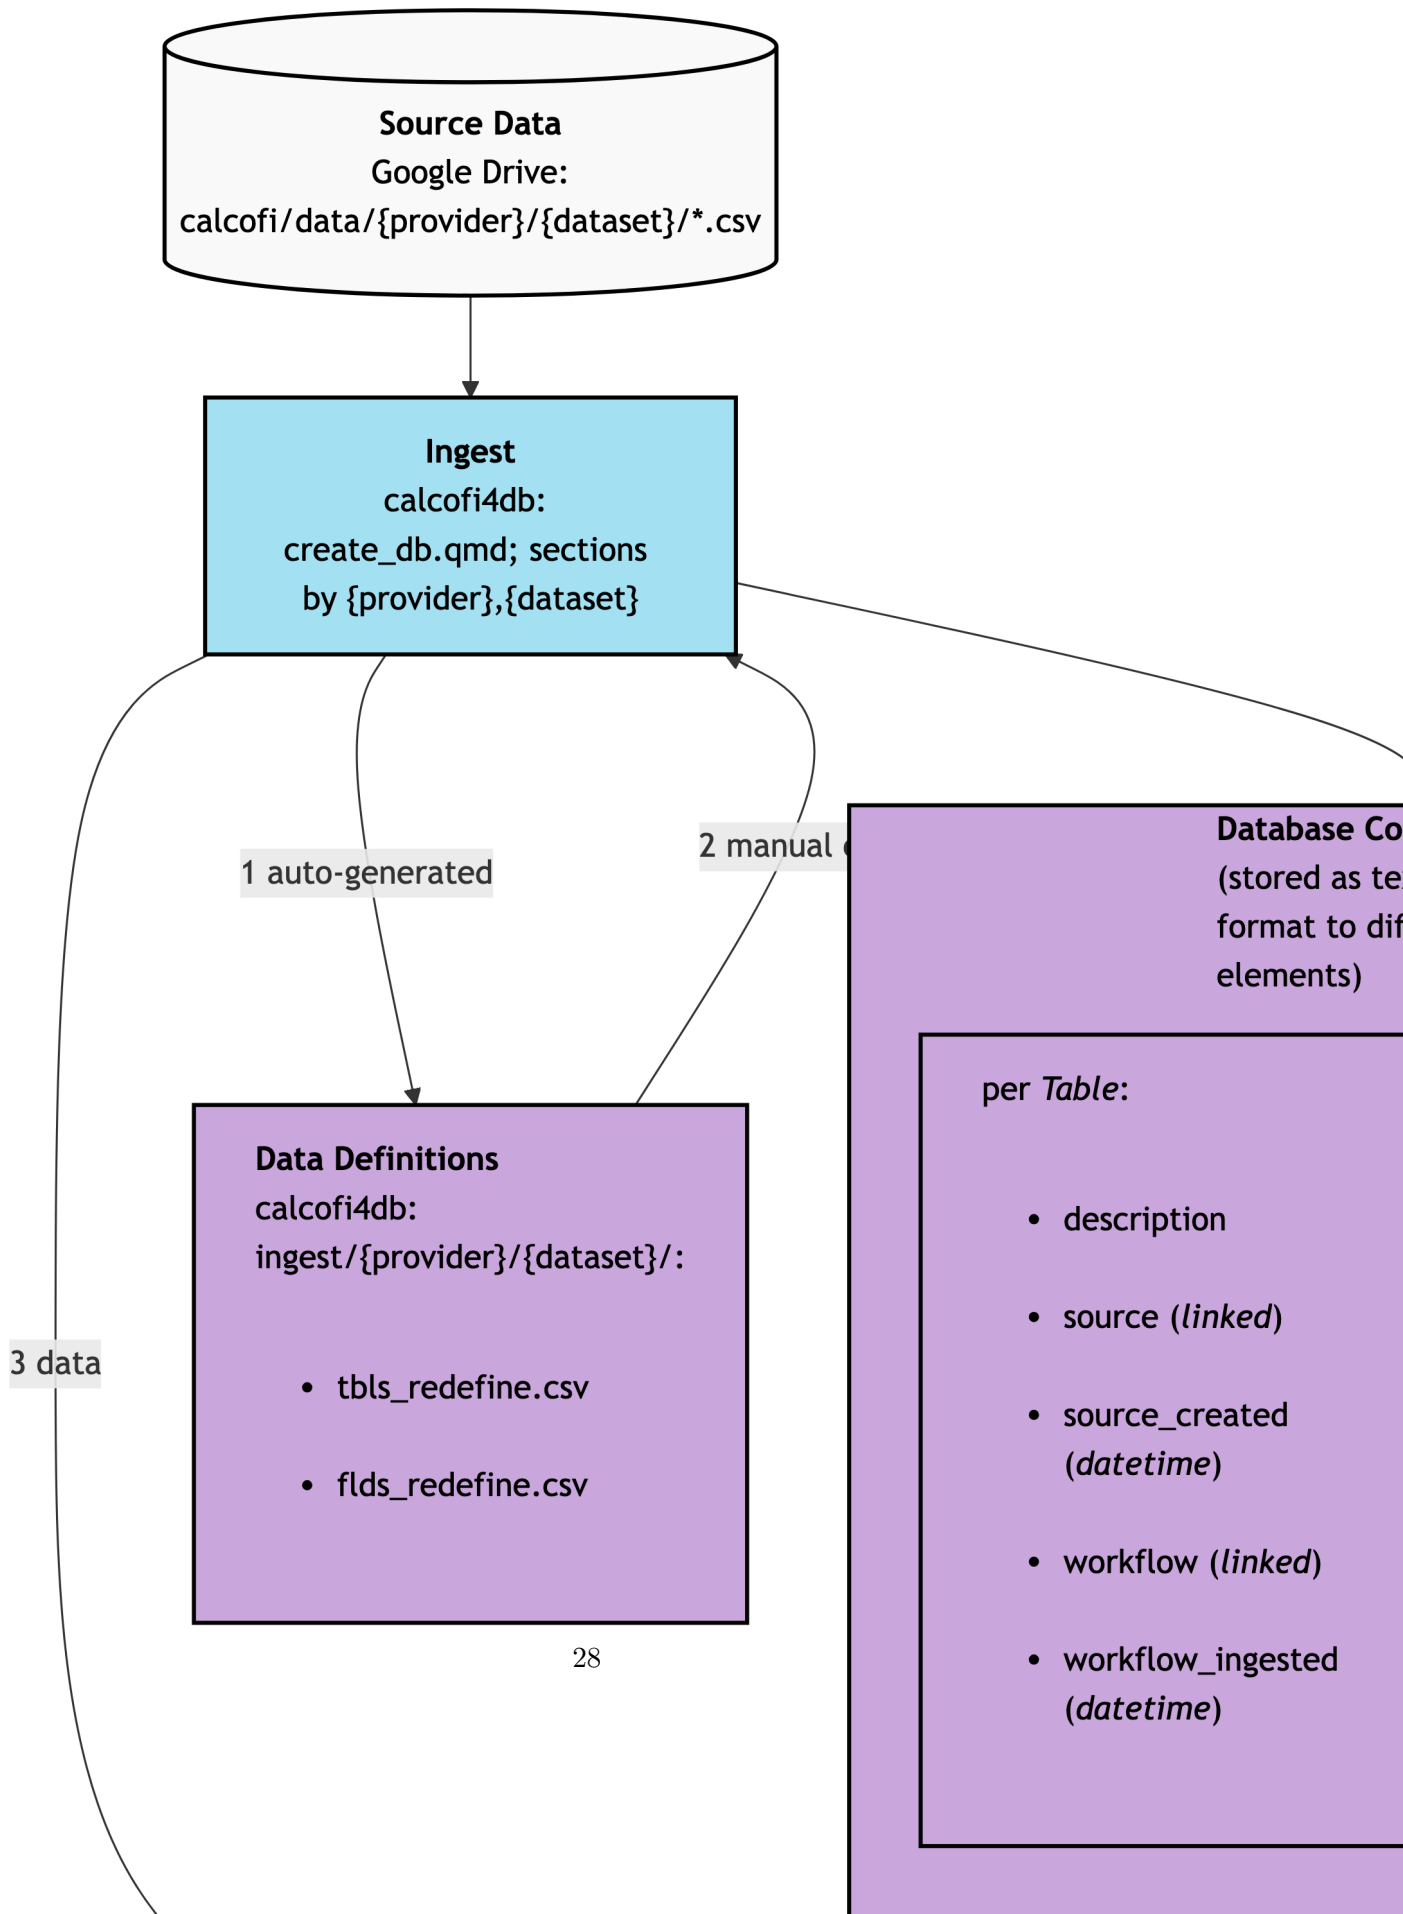

Bucket-level, under `releases/`: `latest.txt` names the promoted version (promoted only after `test_release.qmd`'s consumer-contract suite passes); `versions.json` lists every release — `version`, `release_date`, `tables`, `total_rows`, `size_mb` — with `consolidated: true` on the milestone versions (v2026.04.08, v2026.05.14, v2026.06.26, v2026.07.17, v2026.08.14, v2026.08.25) and `retired: {retired_utc, to, reason}` on a thinned one, `to` being the consolidated version to use instead; and `RELEASES.md` is the running changelog across versions, newest first, with `# Unreleased` collecting changes until the next cut.

5.4.3 Metadata registries — the single sources of truth

Descriptions, vocabularies and provenance live as reviewable CSVs in [CalCOFI/workflows](#) — **not** in the database — so they travel with the code that produced them and change through pull requests.

Per dataset, under `metadata/{provider}/{dataset}/`:

- `tbls_redefine.csv` — `tbl_new`, `tbl_description`
- `flds_redefine.csv` — `tbl_new`, `fld_new`, `fld_description`, `units`
- `metadata_derived.csv` — optional markdown/units overlay for derived tables and columns
- `questions.csv` — the **provider-question registry**: what we have asked the data's owners, what they answered, and what we have *proposed* an answer to and want confirmed. Each question has a durable global id and a short per-dataset label (Q15), a status (`open` / `proposed` / `answered` / `wontfix`) and a `priority`.
- `citation_authority.json` — a **generated cache** of what the source's own authority (EDI, NCEI, ERDDAP, DataCite) says about the citation and licence. A proposal, never the record.

Shared, under `metadata/`:

file	role
<code>field_dictionary.csv</code>	Prescriptive canonical field names, types, units and aliases; new datasets conform to it. <code>dwc_term</code> names the Darwin Core term a field publishes as.
<code>measurement_type.csv</code>	The canonical measurement vocabulary — <code>description</code> , <code>units</code> , <code>category</code> , <code>variable</code> (which types measure the same thing comparably across datasets), <code>derivation</code> for a derived type, <code>is_canonical</code> , the validity bounds, and the controlled-vocabulary ids <code>nerc_p01</code> / <code>units_nerc_p06</code> (below). Released as a table.

file	role
<code>measurement_qual.csv</code>	Each dataset's quality-flag vocabulary, uninterpreted.
<code>category.csv</code>	The twelve data categories every dataset and measurement type is filed under.
<code>provider.csv</code>	The curating organizations. provider is the organization that holds and can license the data — not the portal that serves it, and not a collection or lab inside it.
<code>license.csv</code>	The licence ids a dataset may declare.
<code>life_stage.csv</code>	Every distinct <code>obs.life_stage</code> value with its Darwin Core label and NERC S11 id.
<code>gear.csv</code>	Every <code>sample.tow_type</code> code with its <code>samplingProtocol</code> sentence and NERC L22 device id.
<code>relationships_cross.csv</code>	Cross-dataset foreign keys (intra-dataset ones live in each ingest's <code>relationships.json</code>).
<code>release_tables.csv</code> , <code>release_columns.csv</code>	Descriptions for tables built inside <code>release_database.qmd</code> itself.
<code>measurement_taxon.csv</code> , <code>taxon_override.csv</code>	How a taxon-bearing measurement name decomposes, and manual id resolution where a source taxon has no clean id.
<code>taxon_lineage.csv</code> , <code>taxon_xref.csv</code>	Generated caches of the WoRMS/ITIS classification chains and the WoRMS ITIS cross-reference. Safe to delete; they refetch.
<code>dataset.csv</code>	Deprecated. Dataset-level metadata is the <code>calcofi</code> : YAML block in each ingest notebook, which is what the release reads (see Cite This Data for how to cite them). The CSV drifted from the notebooks and orphaned observations.

These flow through two stages:

1. **Per ingest:** `calcofi4db::build_metadata_json()` writes `data/parquet/{provider}_{dataset}/meta` (schema version 1.0) beside the parquet outputs, and reports its own documentation gaps.
2. **Per release:** `calcofi4db::merge_metadata_json()` merges every per-ingest sidecar plus the release-only registries into `gs://calcofi-db/ducklake/releases/{version}/metadata.json` (schema version 1.1):

```

{
  "schema_version": "1.1",
  "release_version": "v2026.05.14",
  "release_date": "2026-05-14",
  "datasets": { "calcofi_bottle": { ... } },
  "tables": { "bottle": { "name_long": "Bottle",
    "description_md": "...",
    "provider": "calcofi",
    "dataset": "bottle" } },
  "columns": { "bottle.depth_m": { "name_long": "Depth M",
    "units": "meters",
    "description_md": "Bottle depth" } },
  "measurement_types": { "temperature": { "description": "...",
    "units": "degC",
    "is_canonical": true } }
}

```

Markdown is supported anywhere in `description_md`; consumers should render it through a markdown parser when displaying.

5.4.4 Coverage is measured, never asserted

A dataset’s temporal and spatial extent is **measured from the assembled data at release time** — `coverage_temporal_observed`, `coverage_spatial_observed` and `coverage_bbox` in `metadata.json`, and the corresponding columns on the released `dataset` table. Nothing hand-writes an extent.

This is not pedantry. A hand-written extent is authored once while the data grows underneath it: at v2026.08.06 seven of fifteen datasets were wrong — one claimed data through 2021-05 that ends 2015-04, three said “present” while stalling in 2019, 2022 and 2023. Measurement is also honest about what it finds, which is how two coordinate bugs surfaced that the prose had hidden (a dropped minus sign putting a dataset at 124.9° **E**, and a dataset reaching latitude 0.0). One dataset asserts its temporal half and says why in a comment: it is region-pooled and has no datetimes at all.

5.4.5 Citation and licence are a contract, and they are checked

Every dataset carries `citation_main`, `license`, `doi`, `acknowledgement` and `contact` in its ingest notebook’s YAML, and these are **checked, not trusted** — by the workflows index build and again by the release. A citation needs a year and a locator; `license` must be an active id in `license.csv` (custom requires a `license_url`; `unknown` or empty fails unless a

provider question is open on that field); a doi is stored bare and must resolve. The check also asks the source's own authority — EDI's cite service, NCEI's "Cite as", an ERDDAP .das, DataCite — caches the answer, and **reports drift without ever writing into the notebook**: the author's string is the record.

source_accessed is measured, not authored. And the release cites itself: catalog.json carries a citation, a concept_doi and, once minted, the version doi; the release notes open with "How to cite"; CITATION.cff and .zenodo.json are generated from the same source.

CalCOFI (2026). CalCOFI Integrated Database, release v2026.08.25 [Data set]. Scripps Institution of Oceanography, NOAA Fisheries, and California Department of Fish and Wildlife. <https://doi.org/10.5281/zenodo.NNNNNNN>

When you use these data, cite the release *and* the source datasets you used. The release dataset table carries each source's own citation_main, license, doi and acknowledgement for exactly this purpose — one row per dataset, so a query that touched dataset_key already knows whom to credit.

5.4.6 Consuming descriptions

The fastest way to browse the schema is the [CalCOFI Schema explorer](#) — per-release ERD, sortable table/column lists with units, dataset provenance, and the measurement-type registry, all sourced from the release metadata.json sidecar on GCS. Deep-link to a specific release with #erd?v=v2026.05.19 (or #tables, #columns, #measurements).

From R, fetch the descriptions either column-by-column or as a full interactive catalog. Both calls hit the same release metadata.json sidecar:

```
library(calcofi4r)

# schema + descriptions + units for a single table
tbl <- cc_describe_table("bottle")
attr(tbl, "description_md")    # table-level description

# interactive datatable of every table and column in the release
cc_db_catalog()
cc_db_catalog.tables = c("bottle", "ichthyo")
cc_db_catalog.version = "v2026.05.14"
```

When writing a new ingest, populate tbls_redefine.csv and flds_redefine.csv (especially fld_description and units) before running the ingest notebook — build_metadata_json() reads them directly. The Claude Code /generate-metadata and /validate-ingest skills enforce this.

5.4.7 Publishing to portals

Workflows in `workflows/publish_*.qmd` push selected tables to external portals — ERDDAP, EDI, OBIS, NCEI. They read the release `catalog.json` and `metadata.json` to assemble Ecological Metadata Language (EML), ERDDAP `datasets.xml` entries and netCDF attributes, so a description written once in a metadata registry reaches every portal without re-keying, and so no publish notebook builds a parquet path by hand.

The netCDF and ERDDAP publishers are **generic** — parameterised by dataset, driven by the release — while the OBIS publisher is still per-dataset; see [Darwin Core / OBIS ENV-DATA mapping](#) for what a generic one reads.

ERDDAP (`publish_to-erddap.qmd`) discovers one config block per `dataset_key` from what the core actually holds, rather than a hand-maintained table list, and executes every view against the real release before writing its XML. Since the pre-release plan D-S1/D-S3 (2026-09) the `{dataset_key}` observation grain reads `obs_bio` (bio datasets) or `obs_env` (env datasets) through the release catalog (`calcofi4r::cc_release_sources()`) — never a hand-built `releases/{v}/parquet` path — carrying the sample’s own gear and effort (`tow_type`, `std_haul_factor`, `prop_sorted`, `volume_sampled_m3`) and the two canonical densities (`density_per_10m2`, `density_per_1000m3`, `effort_class`) inline, plus `flag_values/flag_meanings` on `measurement_qual` from `metadata/measurement_qual.csv`. A release cut before D-S1 (no `obs_bio/obs_env` in its catalog) falls back to the deprecated `obs` objects, with no effort/density columns.

5.5 Darwin Core / OBIS ENV-DATA mapping

The core model was designed against the [OBIS ENV-DATA](#) pattern described by [De Pooter et al. \(2017\)](#), so the shapes map one to one: `sample`’s adjacency list **is** an Event core, `obs`’s bio rows **are** an Occurrence extension, and the two measurement grains **are** extended Measurement-or-Fact tables. What was missing was never the shape — it was the *vocabulary*: an export had to guess which controlled term a CalCOFI measurement name meant, and the ichthyoplankton OBIS notebook did not guess, it wrote `measurementTypeID = NA`.

The ids now live in the registries the release already publishes, so a portal export is a lookup rather than a judgement.

CalCOFI	Darwin Core / OBIS ENV-DATA	how it is constructed
sample (adjacency list)	Event core	eventID = sample_key; parentEventID = parent_sample_key; eventDate from datetime (a tow publishes as its start/end interval); decimalLatitude / decimalLongitude; minimumDepthInMeters / maximumDepthInMeters = depth_min_m / depth_max_m; footprintWKT from geom; locationID = site_key; samplingProtocol from metadata/gear.csv keyed on tow_type; sampleSizeValue = volume_sampled_m3 with sampleSizeUnit = cubic metre
obs_bio (obs where realm = 'bio')	Occurrence extension	occurrenceID from obs_id; eventID = sample_key; scientificNameID built from taxon_key (urn:lsid:marinespecies.org:taxname:<word> or the ITIS TSN for a bird); scientificName from taxon; lifeStage + its NERC S11 id from metadata/life_stage.csv; organismQuantity = density_per_10m2 or density_per_1000m3 with organismQuantityType naming that denominator

CalCOFI	Darwin Core / OBIS ENV-DATA	how it is constructed
sample_measurement	eMoF on Events (net effort, cast conditions)	measurementType / measurementValue / measurementUnit, plus measurementTypeID = measurement_type.nerc_p01 and measurementUnitID = measurement_type.units_nerc_p06
obs_attribute	eMoF on Occurrences (length and stage frequency)	bin_value / bin_label / count → measurementValue; ids as above
obs_env (obs where realm = 'env')	eMoF on the bottle or depth Event	ids as above

metadata/field_dictionary.csv carries a `dwc_term` column holding the full term URI for the **12 of 57** canonical fields that one Darwin Core term means exactly. A field Darwin Core *splits* — `depth_m` becomes `minimumDepthInMeters` and `maximumDepthInMeters` — or has no term for is deliberately left empty rather than mapped approximately.

5.5.1 An id is filled only on an exact match

Empty means “no concept in the vocabulary says exactly this”, never “nobody looked.” An id is written only when every facet the concept states — quantity, matrix, phase, method — is something the registry or the dataset’s documented protocol actually supplies. A *generic* concept is an exact match at coarser specificity: NERC P01 TEMPPR01, *Temperature of the water body*, is exactly what a QC’d bottle temperature is. A concept that adds a facet nobody recorded is not: IRRDUV01 pins PAR to a cosine-collector radiometer, which no CalCOFI metadata states, so PAR has no id.

Filling an id you are not sure of is worse than leaving it empty. An empty `measurementTypeID` is a portal record that says “this measurement is not mapped”; a wrong one is a record that confidently says the wrong thing, at an aggregator that will never ask.

Coverage as of v2026.09:

registry	column	filled
measurement_type.csv	nerc_p01 (P01, measurementTypeID)	115 / 200

registry	column	filled
measurement_type.csv	units_nerc_p06 (P06, measurementUnitID)	174 / 200
life_stage.csv	nerc_s11 (S11, lifeStage)	10 / 23
gear.csv	nerc_l22 (L22, samplingProtocol device)	4 / 11
field_dictionary.csv	dwc_term	12 / 57

Of the 85 measurement types with no P01, **29 are taxon-bearing** abundance, biomass or size types — P01 encodes the taxon *in the concept*, and CalCOFI carries it in **taxon_key**, so a per-type id there would be wrong rather than missing. Another 8 are event-level effort and sub-occurrence attributes BODC does not model as parameters. The genuine gaps are documented in **RELEASES.md**, and most of them are questions for a data provider rather than for the vocabulary: an unrecorded transmissometer wavelength, radiation channels that do not say whether they are upwelling or downwelling, flow-cytometry gating that was never written down.

5.5.2 Three caveats for anyone building an export

- **obs is positive-only for ichthyoplankton.** A tow that was sorted and found nothing has **no row**, so `occurrenceStatus = "absent"` cannot be derived from zero values. Absences come from the sampling events (**sample**, root rows) minus the taxa observed on them — and a surveyed year with no positives is indistinguishable from an unsurveyed year if you count rows instead of events.
- **organismQuantityType is the whole meaning of the number.** Areal (individuals per 10 m², from an oblique or vertical tow standardized by the haul factor) and volumetric (individuals per 1000 m³, from a surface Manta tow or any tow with a filtered volume) are **not interconvertible** without an integrated depth and a vertical-distribution assumption. Publish the denominator with the number, never a bare count.
- **Two life_stage values are not life stages.** Euphausiid **damaged** marks specimens too damaged to stage (`occurrenceRemarks`), and ichthyoplankton **invert** is a provenance flag for the merged invertebrate counts. `metadata/life_stage.csv` says so per value; do not pass either through as `lifeStage`.

A generic `publish_to-obis.qmd` over the core — replacing the per-dataset ichthyoplankton notebook — is planned rather than built; the registries above are what it was waiting for.

5.6 Relationships between tables

Primary and foreign keys ship with every release as `relationships.json` beside `catalog.json`, and the [Schema explorer](#) draws them as an entity-relationship diagram per release (deep-link with `#erd?v=v2026.08.25`). Intra-dataset relationships are declared in each ingest's own `relationships.json`; cross-dataset ones live in `metadata/relationships_cross.csv` and are merged in at release time.

The joins worth memorising:

```
-- an observation to its sampling event, and up the hierarchy
obs.sample_key      -> sample.sample_key
sample.parent_sample_key -> sample.sample_key      -- adjacency list
sample.root_sample_key  -> sample.sample_key      -- top of the chain

-- provenance and place, denormalized onto obs so a rollup needs no join
obs.dataset_key      -> dataset.dataset_key
obs.cruise_key       -> cruise.cruise_key
obs.grid_key         -> grid.grid_key

-- what was measured, and of what
obs.measurement_type -> measurement_type.measurement_type
obs.taxon_key        -> taxon.taxon_key
(dataset_key, ds_taxa_code) -> dataset_taxon      -- the per-dataset vocabulary
```

5.7 Spatial Tips

- Use `ST_Subdivide()` when running spatial joins on large polygons.
- **All released geometry is tagged EPSG:4326**, normalized immediately before the freeze. This matters because `ST_Point(lon, lat)` tags OGC:CRS84 while `ST_Read()` over GeoJSON tags EPSG:4326 — the same WGS 84 longitude/latitude — and **DuckDB refuses `ST_Intersects` across differing tags**. If you build geometry on one side of a join, tag both sides; do not coerce one to match the other, or the next release will break you.
- **NaN is not NULL, and it corrupts spatial queries beyond its own row**. A NaN coordinate survives `IS NOT NULL`, and `ST_Point(NaN, NaN)` returns a real, non-NULL geometry that survives `geom IS NOT NULL` too. Worse, its presence makes `ST_Intersects` return **different counts at different thread counts**, dropping valid, unrelated pairs. The release normalizes NaN/Inf to NULL before minting geometry — but if you build your own, test `isnan()` and `isinf()` explicitly.

6 Metadata & the ingest loop

How a dataset gets into CalCOFI.io, where its words live, and what a data provider or a member of the data team edits — and what they never have to. This chapter is for people who own or curate a dataset; the engineering detail behind each step is in [CalCOFI/workflows](#) and its `CLAUDE.md`.

6.1 One key, one record, one page

Every dataset has one key, `{provider}_{dataset}` (`calcofi_bottle`, `swfsc_ichthyo`, `cce-lter_zooscan`), and that key names everything about it: its folder of metadata in git, its row in its provider’s Google Sheet, its record in the release, and its page at [calcofi.io/datasets/{key}/](#). A dataset is in one of three states, and the key, the folder, the Sheet row and the page URL are the same in all three, so a link never breaks when a dataset moves forward:

state	what it means	where it shows
holding (external, archived or planned)	CalCOFI has or knows of the data, but it is not in the integrated database yet	the catalog grid under <i>not yet in the database</i> , with its links out
in the pipeline (<code>in_release: false</code>)	an ingest notebook runs and produces outputs, but provider questions are still open	the workflow page only; nothing public until the switch flips
released	the dataset is in a frozen release with a DOI	its full page, every endpoint, every app

6.2 Where the words live

Two kinds of fact describe a dataset, and they are kept apart on purpose:

- **Authored** — abstract, methods, who made it, how to cite it, its licence and DOI, the acknowledgement a use should carry. These live in one small file per dataset in git, `metadata/{provider}/{dataset}/dataset_meta.yml`, and every public surface is

generated from it: the dataset page, the EML document the portals read, the citation the apps copy.

- **Measured** — years and area covered, row counts, when the source was last fetched, whether a DOI resolves. These are computed when a release is cut and are never typed; a hand-written extent goes stale the moment the data grows underneath it.

The authored fields are tiered, so a provider sees the few that matter first. The table reads the field registry live from the repository:

6.3 The Sheets, and what you may edit

Each provider organization (`calcofi`, `swfsc`, `sio`, `cce-lter`, `cdfw`, `farallon`, `sccoos`) has **one Google Sheet**, generated from git and synced back to it. The data team sends each provider the link to their own Sheet; the set lives in a [Shared Drive folder](#) owned by the CalCOFI service account, so nothing depends on one person's login. A Sheet has three kinds of tab:

tab	one row per	you edit	everything else
a dataset's tab (its key)	question we have asked about that dataset	<code>answer</code> , <code>status</code> , <code>answered_date</code> , <code>who</code>	protected
metadata	(dataset, field) — long form, because abstracts are paragraphs	<code>value</code> (<code>edited_by</code> and <code>edited_date</code> fill themselves)	protected; measured fields shown read-only for context
holdings (the CalCOFI Sheet only)	dataset not yet ingested, across all providers — the team's triage board	<code>status</code> , <code>priority</code> , <code>owner</code> , <code>next_step</code>	protected

Two rows deserve a note. **visibility** is a checkbox: **internal** keeps a dataset in the record and on the triage board but off every public page, the sitemap and `data.json` until the conversation with its provider is done. **license** must be one of the ids in the licence registry (`CC-BY-4.0`, `CC0-1.0`, `US-PD`, `custom` with a URL, ...); anything else is refused when the Sheet is pulled, not discovered at release.

6.4 Questions, and what *proposed* means

Every question we have for a dataset's owner is a row in `metadata/{provider}/{dataset}/questions.csv` (see [the registries](#)) and in that dataset's Sheet tab. A row has a short label (Q07), the question,

Table 6.1: Authored metadata fields, by tier (`metadata/dataset_meta_fields.csv` in CalCOFI/workflows). Read-only rows are what the release measures and shows beside the editable ones for context.

field		what it is for
required		
description	edit	One-paragraph summary used on calcofi.io cards
abstract	edit	Full EML abstract: what the dataset is, why
methods_md	edit	How the data were collected or measured (instructions)
study_extent	edit	The spatial/temporal/thematic scope actually covered
sampling_description	edit	The sampling design in prose: gear, frequency, etc.
creators	edit	One per line: Name · Organization · orcid
contact	edit	An email or URL a user can reach about this dataset
keywords	edit	Free-text keywords, one per line or semicolon-separated
license	edit	An id from metadata/license.csv (CC-BY-4.0, CC-BY-NC-ND-4.0, etc.)
visibility	edit	public or internal (checkbox). internal keeps the dataset private
recommended		
quality_control_md	edit	QC steps applied before release (flags, corrections, etc.)
maintenance	edit	Update frequency / ongoing vs. completed / finished
associated_parties	edit	Other contributors and their role (dataManager, etc.)
keywords_gcmd	edit	GCMD Science Keywords controlled-vocabulary
funding	edit	Funding sources / grant numbers.
acknowledgement	edit	Acknowledgement text a use of this data is required
citation_main	edit	The canonical how-to-cite string for this dataset
license_url	edit	Required when license = custom: URL to the license
doi	edit	Bare DOI (10.xxxx/...), no https:// prefix, expanded
pi_names	edit	Principal investigator name(s), semicolon-separated
link_calcofi_org	edit	The calcofi.org landing page for this dataset, if any
link_data_source	edit	The portal/download URL the data is actually from
optional		
citation_others	edit	Other citations relevant to this dataset (companion DOIs, etc.)
link_others	edit	Other relevant URLs (companion DOIs, related datasets, etc.)
coverage_temporal	edit	Asserted ONLY when the data provably cannot be interpolated
coverage_spatial	edit	Asserted ONLY when the data provably cannot be interpolated
coverage_temporal_observed	read-only	Measured at release from the assembled core
coverage_spatial_observed	read-only	Measured at release from the assembled core
source_accessed	read-only	When the source was last fetched (resolve_source)
n_obs	read-only	Row count in <code>obs</code> for this dataset at the last release
year_min	read-only	Earliest observed year in the release. Read-only
year_max	read-only	Latest observed year in the release. Read-only

the context we already know, a priority, and a **status**:

- **open** — we need an answer we do not have.
- **proposed** — we have already built or reasoned an answer and want it confirmed; the `proposed_answer` column holds it. Most rows are **proposed**, so a provider approves a solution rather than being handed a problem.
- **answered** and **wontfix** — closed, with the answer kept beside the question.

Questions reach a provider through the Sheet and, when a batch is ready, through one email drafted from the same rows. Answers come back the same way: the data team pulls the Sheet, the four answer columns are validated and written into `questions.csv` in one commit, and the next release carries whatever changed.

6.5 What happens after you edit

Nothing happens on the Sheet itself. The data team runs a sync (**push** to regenerate the tabs from git, **pull** to bring edits back; both are dry runs until told otherwise), which rewrites only the changed values in the sidecar and leaves its history and comments intact. The next release — cut every few weeks, each with its own DOI — then regenerates every surface from the record:

Between releases, a weekly job asks each portal what it says *now* about every dataset and holding — a new EDI revision, an OBIS re-index, an ERDDAP id that disappeared — and files a **proposed** question for the provider when something changed. It observes; it never edits the record.

6.6 A new dataset, end to end

Bringing a dataset in is a loop of five steps with a person at every hand-off:

1. **Explore** — profile the source (columns, coverage, keys, provider), and seed the first questions from what the profile cannot answer.
2. **Metadata** — map the source's fields onto the shared field dictionary and measurement vocabulary; register the dataset's key, category and descriptive sidecar.
3. **Ingest** — a notebook (`ingest_{provider}_{dataset}.qmd`) turns the source into the core tables, with the provider's own identifiers kept as columns and the questions section at the end.
4. **Validate** — keys, ranges, taxa and coverage are checked; every finding is either fixed or becomes a **proposed** question.
5. **Release** — the dataset joins the next frozen release, gets its page, its EML and STAC records, and its rows in the apps.

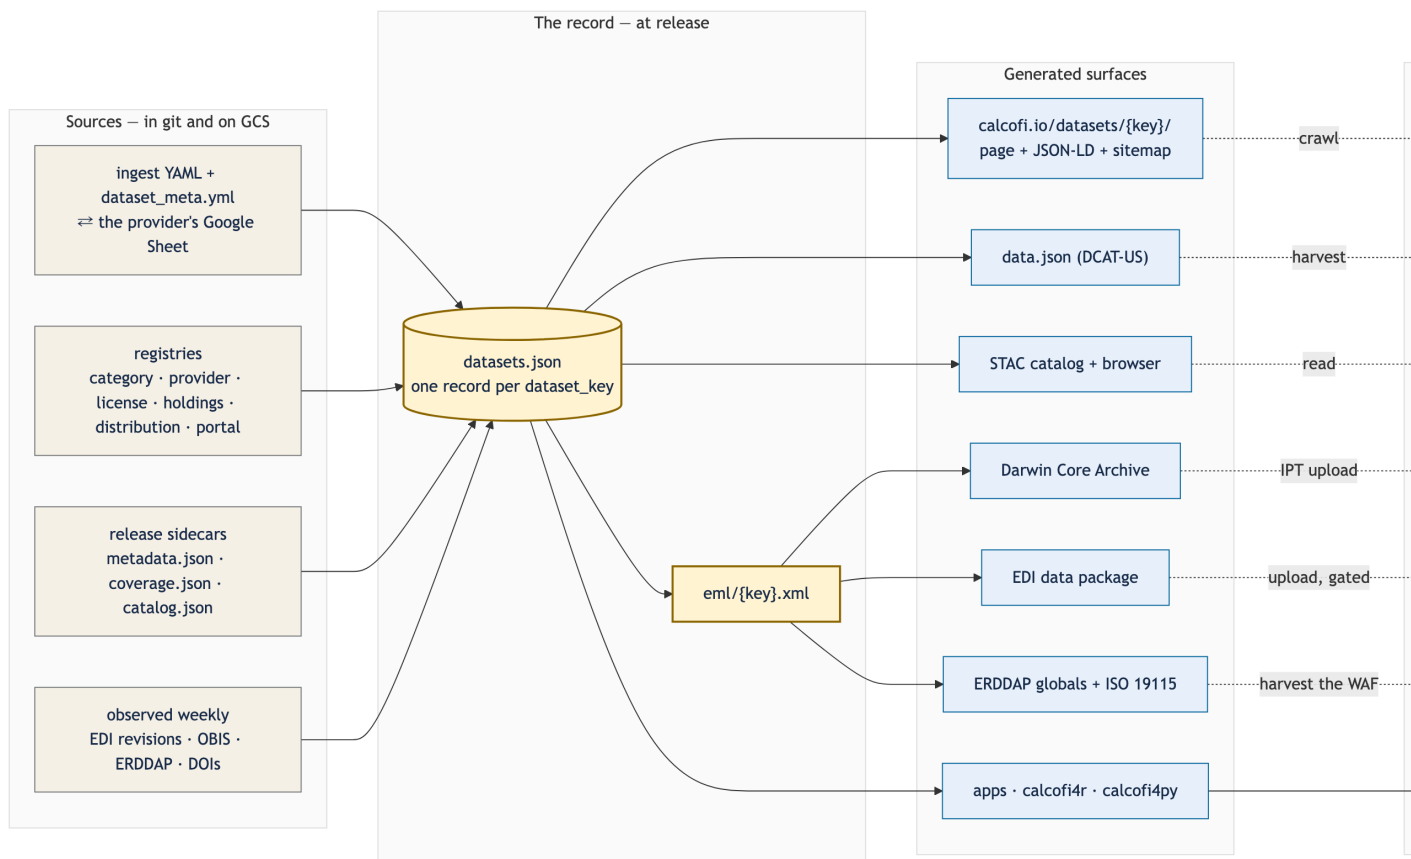


Figure 6.1: Everything a portal sees is generated from one record per dataset. The dotted boxes are catalogs run by others; each is pointed at a static file we already publish.

A dataset can stop after step 3 with `in_release: false` while its questions are open. That is normal, and it is what the holdings triage board is for: a holding's `next_step` names which of these steps it is waiting on and who owns it.

6.7 Who to contact

- `data@calcofi.io` reaches the CalCOFI data team, and is the contact printed in every record and metadata document unless a dataset names its own.
- **The feedback button** in the [Explorer](#) captures the view you are looking at (annotate it if you like) and sends it to the team, a tracking sheet and a public issue; *Register a product* on the same dialog tells a provider what was made from their data.
- **GitHub issues** on [CalCOFI/workflows](#) for anything about a dataset's ingest or meta-data.

6.8 See also

- [The database schema](#) — the metadata registries and the `dataset` table.
- [Portals](#) — where each dataset is archived and registered, and the policy per dataset.
- [Cite this data](#) — the citations the record produces.

7 Data Access

CalCOFI [database](#) releases are published as **Parquet** files on a public Google Cloud Storage (GCS) bucket. You can query them directly with [DuckDB](#) — from R, Python, the DuckDB CLI, or any DuckDB client — with **no credentials, no API server, and no full download**. DuckDB reads only the columns and row groups a query actually touches, straight over HTTPS.

This page covers querying the release Parquet directly. For convenience-wrapped biological environmental matching, see [Matching Helpers](#). Looking for a particular dataset rather than a query? Every dataset has its own page at calcofi.io/datasets/{dataset_key}/ — coverage, every place it can be reached (this page's Parquet included), its citation and its provider — see [Portals](#).

The releases are read-only snapshots. The CTD team's *working* database — multi-user PostgreSQL on the CalCOFI server, private, reached over SSH — is described in [Server Access](#), including how to join it with the releases from DuckDB.

7.1 Where the data lives

A release is a versioned folder of **sidecars** — the record of what the release is — and its tables are Parquet **objects** that the release's `catalog.json` points at:

```
gs://calcofi-db/ducklake/
  releases/
    latest.txt           # the promoted version, e.g. v2026.08.25
    versions.json        # every version: date, tables, rows; consolidated / retired
    RELEASES.md          # what changed between versions and why, newest first
    {version}/
      catalog.json       # table list, rows, partitioned/supplemental flags,
                        #   and objects[] - where each table's bytes live
      relationships.json # primary keys + foreign keys
      metadata.json      # table/column descriptions, units, datasets, measurement type
      RELEASE_NOTES.md   # this version's RELEASES.md section + a generated appendix
      parquet/           # legacy per-release copy - promoted + consolidated versions o
        {table}.parquet
```

```

        {table}/dataset_key=.../*.parquet
tables/                # content-addressed objects, from the v2026.09 releases
        {table}/{content_hash}/{table}.parquet
        {table}/{col}={value}/{content_hash}/data_0.parquet

```

- Public HTTPS root of the bucket: <https://storage.googleapis.com/calcofi-db/> — every path in a catalog is relative to it. <https://storage.calcofi.io/calcofi-db/> serves the same bucket and redirects a legacy `releases/{version}/parquet/...` URL to the canonical object where one still exists.
- The promoted version is at [releases/latest.txt](#); the table list — and where each table’s bytes live — at `releases/{version}/catalog.json`.
- **Resolve a table through the catalog; never build a parquet/ path by hand.** From the v2026.09 releases each table entry in `catalog.json` carries `objects[]` — one object for a single-file table, one per partition for a partitioned one — with a bucket-relative `path`, `bytes`, `sha256`, `content_hash`, `since` (the first version that shipped that exact object) and its own `compat_path` (the legacy per-release path of that one file). Objects are immutable and shared between versions: a release that changed three tables shares every other object with the release before it, so `since` is the per-table “what changed”. The legacy `releases/{version}/parquet/{table}.parquet` copy remains only for the promoted version and the consolidated ones (see [Versions](#)). The packages’ resolvers — `calcofi4r::cc_release_sources()`, `calcofi4py.release_sources()` — turn a catalog entry into URLs for any version, including those before v2026.09.
- Most tables are **single-file**. `obs` and the supplemental `obs_ctd_full` / `obs_mets_full` are **hive-partitioned** by `dataset_key` (`catalog.json` flags these with `"partitioned": true`); a partition object’s `path` carries its `dataset_key=...` segment, so `hive_partitioning = true` recovers the column. Supplemental tables (`"supplemental": true`) are hosted and cataloged but excluded from `cc_get_db()` by default — `obs_ctd_full` alone is ~270 M rows.
- To see **what’s in each table** before writing a query, open the [CalCOFI Schema explorer](#) — ERD, sortable tables/columns with units and descriptions, dataset provenance, and the canonical measurement-type registry, all reading the same `metadata.json` sidecar.

7.2 Versions

- **latest vs pinned.** `latest.txt` names the *promoted* version — a release is promoted only after its consumer-contract query suite passes, so **latest** is safe to follow interactively and is what `cc_get_db()` defaults to. Anything that must be reproducible — a paper, an app build, a download bundle — pins a `vYYYY.MM.DD`. Releases are immutable: the same version always returns the same rows.
- **Consolidated vs retired.** Every version keeps its sidecars and notes, but only some keep their bytes. The **consolidated** versions (`"consolidated": true` in

`versions.json`) mark a schema or data milestone and keep their `parquet/` copy indefinitely — `v2026.04.08` (last of the per-dataset schema), `v2026.05.14` (first `ctd_thin`), `v2026.06.26` (`zoodb` and `zooscan` enter), `v2026.07.17` (unified `taxon`), `v2026.08.14` (last before content-addressing) and `v2026.08.25` (`cruise_key` by date span, depth ceiling, quality flags mapped) — plus, always, the promoted version and its predecessor. Every other version is **retired** by archive thinning once it is neither: its `versions.json` entry gains `retired: {retired_utc, to, reason}`, where `to` is the consolidated version to use instead, and `cc_get_db("v2026.08.10")` errors naming it rather than failing table by table on 404s. When you pin, pin a consolidated version.

- **What changed.** [RELEASES.md](#) is the running changelog across versions — one section per release, newest first, saying what was wrong, what is true now, and what it costs a consumer (`**Consumers:**` lines). Each version's `RELEASE_NOTES.md` is its section plus a generated appendix (tables and rows, datasets, the consumer-contract result, package versions): `calcofi4r::cc_release_notes(version)` prints it, and `cc_list_versions()` / `calcofi4py.cc_list_versions()` list `versions.json`. Per table, `objects[].since` in the catalog says which version last changed its bytes.

7.3 Setup: the `httpfs` extension

DuckDB reads remote Parquet through its `httpfs` extension. Spatial queries (e.g. distances between casts and tows) also need `spatial`. Both are one-time installs, then loaded per session:

```
INSTALL httpfs; LOAD httpfs;
INSTALL spatial; LOAD spatial;  -- only if you use ST_* functions
```

7.4 Single-file tables

A single-file table is one HTTPS URL handed to `read_parquet()`. Take it from the catalog (the packages do this for you, below); typed by hand it must be a version whose `parquet/` copy is kept — `v2026.08.25` is consolidated, so this URL answers indefinitely:

```
SELECT taxon_key, scientific_name, common_name, worms_id, rank
FROM read_parquet('https://storage.googleapis.com/calcofi-db/ducklake/releases/v2026.08.25/p
WHERE scientific_name = 'Sardinops sagax';
```

Joins work the same way — name each table's URL. The core model is small: `obs` holds one measured value per row (`realm = bio | env`) and points at the `sample` it came from (`sample_key`; `parent_sample_key` walks `net` → `tow` → `site` and `bottle` → `cast`)

and, for biology, at `taxon` (`taxon_key`); event-level effort such as `std_haul_factor` is in `sample_measurement`:

```
SELECT s.sample_key, s.sample_type, s.datetime, s.latitude, s.longitude,
       sm.measurement_type, sm.measurement_value
FROM read_parquet('https://storage.googleapis.com/calcofi-db/ducklake/releases/v2026.08.25/p
JOIN read_parquet('https://storage.googleapis.com/calcofi-db/ducklake/releases/v2026.08.25/p
WHERE s.dataset_key = 'swfsc_ichthyo'
      AND sm.measurement_type = 'std_haul_factor'
LIMIT 10;
```

7.5 Hive-partitioned tables

`obs` (and the supplemental `obs_ctd_full` / `obs_mets_full`) is partitioned into one folder per `dataset_key`. From the v2026.09 releases the catalog lists each partition as its own object, so a partitioned table is read as an **explicit list of HTTPS URLs** — `objects[].path` prefixed with the bucket root — with `hive_partitioning = true` to recover `dataset_key` from the `dataset_key=...` path segment. That runs in every DuckDB, the browser included:

```
-- the list is catalog.json  tables[name = 'obs']  objects[].path, one per partition
SELECT dataset_key, count(*) AS n
FROM read_parquet([
    'https://storage.googleapis.com/calcofi-db/ducklake/tables/obs/dataset_key=calcofi_bottl
    'https://storage.googleapis.com/calcofi-db/ducklake/tables/obs/dataset_key=calcofi_ctd-c
    -- ... one URL per partition, in catalog order
    'https://storage.googleapis.com/calcofi-db/ducklake/tables/obs/dataset_key=swfsc_ichthyo
], hive_partitioning = true)
GROUP BY dataset_key
ORDER BY dataset_key;
```

Because `dataset_key` is the partition column, filtering on it lets DuckDB **prune** whole partitions — a single-dataset query never opens the other files. Nobody types that list: `calcofi4r::cc_read_parquet_sql()` / `calcofi4py.read_parquet_sql()` emit it from the catalog (next sections).

A partitioned table may **also** publish one whole-table file — a single-file **twin** — and `obs` does. In the catalog it is the `objects[]` entry *without* `partition_by` (`ducklake/tables/obs/{content_hash}/obs.parquet`); the resolvers leave it out of `urls` and return it separately as `single_file` (NA / None for a table that has none). It exists for https-only readers that cannot take a list — browser DuckDB-WASM, a `read_parquet()` that wants one URL — which read `single_file` *instead of* the partition list. Read one or

the other, **never both**: the twin holds the same rows as the partitions, so a query over both counts every row twice. The price of the twin is partition pruning — a `dataset_key` filter still works, but scans the one file. On releases before v2026.09 it is the plain per-release copy, `.../releases/{version}/parquet/obs.parquet`:

```
-- the single-file twin of obs, for readers that cannot take a list or glob
SELECT dataset_key, count(*) AS n
FROM read_parquet('https://storage.googleapis.com/calcofi-db/ducklake/releases/v2026.08.25/p
GROUP BY dataset_key
ORDER BY dataset_key;
```

Releases **before v2026.09** (v2026.08.25 and the consolidated versions before it) have no `objects[]`: their partitioned table is a directory under `parquet/`, and plain HTTPS URLs cannot glob a directory. Reading one needs an **s3-style glob**, so configure DuckDB's anonymous s3 access — GCS is s3-compatible:

```
INSTALL httpfs; LOAD httpfs;
SET s3_region          = 'auto';
SET s3_endpoint        = 'storage.googleapis.com';
SET s3_url_style       = 'path';
SET s3_access_key_id   = '';
SET s3_secret_access_key = '';

SELECT dataset_key, count(*) AS n
FROM read_parquet(
  's3://calcofi-db/ducklake/releases/v2026.08.25/parquet/obs/**/*.parquet',
  hive_partitioning = true)
GROUP BY dataset_key
ORDER BY dataset_key;
```

The resolvers return this form for those versions automatically.

7.6 From R

Let the `calcofi4r` package register every release table as a view — it resolves each table through the catalog and handles `httpfs`, the partitioned tables, the supplemental opt-in and local caching (content-addressed, so a table unchanged between releases is cached once):


```
# remotes::install_github("calcofi/calcofi4r")
library(calcofi4r)

con <- cc_get_db() # promoted release, tables as views
con <- cc_get_db("v2026.08.25") # pinned; a retired version errors, naming the repl
DBI::dbListTables(con)

# lazy dbplyr against the remote parquet
library(dplyr)
tbl(con, "taxon") |> filter(scientific_name == "Sardinops sagax")

# or a one-off SQL query
cc_query("SELECT dataset_key, count(*) AS n FROM obs GROUP BY 1 ORDER BY 2 DESC")
```

To hand a table's URLs to DuckDB (or anything else) yourself, resolve them through the catalog rather than building a path — `cc_release_sources()` is the one place a catalog entry becomes URLs, for any version:

```
library(DBI)
cat_ <- cc_catalog("latest") # or a pinned "vYYYY.MM.DD"
src <- cc_release_sources(cat_, "obs") # list(urls, hive, canonical, hashes, local_paths,
src$urls # one https URL per partition (the legacy path or s
src$single_file # obs's whole-table twin - read it OR src$urls, new

con <- dbConnect(duckdb::duckdb())
dbExecute(con, "INSTALL httpfs; LOAD httpfs;")
d <- dbGetQuery(con, sprintf(
  "SELECT scientific_name, common_name, worms_id
  FROM %s
  WHERE common_name ILIKE '%%sardine%%'",
  cc_read_parquet_sql(cc_release_sources(cat_, "taxon")))) # read_parquet('...') or read_par
```

7.7 From Python

`calcofi4py` registers every release table as a DuckDB view for you (partitioned + supplemental handling included), mirroring `calcofi4r`:

```
# pip install "calcofi4py @ git+https://github.com/CalCOFI/calcofi4py"
import calcofi4py as cc
con = cc.cc_get_db() # promoted release; cc_get_db("v2026.08.25") to pin
```

```
df = con.sql("SELECT * FROM taxon WHERE common_name ILIKE '%sardine%'").df()
cc.cc_query("SELECT count(*) FROM obs").fetchone()
```

! Apply the quality flags

`obs.measurement_qual` carries each dataset's **own** flag vocabulary, uninterpreted — bottle (6 = OK but from CTD, 8 = suspect, 9 = missing), CTD cast files (1/2 = use the primary/secondary sensor, 8 = questionable, 9 = bad/missing), DIC WOCE (2 = good, 3 = questionable, 4 = bad, 9 = missing); see [metadata/measurement_qual.csv](#). A flagged value is still a row. Filter it yourself, or use the one predicate the apps use:

```
calcofi4r::cc_qual_ok_sql("o")      # append to any WHERE over obs / obs_ctd_full / sample_r
```

```
calcofi4py.qual_ok_sql("o")
```

```
-- what both expand to (NULL-safe: an unflagged row is kept)
AND COALESCE(NOT ((o.dataset_key IN ('calcofi_bottle', 'calcofi_ctd-cast')
                  AND regexp_replace(o.measurement_qual, '\.0+$', '') IN ('8', '9'))
             OR (o.dataset_key = 'calcofi_dic' AND o.measurement_qual IN ('3', '4', '9'))
```

Or plain duckdb, resolving the URLs through the catalog yourself (`release_sources()` mirrors `calcofi4r::cc_release_sources()`; a retired version raises `RetiredVersionError`, whose `.to` is the version to use instead):

```
import duckdb
import calcofi4py as cc

catalog = cc.cc_catalog("latest")          # or "v2026.08.25"
src      = cc.release_sources(catalog, "taxon") # {"urls", "hive", "canonical", "hashes", ...}

con = duckdb.connect()
con.sql("INSTALL https; LOAD https;")
df = con.sql(f"""
    SELECT scientific_name, common_name, worms_id
    FROM {cc.read_parquet_sql(src)}
    WHERE common_name ILIKE '%sardine%'
""").df()
```

Without the package the same resolution is a few lines of json: fetch `releases/{version}/catalog.json` and prefix each table's `objects[].path` with `https://storage.googleapis.com/calcofi-db/`, as the browser example below does.

7.8 From your browser

DuckDB compiles to WebAssembly, so the *same engine* runs **client-side in your browser** — no server, no install, no R or Python. CalCOFI ships a ready-made form at → [Open CalCOFI Query](#) that wraps the three retired bio env Plumber endpoints (and a free-form SQL shell): pick a function, fill the form, click **Run**, and a Chromium / Firefox / Safari worker thread fetches Parquet range-by-range over HTTPS and joins them in-browser.

To embed DuckDB-WASM in your own page, the boilerplate is about 15 lines — load the bundle from a CDN, instantiate, `INSTALL httpfs` and you're ready:

```
<script type="module">
  import * as duckdb from "https://cdn.jsdelivr.net/npm/@duckdb/duckdb-wasm@1.29.0/+esm";

  const bundles = duckdb.getJsDelivrBundles();
  const bundle = await duckdb.selectBundle(bundles);
  const worker = await duckdb.createWorker(bundle.mainWorker);
  const db = new duckdb.AsyncDuckDB(new duckdb.ConsoleLogger(), worker);
  await db.instantiate(bundle.mainModule, bundle.pthreadWorker);
  const conn = await db.connect();
  await conn.query("INSTALL httpfs; LOAD httpfs;");
  await conn.query("INSTALL spatial; LOAD spatial;");

  const root = "https://storage.googleapis.com/calcofi-db";
  const version = (await (await fetch(`${root}/ducklake/releases/latest.txt`)).text()).trim();
  const catalog = await (await fetch(`${root}/ducklake/releases/${version}/catalog.json`)).json();

  // resolve a table through the catalog: objects[].path → https URL. A partitioned
  // table lists one object per partition (needs hive_partitioning) and may also
  // publish a whole-table twin - the object WITHOUT partition_by (obs does); a
  // browser reads the twin instead of the list, never both (that doubles every row).
  // catalogs before v2026.09 have no objects[] - fall back to the per-release path
  const readParquet = (name) => {
    const t = catalog.tables.find(t => t.name === name);
    const objs = t.objects ?? [{ path: `ducklake/releases/${version}/parquet/${name}.parquet` }];
    const twin = t.partitioned ? objs.find(o => !o.partition_by) : null;
    if (twin) return `read_parquet('${root}/${twin.path}')`;
    const urls = objs.map(o => `${root}/${o.path}`).join(", ");
    return `read_parquet([${urls}]${t.partitioned ? ", hive_partitioning = true" : ""})`;
  };

  const result = await conn.query(`
    SELECT scientific_name, common_name, worms_id
```

```
FROM ${readParquet("taxon")}
WHERE common_name ILIKE '%sardine%'
`);
console.log(result.toArray());
</script>
```

For arbitrary one-off SQL with no setup at all, paste a query into shell.duckdb.org — DuckDB’s official DuckDB-WASM shell. Same WebAssembly engine, same public Parquet, identical rows.

7.9 Run it from anywhere

The same portable SQL — what `calcofi4r::cc_match_*` emits as `attr(d, "sql")`, what the [Integrated App](#) download bundle ships in its `query/` folder, what is shown in [the worked example](#) below — runs in any DuckDB client:

Where	How
R , on your laptop	<code>calcofi4r::cc_match_ichthyo_by_name(...)</code> — emits and runs the SQL; <code>attr(d, "sql")</code> hands it back
Python , on a notebook server	<code>duckdb.connect().sql(open("query.sql").read()).df()</code> — see From Python
shell , on the command line	<code>duckdb < query.sql</code>
your web browser , no install	CalCOFI Query — point-and-click form, runs DuckDB-WASM client-side

7.10 Reproducibility

Because every query is plain SQL against immutable, versioned, public Parquet, a CalCOFI result is **reproducible by anyone** — pin the `{version}` and re-run the SQL. Pin a [consolidated](#) version: its bytes are kept indefinitely, and a later release that shares an object with it shares the same bytes.

The [Integrated App](#) builds on this: its data **download bundle** ships a `query/` folder alongside the data:

```
data/original/{bio,env}.csv      ← query/{bio,env}.sql
data/integrated/integrated_*.csv ← query/integrated_*.sql
```

query/manifest.json	release version, filters, GCS source URLs, per-file row counts + md5 checksums
query/REPRODUCE.md	DuckDB-CLI / Python / R re-run snippets

Each *.sql file is fully interpolated, GCS-URL-based, and copy-paste runnable (prefixed with the INSTALL/LOAD it needs). Re-run query/integrated_*.sql in DuckDB and you get back exactly the rows in the matching .csv — the manifest.json md5 checksums let you confirm it. The same SQL is what [calcofi4r::cc_match_bio_env\(\)](#) executes and attaches as attr(x, "sql"), what the browser-based [CalCOFI Query](#) generates as its SQL panel, and what a hand-written query produces — **a single source of truth across R, Python, the CLI and JavaScript.**

7.11 Worked example: sardine larvae + temperature

The recurring example through these pages is *Pacific sardine* (*Sardinops sagax*) larvae matched to CTD-bottle temperature, Q1 2018, with relaxed (5 km / 72 hr) matching.

i Note

Q1 2018 — not a more recent year — because CTD-bottle environmental data in the current release ends 2021-05, while net-tow biological data runs later. Q1 2018 has ample overlap of both.

Done as **direct SQL**, the query is a temporal interval join plus a spatial ST_Distance_Sphere filter. After the INSTALL/LOAD setup above, run the query below. This block is character-for-character what [calcofi4r::cc_match_ichthyo_by_name\(\)](#) returns as attr(d, "sql") with **version** = "v2026.08.25" — the two produce the **identical 13 rows**. Every table in it was resolved through that release's catalog, and because v2026.08.25 is [consolidated](#) the URLs stay valid. On this pre-v2026.09 release the partitioned obs resolves to an s3:// glob, so the query needs the [anonymous-s3 settings](#); from v2026.09 the same call emits an explicit HTTPS list that runs anywhere, the browser included. The [Integrated App](#) download bundle builds query/integrated_*.sql with the same cc_match_bio_env() engine (its filter set is taxa + quarters + dates rather than life_stage, so a sardine / Q1 2018 bundle returns the egg + larva superset — same matching mechanics, same reproducibility):

```
WITH bio AS (
SELECT
  o.obs_id::VARCHAR AS bio_id,
  o.datetime AS bio_datetime,
  o.longitude AS bio_lon,
  o.latitude AS bio_lat,
```

```

    o.measurement_value * shf.measurement_value / nullif(ps.measurement_value, 0) AS bio_value
    o.measurement_value AS tally,
    o.taxon_key,
    t.scientific_name,
    t.worms_id,
    o.life_stage
FROM read_parquet('s3://calcofi-db/ducklake/releases/v2026.08.25/parquet/obs/**/*.parquet', 1)
JOIN read_parquet('https://storage.googleapis.com/calcofi-db/ducklake/releases/v2026.08.25/p
LEFT JOIN read_parquet('https://storage.googleapis.com/calcofi-db/ducklake/releases/v2026.08
LEFT JOIN read_parquet('https://storage.googleapis.com/calcofi-db/ducklake/releases/v2026.08
WHERE o.realm = 'bio'
    AND o.dataset_key = 'swfsc_ichthyo'
    AND o.measurement_type = 'abundance'
    AND o.measurement_value IS NOT NULL
    AND COALESCE(NOT ((o.dataset_key = 'calcofi_bottle' AND regexp_replace(o.measurement_qual
    AND o.datetime IS NOT NULL
    AND o.longitude IS NOT NULL
    AND o.latitude IS NOT NULL
    AND t.scientific_name IN ('Sardinops sagax')
    AND o.life_stage IN ('larva')
    AND o.datetime >= TIMESTAMP '2018-01-01'
    AND o.datetime <= TIMESTAMP '2018-03-31'
),
env AS (
SELECT
    obs_id AS env_id,
    datetime AS env_datetime,
    longitude AS env_lon,
    latitude AS env_lat,
    measurement_value AS env_value,
    depth_min_m AS env_depth_m,
    measurement_type AS measurement_type
FROM read_parquet('s3://calcofi-db/ducklake/releases/v2026.08.25/parquet/obs/**/*.parquet', 1)
WHERE realm = 'env'
    AND measurement_type = 'temperature'
    AND measurement_value IS NOT NULL
    AND COALESCE(NOT ((dataset_key = 'calcofi_bottle' AND regexp_replace(measurement_qual, '
    AND datetime IS NOT NULL
    AND longitude IS NOT NULL
    AND latitude IS NOT NULL
    AND datetime >= TIMESTAMP '2018-01-01' - INTERVAL '72 hours'
    AND datetime <= TIMESTAMP '2018-03-31' + INTERVAL '72 hours'

```

```

),
matched AS (
  -- temporal interval join: every env observation within ± max_time_hr
  SELECT
    bio.*,
    env.* EXCLUDE (env_lon, env_lat),
    abs(epoch(bio.bio_datetime) - epoch(env.env_datetime)) / 3600.0 AS time_diff_hr,
    ST_Distance_Sphere(
      ST_Point(bio.bio_lon, bio.bio_lat),
      ST_Point(env.env_lon, env.env_lat)) / 1000.0 AS dist_km
  FROM bio
  JOIN env
    ON env.env_datetime BETWEEN bio.bio_datetime - INTERVAL '72 hours'
      AND bio.bio_datetime + INTERVAL '72 hours'
),
within AS (
  -- spatial filter: keep pairs within max_dist_km
  SELECT * FROM matched
  WHERE dist_km <= 5
),
ranked AS (
  SELECT
    *,
    min(time_diff_hr) OVER (PARTITION BY bio_id) AS mn_time_diff_hr,
    min(dist_km) OVER (PARTITION BY bio_id) AS mn_dist_km
  FROM within
)
-- one row per bio observation (* measurement_type): env values aggregated
SELECT
  * EXCLUDE (
    env_id, env_value, env_datetime, env_depth_m,
    time_diff_hr, dist_km, mn_time_diff_hr, mn_dist_km),
  count(*) AS n_env,
  avg(env_value) AS env_value,
  CASE WHEN count(*) = 1 THEN 0
    ELSE coalesce(stddev_samp(env_value), 0) END AS env_value_sd,
  avg(env_depth_m) AS env_depth_m,
  min(env_datetime) AS env_datetime_min,
  max(env_datetime) AS env_datetime_max,
  avg(dist_km) AS dist_km,
  avg(time_diff_hr) AS time_diff_hr
FROM ranked

```

```
WHERE time_diff_hr = mn_time_diff_hr  
GROUP BY ALL  
ORDER BY bio_id
```

The next page, [Matching Helpers](#), shows this same query as a one-liner.

8 Server Access

8.1 SSH, SFTP & PostgreSQL

The CalCOFI server (`ssh.calcofi.io`, a Google Cloud VM in Iowa) hosts the apps, RStudio Server, ERDDAP — and, since August 2026, a **multi-user PostgreSQL database** that the CTD team uses for QA/QC: everyone reads and writes the same tables, originals stay immutable, flags and proposed fixes live beside them. This page is the one place that explains how to get in and how to connect, for **Mac** and **Windows**.

i Two databases, two access paths

- The **public releases** (v2026.08.14 ...) are Parquet on a public bucket. No account, no tunnel: [Data Access](#), `calcofi4r::cc_get_db()`, DuckDB, the browser.
- The **working PostgreSQL database** (`calcofi`) is private and reachable only over SSH. That is what the rest of this page is about.

8.2 The stack

Everything the server runs is one **Docker Compose stack**, configured in the [CalCOFI/server](#) repository — the config of record for every `*.calcofi.io` service (file an [issue](#) there for server problems):

service	container	serves
Caddy	<code>caddy</code>	reverse proxy + HTTPS for every subdomain below (caddy/Caddyfile)
Shiny Server	<code>rstudio</code>	the interactive apps at app.calcofi.io
RStudio Server	<code>rstudio</code>	rstudio.calcofi.io — R in the browser, on the server
PostgreSQL + PostGIS	<code>postgis</code>	the working <code>calcofi</code> database (below) and legacy <code>gis</code>

service	container	serves
pgAdmin	pgadmin	pgadmin.calcofi.io — web UI onto PostgreSQL
pg_tileserv	pg_tileserv	tile.calcofi.io — vector tiles from PostGIS
ERDDAP	erddap	erddap.calcofi.io — tabular data services
plumber	plumber	api.calcofi.io — the R API
Varnish	varnish	h3t.calcofi.io — cached hexagon-tile API (see Maps)

Caddy also fronts two static services with no container of their own: file.calcofi.io (public files on the server's disk) and storage.calcofi.io (a browsable front door onto the public Google Cloud Storage buckets).

8.3 Getting an account

Accounts are personal (no shared logins), key-only (no passwords over SSH), and named after your email local-part — `rswalethorp`, `bmgiore`, `kdvogel`, `bthuang`, `esatterthwaite`, `bebest`. Each account gets:

what	where
SSH + SFTP login	<code>ssh.calcofi.io</code> , your home directory (small — keep big files under <code>~/ctd</code>)
shared CTD folder	<code>~/ctd</code> → <code>/share/data/ctd/{incoming,archive,exports}</code> (group-writable)
PostgreSQL role	same name as your username, in database <code>calcofi</code> ; schemas <code>ctd</code> (curated), <code>work</code> (shared scratch), and your own schema (<code>rswalethorp.*</code>)
pgAdmin web login	pgadmin.calcofi.io with your email
RStudio Server login	rstudio.calcofi.io — R in the browser, already on the server (no tunnel needed there)

To request one: send Ben (bebest@ucsd.edu) your SSH *public* key. Generate it once per computer:

8.4 Mac (Terminal)

```
ssh-keygen -t ed25519 -C "you@ucsd.edu"      # accept the default file, set a passphrase
cat ~/.ssh/id_ed25519.pub                  # this ONE line is what you send
```

8.5 Windows (PowerShell)

Windows 10/11 ships OpenSSH (`ssh`, `ssh-keygen`, `sftp`, `scp`) — the commands are the same as on Mac. Open **PowerShell** (not `cmd`):

```
ssh-keygen -t ed25519 -C "you@ucsd.edu"      # accept the default file, set a passphrase
Get-Content $env:USERPROFILE\.ssh\id_ed25519.pub  # this ONE line is what you send
```

If `ssh-keygen` is not found: *Settings* *System* *Optional features* *Add* *OpenSSH Client*, then reopen PowerShell.

8.6 Windows (PuTTY)

If you already use PuTTY: **PuTTYgen** **Generate** (EdDSA/Ed25519), set a passphrase, **Save private key** (`calcofi.ppk`), and copy the text in “*Public key for pasting into OpenSSH authorized_keys file*” — that is what you send. (A `.ppk` can also be imported into the built-in OpenSSH with *Conversions* *Export OpenSSH key*.)

Never send the private key (`id_ed25519` without `.pub`). Lost laptop → tell Ben, the key is revoked and you send a new one.

8.7 Step 1 — SSH in

Put the server in your SSH config once, and every tool (`ssh`, `sftp`, `R`, VS Code) can use the short name `calcofi`. The `LocalForward` line is the database tunnel (next section).

8.8 Mac (Terminal)

Create or edit `~/.ssh/config` (e.g. `nano ~/.ssh/config`):

```
Host calcofi
  HostName ssh.calcofi.io
  User rswalethorp          # <- your username
  IdentityFile ~/.ssh/id_ed25519
  LocalForward 5432 localhost:5432 # database tunnel (see below)
  ServerAliveInterval 60
```

Then:

```
ssh calcofi          # first time: answer "yes" to the host-key prompt
```

8.9 Windows (PowerShell)

Same file, at C:\Users\<you>\.ssh\config (create it with Notepad; no extension):

```
Host calcofi
  HostName ssh.calcofi.io
  User rswalethorp
  IdentityFile ~/.ssh/id_ed25519
  LocalForward 5432 localhost:5432
  ServerAliveInterval 60
```

```
ssh calcofi
```

8.10 Windows (PuTTY)

Session: Host Name ssh.calcofi.io, Port 22, Saved Sessions calcofi. **Connection Data:** Auto-login username = your username. **Connection SSH Auth Credentials:** Private key file = your calcofi.ppk. **Connection SSH Tunnels:** Source port 5432, Destination localhost:5432, **Add.** Back on **Session, Save**, then **Open**. Keep the window open while you use the database. (Pageant can hold the key so you type the passphrase once per session.)

You land in your home directory. Useful first commands:

```
ls -la ~/ctd/      # the shared CTD folder (incoming/ archive/ exports/)
df -h /share       # how much disk is left - it is shared
cat ~/.pgpass      # your database password (Step 2)
```

💡 VS Code

The **Remote – SSH** extension reuses the same `~/.ssh/config`: *Remote-SSH: Connect to Host...* *calcofi* gives you a file browser, terminal and editor on the server. Handy for looking at files under `/share/data/ctd` without SFTP.

8.11 Step 2 — your database password

Your PostgreSQL password was generated when the account was created and is stored **only** in a file in your home directory on the server — it was never emailed. Read it once:

```
cat ~/.pgpass
# host:port:database:user:password - the last field is your CalCOFI database password
# localhost:5432*:rswalethorp:XXXXXXXXXXXXXXXXXXXXXXXXXXXX
# postgres:5432*:rswalethorp:XXXXXXXXXXXXXXXXXXXXXXXXXXXX
```

`.pgpass` is the standard PostgreSQL password file: every PostgreSQL client (psql, R's RPostgres, Python's psycopg, pgAdmin desktop, DBeaver, DuckDB) reads it, so you never put the password in a script. Copy the `localhost` line into the same file **on your laptop**:

8.12 Mac

```
nano ~/.pgpass      # paste the localhost:5432*:<you>:<password> line, save
chmod 600 ~/.pgpass # required - libpq ignores the file if others can read it
```

8.13 Windows

The file is `%APPDATA%\postgresql\pgpass.conf` (usually `C:\Users\<you>\AppData\Roaming\postgresql\pgpass.conf`). Create the folder and the file with Notepad, one line: `localhost:5432*:<you>:<password>`. No `chmod` needed on Windows.

To change the password: `psql -h localhost calcofi -c '\password'` (through the tunnel), then update both `.pgpass` files. Until Google sign-in is enabled on pgAdmin, the **same password** is your pgadmin.calcofi.io password (login = your email).

8.14 Step 3 — the database over the tunnel

PostgreSQL is **not** exposed to the internet. Your SSH connection carries it: with the `LocalForward 5432 localhost:5432` line in place, *while `ssh calcofi` is open* (or `ssh -N calcofi`, which opens the tunnel without a shell), anything on your laptop that connects to `localhost:5432` is talking to the server's database.

```
ssh -N calcofi & # tunnel only, in the background (Ctrl-C /
psql -h localhost -d calcofi # password from ~/.pgpass; user = your OS
psql -h localhost -d calcofi -U rswalethorp # ...or say it explicitly if they differ
```

Inside psql:

```
\dn          -- schemas: ctd, work, public, yours
\dt ctd.*     -- curated CTD tables
SHOW search_path; -- "$user", work, ctd, public (unqualified names land in YOUR sch
CREATE TABLE t AS SELECT 1 AS x; -- -> rswalethorp.t, visible to colleagues
CREATE TABLE work.t2 AS SELECT 1; -- -> work.t2, shared scratch, writable by all
```

 “Address already in use” / port 5432 taken

If `ssh` prints `bind [127.0.0.1]:5432: Address already in use`, something on your laptop (often a local Postgres or pgAdmin's bundled server) already owns 5432. Use **15432** instead in two places: `LocalForward 15432 localhost:5432` in `~/.ssh/config` (or the PuTTY Tunnels source port), and `port 15432 / localhost:15432` wherever you connect (`psql -p 15432`, the `.pgpass` line, `PGPORT=15432` for R/Python).

8.14.1 Graphical clients

client	how	best for
pgAdmin 4 desktop (download)	<i>Register</i> Server: General name calcofi ; Connection host localhost , port 5432 , database calcofi , username <i>you</i> ; SSH Tunnel tab: <i>Use SSH tunneling</i> , host ssh.calcofi.io , port 22 , username <i>you</i> , authentication <i>Identity file</i> → your private key. It opens the tunnel itself — no terminal needed.	Windows users; browsing + query tool + ERD
pgadmin.calcofi.io (web)	log in with your email + database password (Google sign-in coming); servers <i>calcofi (CTD QA/QC)</i> and <i>gis (legacy 2022)</i> are already registered — on first connect replace the username with yours and enter your password (the master password it asks for is a local encryption key of your choosing)	zero install, any machine
DBeaver (free)	New connection PostgreSQL host localhost , db calcofi , user <i>you</i> ; SSH tab host ssh.calcofi.io , user <i>you</i> , <i>Public Key</i> auth	people who already use it
RStudio Server (rstudio.calcofi.io)	log in with your username + database password; in R use host = "postgis" (it is on the same network, no tunnel); calcofi4r::cc_pg_connect() works out of the box	R without installing anything

8.15 From R

`calcofi4r` 1.8.0 (`remotes::install_github("calcofi/calcofi4r")`) resolves the host, your role and the tunnel for you:

```
library(calcofi4r)
con <- cc_pg_connect() # tunnel already open; role + password from ~/.pgpass
con <- cc_pg_connect(tunnel = TRUE) # ...or let it run `ssh -N calcofi` for you (needs
con <- cc_pg_connect(port = 15432, tunnel = TRUE) # if you had to move the local port

DBI::dbListObjects(con, DBI::Id(schema = "ctd"))
library(dplyr)
tbl(con, I("ctd.cast")) |> filter(cruise_key == "2023-04-3322") |> collect()

# write to your own schema or to work - and read it back from any other client
DBI::dbWriteTable(con, DBI::Id(schema = "work", table = "my_check"), my_df, overwrite = TRUE)
DBI::dbDisconnect(con)
cc_pg_tunnel_close() # if you used tunnel = TRUE
```

Plain RPostgres, if you prefer:

```
con <- DBI::dbConnect(RPostgres::Postgres(),
  host = "localhost", port = 5432, dbname = "calcofi", user = "rswalethorp") # password: ~/.pgpass:
```

PostGIS geometry comes through `sf`: `sf::st_read(con, query = "SELECT * FROM ctd.cast")`.

8.16 From Python

`calcofi4py` mirrors `calcofi4r` — same verbs, same defaults, password from the same `~/.pgpass`:

```
# pip install "calcofi4py @ git+https://github.com/CalCOFI/calcofi4py"
import calcofi4py as cc

con = cc.cc_pg_connect(tunnel=True) # opens `ssh -N calcofi` for you; role + password from
con.execute("SELECT count(*) FROM ctd.cast WHERE is_best_stage").fetchone()

import pandas as pd
casts = pd.read_sql("SELECT * FROM ctd.v_scan_qc WHERE study = '2304SH' AND cast_id = '2304_")
```



```
# propose a QC flag (curators accept/reject)
con.execute("""
    INSERT INTO ctd.flag (scan_id, variable, qual_code, reason)
    SELECT scan_id, 'temp1', 4, 'spike vs neighbours'
    FROM ctd.v_scan_best WHERE study=%s AND cast_id=%s AND depth=%s
""", ("2304SH", "2304_001d", 57))
con.commit()
cc.cc_pg_tunnel_close()
```

It also wraps the public releases (`cc.cc_get_db()` — DuckDB with every release table as a view, versions pinnable) and the bridge (`cc.cc_pg_attach()`, next section). Prefer plain libraries? `psycopg` / `SQLAlchemy` / `GeoPandas` read the same `.pgpass` — connection string `postgresql+psycopg://<you>@localhost:5432/calcofi`, no password in the URL.

8.17 DuckDB PostgreSQL

DuckDB's `postgres` extension lets **one query** join the public release Parquet with the team's PostgreSQL tables — and write back. From R:

```
con <- cc_get_db()           # DuckDB with the release tables as views (public, no tunnel)
cc_pg_attach(con)           # ATTACH the PostgreSQL db as `pg` (through your tunnel)
DBI::dbGetQuery(con, "
    SELECT c.cruise_key, count(*) AS n
    FROM pg.ctd.cast c
    JOIN sample s ON s.sample_key = c.sample_key      -- release table
    GROUP BY 1 ORDER BY 2 DESC LIMIT 5")
cc_pg_attach(con, alias = "pgw", read_only = FALSE) # writable: CREATE TABLE pgw.work.x AS SI
```

The same from Python (`calcofi4py`) or any DuckDB CLI:

```
import calcofi4py as cc
con = cc.cc_get_db(tables=["cruise", "sample"]) # release views
cc.cc_pg_attach(con)                          # + the PostgreSQL db as `pg`
con.sql("SELECT count(*) FROM pg.ctd.flag").fetchone()
```

Raw SQL, in any DuckDB:

```

INSTALL postgres; LOAD postgres;
ATTACH 'dbname=calcofi host=localhost port=5432 user=rswalethorp' AS pg (TYPE postgres, READ);
SELECT * FROM pg.ctd.cast LIMIT 5;
-- v2026.08.14 is a consolidated release, so this per-release path is kept; for any
-- other version take the URL from the release catalog (see below)
SELECT * FROM read_parquet('https://storage.googleapis.com/calcofi-db/ducklake/releases/v2026.08.14/p

```

And the other direction — **DuckDB *inside* PostgreSQL**. The server runs the [pg_duckdb](#) extension, so from psql / pgAdmin you can read the public release Parquet without leaving SQL:

```

SELECT * FROM release.cruise WHERE year = 2023;           -- views over the current release (cr
SELECT r['sample_key']::text, r['datetime_utc']::timestamp
FROM read_parquet('https://storage.googleapis.com/calcofi-db/ducklake/releases/v2026.08.14/p
WHERE r['dataset_key']::text = 'calcofi_ctd-cast' LIMIT 10;

```

The v2026.08.14 URL works because that version is **consolidated** — its `parquet/` copy is kept indefinitely — whereas a retired version's is removed by archive thinning (see [Versions](#)). For any other version, resolve the table through its `catalog.json` instead of typing a path; the packages hand back the `read_parquet(...)` fragment to paste in:

```

calcofi4r::cc_read_parquet_sql(cc_release_sources(cc_catalog("latest"), "sample"))
#> read_parquet('https://storage.googleapis.com/calcofi-db/ducklake/.../sample.parquet')

```

(`r['column']::type` is `pg_duckdb`'s row syntax. Big tables — `obs`, `obs_ctd_full` — are better filtered in DuckDB on your laptop than pulled through the server.)

8.18 The CTD QA/QC database

Database `calcofi`, three kinds of schema:

schema	what	who writes
ctd	curated: the calcofi.org db-CSV cast files loaded verbatim and never edited (ctd.file , ctd.scan — all 82 source columns, ~10.8 M scans; ctd.scan_issue keeps the handful of cells that could not be typed, as text; ctd.scan_column is the data dictionary), the flag ledger (ctd.flag , IODE codes in ctd.qual_code), derived ctd.cast , and views: ctd.v_scan_best (one archive+stage per cruise × direction), ctd.v_scan_qc (originals + <var>_qc / <var>_fix from accepted flags), ctd.v_scan_clean (fixes applied, accepted-bad nulled)	originals: the loader only; flags: everyone proposes (INSERT INTO ctd.flag (scan_id , variable , qual_code , reason , proposed_value)), curators set status to accepted/rejected
release	read-only views over the public DuckDB release Parquet via pg_duckdb (release.cruise , release.ship , release.dataset)	nobody (regenerated per release)
work	shared scratch — anything goes, readable and writable by the whole team	everyone
<you>	your personal schema (first on your search_path); colleagues can read it	you

The rules of the road: **originals never change** — a problem is a row in **ctd.flag** (which scan, which variable, what code, optional proposed value, why), a fix is an *accepted* flag, and every derived product is computed from originals + accepted flags so it can be regenerated. A first flag, end to end:

```
-- propose: temperature spike on one scan (IODE 4 = bad); 5 = changed, with proposed_value
INSERT INTO ctd.flag (scan_id, variable, qual_code, reason)
SELECT scan_id, 'temp1', 4, 'spike vs neighbours' FROM ctd.v_scan_best
WHERE study = '2304SH' AND cast_id = '2304_001d' AND depth = 57;
-- review (curators): accept or reject; reviewed_by/at are filled in for you
UPDATE ctd.flag SET status = 'accepted', review_note = 'agree' WHERE flag_id = 123;
-- see it: the _qc column carries the code, v_scan_clean nulls the value
SELECT depth, temp1, temp1_qc FROM ctd.v_scan_qc WHERE study = '2304SH' AND cast_id = '2304_001d';
```

Every change to `ctd.flag` is kept in `ctd.flag_audit`. The schema and vocabulary are new (August 2026) — propose changes in `work`, and they will be folded into `ctd`.

8.19 Files: SFTP and the shared folder

```
sftp calcofi # same key, same alias; cd ctd/incoming ; put file.zip ; g
scp big.zip calcofi:ctd/incoming/ # one-shot copy
```

GUI clients: **Cyberduck** (Mac/Windows), **FileZilla**, **WinSCP** (Windows; uses the .ppk or the OpenSSH key) — protocol SFTP, host `ssh.calcofi.io`, user *you*, key file.

`/share/data/ctd` is owned by group `calcofi` with the group-write bit inherited, so files you upload are editable by teammates. Put **uploads in incoming/**, leave **archive/** to the loader, and use **exports/** for things you want others (or yourself, later) to download. Your home directory is on the small system disk — keep it for dotfiles and scripts.

8.20 Etiquette & limits

- One 4-vCPU / 15 GB machine runs everything. LIMIT first, \timing on, and ask before a CREATE INDEX on the big `ctd.scan` table.
- Backups: nightly dump → Google Cloud Storage, weekly automated restore test. Still, a DROP TABLE is a DROP TABLE — `work` is scratch, your schema is yours, `ctd` is protected.
- Disk is shared and finite; delete what you no longer need under `~/ctd`.
- Problems, keys, password resets, new tables in `ctd`: Ben Best (bebest@ucsd.edu).

9 Matching Helpers

The `calcofi4r` package provides helper functions that relate **biological** observations (net-tow ichthyoplankton or zooplankton biomass) to **environmental** observations (CTD-bottle measurements) by matching them in time and space — on the fly, against the public release [Parquet on GCS](#).

These supersede the retired Postgres Plumber [API](#) endpoints `zooplankton_biomass`, `itis_ichthyodata` and `ichthyodata`, which depended on pre-built `uunet2ctd*` match tables that are no longer part of releases.

9.1 Install

```
# remotes::install_github("calcofi/calcofi4r")
library(calcofi4r)
```

The matching helpers need `calcofi4r` 1.2.0 and DuckDB with the `httpfs` and `spatial` extensions (the functions `install/load` these for you).

9.2 The wrappers

Three wrappers cover the common cases. Each builds the matching SQL, runs it, and returns a tibble of **one row per biological observation** with the matched environmental value:

Function	Biological side	Replaces
<code>cc_match_ichthyo_by_name()</code>	ichthyoplankton, filtered by scientific name	<code>/ichthyodata</code>
<code>cc_match_ichthyo_by_taxon()</code>	ichthyoplankton, filtered by a WoRMS taxon and all its descendants	<code>/itis_ichthyodata</code>
<code>cc_match_zooplankton_biomass()</code>	net-tow displacement-volume biomass (<code>totalplankton / smallplankton</code>)	<code>/zooplankton_biomass</code>

```
# ichthyoplankton by scientific name
d <- cc_match_ichthyo_by_name(
  "Sardinops sagax", env_var = "temperature")

# every descendant of a WoRMS taxon (recursive parentNameUsageID walk)
d <- cc_match_ichthyo_by_taxon(
  worms_id = 125724, env_var = "salinity") # 125724 = genus Engraulis

# zooplankton biomass
d <- cc_match_zooplankton_biomass(
  env_var = "temperature", biomass_type = "totalplankton")
```

9.3 Worked example: sardine larvae + temperature

The recurring example through these pages — *Pacific sardine* (*Sardinops sagax*) larvae matched to CTD-bottle temperature, Q1 2018, with relaxed (5 km / 72 hr) matching — is a single call:

```
d <- cc_match_ichthyo_by_name(
  "Sardinops sagax",
  env_var      = "temperature",
  life_stage   = "larva",
  date_min     = "2018-01-01",
  date_max     = "2018-03-31",
  relax_matching = TRUE)
```

```
d[, c("scientific_name", "life_stage", "bio_datetime",
      "bio_value", "n_env", "env_value", "dist_km", "time_diff_hr")]
#> # A tibble: 13 × 8
#>   scientific_name life_stage bio_datetime      bio_value n_env env_value dist_km time_d
#>   <chr>          <chr>      <dtm>          <dbl> <dbl>   <dbl>   <dbl>
#> 1 Sardinops sagax larva    2018-02-05 00:44:00    116.    34    11.4    0.167
#> 2 Sardinops sagax larva    2018-02-05 06:03:00     17.8    30    10.5    0.225
#> 3 Sardinops sagax larva    2018-02-07 09:56:00    120.    33    10.4    ...
#> # ... 10 more rows
```

bio_value is the standardized larval tally; **env_value** is the matched mean temperature (°C); **n_env** is how many bottle measurements were averaged; **dist_km** / **time_diff_hr** are the realized match offsets (within the 5 km / 72 hr window). This returns the **identical 13 rows**

as the [direct SQL](#) — `attr(d, "sql")` is that exact query. The [Integrated App](#) download bundle uses the same `cc_match_bio_env()` engine for its `query/` folder.

i Note

Q1 **2018**, not a more recent year: CTD-bottle environmental data in the current release ends 2021-05, while net-tow biological data runs later. Q1 2018 has ample overlap.

9.4 Reproducible SQL

Every helper attaches the **exact, portable SQL** that produced the result, plus query meta-data, as attributes:

```
cat(attr(d, "sql"))      # the fully-interpolated, GCS-URL-based query
str(attr(d, "query_meta")) # package + release version, params, source URLs
```

`attr(d, "sql")` is character-for-character the query shown on the [Data Access](#) page — copy-paste it into the DuckDB CLI, Python, a colleague's R session, or the browser-based [CalCOFI Query](#) and it returns identical rows. That is the contract behind the [Integrated App](#) download bundle's `query/` folder.

To get the SQL **without running it** — e.g. to serialize or inspect it — pass `return_sql = TRUE`:

```
sql <- cc_match_ichthyo_by_name("Sardinops sagax", return_sql = TRUE)
cat(sql)
```

9.5 Run it from anywhere

The portable SQL these helpers emit runs in any DuckDB client:

Where	How
R , on your laptop	<code>cc_match_ichthyo_by_name(...)</code> — this page
Python , on a notebook server	<code>duckdb.connect().sql(open("query.sql").read()).df()</code> — see Data Access → From Python
shell , on the command line	<code>duckdb < query.sql</code>

Where	How
your web browser , no install	CalCOFI Query — point-and-click form for the three wrappers + custom SQL + a free-form SQL shell, all running DuckDB-WASM client-side

In each case the *exact same* generated SQL hits the *exact same* public GCS Parquet, so a colleague who only writes Python (or only opens browser tabs) gets the same rows you do — same `bio_ids`, same `env_values`, same `time_diff_hrs`.

9.6 The core engine: `cc_match_bio_env()`

The wrappers are thin shells over `cc_match_bio_env()`, which takes a `bio` and an `env` SQL `SELECT` string and performs the match. Call it directly when you need a biological or environmental side the wrappers don't cover (custom filters, a different grouping, joining `bottle` to `cast_condition`, ...):

```
cc_match_bio_env(
    bio, env,                                # SELECT strings (see contract below)
    max_dist_km = 2, max_time_hr = 6,        # match tolerances
    join_method = "nearest_time",            # or "nearest_dist", "average"
    version      = "latest",
    collect      = TRUE,                      # FALSE → lazy dplyr::tbl
    return_sql   = FALSE)                    # TRUE  → just the SQL string
```

Contract. `bio` must yield `bio_id`, `bio_datetime`, `bio_lon`, `bio_lat`, `bio_value` (plus any descriptive columns, carried through as grouping keys). `env` must yield exactly `env_id`, `env_datetime`, `env_lon`, `env_lat`, `env_value`, `env_depth_m`, `measurement_type`. Both typically `FROM read_parquet('https://.../{table}.parquet')` so the emitted SQL stays portable.

9.7 Parameters

- `max_dist_km`, `max_time_hr` — the spatial and temporal match windows. Defaults are 2 km / 6 hr; `relax_matching = TRUE` widens them to 5 km / 72 hr (an explicit value always wins). This replaces the old API's `relax_matching` boolean.
- `join_method` — how the environmental observations inside the window are reduced to one value per biological observation:

- "nearest_time" (default) — keep the closest in time, average ties;
- "nearest_dist" — keep the closest in space, average ties;
- "average" — average every observation in the window.

CalCOFI co-locates net tows and CTD casts, so in practice `nearest_time` and `nearest_dist` usually agree and `average` differs only slightly.

- `life_stage` (ichthyo wrappers) — restrict to e.g. "larva" or "egg".
- `date_min`, `date_max` — bound the biological side by tow start date.
- `depth_m_min`, `depth_m_max` — bound the environmental bottle depths.
- `version` — a release string like "v2026.05.14", or "latest".

9.8 Migrating from the API

Old API	New helper
<code>/ichthyodata (species, exact_match)</code>	<code>cc_match_ichthyo_by_name(scientific_name, exact_match=)</code>
<code>/itis_ichthyodata (ITISid)</code>	<code>cc_match_ichthyo_by_taxon(worms_id)</code> — WoRMS, recursive subtree
<code>/zooplankton_biomass</code> <code>relax_matching = TRUE</code>	<code>cc_match_zooplankton_biomass()</code> <code>relax_matching = TRUE</code> (5 km / 72 hr) or explicit <code>max_dist_km</code> / <code>max_time_hr</code>
<code>cruiseymd_min</code> / <code>cruiseymd_max</code> <code>stage</code>	<code>date_min</code> / <code>date_max</code> <code>life_stage</code>

The taxon wrapper is the one real change: ITIS `path`-regex matching is gone; descendants are now resolved by a recursive walk of WoRMS `taxon.parentNameUsageID` against the release `taxon` table.

10 API

! Superseded by direct querying + `calcofi4r` helpers

The Postgres-backed Plumber API at api.calcofi.io is **being phased out**. CalCOFI data is now published as versioned, public **Parquet** files that you query directly with DuckDB — no API server, no credentials, no rate limits.

- To query the data directly (SQL, R, Python), see [Data Access](#).
- For biological environmental matching (the old `zooplankton_biomass`, `itis_ichthyodata` and `ichthyodata` endpoints), see [Matching Helpers](#) — the `calcofi4r` functions `cc_match_zooplankton_biomass()`, `cc_match_ichthyo_by_taxon()` and `cc_match_ichthyo_by_name()`.

The endpoint notes below are retained as a historical reference and a map from each API endpoint to its replacement.

💡 Try the new client-side query playground

The three retired bio env endpoints — and many more queries besides — are now an interactive form at calcofi.io/db-query/ that runs entirely in your browser. Pick a query from the left-side accordion, fill the form, click **Run**, see the rows — no server, no credentials, no install. DuckDB-WASM in a worker thread, public Parquet on Google Cloud Storage, the same portable SQL the `calcofi4r::cc_match_*()` helpers emit.

The raw interface to the legacy Application Programming Interface (API) is available at:

- api.calcofi.io

10.1 Endpoint → replacement

Legacy endpoint	R helper (<code>calcofi4r</code>)	Browser
<code>/variables</code>	<code>cc_list_measurement_types()</code>	Query → measurement types
<code>/timeseries</code>	direct SQL aggregation — see Data Access	Query → SQL shell

Legacy endpoint	R helper (calcofi4r)	Browser
/cruises	cc_read_cruise()	Query → cruises
/raster	direct SQL + pts_to_rast_idw()	—
/cruise_lines, /cruise_line_profile	direct SQL against ctd_cast / ctd_thin	Query → SQL shell
zooplankton_biomass	cc_match_zooplankton_biomass()	Query → zoo biomass
itis_ichthyodata	cc_match_ichthyo_by_taxon()	Query → by taxon
ichthyodata	cc_match_ichthyo_by_name()	Query → by name

10.2 Legacy endpoint reference

10.2.1 /variables: get list of variables for timeseries

Get list of variables for use in /timeseries.

10.2.2 /species_groups: get species groups for larvae

Not yet working. Get list of species groups for use with variables `larvae_counts.count` in /timeseries.

10.2.3 /timeseries: get time series data

10.2.4 /cruises: get list of cruises

Get list of cruises with summary stats as CSV table for time (`date_beg`).

10.2.5 /raster: get raster map of variable

Get raster of variable.

10.2.6 /cruise_lines: get station lines from cruises

Get station lines from cruises (with more than one cast).

10.2.7 /cruise_line_profile

Get profile at depths for given variable of casts along line of stations.

11 Portals

11.1 Overview

CalCOFI data is available through various portals, each serving different purposes and user needs. Since 2026-09, every dataset — integrated into the database or still a holding — also has one calcofi.io page (/datasets/{dataset_key}/) joining every endpoint it can be reached through: the release Parquet, a CF netCDF, ERDDAP, and the archive or aggregator portals below, each with its own publication status. That page, not this chapter, is now the record — the tables here are generated from the same registries the page reads, so the two can never disagree.

11.2 Data Flow

While it would be ideal for CalCOFI data to be available through a single portal, each portal has its strengths and limitations. The diagram below is the flow as it runs today: what we author and observe (left) becomes one record per dataset at release, that record generates every surface a portal can read, and each portal or meta-portal is pointed at one of those static files.

In practice, CalCOFI is a partnership with various contributing members, so the authoritative dataset might flow differently, such as from EDI to the database to the other portals. The other portals, such as OBIS or ERDDAP, serve different audiences or purposes. The dataset catalog is what now feeds the meta-portals directly — ODIS crawls its sitemap and JSON-LD, Google Dataset Search its JSON-LD, and data.gov its DCAT-US `data.json` — rather than each meta-portal having to know about every downstream portal individually.

11.3 Portal capabilities

While some portals serve as data repositories, others provide advanced data access and visualization tools, and a few are meta-portals that index the others rather than holding data themselves. The table below is generated from [CalCOFI/workflows' metadata/portal.csv](#) — the same registry `datasets.json's registrations[]` and this book both read — so a

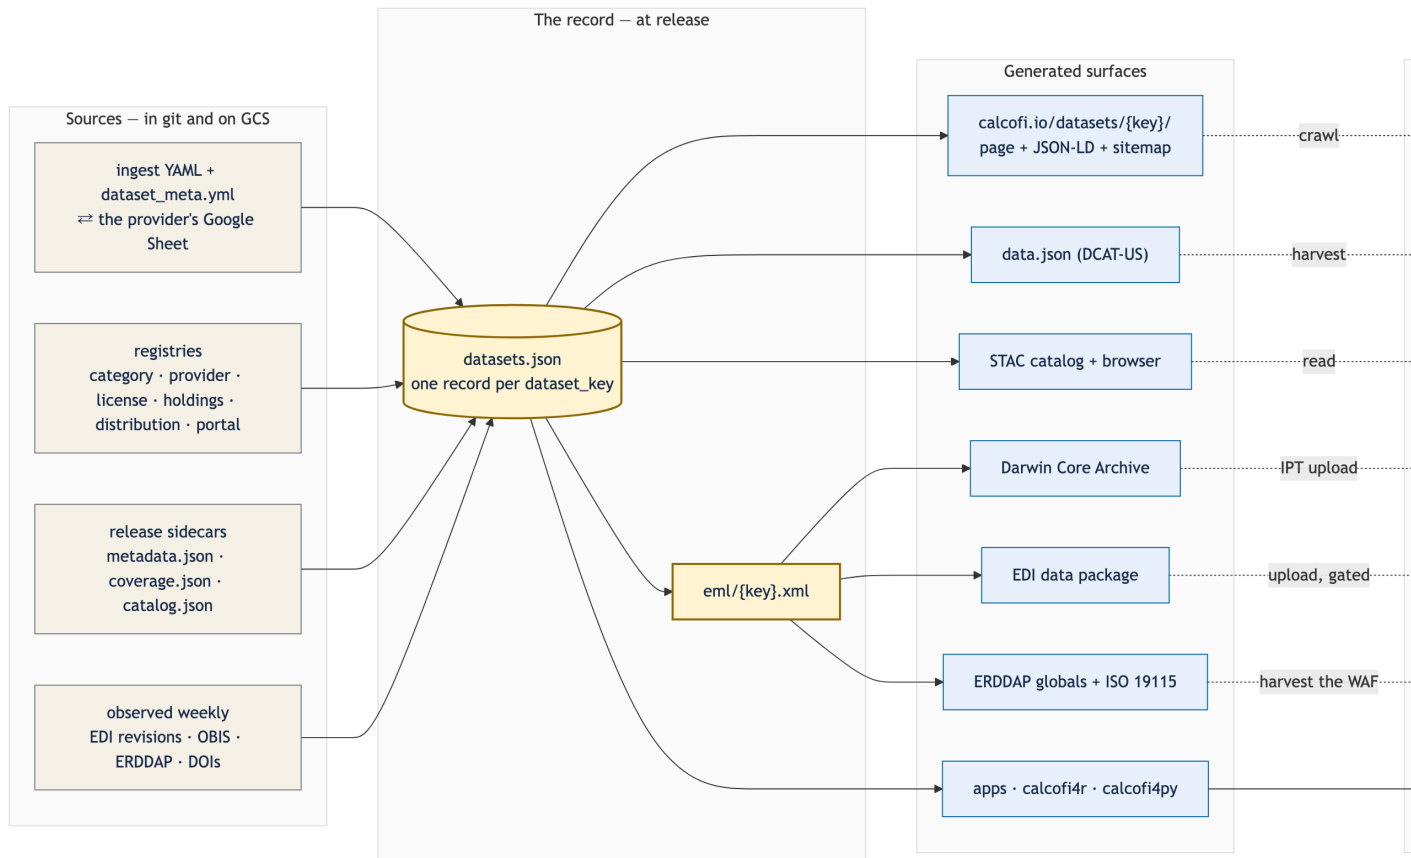


Figure 11.1: Everything a portal sees is generated from one record per dataset. The dotted boxes are catalogs run by others; each is pointed at a static file we already publish. The one server-shaped option, pycsw, is gated on a partner asking for CSW.

Table 11.1: Portal capabilities, from `metadata/portal.csv` (CalCOFI/workflows).

	Kind	Full Archive	Versioning	DOI
Environmental Data Initiative	archive			
NOAA National Centers for Environmental Information	archive			
Ocean Biodiversity Information System	aggregator			
OBIS-USA Integrated Publishing Toolkit	publisher			
erddap.calcofi.io	service			
NOAA CoastWatch / OceanView ERDDAP	service			
Zenodo	archive			
Ocean Data and Information System (ODIS / OIH)	catalog			
Google Dataset Search	catalog			
IOOS Catalog (data.ioos.us)	catalog			
CalOOS data portal (SCCOOS + CeNCOOS)	catalog			
data.gov (DCAT-US)	catalog			
CCE-LTER DataZoo / SIO Ocean Informatics portals	portal			
UC San Diego Library Digital Collections	archive			
NCBI BioProject / SRA	archive			
calcofi.org data pages	portal			

Capability legend: = full, = partial, = none. **Harvests from us** names the mechanism CalCOFI feeds that portal through (an ERDDAP WAF, a sitemap of JSON-LD, an IPT upload, ...), or **none** for a discovery-only aggregator with no CalCOFI-fed channel yet.

portal added there (CalOOS and the IOOS Catalog joined in 2026-09) shows up here without anyone hand-editing a table.

11.3.1 EDI

Environmental Data Initiative

- Complete dataset archives using DataOne software and EML metadata
- DOIs issued for all datasets ensuring citability
- Full archive allowing for any data file types
- Basic spatial and temporal filtering through web interface
- Download in original formats with metadata
- Access through DataOne API
- Links:
 - [EDIREpository.org](https://edirepository.org)

- CalCOFI datasets: [EDI query “CalCOFI”](#)

Publishing there is manual, in four steps (`publish_to-edi.qmd`, generic per dataset; the package is built from the release’s own `eml/{dataset_key}.xml` plus CSV entities exported from the core — for the bottle database three tables totalling 2.1 GB plus the shared vocabulary table). (1) An EDI account for the open `edi` scope, held by Erin, with Ben granted editor access through the EML `access` element — created once at dashboard.edirepository.org. Every render already stages the package at `gs://calcofi-db/publish/edi/{dataset_key}/{dataset_key}_{version}/` for review (the dataset page lists it as *built, not deposited*). (2) Set `EDI_USER/EDI_PASS` (or an EDI API key as `EDI_KEY`) wherever the pipeline runs and render the notebook: PASTA **evaluate** runs automatically against **staging** and the report lands beside the package; fix what it names and re-render. (3) Once evaluate is clean, render with `CALCOFI_PUBLISH_EDI=true` to **create** (or, on a later release, **update**) the package against **production** — this mints a DOI and a `scope.identifier.revision`, recorded in `metadata/edi_packages.csv`. (4) Add the DOI back as an `archive` row in `metadata/distribution.csv` (portal: `edi`) and as the dataset’s `doi` in its `metadata/{provider}/{dataset}/dataset_meta.yml`, so the record and the citation carry it from the next release on. CCE-LTER’s `knb-lter-cce` packages stay theirs and are never republished.

11.3.2 NCEI

National Centers for Environmental Information

- Long-term archival of oceanographic data
- DOIs issued for dataset submissions
- Standardized metadata using ISO 19115-2
- Basic search interface with geographic and temporal filtering
- Data preserved in original submission formats
- Access through NCEI API services
- Links:
 - [NCEI Ocean Archive](#)
 - CalCOFI datasets: [NCEI search “CalCOFI”](#)

11.3.3 OBIS

Ocean Biodiversity Information System

- Specialized in marine biodiversity data
- Standardized using DarwinCore fields
- Extended measurements supported via [extendedMeasurementOrFact](#)
- Powerful filtering by space, time, and taxonomic parameters

- Multiple download formats (CSV, JSON, Darwin Core Archive)
- Full REST API access
- Published through the OBIS-USA Integrated Publishing Toolkit (ipt-obis.gbif.us), one resource per dataset whose taxa resolve to WoRMS
- Links:
 - OBIS.org
 - [swfsc_ichthyo](#) on OBIS: *CalCOFI Fish Larvae & Egg Tows* (77,188 events, 463,655 occurrences, 610,816 eMoF; featured by OBIS 2026-04-15) — the [dataset page](#) carries the rest as they publish

Uploading is manual, and deliberately so. `publish_to-obis.qmd` writes `data/darwincore/{dataset_key}` and a `{dataset_key}_manifest.json`, and stages both at `gs://calcofi-db/publish/dwca/{dataset_key}/` so a provider — and the dataset page, which lists the archive as *built, not deposited* — can inspect the bundle before any upload; nothing in the pipeline talks to a portal. CalCOFI has no IPT of its own — the resources live on the **OBIS-USA IPT**, ipt-obis.gbif.us, under Ben’s login. Before a first upload, the OBIS records that already cover the same source are listed (the notebook queries `api.obis.org/v3/dataset` and prints the curated rows from `metadata/distribution.csv`) and resolved **with their owners**: a provider’s own record is never duplicated, and a historical CalCOFI record is retired or cross-referenced only with its owner’s agreement. Then: open (or create) the resource → upload the zip’s files as the source → map the Event core plus the Occurrence and ExtendedMeasurementOrFact extensions exactly as `meta.xml` describes them → publish a new version. Afterwards, record the OBIS dataset id and the IPT resource id as `distribution.csv` rows (`portal = obis / ipt, kind = archive`) and stamp `uploaded_utc + uploaded_hash` into the manifest. That last step is what makes a dataset page honest: the record reports **built, not uploaded / published (vX) / stale - data changed in vY** by comparing the uploaded hash with the archive’s own, so it says when an upload is due. Re-upload only when the `content_hash` changed — it is deterministic over the archive’s CSV bytes.

11.3.4 ERDDAP

Environmental Research Division Data Access Program

- Tabular and gridded data server
- Advanced subsetting by space, time, and parameters
- Multiple output formats (CSV, JSON, NetCDF, etc.)
- RESTful API with direct data access
- Built-in data visualization tools
- No persistent identifiers but stable URLs
- Links:
 - [ERDDAP](#)

- erddap.calcofi.io — CalCOFI’s own ERDDAP over the release, every dataset’s `infoUrl` pointing back at its [dataset page](#)
- [ERDDAP, OceanView - CalCOFI seabirds](#)
- [ERDDAP, CoastWatch - CalCOFI oceanographic](#)

11.3.5 Zenodo

- One DOI per integrated-database release, via the GitHub integration on [CalCOFI/workflows](#) — a concept DOI covers every version, a version DOI each one
- Archives the pipeline itself at the release tag, plus `catalog.json` / `metadata.json`
- Link: zenodo.org

11.3.6 CalOOS

The SCCOOS + CeNCOOS regional data portal

- Registering erddap.calcofi.io gives every existing CoastWatch-fed module a calcofi.io distribution beside it
- What data.ioos.us (the national IOOS Catalog) harvests for this region — likely the only IOOS-level registration CalCOFI needs
- Link: data.caloos.org

11.4 Metadata

The [Ecological Metadata Language \(EML\)](#) is the one metadata document CalCOFI’s publishers share. Since 2026-09 the release writes one EML 2.2 document per dataset — `eml/{dataset_key}.xml`, built by `calcofi4db::build_eml()` directly from `datasets.json` and each dataset’s descriptive sidecar, checked by `check_eml()` before it ships — rather than each publish notebook typing its own sampling methods, study extent and rights by hand. The Darwin Core Archive OBIS publishing uses and an EDI data package both start from the same document, so a provider correction to a dataset’s abstract or creators reaches every publisher at once.

The EML specification provides detailed structure for describing datasets, including:

- [Dataset identification and citation](#)
- Geographic and temporal coverage
- Variable definitions and units
- Methods and protocols
- Quality control procedures
- Access and usage rights

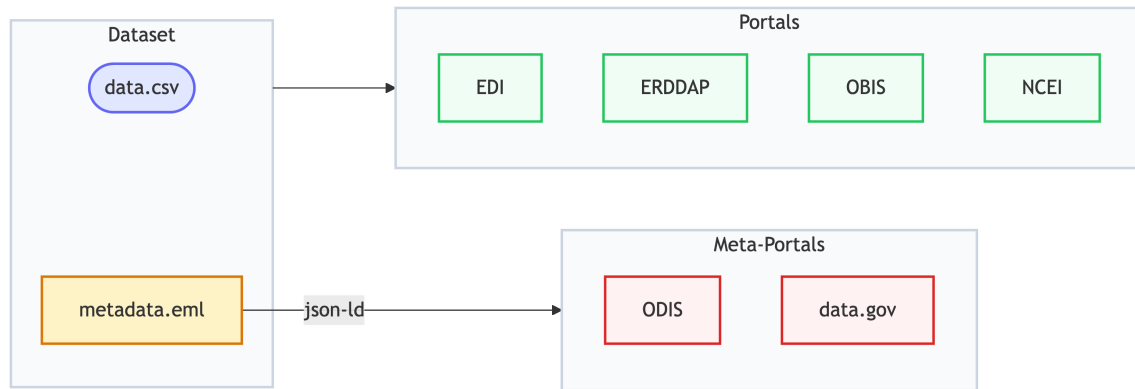


Figure 11.2: Metadata in the form of ecological metadata language (EML) is used to describe the dataset in a consistent manner that can be ingested by the portals.

This standardized metadata enables automated data transformation and ingestion into various portal systems while preserving the original data context and quality information.

11.5 Meta-Portals

11.5.1 Google Dataset Search

The JSON-LD metadata on every calcofi.io dataset page gets indexed by [Google Dataset Search](#) through schema.org metadata. This ensures that CalCOFI data is discoverable through Google search and other search engines.

11.5.2 ODIS

Ocean Data Information System

ODIS uses the same technology as Google Dataset Search (schema.org, JSON-LD), but focuses on ocean data. ODISCat record 3318 points at calcofi.io's generated [datasets/sitemap.xml](#), so a dataset's calcofi.io page is what [ODIS.org](#) crawls — the record's **sameAs** then links each external portal record from there.

11.5.3 data.gov (DCAT-US)

calcofi.io publishes a [data.json](#) (Project Open Data / DCAT-US 1.1), generated from `datasets.json` the same way the sitemap is — one entry per public dataset, with its licence,

Table 11.2: Per-dataset portal registrations, read live from the promoted release’s `datasets.json`.

Dataset	erddap	obis	edi	ncei	caloos	zenodo
CTD Cast Files						
CUFES Fish Eggs						
Carbonate Chemistry / DIC						
Dungeness Crab Megalopae						
Euphausiids (Krill)						
Hydrographic Bottle						
Ichthyoplankton						
Mesopelagic Fish						
Phyllosoma (Lobster Larvae)						
Phytoplankton						
Picoplankton & Bacteria						
Seabirds & Marine Mammals						
Underway Meteorological (METS)						
ZooDB (Holoplankton Community)						
ZooScan (Imaged Zooplankton)						
Zooplankton Net Tows						

Status legend: = published, = planned, = n/a. Read from v2026.09.06’s `datasets.json`; the same rows back each dataset’s own page.

distributions and contact point. This is what a CKAN instance (data.gov, a university’s, CDFW’s) harvests with no work on our side.

This federated approach ensures that CalCOFI data remains:

- Discoverable through multiple channels
- Properly cited and attributed
- Integrated with global ocean data systems

11.6 The dataset catalog, and who registers where

`datasets.json` (`calcofi4db::build_dataset_catalog()`, `calcofi4db` 4.1.0) is the record this whole chapter is a rendering of: one entry per dataset, its `registrations[]` naming every portal above with a status of **published**, **planned** (usually linking the tracking issue) or **n/a**. The table below reads it **live**, straight from the promoted release, so it can never drift from what `calcofi.io/datasets/{dataset_key}/`’s own Access table shows.

11.7 Archive of record, per dataset

Every dataset has **one** portal that holds its citable, DOI-bearing copy — its archive of record — and the others are either aggregators and services that read from it or do not apply. The rule is stated per dataset, in one sentence, in `metadata/dataset_status.csv`'s `publish_policy` column (CalCOFI/workflows), carried into `datasets.json` as `status.publish_policy` (calcofi4db 4.6.3) and shown on each dataset page above its *Archives & portals* table. The rules behind the sentences:

- **A provider's own archive is the archive of record, and is never republished.** The nine CCE-LTER-adjacent datasets live in `knb-lter-cce` on EDI (phyllsoma, phytoplankton, euphausiids, picoplankton, the Farallon bird and mammal census) or in CCE-LTER's DataZoo exports (ZooDB, ZooScan); DIC is NCEI accession 0301029; the mesopelagic fish and the Dungeness crab megalopae are UC San Diego Library deposits; CUFES is SWFSC's CoastWatch ERDDAP dataset.
- **CalCOFI's own program datasets get an EDI package from the release** — bottle, CTD casts, METS — built by `publish_to-edl.qmd` from `eul/{dataset_key}.xml` and the release tables, staged at `gs://calcofi-db/publish/edi/` for review, deposited only with credentials and `CALCOFI_PUBLISH_EDI=true`. NCEI for these is planned through the SWFSC data manager.
- **OBIS is the archive of record for occurrences of named taxa.** The SWFSC ichthyoplankton is published there (through the OBIS-USA IPT); every other biological dataset's Darwin Core Archive is built and staged at `gs://calcofi-db/publish/dwca/` each release, and its upload is the provider's call (planned). Environmental datasets do not apply.
- **NCEI is the provider's to deposit for NOAA-collected data** (SWFSC's ichthyoplankton and CUFES), so it reads `n/a` on those rather than `planned`.
- **Zenodo** holds the integrated database release itself, one DOI per version.

11.8 Getting the data through calcofi.io

The portals above are where CalCOFI data is discoverable *outside* calcofi.io; calcofi.io itself is a fourth way in, and it is where the record lives:

- **The dataset catalog** — one page per dataset (and per holding not yet ingested), with its coverage, every distribution above, its citation and provenance, and machine surfaces (`{key}.json`, `{key}.jsonld`, the sitemap and `data.json` described above).
- **Data Access** — query the release Parquet directly from R, Python or a browser with DuckDB; no credentials, no API server.

Table 11.3: Each dataset’s archive-of-record policy, read live from the promoted release’s `datasets.json` (the registry it comes from until a release carries it).

Dataset	Archive of record, and why
CTD Cast Files	Archive of record: none yet — a CalCOFI program dataset with
CUFES Fish Eggs	Archive of record: NOAA CoastWatch ERDDAP (erdCalCOFIcu
Carbonate Chemistry / DIC	Archive of record: NCEI accession 0301029, the provider’s own d
Dungeness Crab Megalopae	Archive of record: UC San Diego Library Digital Collections dep
Euphausiids (Krill)	Archive of record: CCE-LTER’s EDI package knb-lter-cce.313, th
Hydrographic Bottle	Archive of record: none yet — a CalCOFI program dataset with
Ichthyoplankton	Archive of record: OBIS, through the OBIS-USA IPT (published
Mesopelagic Fish	Archive of record: UC San Diego Library Digital Collections (doi
Phyllosoma (Lobster Larvae)	Archive of record: CCE-LTER’s EDI package knb-lter-cce.188.4,
Phytoplankton	Archive of record: CCE-LTER’s EDI package knb-lter-cce.254.4,
Picoplankton & Bacteria	Archive of record: CCE-LTER’s EDI package knb-lter-cce.159; th
Seabirds & Marine Mammals	Archive of record: CCE-LTER’s EDI package knb-lter-cce.255.3 (
Underway Meteorological (METS)	Archive of record: none yet — a CalCOFI program dataset. EDI
ZooDB (Holoplankton Community)	Archive of record: none with a DOI — the ingest reads CCE-LTE
ZooScan (Imaged Zooplankton)	Archive of record: none with a DOI — the ingest reads CCE-LTE
Zooplankton Net Tows	Archive of record: none yet — the SIO Pelagic Invertebrate Colle
Read from <code>metadata/dataset_status.csv</code> on CalCOFI/workflows main (the promoted release predates <code>status.publish_policy</code>); the same sentence heads each dataset page’s <i>Archives & portals</i> table.	

- **Libraries** — `calcofi4r::cc_datasets()` / `calcofi4py.cc_datasets()` read the same `datasets.json` this page's tables do, into a data frame; `cc_get_db()` / `cc_query()` for the data itself.
- **Cite This Data** — `cc_cite()` in `calcofi4r` / `calcofi4py` for exactly the datasets a query touched, checked citations, licences and DOIs.
- **Apps** — interactive exploration (the Explorer, Station and Hexagon Explorers, CTD Transects) without writing a query at all; each app's Sources panel links back to the same dataset pages.

12 Status

12.1 2026-07-01

This report covers the second half of the **2025-10-01 to 2026-06-30** contract period (work since the 2025-12-01 status) and serves as the end-of-contract wrap-up. It is organized around the three contract components — **Ingest**, **Visualize**, and **Share** — and closes with a deliverables crosswalk against the Statement of Work. Headline outcomes: all eight must-complete (**) datasets are ingested into a versioned, reproducible database; nine releases were published (v2026.03.25 → v2026.06.08, now 44 tables); a new on-the-fly hexagon tile service powers the integrated app; and CalCOFI data are now flowing to ERDDAP and OBIS, browsable through new schema and query explorers.

12.1.1 1. Ingest — A Versioned, Reproducible Integrated Database

The bulk of the period’s effort went into the ingestion pipeline (**workflows**) and its engine package (**calcofi4db**), which together turn heterogeneous source files into a single, versioned database.

- **All must-complete datasets ingested.** Building on bottle, fish eggs & larvae (ichthyo), and CTD casts, the team added **DIC** (dissolved inorganic carbon), **phytoplankton** (Venrick, EDI #28, region-pooled grain with WoRMS taxonomy), **lobster phyllosoma** (EDI #33), **CUFES** (#35), **euphausiids/krill**, **PIC zooplankton**, and **bird & mammal census** data. Cephalopod/invertebrate counts were folded into the ichthyo dataset rather than maintained separately. Release **v2026.06.08** now spans **44 tables**.
- **Frozen, reproducible releases (DuckLake + Parquet on GCS).** `release_database.qmd` acts as the pipeline “caboose”: it validates, freezes, and uploads each release to a Google Cloud Storage bucket as Parquet, with an auto-generated entity-relationship diagram and a `metadata.json` sidecar carrying full table/column descriptions, units, and data types. Nine releases were cut between March and June 2026.

- **A hardened, well-keyed data model.** Identifiers were standardized on stable keys — UUID-first source keys, `cruise_key` as YYYY-MM-NODC, and `sta_key` → `site_key`. The CTD data — by far the largest input — was tamed with a new adaptively-thinned `ctd_thin` table (5.5M rows / ~258 MB, preserving inflections via Douglas-Peucker) replacing the 15+ GB raw measurement table as the headline product, and several duplicate-key and phantom-cruise bugs were fixed.
- **calcofi4db formalized (v2.4 → v2.8).** New capabilities include content-hash deduplication of Parquet uploads (ignoring provenance columns), YAML-authoritative dataset metadata, native GEOMETRY storage with `ST_Hilbert` spatial ordering, dependency VIEWS, and server-side GCS copy — which together cut a full pipeline run from 60+ minutes to ~4 minutes. A reusable set of **Claude Code ingest skills** (explore → generate-metadata → ingest → validate) and **cross-dataset match helpers** now make adding a new dataset largely turnkey.
- **Data-lake migration.** Source contributions were migrated from a personal Google Drive to the organizational **CalCOFI Data Folder** shared drive, with `rclone`-based GDrive→GCS sync via a dedicated `calcofi-admin` service account (provisioned with Erin’s help), establishing the long-term archive.

12.1.2 2. Visualize — On-the-Fly Hexagons, Management Areas, and Partner Dashboards

- **On-the-fly hexagon tile service (the cached-endpoint deliverable).** The integrated app previously pre-computed hexagon summaries for all zoom levels across the entire study area. A new **H3T tile API** now summarizes only the current zoom level and map extent on demand. It was prototyped as an R/Plumber service (`api-h3t`), then rewritten as a FastAPI service (`api-h3t-py`) with multi-database support, fronted by Varnish caching and edge gzip/zstd compression at `h3t.calcofi.io`. The integrated app reads hex data from it behind a `USE_H3T` flag.
- **Management areas of interest.** The integrated app (`db-viz-hex`) gained spatial layers for maritime zones, marine protected areas, and wind energy areas, plus a dark/light theme, reproducible query/data download bundles, and a direct connection to the `calcofi4r` Parquet database (replacing the old API dependency).
- **Standalone and partner apps.** New/redesigned Shiny apps include `ctd-viz` (linked map/table, plotly transects, GEBCO bathymetry), a `datacheck` cross-dataset observation explorer with deep-linkable URLs, and a `cruises` explorer. Three 2026 student-capstone visualization products were also supported and now ship from GitHub Pages: the **UCSB Station Data Portal**, the **UCSB Larvae Dashboard**, and the **UCLA**

California Ocean & Coastal Monitoring Inventory map — extending the partner coalition envisioned in the SOW.

12.1.3 3. Share — Publishing to ERDDAP & OBIS, plus Discovery Tools

- **ERDDAP.** A CalCOFI-branded ERDDAP server was configured and deployed, serving multiple `EDDTableFromParquetFiles` datasets (bottle, phytoplankton, and others). A dedicated benchmark study compared Parquet, NetCDF (`EDDTableFromNcCFFiles`), and DuckDB serving backends to choose the best layout — prompted by the wide CTD table OOM-ing ERDDAP’s heap, which remains the one open serving issue (see cross-walk).
- **OBIS.** The fish eggs & larvae → OBIS workflow (Darwin Core + EML, joining biological observations to CTD environment by cruise) was refined to use the stable UUID keys and ichthyo-only scope.
- **Discovery & documentation.** Two new browser-based, serverless tools were built and linked throughout the docs: a **Schema explorer** (`schema/` — diagram, tables, columns, datasets, measurements, with a cross-tab dataset filter and clickable ERD) and a **Query playground** (`query/` — a Jekyll + DuckDB-WASM SQL sandbox). `calcofi4r` was rewired to read release `metadata.json`, emits `llms.txt`, and documents bio environment matching helpers; the docs site added Data Access and Matching pages.
- **Webinar series — pending.** The final Share deliverable (a recorded webinar series) has not yet been produced; a progress deck (Dec 2025 – Jun 2026) was assembled in its place.

12.1.4 Deliverables Crosswalk

Against the SOW (** = must-complete by end of contract):

Ingest — all must-complete datasets done:

Dataset	Status
Bottle Database **	ingested
Fish Eggs & Larvae **	ingested (ichthyo)
CTD Cast Files **	ingested (<code>ctd_thin</code> + <code>ctd_cast</code>)
Krill / euphausiids **	ingested

Dataset	Status
Zooplankton biovolume **	ingested (PIC)
Cephalopod / invertebrate **	folded into ichthyo
Phytoplankton (Venrick) **	ingested (#28)
DIC **	ingested
CUFES, lobster phyllosoma, bird/mammal census	ingested (beyond must-complete)

Visualize:

Deliverable	Status
Add management areas (sanctuaries, MPAs, wind areas)	added to db-viz-hex
On-the-fly hexagon endpoint by extent/zoom	H3T tile API live
Expand hex summaries across new datasets	in progress as datasets land

Share:

Deliverable	Status
CTD Cast Files → ERDDAP **	wide-table OOM under investigation (backend benchmark)
Bottle Database → ERDDAP **	published
Fish Eggs & Larvae → OBIS **	workflow complete
Other portals (EDI, NCEI, additional OBIS)	/ as prioritized
Recorded webinar series	pending (progress deck delivered)

12.1.5 Program Coordination

Beyond code, the period included sustained coordination with the CalCOFI program (Erin Satterthwaite and team): contributing to the **Data Management Plan**, gathering input on a **dataset search tool** (categorizing variables by EOVs), scoping **CalOOS/SCCOOS portal** integration, mentoring the UCSB/UCLA **capstone teams**, and contributing to an MBON ocean-indicators manuscript and several joint proposals (GOMO AI/Data pilots, IOOS OTT). EcoQuants LLC's CalCOFI work transitioned to **Ocean Metrics LLC** during this period.

12.2 2025-12-01

Over the past several months, CalCOFI's software and data systems have advanced significantly toward a unified, reliable, and user-friendly platform for exploring and publishing CalCOFI data. Work has focused on four main areas: the integrated data app, the underlying database and workflows, pushing to OBIS, and organizing of CTD data.

12.2.1 A More Capable, User-Friendly Integrated App

The **CalCOFI integrated application (db-viz-hex)** has evolved into a much richer and more intuitive tool for scientists and partners:

- **Taxonomy-aware exploration**

The app now understands species and their taxonomic relationships. Users can browse taxa hierarchies, see taxonomic ranks, and work with improved species metadata tied to authoritative sources (e.g., WoRMS, ITIS). This makes it easier to find and compare species and groups of species consistently.

- **Better visual experience and theming**

A new **dark/light theme toggle** has been implemented and refined so that maps, time series, and other plots remain readable and visually consistent. Navigation has been reorganized, with a clearer About page, a guided “tour” of the app, and more intuitive icons and labels, making the app easier to learn and use.

- **Stronger spatial and temporal tools**

Spatial maps now rely on efficient hexagon grids calculated in the database, improving performance and scalability. Default settings for time and depth matching have been tuned to yield better joins between environmental and biological data out of the box.

Overall, the app is moving from a prototype to a **polished, guided interface** that better supports exploratory analysis and communication.

12.2.2 A Stable, Well-Documented Database Foundation

The **CalCOFI database package (calcofi4db)** has been formalized and versioned, providing a solid foundation for all downstream tools:

- **Two stable releases** (versions 1.0 and 1.1) have established a reliable baseline for the database, including bottle-level data.
- The project now follows a **clear strategy for separate development and production databases**, reducing risk when making changes and improving reproducibility.

- Data ingestion from NOAA and other sources has been **hardened**, with several rounds of fixes to handle edge cases and ensure that raw files are consistently and correctly translated into the database.

In addition, the package’s **online documentation site** has been refreshed so that developers and analysts have up-to-date guidance on how data flow into and through the database.

12.2.3 Unified R Tools and Documentation Around DuckDB

Across the toolchain, CalCOFI has standardized on **DuckDB** as the core data engine:

- The **R package (calcofi4r)** now encapsulates key logic originally developed inside the integrated app, so the same high-quality data access and processing is available in scripts, reports, and analyses—not just in the web interface.
- Both the app and R package can connect to **local or remote DuckDB databases**, improving performance and enabling offline or near-offline workflows.
- Documentation in the **docs repository** has been updated to describe the full data creation process (from raw data to ready-to-use databases) and to explain the new development/production database strategy. Status documents and helper scripts provide clearer visibility into project progress.

This brings CalCOFI closer to a **coherent, documented platform** where analysts can move seamlessly between app-based exploration and scripted analysis.

12.2.4 Standards-Compliant Publication of Biological Data

The **workflows** repository has seen major progress in turning CalCOFI’s biological datasets into **publication-ready products**:

- New workflows now **publish larval data to OBIS**, the global biodiversity information system, with repeatable recipes that combine biological observations with CTD (oceanographic) data.
- The underlying data model for **events and occurrences** has been strengthened to align with international standards (e.g., Darwin Core), including:
 - Clear hierarchies of sampling events,
 - Better handling of life-stage and size information (e.g., egg and larval stages),
 - Automated generation of metadata files required for data archives.

- Additional integrity checks and foreign key relationships help ensure that data are correct and consistent before publication.

These advances substantially improve CalCOFI's ability to **share high-quality, well-structured biodiversity data** with the broader scientific community.

12.2.5 Improved Public Access and Infrastructure

Finally, several changes improve how external users find and access CalCOFI tools:

- The **public website** (CalCOFI.github.io) now highlights key applications, including the integrated app and a pollutants-focused app, making them easier to discover.
 - Server configuration has been updated so that **Shiny apps are served from a new dedicated domain `app.calcofi.io`** (and still `shiny.calcofi.io`), clarifying the entry point for interactive tools and simplifying operations.
-

12.2.6 Overall Impact

Together, these developments move CalCOFI toward a **modern, integrated data platform**:

- Scientists and partners gain a more powerful, user-friendly app and R toolkit for exploring CalCOFI data.
- The underlying database and workflows are more robust, testable, and clearly documented.
- CalCOFI's biological data are better positioned for **global visibility and reuse** through standards-compliant publication channels like OBIS.
- Public-facing web presence and infrastructure are cleaner and more aligned, making it easier for stakeholders to find and use CalCOFI resources.

12.3 2025-07-01

This report summarizes the key development activities, major accomplishments, and ongoing work for the first 6 months of 2025 across the CalCOFI GitHub repositories: **api**, **apps**, **calcofi4db**, **calcofi4r**, **docs**, **server**, **workflows**. The findings are based on issues and commits from January–July 2025.

12.3.1 API Enhancements

12.3.1.1 New Features & Data Integration

- **Expanded API Options**
 - Added ability to include bottle data and use relaxed criteria for net-to-cast matching ([commit](#)).
 - Supported upcast/downcast data downloads ([commit](#)).
 - Added Zooplankton biomass and improved ichthyodata output ([commit](#)).
- **Performance & Maintenance**
 - Implemented docker compose restart for Plumber API service ([commit](#)).
- **Ongoing Work**
 - Migration of database contouring functions to API/app level for improved caching and rendering efficiency.
 - Development of a robust, user-friendly API for seamless DB integration ([issue](#)).

12.3.2 Apps Development

12.3.2.1 Visualization & User Interface

- **Continuous Improvements**
 - Multiple commits indicate ongoing enhancement, likely focused on UI, data visualization, and integration with the API (see [recent commit log](#)).
 - Close coordination between API and Apps for improved workflows and data access.

12.3.3 calcofi4db: R Package & Data Management

12.3.3.1 R Package Initialization & Data Ingestion

- **New R Package: calcofi4db**
 - Initial commit and setup ([commit](#)), including functions for ingesting CSV datasets and metadata.
 - Refined change detection logic for source CSV files, improving tracking of table/field changes ([commit](#)).
 - Enhanced documentation and site via pkgdown.
 - Improved function naming and structure for ingestion ([commits](#), [commit](#)).
-

12.3.4 calcofi4r: Spatial & Ecological Data Tools

12.3.4.1 Data Layers, Analysis, and Bug Fixes

- **Spatial Management Layers**
 - Ongoing integration of BOEM Wind Planning Areas, Marine Protected Areas, and SCCWRP management regions ([issue](#), [issue](#)).
 - **Analysis Functions**
 - Improved packages for ecological and spatial analysis, including new dependencies ([commit](#)).
 - **User Feedback**
 - Addressing user-reported bugs such as deprecated function calls ([issue](#)).
-

12.3.5 Documentation (docs)

12.3.5.1 Infrastructure & Environment

- **Documentation Site Updates**
 - Added documentation for new packages and ingestion workflows ([commit](#)).
 - Improved environment handling for rendering with Quarto and Chromium ([multiple commits Jan-Mar 2025](#)).

- Updated diagrams and edge labels for database documentation.
-

12.3.6 Server

12.3.6.1 Backend Infrastructure

- **Backend Maintenance**
 - Numerous commits for improving server reliability, configuration, and deployment.
 - Indicates active backend support for API and Apps.
-

12.3.7 Workflows

12.3.7.1 Data Pipeline, Integration, and Registration

- **Workflow Automation**
 - Multiple commits show ongoing development of data ingestion, harmonization, and visualization workflows ([commit](#), [commit](#)).
 - **ODIS Registration**
 - Registering datasets with ODIS (using JSON-LD) for broader interoperability ([issue](#)).
 - **Integration with External Data**
 - Ongoing work to load and harmonize diverse ecological datasets (bottle data, larvae, zooplankton, etc.).
 - **Spatial Data Management**
 - Continued development of AOI (areas of interest), spatial buffer creation, and integration of management regions.
-

12.3.8 Key Themes & Impact

12.3.8.1 Integration & Interoperability

- Strong focus on connecting API, Apps, R packages, and backend infrastructure for seamless data access and visualization.
- Enhanced interoperability through ODIS registration and harmonized workflows.

12.3.8.2 Data Accessibility & Usability

- Improvements to API and Apps make ecological data more accessible to researchers and managers.
- Expanded support for spatial management areas and ecological datasets.

12.3.8.3 Infrastructure & Sustainability

- Investments in documentation, backend reliability, and workflow automation contribute to long-term sustainability and reproducibility.
-

12.3.9 For More Details

- Some results may be incomplete due to API limits.
- To view all commits/issues for 2025, visit each repository's [GitHub UI](#) and filter by year.

13 References

13.1 R packages

- API: plumber (Schloerke and Allen 2024)
- docs: Quarto (Allaire and Dervieux 2024)
- apps: Shiny (Chang et al. 2024)

Allaire, JJ, and Christophe Dervieux. 2024. *Quarto: R Interface to Quarto Markdown Publishing System*. <https://github.com/quarto-dev/quarto-r>.

Chang, Winston, Joe Cheng, JJ Allaire, et al. 2024. *Shiny: Web Application Framework for r*. <https://shiny.posit.co/>.

Schloerke, Barret, and Jeff Allen. 2024. *Plumber: An API Generator for r*. <https://www.rplumber.io>.