Donor Account Management — Use Case Model

Project: Biomat USA Donor Management
Course: IS 6465 — Web Based Applications
Team: Caleb Syndergaard, Josh Stott, Cade Bray
Section author: Cade Bray (Donor Account Management)

---

1. Use Case Model

The Donor is the only actor. Each association links the Donor to one of the four donor account use cases. Authentication is a precondition of viewing, updating, or deleting account information, so Log In is not shown.

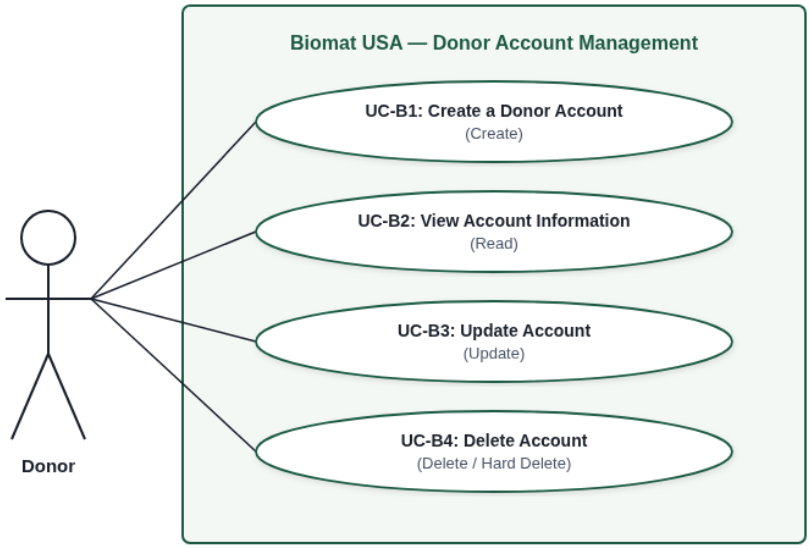


Figure 1. Donor Account Management use case model (UML). The diagram follows the course UML specification.

2. Model Elements

Element	UML type	Description
Donor	Actor	A registered or prospective user interacting with their donor account. Shown outside the system boundary.
Biomat USA — Donor Account Management	System boundary	The Donor Account Management portion of the Biomat Donor Services web application (the register.php and account.php pages).
UC-B1: Create a donor account	Use case (Create)	The donor registers a new profile by submitting required personal identifying information (PII), contact details, address, initial blood type, and credentials.
UC-B2: View Account Information	Use case (Read)	The authenticated donor views all their own recorded contact details, emergency contacts, and physical health profile (weight, height, and blood type).
UC-B3: Update Account	Use case (Update)	The authenticated Donor edits and saves updates to their contact details, address, emergency contact, or blood type/vitals.
UC-B4: Delete Account	Use case (Delete / Hard Delete)	The authenticated Donor permanently removes their account after password reauthentication; cascade deletion purges linked appointments.
Donor — UC-B1 to UC-B4	Association	Four solid lines with no arrowheads: the Donor initiates each use case.

3. Combining with Appointment Management

- **Actor:** The Donor in this model is the same Donor actor used in Appointment Management. Show it once in the combined model, connected to both sets of use cases.
- **IDs:** Keep the UC-B prefix for these four use cases, so they stay traceable to their use-case descriptions, activity diagrams, and wireframes.
- **Boundary:** the four ovals can be moved as a group into the combined system boundary. Rename the boundary to cover the whole application.