Appointment Management — Use Case Model

Project: Biomat USA Donor Management and Appointment Scheduling
Course: IS 6465 — Web Based Applications
Team: Caleb Syndergaard, Josh Stott, Cade Bray
Section author: Josh Stott (Appointment Management)

---

1. Use Case Model

The Donor is the only actor. Each association links the Donor to one of the four appointment use cases. Authentication is a precondition of every use case, so Log In is not shown.

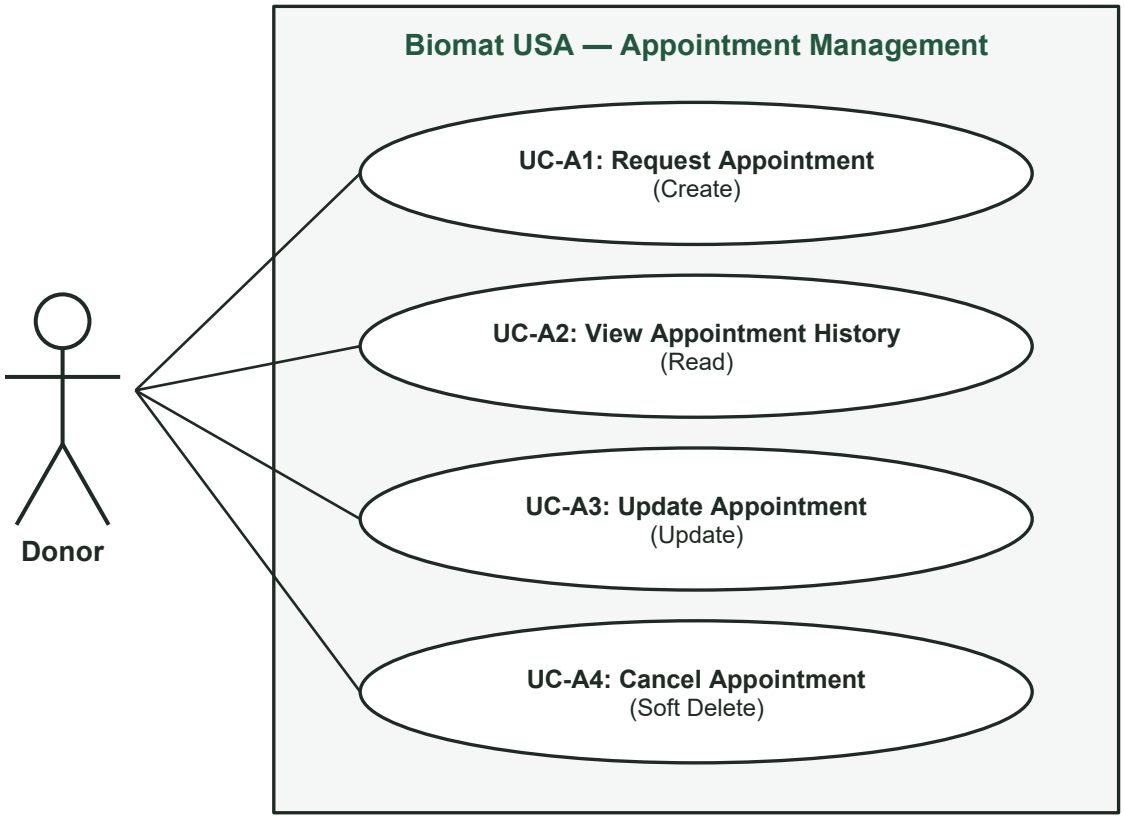


Figure 1. Appointment Management use case model (UML). The diagram is made of editable Word shapes.

2. Model Elements

Element	UML type	Description
Donor	Actor	A registered user signed in with a donor account. Shown outside the system boundary.

Element	UML type	Description
Biomat USA — Appointment Management	System boundary	The Appointment Management portion of the Biomat Donor Services web application (the My appointments page).
UC-A1: Request Appointment	Use case (Create)	The Donor books a new appointment at an active donation center.
UC-A2: View Appointment History	Use case (Read)	The Donor views all of their own past and upcoming appointments.
UC-A3: Update Appointment	Use case (Update)	The Donor changes the center or date and time of an upcoming booked appointment.
UC-A4: Cancel Appointment	Use case (Soft Delete)	The Donor cancels an upcoming booked appointment; the record is kept with status Cancelled.
Donor — UC-A1 to UC-A4	Association	Four solid lines with no arrowheads: the Donor initiates each use case.

3. Combining with User Account Management

- **Actor:** the Donor in this model is the same Donor actor used in User Account Management. Show it once in the combined model, connected to both sets of use cases.
- **IDs:** keep the UC-A prefix for these four use cases so they stay traceable to their use case descriptions, activity diagrams and wireframes.
- **Boundary:** the four ovals can be moved as a group into the combined system boundary. Rename the boundary there to cover the whole application.