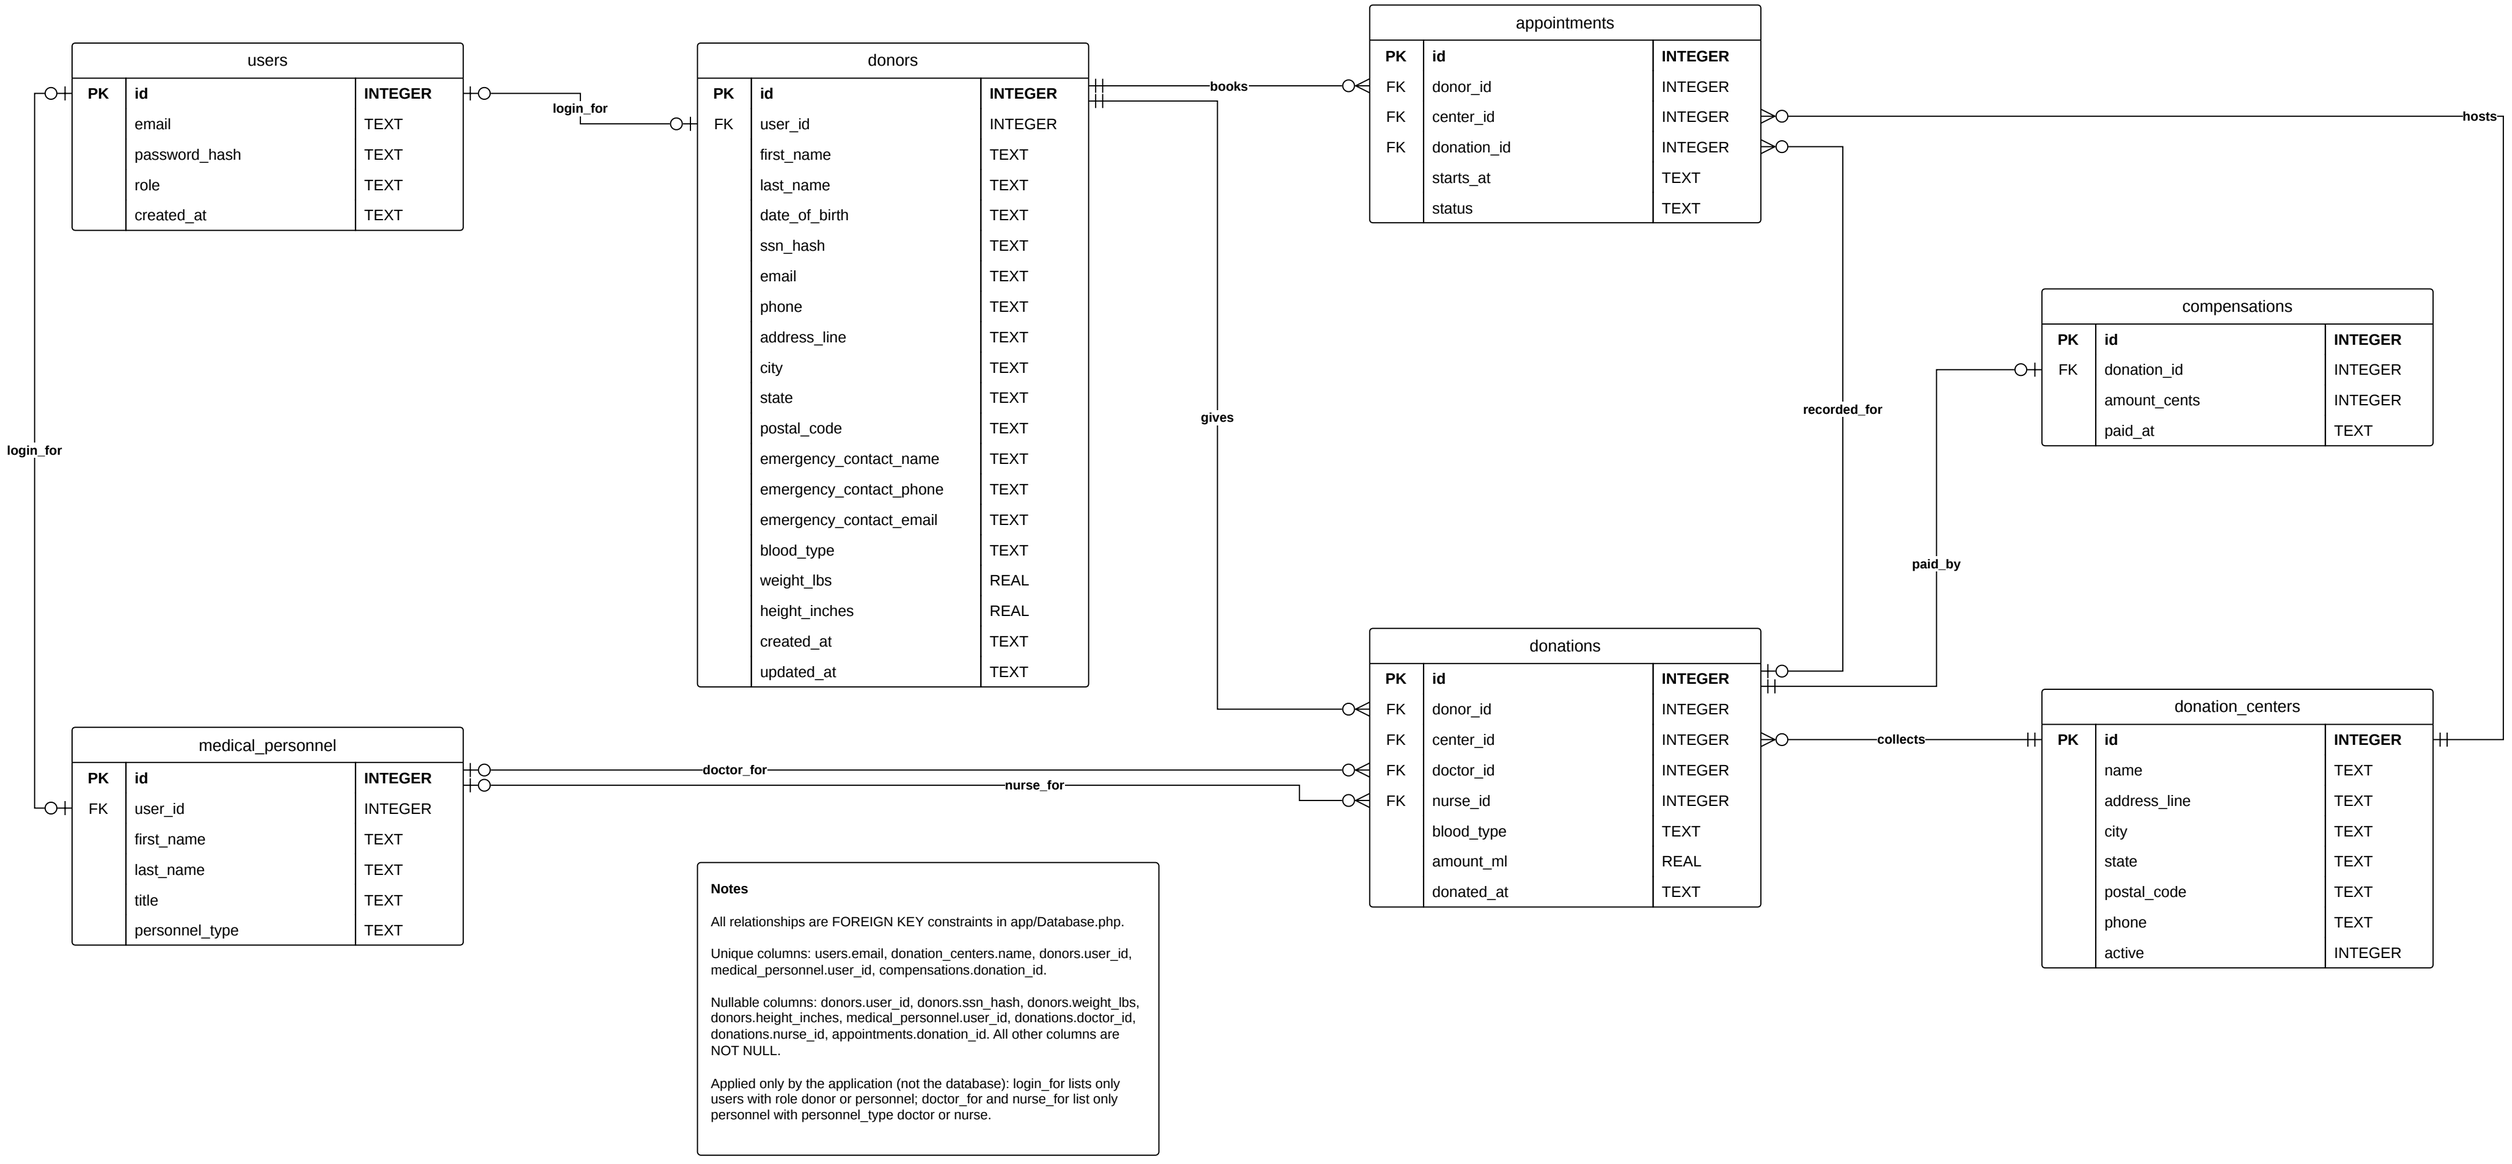

users
PK id INTEGER
email TEXT
password_hash TEXT
role TEXT
created_at TEXT
donors
PK id INTEGER
FK user_id INTEGER
first_name TEXT
last_name TEXT
date_of_birth TEXT
ssn_hash TEXT
email TEXT
phone TEXT
address_line TEXT
city TEXT
state TEXT
postal_code TEXT
emergency_contact_name TEXT
emergency_contact_phone TEXT
emergency_contact_email TEXT
blood_type TEXT
weight_lbs REAL
height_inches REAL
created_at TEXT
updated_at TEXT
appointments
PK id INTEGER
FK donor_id INTEGER
FK center_id INTEGER
FK donation_id INTEGER
starts_at TEXT
status TEXT
compensations
PK id INTEGER
FK donation_id INTEGER
amount_cents INTEGER
paid_at TEXT
donations
PK id INTEGER
FK donor_id INTEGER
FK center_id INTEGER
FK doctor_id INTEGER
FK nurse_id INTEGER
blood_type TEXT
amount_ml REAL
donated_at TEXT
donation_centers
PK id INTEGER
name TEXT
address_line TEXT
city TEXT
state TEXT
postal_code TEXT
phone TEXT
active INTEGER
medical_personnel
PK id INTEGER
FK user_id INTEGER
first_name TEXT
last_name TEXT
title TEXT
personnel_type TEXT
login_for
books
hosts
gives
recorded_for
paid_by
collects
doctor_for
nurse_for
Notes
All relationships are FOREIGN KEY constraints in app/Database.php.
Unique columns: users.email, donation_centers.name, donors.user_id, medical_personnel.user_id, compensations.donation_id.
Nullable columns: donors.user_id, donors.ssn_hash, donors.weight_lbs, donors.height_inches, medical_personnel.user_id, donations.doctor_id, donations.nurse_id, appointments.donation_id. All other columns are NOT NULL.
Applied only by the application (not the database): login_for lists only users with role donor or personnel; doctor_for and nurse_for list only personnel with personnel_type doctor or nurse.